

JUN 29 1967

ML 552 .H662-1855






Digitized by the Internet Archive in 2015



# THE ORGAN;

ITS HISTORY AND CONSTRUCTION.





# THE ORGAN,

## ITS HISTORY AND CONSTRUCTION:

A COMPREHENSIVE TREATISE

ON THE

## STRUCTURE AND CAPABILITIES OF THE ORGAN,

WITH SPECIFICATIONS AND SUGGESTIVE DETAILS FOR INSTRUMENTS OF ALL SIZES,

INTENDED AS A

HANDBOOK FOR THE ORGANIST AND THE AMATEUR,

BY

EDWARD J. HOPKINS,

ORGANIST OF THE TEMPLE CHURCH;

PRECEDED BY AN ENTIRELY

### NEW HISTORY OF THE ORGAN,

MEMOIRS OF THE MOST EMINENT BUILDERS OF THE SEVENTEENTH AND EIGHTEENTH CENTURIES, AND OTHER MATTERS OF RESEARCH IN CONNECTION WITH THE SUBJECT

BY

EDWARD F. RIMBAULT, LL.D.

MEMBER OF THE ROYAL ACADEMY OF MUSIC IN STOCKHOLM, ETC.

#### LONDON:

### ROBERT COCKS AND CO. NEW BURLINGTON STREET,

MUSIC PUBLISHERS TO HER MOST GRACIOUS MAJESTY QUEEN VICTORIA, AND HIS IMPERIAL MAJESTY NAPOLEON III, EMPEROR OF THE PRENCH.

SIMPKIN, MARSHALL, AND CO. WHITTAKER AND CO. H. BAILLIERE, NEW YORK.

MDCCCLV.

PRINTED BY J. MALLETT, 59, WARDOUR STREET, LONDON.

#### PREFACE.

THE following work has been undertaken with the view of supplying what has hitherto been felt to be a great desideratum in this country; namely, a hand-book describing the construction of the English Organ with the necessary minuteness to enable those not previously conversant with the subject to understand the formation, nature, and operation of every part of that most ingenious, complex, and noble of all Musical Instruments. In proceeding to carry out this design, several plans presented themselves; but the one that appeared best calculated to place the subject in the most simple shape before the reader, was that of arranging the various systems of mechanism, and the several clever devices for giving speech and vitality to the Organ, into separate divisions, and then of describing the numerous parts which together form those main portions, in the continuous order they are usually met with in modern English instruments. This course has therefore been adopted in the arrangement of the materials forming the following chapters; and each separate subject—as, for instance, some particular system of mechanism—is traced from its source to its termination, with a slight notice only (at the time) being taken of other portions of the intricate machine towards which it may occasionally approach closely, yet without having therewith any actual connection.

The endeavour has been made, in the progress of the work, to record the names of the originators of the numerous ameliorations and improvements that have been made from time to time in the details of Organ-building. This part of the design, however, has not been found by any means so easy of accomplishment as at first it might appear to be; for but few records were ever kept either of the date or the builder by whom such advantageous modifications were effected. An internal examination of numerous Organs, and a comparison of their dates of construction have been made, with the view of arriving at a correct conclusion on all these points, and the result has been given: at the same time, a date or fact may here or there have escaped the research of the writer, who will therefore be glad to receive any such testimony as may come under the notice of others, and which will be gratefully accepted and carefully preserved for future use. To account for the frequent appearance of names and dates in the descriptions of some of the more recent improvements, it may be mentioned that these have in all cases been given, where positively known, in the hope of obviating future uncertainty.

vi PREFACE.

Among the most vexed questions of the present time regarding the English Organ, are those relating to the compass and the temperament of the instrument. To each of these subjects, therefore, a full chapter has been devoted, which, it is hoped, may have some influence in conducting them nearer towards a settlement. In these discussions, and indeed throughout the work, great pains have been taken to preserve as much simplicity of language and freedom from technicality as seemed practicable. Other matters of importance are those relating to the musical pitch, the composition of the compound stops, and the position of the Organ; all of which have also been considered at some length.

The Appendix will be found to present a collection of specifications of British and Foreign Organs, more varied in size and details, and more extensive in number, than has ever before been brought together in any similar work in any country. A few of the English specimens are either accounts of instruments of past celebrity, or of such as were made according to a system now being fast superseded; but most of the continental descriptions, it is confidently hoped, will prove of the highest value to Organists, in exemplifying what are the general principles observed by the foreign artists, to the investigation of which the Organ-builders and Organists of this country, fortunately, are now almost universally turning their attention. The accounts of Foreign Organs have partly been prepared from notes made by the writer and other tourists at the instruments themselves, and partly from previously printed accounts; the stops, however, being in all cases re-arranged and classified according to one uniform and simple plan, so that they may be more convenient for purposes of reference and comparison. The descriptions of British Organs have been drawn up, in some cases, from accounts kindly furnished by their respective Organists; in others, from well-known printed authorities; while the particulars of the more recently constructed instruments have been extracted chiefly from the descriptions issued by their respective builders.

It remains for the writer to tender his thanks to those gentlemen who have kindly favoured him with their suggestions and opinions; and he feels his acknowledgments to be particularly due to Mr. Hill and Mr. Walker, Mr. Robson and Mr. Jardine, for their exposition of certain technical matters; and to the Rev. Sir Frederic Gore Ousely, Bart. and to C. Harwood Clark, Esq. for placing their MS. note-books, containing accounts of numerous Foreign Organs, so entirely at his disposal.

EDWARD J. HOPKINS.

#### CONTENTS.

#### THE HISTORY OF THE ORGAN.

## FIRST EPOCH.—THE ANCIENT ORGAN, ANTERIOR TO THE INVENTION OF THE KEY-BOARD.

- 1. Its Invention, 1.
- 2. The Hydraulic Organ, 5.
- 3. The Pneumatic Organ, 11.
- 4. Its Introduction into the Church, 13.
- 5. Organ-building in the Eleventh Century, 18.

## SECOND EPOCH.—THE MEDIÆVAL ORGAN, AFTER THE INVENTION OF THE KEY-BOARD.

- 6. The First Key-board, 31.
- 7. The Bellows, 32.
- 8. Supposed Origin of the Mixture Stops, 34.
- 9. The First Monastic Organs, 36.
- 10. The Regal, or Portative, 37.
- 11. The Positive, 39.
- 12. The Meaning of "A Pair of Organs," 40.
- 13. The Improved Key-board, and the Invention of the Pedal, 41.
- 14. Monastic Organs in England, 43.

#### THIRD EPOCH. - THE FIRST ORGAN-BUILDERS BY PROFESSION.

- 15. Early German Builders, 48.
- 16. Early English Builders, 48.
- 17. Notices of English Organs, 55.
- 18. Improvements by German Builders, 56.
- 19. Italian Organ-builders, 57.
- 20. Notices of Foreign Organs, 58.
- 21. The Ancient Position of the Organ, 59.
- 22. The Curiosities of Organ-building, 65.
- 23. The Destruction of Organs in England during the Great Rebellion, 69.

#### FOURTH EPOCH. - THE FOUNDERS OF MODERN ORGAN-BUILDING.

- 24. Father Smith, 75.
- 25. Renatus Harris, 85.
- 26. Father Smith's Nephews, 91.

- 27. John Harris and John Byfield, 92.
- 28. Christopher Schrider, 94.
- .29. Thomas Schwarbrook, 96.
- 30. The Jordans, Father and Son, 97.
- 31. Richard Bridge, 100.
- 32. Organs built by Byfield, Jordan, and Bridge, conjointly, 100.
- 33. John Byfield, junr. 101.
- 34. Messrs. Glyn and Parker, 101.
- 35. John Snetzler, 102.
- 36. Messrs. Crang and Hancock, 104.
- 37. Samuel Green, 104.
- 38. John Avery, 107.
- 39. The Englands, Father and Son, 107.
- 40. Progress of Organ-building in Germany, 108.
- 41. Andreas Silbermann, 109.
- 42. Gottfried Silbermann, 110.
- 43. Johann Andreas Silbermann, 110.
- 44. Johann Daniel Silbermann, 111.
- 45. Cotemporaries and Successors of the Silbermanns, 111.

#### THE ORGAN, ITS STRUCTURE, &c.

\_\_\_\_\_

#### Preliminary Observations, 1.

#### DIVISION I .-- THE EXTERIOR OF THE ORGAN.

#### CHAPTER I .- THE ORGAN CASE.

- 1. Its nature and use, and the materials of which it is formed, 3.
- 2. The general structure of the organ-case, and the means of ingress, 3.
- 4. The general arrangement of the front pipes, 3.
- 6. The various figures in which the front pipes are arranged, 4.
- 15. The arrangement of the front pipes in regard to the sound they produce, 4.
- 21. Of the decoration of the front pipes, 6.

#### DIVISION II.—THE WIND-COLLECTING PORTION OF THE ORGAN.

#### CHAPTER II .- THE BELLOWS.

- 23. Their use, 7.
- 24. The different kinds of organ bellows ordinarily met with; which the oldest; their names; and why so called, 7.
- 29. Particulars concerning the diagonal bellows, 8.
- 30. Their number, 9.
- 31. Arrangement, 9.
- 33. Method of operation, 9.
- 35. Their original defects, 10.
- 38. How remedied, 11.
- 41. The horizontal bellows, 11.
- 44. Their structural features, 12.
- 45. The working of the horizontal bellows, and the room which the compressed air makes for itself between the plates and folds of the reservoir, 15.

- 62. The construction of the reservoir, 16.
- 65. The construction of the feeder, 16.
- 66. The blowing action, 16.
- 68. An early defect and its remedy, 17.
- 69. The counter balances, 17.
- 70. The waste pallet, 18.
- The unsteadiness of the organ-wind arising from unskilful blowing, or from irregular consumption, 19.
- 84. The concussion bellows, 21.
- 87. The anemometer, 21.

#### DIVISION HI.—THE WIND-DISTRIBUTING PORTIONS OF THE ORGAN.

#### CHAPTER III .- THE WIND TRUNKS.

93. The wind-trunks, 23.

#### CHAPTER IV .- THE WIND-CHEST.

- 99. The wind-chest; its use, 25.
- 103. Its attendant parts, 26.

#### CHAPTER V .- THE SOUND-BOARD.

- 110. The formation of a sound-board, 28.
- 117. How the sound-board-pallets are brought under control, 29.
- 119. The sound-board bars, 29.
- 123. The sound-board grooves, 30.
- 126. The sound-board pallets, 30.

#### CHAPTER VI. THE TABLE.

135. The table, 33.

#### CHAPTER VII. -THE UPPER BOARDS.

146. The upper-boards, 35.

#### CHAPTER VIII.-THE SLIDERS, BEARERS, AND PIPE-RACKS.

- 158. The action of a slider, 38.
- 166. The bearers, 38.
- 168. The pipe-racks, 39.

#### CHAPTER IX. - THE ARRANGEMENT OF THE GROOVES AND STOPS.

- 171. The situation of the large and small grooves in the sound-board, 40.
- 177. First plan of groove arrangement, 41.
- 180. Second plan, 42.
- 182. Third plan, 42.
- 184. The arrangement of the stops on the sound-board, 43.

#### DIVISION IV .- THE MECHANISM OF THE ORGAN.

#### CHAPTER X .- THE CLAVIERS AND KEY MOVEMENTS.

- 188. The mechanism of the organ, 43.
- 191. The manuals, 44.
- 198. The pedals, 46.
- 199. The situation of the claviers, 46.
- 204. The key-movement, 47.
- 213. The action of the key movement, 48.
- 221. The roller-board movement, 50.
- 223. The extension of the key-movement, 50.

#### CHAPTER XI.—THE COUPLERS AND SFORZANDO PEDAL.

- 230. Manual couplers, 52.
- 235. The sforzando coupler, 54.
- 237. Pedal couplers, 55.

#### CHAPTER XII .- THE PNEUMATIC ACTION.

241. The pneumatic action, 57.

#### CHAPTER XIII. - THE DRAW-STOP ACTION.

- 249. The wooden-trundle draw-stop action, 60.
- 250. A description of its several parts, 61.
- 255. How the draw-stop action operates, 61.
- 257. The iron-trundle draw-stop action, 62.

#### CHAPTER XIV .- THE SHIFTING MOVEMENT AND THE COMPOSITION PEDALS.

- 260. The shifting movement, 63.
- 262. The composition pedals, 63.
- 264. The single-action composition pedal, 63.
- 266. The double-action composition pedal, 64.
- 271. The composition pedal action, 64.
- 272. The way in which the action operates, 65.

#### CHAPTER XV .- THE ECHO AND SWELL.

- 281. The Echo, 66.
- 283. The nag's head swell, 66.
- 284. The Venetian swell, 66.

#### CHAPTER XVI.-THE TREMULANT.

298. The tremulant, 70.

#### DIVISION V .- THE SOUND-PRODUCING PORTIONS OF THE ORGAN.

#### CHAPTER XVII.-THE MATERIALS USED FOR ORGAN PIPES.

- 306. Tin, 72.
- 316. Metal, 74.
- 317. Spotted metal, 75.
- 318. Lead, 75.
- 319. Antimony metal, 75.
- 320. Zinc, 76.
- 321. The casting of the metal, 76.
- 322. Wood, 76.
- 324. The seasoning of the wood, 76.

#### CHAPTER XVIII .- THE PLAN, OUTLINE, AND STRUCTURE OF ORGAN PIPES.

- 326. The plan and outline of the pipes, 78.
- 331. Cylindrical pipes, 78.
- 332. Open cylindrical pipes, 78.
- 333. Stopped cylindrical pipes, 78.
- 335. Half-stopped cylindrical pipes, 79.
- 337. Perforated cylindrical pipes, 79.
- 340. Conical pipes, 80.
- 342. Conical pipes surmounted by a bell or outspreading top, 81.
- 343. Inverted cone, 81.

- 344. Inverted cone surmounted by a bell, 81.
- 345. Wooden pipes, 81.
- 346. Open four-sided pipes, 82.
- 347. Stopped four-sided pipes, 82.
- 348. Half-stopped four-sided pipes, 82.
- 349. Pyramidal pipes, 82.
- 351. Pyramidal and inverted, 82.
- 353. The classification of the pipes into flue and reed pipes, 83.
- 354. Flue pipes, 83.
- 355. Reed pipes, 83.
- 357. The separate parts of a metal flue pipe, 83.
- 362. The way in which the several parts of metal pipes are united together, 84.
- 367. Wood flue pipes; open, stopped, and half-stopped, 85.
- 371. How the several parts are worked together, 86.
- 380. Origin and continuance of the tone in flue pipes, 87.
- 386. The mouth of a fluc pipe; and the influence of its proportions on the tone of the pipe, 88.
- 387. The voicing of metal and wood flue pipes, 88.
- 399. The influence of the material, form, and scale, on the tone of a pipe, 91.
- 405. Influence of the strength and quantity of the wind on the character and strength of the tone, 92.
- 410. Formation of a reed-pipe, 93.
- 418. The formation of the tubes, 94.
- 419. The different kinds of mouth-pieces or reeds. The open, closed, and free reeds, 94.
- 423. The influence of the tube, its shape, scale, and material, on the strength and character of the tone of a reed-pipe, 95.
- 424. The influence of the reed and tongue on the tone of the pipe, 96.
- 425. How a sound is produced from a reed-pipe, 96.
- 427. How the pitch of the sound of an organ-pipe is determined, 96.

#### CHAPTER XIX. - THE STANDARD LENGTH OF ORGAN PIPES.

- 433. The names of the sounds produced from organ pipes, 98.
- 436. The classification of those sounds into octaves, and the different methods by which the several octaves are distinguished from one another, 99.
- 446. The size of the pipes mostly used for stop measurement, 101.

#### CHAPTER XX .- THE SIZE OF TONE OF ORGAN PIPES.

475. The scale of organ-pipes; and the influence which an alteration in the proportion exercises on the length.

#### CHAPTER XXI. -- ORGAN STOPS.

- 481. Definition of a stop, and an explanation of the various kinds, 106.
- 490. The size of the stops; how ascertained, 108.
- 493. The classification of the stops, in regard to their tone—producing part, into reed stops and flue stops, 108.
- 495. Classification of the flue-stops, in regard to certain peculiarities in their structure, into diapason-work, covered-work, and flute-work, 109.
- 501. Classification of organ stops, in regard to the sound they produce, into foundation, mutation, and compound stops, 110.

#### CHAPTER XXII.—THE NAMES OF ORGAN STOPS.

- 511. The name and description of stops found in English organs, together with their length or size of tone on the manual and pedal, 112.
- 572. Compound stops, 120.
- 589. Reed stops, 122.

## CHAPTER XXIII.—THE ORIGIN AND NECESSITY OF FOUNDATION, MUTATION, AND COMPOUND STOPS.

- 608. The introduction of stops of various sizes, founded on a phenomenon in nature, 126.
- 617. How the sizes of the harmonic-corroborating stops are deduced and fixed, 127.
- 623. Reasons for marking the length of the stops on the knobs, 128.
- 624. Theoretical exceptions sometimes taken to certain organ-stops, 128.

## CHAPTER XXIV.—PARTICULARS CONCERNING THE SCALE AND THE BALANCING OF ORGAN STOPS.

- 627. The comparative scale of the foundation and mutation stops, and ranks of pipes, 130.
- 657. The increase of scale in a stop as the pipes become shorter, and why necessary, 137.
- 662. A variation is made in the scale of the stops of the same name on the different claviers, and also in the duplicates on the same clavier. The reason and necessity thereof, 138.

#### DIVISION VI .- THE TEMPERAMENT, TUNING, AND PITCH OF THE ORGAN.

#### CHAPTER XXV. THE TEMPERAMENT OF THE ORGAN.

- 674. The temperament; the phenomenon in nature that occasions its necessity; and the different systems, 140.
- 678. Unequal temperament, 140.
- 680. Quarter tones, 141.
- 685. Ferfect temperament, 142.
- 687. Equal temperament, 143.
- 689. A reason in favor of unequal temperament, 143.
- 690. That reason considered, 143.
- 695. Illustrations of sacred music, as sounded on an unequally tempered organ, 144.
- 698. Unequal temperament advocated, on the score that it preserves a distinct character of key, 152.
- 700. Equal temperament recommended on the same grounds, 153.
- 702. Temperament, as the only source of distinction of key, questioned, 154.
- 703. Pitch, supposed to exercise an influence in establishing the character of key, 154.
- 704. The internal resources of the musical art capable of giving any character to any key, 155.
- 705. Characteristics of equal temperament, 156.

#### CHAPTER XXVI .- THE TUNING OF THE ORGAN.

- 709. Laying the bearings; and extending their influence to the stops generally, 158.
- 713. How the pitch of the several kinds of organ-pipe is altered, 159.
- 722. The pitch of the organ altered by the heat and cold in different seasons. The extent of this alteration, 160.

#### CHAPTER XXVII. THE PITCH TO WHICH AN ORGAN SHOULD BE TUNED.

- 730. The question a most interesting one, 163.
- 731. The presumed lower pitch of two centuries since, 163.
- 732. The difficulties inseparable from that theory, 163.
- 735. The compass of the human voice supposed to have changed, 164.

- 736. The old composers supposed not to have consulted the convenience of the voices they wrote for, 164.
- 737. The early English composers supposed to have written without regard to any definite pitch, 164.
- 738. Everything questioned except the presumed lowness of the old pitch, 165.
- 739. Strong grounds for believing in the former existence of a high ecclesiastical pitch, 165.
- 740. The sixteenth and seventeenth century organs in Germany a whole tone sharp, 165.
- 741. A high ecclesiastical pitch believed to have existed formerly in England as well as in Germany, 166.
- 742. The very low notation of ancient church music favourable to this view, 166.
- 743. The frequent transpositions of early church music into higher keys in performance, also in support of this view, 166.
- 747. Father Smith's pitch flatter than the presumed ecclesiastical pitch of preceding centuries, 167.
- 748. The flattened pitch accompanied by a raised notation, 168.
- 749. The pitch lower again, at the commencement of the eighteenth century in England, 168.
- 750. A similar alteration of pitch, at the same period, in France and Germany, 168.
- 751. The lower pitch in the last century accompanied by a further ascent in the notation, 168.
- 753. To which of the three church pitches formerly in use should a church organ be tuned?

#### DIVISION VII.

#### CHAPTER XXVIII .- ON THE CORRECT USE OF THE STOPS.

- 757. General rules for the use of the stops, 171.
- 764. The character of tone of some of the leading stops; and the purposes to which they may be applied, 171.
- 774. On the combination of the stops for the production of any required strength of tone,
- 788. On the adaptation of the organ-tone to the true purposes of choral accompaniment, 176.
- DIVISION VIII.—THE CAUSE OF MANY OF THE FAULTS WHICH ARISE IN AN ORGAN, TOGETHER WITH THEIR REMEDIES.

#### CHAPTER XXIX.

The unbidden Sounding of a Pipe from Causes in the Region of the Pallets.

- 792. Ciphering caused by dirt on the pallet, 179.
- 794. Ciphering from a pallet-spring being too weak, 179.
- 795. Ciphering caused by the pallet catching on a direction-pin, 179.
- 796. Ciphering from damp loosening the leather, or heat warping the pallet, 180.
- 798. Ciphering caused by a pull-down being rusty, 180.

#### The unbidden Sounding of a Pipe from Faults in the Key-Movement.

- 799. Ciphering from some adhesive substance falling between the keys, 180.
- 800. Ciphering caused by a key warping, 180.
- 801. Ciphering from a sticker binding, 181.
- 802. Ciphering caused by a backfall getting off the sticker, 181.
- 803. Ciphering from grit in the centre-holes, or by a swelling of the movement, 181.

CONTENTS. The unbidden Sounding of a Pipe from Defects in the Sound-board.

- A running caused by an upper-board being too loose, 182. 805.
- A running caused by a sound-board bar separating from the table, or by an un-806. sound bar, 182.
- A humming caused by one slider touching and partly drawing a second, 182. 807.
- A humming caused by pipes standing in too close proximity, 183. 808.

#### Defects in the Key-Movement.

- 809. A springing in the key-movement, 183.
- A dead resistance opposed to the finger by the key-movement, 183. 810.
- 811. A thumping at the keys, 183.
- 812. A rattling in the key-movement, from the noisy nature of the materials, 183.
- A rattling sometimes caused by trackers flapping together, 184. 814.
- 815. A key down without producing any sound, 184.
- The touch of the manuals too shallow at certain seasons, and too deep at others, 185. 816.
- 818. An unevenness in the level of the keys of the manual, 185.
- 819. A key screwed up too high, sometimes causes the speech of the pipes to tremble, 185.
- A ciphering caused by the breaking of a pedal-spring, 185. 820.

#### Disarrangements connected with the Draw-stop Action and Sliders.

- 821. A draw-stop rod will sometimes come out too far, or go too far in, 186.
- 822. A draw-stop sometimes very stiff, 186.

#### Defects in the Bellows and the Winding of the Organ.

- 823. A creaking from friction at the centres, 186.
- 824. A clacking caused by hard valves, 187.
- 825. A gasping from the valves being too few and small, 187.
- Bellows work quicker in hot weather, 187. 826.
- Bellows produce a cracking sound after damp weather, 187. 827.
- 828. Tremulousness, from the length and elasticity of the column of wind, 187.
- Tremulousness from shortness of supply, 188. 829.
- Unequal intonation caused by small grooves and pallet holes. A robbing, 188. 830.
- A hissing arising from an escape of wind, 189. 831.

#### Faults connected with the Speech of the Pipes.

- Small pipes are frequently dumb, tremulous or weak in their speech, 189. 833.
- Flue pipes become unequal in their strength and quality of tone from various causes, 834.
- A pipe sometimes sounds its octave, from the effects of dirt, or over-blowing, 190. 835.
- The tone of wood-pipes influenced by change of temperature, 190. 836.
- Stopped wood-pipes sometimes deranged by heat and drought, 190. 837.
- 838. Reed-pipes very susceptible of change of temperature, 191.

#### DIVISION IX. -SUGGESTIONS FOR THE CONSIDERATION OF THOSE WHO HAVE TO SUPERINTEND THE CONSTRUCTION AND ERECTION OF AN ORGAN.

#### CHAPTER XXX.--THE COMPASS OF THE CLAVIERS, AND OF THEIR SEPARATE DIVISIONS OF THE ORGAN.

- Precedents for nearly every variety of clavier range, 192. 844.
- The compass of the manuals; the confused state in which the question is involved 845. in England; and the importance of a correct view of the subject, 193.
- How the true manual compass is to be ascertained, 193. 846.
- Arguments against the CC manual compass, and in favour of a longer range, 194. 849.

- 855. Much room and a great expenditure of funds required to extend the compass of a manual organ below CC, 196.
- 857. The true method of increasing the resources of a manual organ, 196.
- 858. How it may be ascertained whether certain keys are essential or not as manual ones, 197.
- 861. The amcliorations that might be effected on a given specification, by regulating the outlay otherwise than in the construction of unessential manual notes, 198.
- 876. Other views in favour of GG manuals, and against CC, considered, 201.
- 887. How the CC manual compass was first exceeded, 203.
- 889. The confusion in the size of the stops caused by their elongation, 203.
- 89 k. The upward range of the manuals, 205.

## CHAPTER XXXI.—OF THE PEDALS AND PEDAL ORGAN; THEIR GRADUAL INTRODUCTION INTO ENGLAND; AND THEIR CORRECT COMPASS.

- 902. The insufficiency and incorrectness of GG pedals for practical purposes, 208.
- 903. The wrong pitch in which GG pedals execute on the manual stops such passages as do come within their range, 208.
- 904. The impossibility of satisfactorily uniting CCC pipes to GG pedals; and the false pitch in which the pipes sound when they are so united, 208.
- 906. The false readings which the CCC pedal pipes create, 209.
- 921. The introduction of "Double Pedal Pipes" as the first pedal stop, not in accordance with the laws of organ-building, 211.
- 925. The premature introduction of double pedal pipes often a hindrance to the introduction of more important pedal stops, 212.
- 926. The arrangements of a CC organ contrast favourably with those of GG compass, 213.

#### CHAPTER XXXII.-THE SITUATION FOR THE ORGAN.

- 930. Acoustical facts to be consulted, 215.
- 931. How sound is produced and propagated, 215.
- 932. How brief sounds disperse, 215.
- 933. How sustained sounds more completely occupy space, 216.
- 934. The distribution of a sound that cannot travel backwards, 216.
- 937. Sound weakened by divergence, 217.
- 938. Echo, 217.
- 939. Resonance, 217.
- 948. Impediments to the equal distribution of sound, 219.
- 949 Absorbents of sound, 219.
- 950. Church arrangements that are favourable to sound, 219.
- 951. Absorbents sometimes introduced to subdue excessive echo, 219.
- 952. Velocity of sound, 220.
- 955. The apparent strength of a sound dependent on the position of the auditor, &c. 220.
- 957. Penetration of sound, 221.
- 959. The west-end of a church, as the situation for the organ, 221.
- 960. Old examples of west-end organs in continental churches, 221.
- 962. The merits of the west-end, as the situation for the organ, considered, 222.
- 972. An architectural objection to the organ occupying the west-end, 223.
- 973. Examples of divided west-end organs in continental churches, 223.
- 979. Smith and Harris's parish church organs usually placed at the west-end, 224.
- 980. Their cathedral organs usually placed on the choir screen, 225.
- 981. Harris's proposal for a grand west-end organ in St. Paul's Cathedral, 225.
- 982. The erection of Father Smith's organ on the choir screen of St. Paul's, opposed, 225.

- 986. The comparative merits of the several side situations considered, 226.
- 995. The east-end of an aisle, or a chancel chapel, as the situation for the Organ, considered, 228.
- 1001. The chancel an eligible position for a divided organ, 229.
- 1002. The relative position of the vocal choir and organ, 230.
- 1003. Recent arrangements in cathedrals, 231.

#### CHAPTER XXXIII .- THE SIZE OF THE ORGAN.

- 1008. The organ should be proportioned to the congregation and church, 233.
- 1009. Certain influencing circumstances to be taken into account, 233.
- 1010. An approximate calculation of the number of stops necessary for an organ to have, 233.
- 1011. Too small an organ in a church most undesirable, 234.
- 1012. The strength of the human voice, as compared with that of the organ-wind, 234.
- 1013. The general requisites of a church organ, 234.
- 1014. An organ of sufficient dimensions in a church a great acquisition, 235.
- 1016. The power of an organ partly due to its extent of tone, 236.
- 1018. How the acoustic capacity of a manual organ is increased to adapt its tone to a large building, 237.
- 1019. The acoustical grounds on which double stops are introduced into an organ, 238.
- 1021. The effect of a large organ not constructed on acoustic principles as well as on harmonic, 238.
- CHAPTER XXXIV.— VARIOUS MATTERS CONNECTED WITH THE DIVISION OF THE STOPS, AND THEIR SELECTION ACCORDING TO THEIR SIZE.
- 1023. The proportionate division of a given number of stops among the several departments, 240.
- 1028. The size of stop that should form the basis of the manual and pedal tone, 241.
- 1029. Stops of one size only, for manual or pedal, incorrect, 241.
- 1030. The proper size for the stops, and the order in which they should be selected, 241.
- 1032. The stop from which the harmonic corroborating stops must be measured, 242.
- 1039. The meaning of the German terms 16-feet manual, 8-feet manual, and 4-feet manual, 243.
- 1040. Stops of one class alone not sufficient to produce the best organ effect, 244.
- 1041. The proportion to be observed in the number of stops of different sizes, 244.

#### CHAPTER XXXV .-- THE COMPOSITION OF THE MIXTURES.

- 1054. Why should there be breaks in a compound stop? 248.
- 1055. A compound stop without a break, not in accordance with the suggestions of nature, 248.
- 1056. The same compound not productive of the same effect in different parts of the scale, 248.
- 1057. Might not a rank "die out," instead of presenting a break? 249.
- 1058. The valuable aid rendered to the treble of an organ by the return ranks, 249.
- 1059. On what keys the breaks had better take place, 250
- 1060. Where the broken ranks should return to, 250.
- 1063. Plans for compound stops, 251.
  - I. Composition for a full mixture of III ranks, 251.
  - II. Ditto for a clear mixture of IV ranks, 252.
  - III. Ditto for a sharp mixture of IV ranks, 252.
  - IV. Ditto for a quint mixture of IV ranks, 253.
  - V. Ditto for a full mixture of IV ranks, 253.

- VI. Composition for a sharp mixture of V ranks, 254.
- VII. Ditto for a full mixture III ranks, and a sharp mixture III ranks, 255.
- VIII. Ditto for a full mixture III ranks, and a sharp mixture IV ranks, 256.
  - Ditto for a full mixture III and IV ranks, and a sharp mixture V ranks, 256.
  - X. Ditto for a sesquialtera 11 ranks, a full mixture 111 and IV ranks, and a sharp mixture V ranks, 258.

### CHAPTER XXXVI.—THE EXTERIOR ARRANGEMENT OF THE ORGAN.

- 1095. The organ case, 261.
- 1102. The manuals and pedals; their width; and their proper situation in regard to each other, 262.
- 1116. The organ-stool, 265.
- 1118. The swell pedal, 265.
- 1120. The music-desk, 266.
- 1121. The composition pedals, 266.
- 1122. The arrangement of the draw-stops, 266.

#### CHAPTER XXXVII. - THE INTERIOR ARRANGEMENTS OF THE ORGAN.

- 1143. The building-frame, 270.
- 1144. The platform, 270.
- 1146. The distribution of the sound-boards, 270.
- 1151. The cause of the bad proportions of many English organs, 271.
- 1154. Much room conducive to the orderly arrangement of the organ, 272.
- 1156. The advantages of large sound-boards, 272.
- 1164. "Unoccupied space" in an organ not "lost room," 274.
- 1165. The Abbe Vogler's symplification system, 274.
- 1173. Passage-boards advantageous in more ways than one, 276.
- 1174. The pipes should be so arranged that the small ones are accessible, 276
- 1176. Double grooves in the bass of large sound-boards advisable, 277.
- 1177. The roller-boards, 277.
- 1178. The bellows, 277.
- 1182. The wind-trunks, 278.
- 1183. The swell-box, 278.
- 1184. The scale for the pipe-work, 279.
- 1202. The materials for the pipe-work, 285.
- 1213. The price of the organ, 288.

#### CHAPTER XXXVIII. -- PLANS FOR ORGANS OF VARIOUS SIZES.

- I. Specification for a small Organ of VIII Sounding Stops, I Manual and Pedal, 293. Second Specification ditto, 294.
- II. Specification for an Organ with XIII Sounding stops, II Manuals and Pedal, 294.
- III. Specification for an Organ with XVI Sounding Stops, II Manuals and Pedal, 297.
- IV. Specification for an Organ with XX Sounding Stops, II Manuals and Pedal, 299.
- V. Specification for an Organ of XXVIII Sounding Stops, III Manuals and Pedal, 301.
- VI. Specification for an Organ with XXVII Sounding Stops, II Manuals and Pedal, 305.
- VII. Specification for an Organ of XXXVI Sounding Stops, III Manuals and Pedal, 306. VIII. Specification for an Organ of L Sounding Stops, 111 Manuals and Pedal, 308.
- IX. Specification for an Organ of XC Stops, IV Manuals and Pedal, 311.

#### APPENDIX,

#### COMPRISING AN ACCOUNT OF FOREIGN AND BRITISH ORGANS.

17.

18.

4.9.

50. 51. 52.

53.

54.

55.

56.

57.

58.

59.

60. 61.

62.

88.

388.

Zerbst—St. Nicholas, 354. Langensulza—St. Boniface, 355.

Merseburg—the Cathedral, 356. Halle—St. Maurice, 357.

KATSCHER-the Catholic Church, 358.

KRUMOLS-the New Catholic Church,

HALBERSTADT - the Great Church,

HIRSCHBERG—Christ Church, 361. NAUMBERG—St. Wenzel, 362.

TREBNIZ—the Catholic Church, 363.

SALZWEDEL—St. Catherine, 363. Weissenfels—the Lock Church,

Celle—the Ludwigs' Church, 364.

Loiz—the Marien-Kirche, 357.

MUHLHAUSEN-355.

Erdmannsdorf-359.

359.

360.

364.

1.	HAARLEM—the Cathedral Church of
	St. Bavon, 315.
2.	ROTTERDAM—the Cathedral Church
	of St. Lawrence, 316.
1)	
3.	— the Octagon Church, 317.
4.	Amsterdam—the Old Church, 318.
5.	— the New Church, 319.
6.	NYMENGEN—St. Stephen, 320. Gouda—St. John the Baptist, 321.
7.	GOUDA—St. John the Baptist, 321.
8.	THE HAGUE—Lutheran Church, 322.
9,	Delft—the New Church, 322.
10.	UTRECHT—the Principal Protestant
- 0 •	Church, 323.
11.	TRIEBEL—the State Church, 324.
12.	Paris—the Abbey of St. Denis, 325.
12.	
	St. Vincent de Paul, 327.
13.	— the Madeleine, 327.
13в.	—— St. Eustace, 329.
14.	AMIENS—the Cathedral, 330.
15.	—— St. Remy, 330.
16.	Tours—the Cathedral, 331.
17.	ROUEN—St. Ouen, 332.
18.	ABBEVILLE—the Cathedral, 333.
19.	Paris—St. Sulpice, 333.
20.	Beauvais—the Cathedral, 335.
21.	Antwerp—the Cathedral, 336.
22.	—— St. Paul, 337.
23.	BRUSSELS—the Cathedral Church of
	St. Gudule, 338.
24.	Liege—St. Martin, 338.
25.	Covers the Cathedral 220
20.	Cologne—the Cathedral, 339.
26.	—— the Minorets' Church, 340.
27.	— the Jesuits' Church, 310.
28.	— St. Marià de Capitol, 341.
29.	—— St. Columba, 342.
30.	—— St. Ursula, 342.
31.	Bonn—the Cathedral, 343.
32.	—— the Protestant Church, 343.
33.	COBLENTZ—the Church of Castor, 344.
34.	STRASBOURG—the Cathedral, 344.
35.	—— St. Thomas, 345.
36.	—— the "Temple neuf," 346.
37.	FRIBURG IN BRISGAU—the Cathe-
.71.	dral, 347.
38.	
	—— the Lutheran Church, 347.
39.	Frankfort—the Cathedral, 348.
40.	— St. Paul, 349.
41.	Fulda—the Town Church, 350.
42.	Gotha—St. Augustine's, 351.
43.	—— St. Margaret, 351.
1.4	П. при при 259

14.

45.

46.

Haarhausen—352. Eltsleben—352.

Waltershausen-353.

63. VERDEN—the Cathedral, 365. 64. Bremen—the Cathedral, 365. Hamburg-St. Michael, 366. 65. - St. Catherine, 368. 66. 67. — St. Jacobi, 369. - St. Nicholas, 371. 68. — St. Peter, 372. 69. LUBECK-the Marien Kirche, 373. 70. 71. --- the "Little Organ," ditto, 374. 72. - the smaller Church, 375. WISMAR-St. Mary, 376. 73. 74. Perleberg-377. Berlin-St. Mary, 377. 75. - the Garrison Church, 378. 76. KRONSTADT—the Cathedral Church, 77. 379. LEIPZIG - the University Church, 78. 380. Dresden — the Royal Catholic Church, 381. 79. - the Royal Church of the Evan-80. gelists, 382.

St. Mary, 382.

St. Sophia, 383.

the Church of the Holy Cross, 81. 82. 83. 384. 84. FREIBERG IN SAXONY—the Cathedral, 385. 85. Prague—St. Dominico, 386. GOERLITZ-St. Peter and St. Paul, 86. 387. 87. - St. Mary, 388.

LIEGNITZ—St. Peter and St. Paul,

	77 1. 1. 1	MINIX	Ala
89.	Breslau—the Cathedral of St. John, 389.	116.	Weingarten—the Benedictine Monnestery, 108.
90.	—— Choir Organ, ditto, 390.	117.	MUNICH-the Odeon Concert Room,
	— the little Organ, ditto, 390.		109.
91.	- St. Mary Magdalen, 391.	118.	Ratisbon—St. Emmeran, 110.
92.	— St. Elizabeth, 392.	119.	Botzen—the Parish Church, 111.
93.	- small Organ, ditto, 393.	i20.	Rome—St. Peter, 411.
94.	— St. Bernhardin, 393.	121.	second Organ, 413.
95.	small Organ, ditto, 391.	122.	MILAN—the Cathedral, 414.
96.	St. Vincent, 391.	123.	—— second Organ, 145.
97.	—— St. Ethelhert, 395.	124.	St. Alessandro, 116.
98.	Church of the II Thousand	125.	— St. Maria della Grazia, 417.
	Virgins, 395.	126.	—— St. Raphael, 417.
99.	—— St. Salvator, 396.	127.	Coмo—the Cathedral, 418.
100,	—— The Cemetery Church, 396.	128.	Church of the Santissimo Cro-
101.	—— St. Mauritius, 397.		cifisso, 419.
102.	—— St. Barbara, 397.	129.	FLORENCE—Church of the Badia, 419.
103.	Music Room of the University, 397.	130.	—— St. Marco, 420
104.	Cracow—the Evangelists' Church,	131.	——————————————————————————————————————
	398.	132.	Genoa—Santa Maria des Vignes,
105.	Warsaw - the Lutheran Church,		421.
	398.	133.	— St. Amhrogio, 122.
106.	VIENNA—the Cathedral of St. Ste-	134.	— the Carigrana Church, 122.
- 0 -	phen, 399.	135.	— St. Felipo Neri, 423.
107.	—— St. Michael, 399.	136.	— Cathedral of St. Pierre, 424.
108.	— the Lutheran Church, 100.	137.	425.
109.	— the Minorites' Church, 401.	138.	Siena—the Cathedral, 125.
H0.	St. Peter, 401.	139.	— the Conventual Church, 426.
111.	FREIBURG IN SWITZERLAND—the	140.	Seville—the Cathedral, 427.
110	Cathedral of St. Nicholas, 402.	141.	— the second Organ, ditto, 430.
112.	GERSAU—the Cathedral, 403.		
113.	Soleure—the Cathedral, 404.	1.40	AMERICA.
114.	Lucerne—the Cathedral, 404.	142.	New York—Trinity Church, 431.
	WINTERTHUR—406.	143.	Church of the Annunciation,
115.	CONSTANCE—the Cathedral, 106.	1.44	432.
AGI I	STUTGARD—the Stiftskirche, 407.	144.	—— the Presbyterian Church, 433.

A TABLE OF FOREIGN AND ENGLISH EQUIVALENT TERMS, 434 to 443. BRITISH ORGANS-LONDON AND ITS ENVIRONS. 145. Panopticon, 443. 167. St. Mary's Catholic Chapel, Moor-146. St. Paul's Cathedral, 445. fields, 463. 147. Westminster Ahbey, 446. 168 St. Mark's, Pentonville, 464. 148. Buckingham Palace (Chapel), 447. 169. St. Dunstan's in the West, Fleet 149. - (private apartments), 447. Street, 464. 150. The Temple Church, 448 170 Foundling Hospital, 465. 151. Christ Church, Newgate Street, 449. 171. St. Clement Dane's, Strand, 466. 172. 152. St. Sepulchre's, Snowhill, 450. St. Martin's Hall, 466. 153. St. Andrew's, Holborn, 452. 173. German Lutheran Church, Savoy, 154. St. Peter's, Cornhill, 452. 467.155. St. Michael's, Cornhill, 453. 174. Exeter Hall, 467. St. Stephen's, Walbrook, 455. St. Edmund the King, Lombard 156. 175. St. Martin's in the Fields, 469. 157. 176. Chapel Royal, Whitehall, 471. Street, 455. 177. St. Margaret's, Westminster, 472. 158. 178. St. Mary-at-Hill, 456. St. Philip's, Waterloo Place, 472. 159. St. Stephen, Coleman Street, 457. 179. St. James's, Piccadilly, 473. 160. St. Botolph, Aldgate, 457. 180. St. George's, Hanover Square, 471. 161. St. Ann's, Limehouse, 458. 181. Hanover Square Rooms, 474. 162. 1S2. Wesleyan Chapel, Poplar, 459. The Cyclorama, 475. 163. 183. St. Katherine's, Regent's Park, 475. Christ Church, Spitalfields, 459. 164. 184. St. Luke's Church, Old Street Road, Christ Church, Marylebone, 476.

461.

165. St. Leonard's, Shoreditch, 462. 166. St. John's, Hackney, 462.

185. Chapel Royal, St. James's, 477. St. Paul's, Wilton Place, Knights-186.

bridge, 477.

XX	APPENDIX.				
1.97	St. Michael's Chapter Sauces 450	100	St. Olama's Sauthanala 494		
187. 188.	St. Michael's, Chester Square, 478.	196.	St. Olave's, Southwark, 484.		
189.	St. Gabriel's Church, Pimlico, 479.	197.	St. John's, Southwark, 485.		
190.	Holy Trinity, Brompton, 480.	198,	St. James's, Bermondscy, 486.		
191.	St. Luke's, Chelsea, 480. St. John's, Waterloo Road, 481.	199 <b>.</b> 200	St. Mary's, Rotherhithe, 486.		
192.		200. 201.	The Hospital, Greenwich, 487.		
193.	St. Pcter's, Walworth, 482. St. George's, Camberwell, 482.	201.	Lee Church, Kent, 488.		
194.	St. Giles, Camberwell, 482.	203.	St. Mary's, Clapham, 488.		
195.	St. Saviour's, Southwark, 483.	204.	Hampton Court Palace, 489.		
2001	So Saviour S, Southwark, 409.	20 F.	Transport Court Larace, 400.		
	Country	ORGAI	Ks.		
205,	Windson—St. George's Chapel, 490.	244.	Lancaster—St. Thomas, 523.		
206.	St. George's Hall, 491.	245.	CARLISLE—the old Cathedral Organ,		
207.	ETON COLLEGE, 492.		524.		
208.	Oxford—Christ Church, 492.	246.	NEWCASTLE-ON-TYNE—St. Nicholas,		
209.	Magdalen College, 493.	0.10	525.		
210.	RADLEY—St. Peter's, 494.	247.	DURHAM—Cathedral, 526.		
211.	GLOUCESTER—Cathedral, 495.	248.	York—Cathedral, 527.		
212. 213.	—— the Shire Hall, 495.	249.	Doncaster—St. George, 529.		
214.	Tewkesbury—the Abbey, 496.	250.	Lincoln—Cathedral, 530.		
215.	HEREFORD—Cathedral, 497.	251.	Boston—Centenary Chapel, 531.		
216.	Workester—Cathedral, 497.	252. 253.	NEWARK—Parish Church, 532.		
217.	— the Shire Hall, 498. Stratford-on-Avon—499.	254.	Norman St. Mary 533.		
218.	Kidderminster—Town Hall, 500.	255.	Nottingham—St. Mary, 533. — Mechanics' Hall, 534.		
219.	BIRMINGHAM—Town Hall, 500.	256.	Peterborough—Cathedral, 535.		
220.	LICHFIELD—Cathedral, 502.	257.	LYNN REGIS—St. Margaret, 535.		
22I.	Shrewsbury—St. Mary's, 502.	258.	Norwich—Cathedral, 536.		
222.	—— St. Chad's, 503.	259.	— St. Peter Mancroft, 537.		
223.	Chester—Cathedral, 504.	260.	GT. YARMOUTH-St. Nicholas, 538.		
224.	St. John's, 504.	261.	Ely—Cathedral, 539.		
225.	LIVERPOOL—St. George's Hall, 505.	262.	Cambridge—Trinity College, 540.		
226.	—— Great George Street Chapel, 508.	263.	St. John's College, 541.		
227.	—— Collegiate Institution, 509.	264.	TURVEY-54I.		
228.	Manchester—the Cathedral, 509.	265.	NORTHAMPTON—All Saints', 542.		
229.	St. Luke's, 510.	266.	— Exchange Room, 542.		
230.	— Holy Trinity Church, 511.	267.	ROCHESTER—Cathedral, 543.		
23I.	St. Peter's Church, 512.	268.	CANTERBURY—Cathedral, 514.		
232.	Ashton-under-line—513.	269.	Tonbridge Wells—Trinity Church,		
233.	STOCKPORT—Sunday School, 514.	950	544.		
234. 235.	OLDHAM—Parish Church, 515.	270.	CRANBROOK—Parish Church, 545.		
200.	Huddersfield — Buxton Road	271. 272.	CHICHESTER—Cathedral, 545.		
236.	Chapel, 516.  Highfield Chapel, 517.	273.	Winchester—Cathedral, 547. Salisbury—Cathedral, 547.		
237.	HALIFAX—Parish Church, 518.	274.	Bristol—Cathedral, 550.		
238.	— Harrison Road Chapel, 519.	275.	St. James, 550.		
239.	Bradford—Eastbrook Chapel, 520.	276.	Wells—Cathedral, 551.		
240.	Leeds—St. Peter's Chapel, 521.	277.	Exeter—Cathedral, 551.		
241.	—— Brunswick Chapel, 521.	278.	Ripon—Cathedral, 552.		
242.	Preston—Parish Church, 522.	279.	Bangor—Cathedral, 553.		
243.	St. Walburgh's Cathol. Church,	280.	St. Asaph's—Cathedral, 553.		
	253.	281.	St. David's—Cathedral, 554.		
	Organs in Scotl.	AND T	RELAND &c		
282.					
283.	GLASGOW—the City Hall, 554. Edinburgh—the Music Hall, 555.	292. 293.	CASHEL—Rom. Cath. Cathedral, 561.		
284.	Dublin—St. Patrick's Cathedral,	294.	Cork—St. Mary, 562. Cloyne—Cathedral, 562.		
20T.	556.	295.	Kilkenny—St. Canice, 563.		
885.	—— Christ Church Cathedral, 557.	296.	TUAM—Cathedral, 564.		
286.	Trinity College Chapel, 558.	297.	Newfoundland—Cathedral, 565.		
287.	— St. Nicholas, 558.	298.	Boston, United States—Tremont		
288.	—— St. Francis Xavier, 559.		Temple, 566.		
289.	Belfast—St. Malachy, 560.	299.	HENLEY-ON-THAMES-567.		
290.	—— St. Patrick, 560.	300.	CARLISLE—new Organ for Cathedral,		
291.	CASHEL—Cathedral, 56I.		567.		

#### THE HISTORY OF THE ORGAN.

- Ancient Organ, from Kircher's Musurgia, 3. Tho "Macraphe d' Arnehin," an Ho-
- 1) brew instrument, from the same, 4.
- An Hydraulie-organ, from Haüser's 3.
- Kirchenmusik, 10. Ancient Organ, from the sculptures on 4 the obelisk at Constantinople, 12.
- from the MS. Psalter of Eadwine, in the library of Trinity College, Cambridge, 18.
- Ancient Organ and various Musical Instruments, of the time of Charlemagne,
- from Gori's Thesaurus Diptychorum, 30. Ancient Key-board, from Prætorius' Theatrum Instrumentorum, 31.

46.

47.

48.

49.

50.

51.

52.

The sliders and bearers, 37.

Groove arrangements, 41.

Side view of manual keys, 45.

Side view of pedal keys, 46.

The pipe racks, 39

-42.

- 42.

- An Organist performing upon an instrument with broad-keys, from Gaffurius' Theorica Musica, 32.
- Curious Mode of Blowing, from Practorins' Theatrum Instrumentorum, 33.
- The Bellows " à la lanterne," from Mer-10. sennus' Harmonie Universelle, 34.
- The Regals, from Luscinius' Musurgia, 11. 38.
- The Positive-organ, from Wilphlingse-12. der's Erotemata Musicos Practica, 10. The Old Organ of Lincoln Cathedral,
- 13. from Dugdale's Monasticon, 61.
- 14. Autograph of Bernard Smith, 80.
- THE CONSTRUCTION OF THE ORGAN. No. No. 6. Arrangement in an angle, 4. Arrangement of pipes in a semicirele, 4. 54. The fan-frame movement, 47. 7. 55. The stickers, 47. - in "niehes, 56. The backfalls, 48. 8. - in a "breasted" form, 4. The trackers, 48 9. 57. 10. - of the "ogec" form, 4. 58. The rollers, 49. 59. 11. - in the flats, 5. The squares, 51 5. 12. 60. The manual coupler, 52. The sliding coupler, 53 13. 61. 14. 62. The sforzando eoupler, 54. The pedal roller movement, 55. 15. The diagonal bellows, 8. 63. The pedal coupler, 55. 16. The horizontal ditto, 8. 64. 65. 17. Section of diagonal ditto, 10. The pneumatic action, closed, 58. 18. - 10. 66. open, 58 19, The top board, 12. 67. The wooden-trundle draw stop action, 61. 20. 12. 68. The iron-trundle ditto, 62. 21. The middle board, 13. 69. The composition pedal action, 64. 22. 70. The tremulant, 71. The bottom board, 13. 71. 23. Section of horizontal bellows, 13. Open cylindrical pipe, 79. Stopped cylindrical pipe, 79. Half-stopped cylindrical pipe, 79. Cylindrical pipe (the clarionet), 80. 24.Inverted ribs, 13. Direct parallel ribs, 13. 72. 25. 73. 26. 74. Triangular ribs, 14. - (the Vox Humana), 80. 27. Valves in the middle and bottom boards, 75. 76. Conical pipe, with a bell, 80. 77. 78. 28. - 14. - (the spitz flöte), 80. The middle frame, 15. - (the gemshorn), 80. 29. 30. Folds of the reservoir, 16. 79. Inverted cone-shaped pipe, 81. 31. Folds of a single feeder, 16. 80. - (the dolcan), 81. 32. Cockoo feeder, 17. 81. - surmounted by a bell, 81. 33. Folds of ditto, 19. 82. Four-sided pipe, 81. Stopped four-sided pipe, 82. 34. Cockoo feeder with reversed lining, 20. 83. The double feeder, 20. The concussion bellows, 21. 84. Pyramidal pipe, 82. 36. 85. Inverted pyramidal pipe, 82. 37. The anemometer, 22. 86. — 82. Front view of a portion of a wind chest, Portion of body of a metal flue pipe, 83. 38. 87. 25. 88. Foot of ditto, 84. 39. Side view of a wind chest, 26. 89. Languid of ditto, 84. Wooden flue pipe (the body), 85. 40. The sound board, 27. 90. The hohl flute, 85 The box pallet, 31. 41. 91. Month of a block pipe, 86. 42. . 31 92. A wood languid pipe, 86. Section of a German wood pipe, 86. 43. The jointed pallet, 32. 93. 44. The valve pallet, 32. 94. The table, 33.
  The upper boards, 35. 45. 96. Section of an English metal pipe, 86. Section of a German metal pipe, 86.

95.

97.

98.

99.

102.

The block of a reed pipe, 93.

The reed, 93.

The tongue, 93.

- 159.

100. The tuning wire, 94. 101. The tuning horn, 159.

103. Mop used in tuning, 160.

#### ERRATA

#### IN "THE CONSTRUCTION OF THE ORGAN," &e.

17, last line but one, after influence of, read the. 18, See. 71, last line but one, instead of by a, read by the. 32, the position of the two wood-cuts should be reversed. 33, Sec. 137, last line, after series, read with Pipes above. 50, Sec. 222, fourth line from the end, for roller, read rollers. 56, See. 240, fifth line, for doubler, read double. 58, See. 243, for fig. read figs. 58, See. 243, eighth line, for m read w, and for t read f. 59, See. 245, fifth line, for n read g; and in seventh line, for q read p. 60, See. 247, fourth line, for pallet read pallets. 83, second line, for second read sound. 84, Sec. 362, for thus read then.
86, Sec. 372, third line, for i read o.
Sec. 374, the comma should be after the word outside in the sixth line, and not after exterior in the seventh. See. 375, fourth line, for it is, read they are. 109, See. 495, the misprints, "Principal-werk, Gedaet-werk, and Flote-werk," should be erased. 120, Sec. 569, second line, for " $1\frac{1}{6}$  foot on the Manual, and  $2\frac{1}{3}$  on the Pedal," read  $1\frac{1}{3}$  foot on the Manual, and 22 feet on the Pedal. 158, See. 709, fourth line, for of third, read of a third. 164, Sec. 737, fifth line, for lower, read low. 166, See. 742, fifteenth line, for "practised E la," read "practised above E la." eighth line, the punctuation should be erased.

173, Note, fourth line, for Stop, read Stops.

186, See. 822, fourth line from the bottom, for "disturbing," read "permanently disturbing." 204, See. 889, last line but two, for iu read in. 208, See. 903 (side note), for writing read uniting. 263, Sec. 1105, second line, for 2½ inches, read 23 inches.
Sec. 1109, first line, after "short," insert "in front of the centre." 269, Sec. 1142, third line, for  $\frac{1}{16}$ , read  $\frac{3}{16}$ . 283, Sec. 1196, thirteenth line, after "plugging," insert "making a wider wiud-way." 284, Sec. 1198, second line, for Diapasons, read Diapason. 288, See. 1212, last line, for notes, read note. 300, Sec. 1237, fourth line from the bottom, for " $5\frac{2}{3}$  feet," read " $5\frac{1}{3}$  feet." 313, See. 1269, last line but one, for "point," read "points." 315, Stop No. 11, for "13 feet," read "15 foot." 317, No. 3, second line, for "and Pedal," read "and a Pedal."
318, Stop No. 11, for "1 feet," read "16 feet."
321, No. 7, Stop No. 50, for "3 feet," read "4 feet."
322, No. 8, last line but two, for "Fuur," read "Four." -last line, for "altissimo," read "alt." 325, No. 12, fifth line, for "Bourbordes," read "Bombardes." 332, No. 17, last line, for " $5^3$  feet," read " $5^{\frac{1}{3}}$  feet." 335, No. 20, Stop No. 12, for " $1\frac{2}{5}$  foot," read " $1\frac{3}{5}$  foot." 342, No. 29, second line, for "that," read "the." 343, No. 31, Stop No. 19, for "3 feet," read "2 feet." 345, Stop No. 21, for "1½ foot," read "1½ foot." 361, Stop No. 57, for " $6\frac{2}{3}$  feet," read " $6\frac{2}{5}$  feet." 501, Stop No. 51, for "03 feet, read "03 feet."

No. 57, Stop No. 11, for "1½ foot," read "1⅓ foot."

365, Stop No. 23, for "22," read "2⅓."

377, No. 74, Stop No. 11, for "1⅔," read "1⅓."

379, No. 77, after Stop 46, instead of "5, 6, and 7," read "44, 45, and 46." 388, No. 88, Stop No. 13, for " $3\frac{1}{3}$  feet," read " $3\frac{1}{3}$  feet." 389, No. 88, Stop No. 20, for " $1\frac{1}{3}$  foot," read " $1\frac{1}{3}$  foot." 399, No. 107, second line, for "name," read "names"

469, No. 174, there is a Bourdon on the Pedal of the Exeter Hall Organ, making the number of Sounding Stops 42 instead of 41.

495 No. 212 The Glovester Shire Hall has in the Great Organ, a IV-rank Sesouialtera

495, No. 212. The Gloueester Shire Hall has, in the Great Organ, a IV-rank Sesquialtera and no Viol di Gamba; in the Choir, a Suabe Flute and no Fifteenth; and in the Swell, a Gamba and no Cromorne. 1t has also 14 Accessory Stops and Movements; namely, 6 Couplers and 8 Composition Pedals.

### AN HISTORICAL ACCOUNT

OF

## THE ORGAN,

ВХ

EDWARD F. RIMBAULT, LL.D.

&c. &c.



### ERRATA.

Page

42, sixth line from the bottom, for "may have been," read "was."

56, third line from the bottom, for "Russian province," read "Prussian province."



#### PREFACE.

When I undertook to prefix to my friend Mr. Hopkins's valuable treatise on the construction of the Organ an historical account of that noble instrument, my intention was to give a resumé of what had already been written, with the addition of such new particulars as the course of years had accumulated in my note-books. But upon collating the various writers, their statements often appeared so vague and unsatisfactory, that it became necessary to consider the subject more attentively, and, in all cases where it could be done, to consult original authorities. The result of this examination has been the clearing up of many doubtful points, and the discovery of some important particulars hitherto unknown.

All modern writers have been perplexed with the notices of the Organ handed down to us by the ancient Greeks, and have endeavoured to reconcile them with our present ideas of the instrument. The *key-board* has been a constant source of difficulty, and the epigram, or rather enigma, of the Emperor Julian has been often cited to prove that the ancients were acquainted with it. The discovery of a treatise on Organ-building by a monk of the eleventh century (printed in the following pages) settles for ever this important question.

Another source of difficulty is the common expression, in medieval times, of "a pair of organs." Some of our ablest antiquaries have exercised their erndition in endeavouring to explain this term; but with what degree of success, the reader who peruses the following pages will have an opportunity of judging.

At a later period in the History of the Organ, the biographies of Smith and Harris have been involved in much obscurity. Father Smith has fathered all our old organs, of whatever kind or description; and so little attention has been paid to dates, that we are told, "Harris's most eelebrated organs are those of St. Sepulchre's, Loudon, 1667, and Doneaster, Yorkshire, 1738!" I have been enabled to arrange the various members of these two eelebrated families under their respective periods, and by so doing have cleared away many anachronisms, and reconciled a few seeming impossibilities.

The Jordans and the Byfields, and their foreign cotemporaries the Silbermanns, have also received the same attention; and if the information regarding them is somewhat seant, it is all my research has enabled me to bring together.

The section on the "Ancient Position of the Organ" is interesting at the present time, when architects are anxiously looking for precedents. I have carefully noted all the authorities upon the point, especially in this country;

XXVi PREFACE.

which, added to Mr. Hopkins's able chapter on the "Situation of the Organ," will, it is to be hoped, be found of some practical utility. The rescue of this noble instrument from the "holes and corners" to which modern ecclesiologists have ofttimes assigned it, is part of our creed.

It will be observed that my historical account deals more with facts than with opinions. For the latter, I am content to refer to the body of the book, trusting with full confidence to Mr. Hopkins's superior judgment and intimate acquaintance with his subject.

The History of the Organ, from the period at which I leave it, chiefly consists in a series of inventions, all of which receive their full share of attention from Mr. Hopkins, in the course of the volume.

I ought not to pass unnoticed the aid I have received from several authors who have written upon the same subject. Amongst them I may especially name the Rev. Sir William Cope's paper on "Early Organ-builders in England," inserted in the Parish Choir; Mr. Sutton's Short Account of Organs built in England from the reign of King Charles the Second to the present time; Herr Seidel's Treatise on the Organ, printed at Breslau; and M. Hamel's valuable reprint of Dom Bedos, forming one of the publications of the Encyclopédie-Roret. If I have not named other modern works purporting to treat of the Organ historically, it is because I have found them unworthy of credit.

It only remains to tender my obligations to those gentlemen who have kindly assisted me in the course of the following essay. I must especially thank my friend, F. W. Fairholt, Esq. F.S.A. for the valuable extracts from Mr. Rolfe's MSS. (inserted in p. 45), and for other information; William Chappell, Esq. F.S.A. for two or three curious notices; Mr. Hill, the eminent Organ-builder, for the loan of G. P. England's MS. Account Book; Alfred Price, Esq. of Gloucester, for his MS. translation of Herr Seidel's Treatise on the Organ, before mentioned; and lastly, Robert Hendrie, Esq. for his kindness in giving me permission to use his excellent translation of Theophilus's Chapters on the Organ.

EDWARD F. RIMBAULT.

### HISTORY OF THE ORGAN.

#### FIRST EPOCH.

THE ANCIENT ORGAN, ANTERIOR TO THE INVENTION OF THE KEY-BOARD.

#### 1. Its Invention.

THE early history of ancient musical instruments is surrounded by mystery and fable; their invention being usually attributed to the heathen deities. Patient investigation is required to sift the historical from the fabulous matter, and it then remains a matter of doubt whether the result does not excite, rather than satisfy, our curiosity.

The word organ, used in the Old Testament and in the Psalms, must not be confounded with the noble instrument now bearing that name. The term was taken from the Greek translation; but the ancient Greeks had no particular musical instrument called an organ; for τργανον, with them, was a general name for an instrument, a work, or an implement of any kind: hence, δργανονικός, instrumental; δργανοποιός, an instrument maker; and δργανοποιία, the fabrication of an instrument. And, in all the Greek musical theorists, organic is a general term applied to instrumental music\*.

It is of much importance to the history of an art, that the origin, etymology, and primitive acceptance of its terms should be minutely traced. In the present instance, the extended application of the word organum, throughout the middle ages, has given rise to much confusion and misunderstanding. It is, however, perfectly clear, to those who have investigated the subject, that the Greeks understood by the word  $\partial \rho \gamma \alpha \nu \nu \nu$ , and the Romans by their organum, not an organ, in our sense of the term, but an instrument of any kind; applying the expression, however, more particularly to musical instruments.

<sup>\*</sup> See note in Burney's  ${\it History~of~Music}$ , vol. i, p. 252; also Liddell and Scott's  ${\it Greek~and~English~Lexicon}$ .

<sup>†</sup> Organum. A general name given to any instrument, machine, or contrivance by which human labour is assisted, in agriculture, architecture, warfare, &c.; differing, however, from machina in this particular, that it required a certain amount of skill from the person using it, whereas that only wanted brute force or numbers to work it. (Vitruvius,

The organ (ougab) mentioned in Genesis (chap. iv, v. 21) certainly little resembled the modern instrument of that name, although it may be regarded as furnishing the first hint\*. It was probably a series of reeds, of unequal length and thickness, joined together; being nearly identical with the pipe of Pan among the Greeks, or that simple instrument called a mouth-organ, which is still in common use†. The classical ancients ascribe its invention to Pan, the great sylvan god; and, accordingly, he was usually figured with the instrument in his hands. The fable states that he formed it of reeds that grew by the river, and caused it to produce all kinds of agreeable sounds, while his goats were skipping around him, and feeding on the banks. This shows that it was regarded as properly a sylvan and pastoral instrument; and so it seems to be mentioned by Job (ch. xxi, v. 11, 12). Pan himself thought it superior to the lyre of Apollo, whom he challenged to a trial of skill; and the challenge being accepted, the umpire (being no other than Midas) decided in favour of Pan's pipes.

The Greek and Latin shepherds made this primitive instrument of strong


x, 1, 3. Columell, iii, 13, 12. Plin. H. N. xix, 20.) Hence the word is especially given to musical instruments (Quint. ix, 4, 10; xi, 3, 20); and, amongst these, more particularly to the one from which our organ is descended (Suet. Nero, 41. Lamprid. Alex. Ser. 27. Id. Heliog. 32); but which also had a special name of its own, in allusion to the water originally employed, instead of weights, for working it.—Rich's Companion to the Latin Dictionary and Greek Lexicon, p. 458.

<sup>\* &</sup>quot;And here we must not think that the organs in the Old Testament were any such things as those which we call so now. We read it in Job, chap. 30, verse 31, and my organ into the voice of them that weep. The Syriack rendreth it, my psaltery, clean another instrument of a triangular form, as you may see by the description of Mersenius (De Instrum. Harm. lib. 10, prop. 44). The Hebrew word in Job is ougab, which the Chaldee still turneth abuba: now abub signifieth properly an ear of corn with the stalk or straw: by translation it signifieth a pipe made of such a reed or stalk, fistula ex novarum frugum calamo confecta \* \* \*. David's organ was but a kind of pipe, what kind soever it was."—Gregorie's Discourse declaring what time the Nicene Creed began to be sung in the Church, 4to, 1683.

<sup>†</sup> It is indeed remarkable that the lyre (kinnor) and syrinx (ougab) were the two first instruments of music the invention of which is recorded in Scripture, and the only ones that are mentioned before the Deluge; and that subsequently the ougab is almost always mentioned in connection with the kinnor. The principle of the instrument is so simple, that it has been one of the most diffused of musical instruments. A syrinx, or fistula Panis, made of reeds tied together, exactly resembling that of the ancients, has been found to be in common use in the island of New Amsterdam, in the South Seas, as flutes and drums have been in Otaheite and New Zealand; which indisputably proves them to be instruments natural to every people in a state of barbarism. They were first used by the Egyptians and Greeks, during the infancy of the musical art among them; and they seem to have been invented and practised at all times by nations remote from each other, and between whom it is hardly possible that there ever could have been the least intercourse or communication. The combination of pipes in question is still used in different parts of Asia. The number of tubes which these instruments exhibit on ancient monuments varies from seven to eleven. See Burney, vol. i, p. 267; and the Pictorial Bible, vol. ii, p. 665, note.

reeds, or some other suitable wood. It originally consisted of seven or eight reeds of progressive lengths, fastened together with wax. The number was afterwards extended to ten or twelve\*. The syrinx, or pipe of Pan, by its form and arrangement, may be regarded as the first kind of organ building; for it consisted of a number of pipes placed together in ranks, according to their succession of tones, and sounded by wind.

To obviate the fatigning motion of the head or hands, by inflating the pipes in some other manner, men seem to have laboured for centuries. The first step towards this end was the invention of a wooden box, the top of which was bored with just so many holes as there were pipes to stand on it. In these they now placed the pipes in the same order as they occupied in the Pan-pipes. From the chest (the modern wind-chest) proceeded a small reed (now the wind-trunk), into which they blew with the mouth. But as, by this means, all the pipes spoke simultaneously, they were obliged to stop with the fingers the tops of those pipes intended to be silent—a process which was soon found to be very troublesome, and, as the number of pipes increased, impossible. Now, in order to prevent the simultaneous intonation of all the pipes, a slider (now ealled the valve) was placed under the aperture of each pipe, which either opened or stopped the entrance of the wind into the pipes. Father Kircher, in his Musurgia, fol. 1650 (lib. ii, p. 53), has given us a drawing of this instrument, which is here copied:




The slides stood in an inclined position, and, in order to open them, levers were added, which were connected with the slides by cords or strings (the origin of the pull-downs). A further increase of the number of pipes at length caused an enlargement of the pipe-chest (the modern wind-chest); consequently, human breath was no longer sufficient to supply the instrument, and then a more suitable contrivance for the production of wind was devised. Thus we have a new class of instrument, called by the Greeks proparou treepartito, and by the Romans tibia utricularis. Virgil has an elegant passage, in which he describes the shepherd Tonius playing upon the tibia utricularis:—

"Et cum multifori Tonius cui tibia buxo Tandem post epulas, et pocula, multicolorem Ventriculum sumpsit, buccasque inflare rubentes Incipiens, oculos aperit, ciliisque levatis,

<sup>\*</sup> This instrument is described by Virgil, and the use of it by Lucretius, lib. v. It is frequently depicted upon ancient medals.

Multotiesque alto flatum e pulmonibus haustum Utrem implet; cubito vocem dat tibia presso, Nunc huc nunc illuc digito saliente..."

When soberly considered, this instrument appears to be nothing more than the origin of the bagpipe. It consisted of pipes pierced with lateral holes, and an inflating pipe, which the performer applied to his mouth to fill the leathern bag with wind. The application of the inflating tube, it is evident, related only to the smaller instruments, such as that described by Virgil; the larger ones were supplied with wind by the compression of the leathern bag or bellows\*. This contrivance proved of so much advantage to the improving instrument, that, in order to obtain a more powerful tone, a second row of pipes of the same pitch was added to the former. The pipes having been thus increased and enlarged, and the box widened, the next improvement was the enlargement of the wind-tube (trunk). It now became evident that the leathern bag was insufficient to supply the proper quantity of wind required. The want of wind thus occasioned by the enlargement of the instrument was remedied by the invention of bellows, yielding a continuous supply to the leathern bag, which, from this time, served the office of our modern windchest. Father Kircher's representation of the Hebrew instrument called Macraphe d'Aruchin, affords an illustration of an organ of this kind:



From the progressive inventions we have recorded, it will be observed that many portions of the modern organ were already to be met with in the instruments of the ancients, in a more or less complete state. We may therefore justly assign the invention of the organ to this period, though no precise date can be given; thus much only can be stated with certainty, that all these inventions date from a period before the birth of Christ.

<sup>\*</sup> M. Fétis has written a long paper to prove that the *Pneumatic Organ* of the ancients was nothing more than a bagpipe! This learned writer has, however, been led into an error by considering only a portion of the ancient authorities, i.e. those relating to the tibia utricularis. See a translation of M. Fétis' paper in the Harmonicon for 1829, p. 4. M. Fétis is, no doubt, correct in saying, "The figure given by Bianchini, of a bagpipe joined to the pipes of an organ (fig. 13, tab. 2), in his Dissertation De tribus generibus instrumentorum veterum, is purely imaginary." The passage from Virgil is cited by M. Fétis.

# 2. The Hydraulic-Organ.

Vitruvius, in his celebrated work on Architecture (but treating of other matters very little allied to that art), has left us a curious chapter on the hydraulic or water-organ, which, from its complicated character, has much puzzled the learned. The bellows of the first organs, as we have seen, were very small, and so imperfectly constructed, that they could not supply a steady wind; the organ in consequence did not produce an uniform tone. Thus, the improvement of the wind apparatus was now seriously thought of, and the result was the invention of the water-organ.

Vitruvius' description, extracted from his work de Architectura, lib. x, cap. xi (translated by Newton), is as follows:

## "OF THE HYDRAULIC ORGANS".

"I must not omit to discourse briefly, and as explicitly as I am able, on the construction of the hydraulic-organs. Upon a compact base of timber

<sup>\*</sup> I subjoin the original Latin text:-

<sup>&</sup>quot;De hydraulicis autem quas habeant ratiocinationes, quam brevissime proximeque attingere potero et scriptura consequi, non prætermittam. De materia compacta basi, arca in ea ex ære fabricata collocatur. Supra basim eriguntur regulæ dextra ac sinistra scalari forma compactæ, quibus includuntur ærei modioli fundulis anıbulatilibus ex torno subtiliter subactis, habentibus fixos in medio ferreos ancones, et verticulis cum vectibus conjunctos pellibusque lanatis involutos. Item in summa planitie foramina circiter digitorum ternum, quibus foraminibus proxime in verticulis collocati ærei Delphini, pandentia habentes catenis cymbala ex ore infra foramina modiolorum chalata. Intra arcam, quo loci aqua sustinetur, inest in id genus uti infundibulum inversum, quod super taxilli alti circiter digitorum ternum suppositi librant spatium imum, ima inter labra pnigeos et arcæ fundum. Supra autem cerviculum ejus coagmentata arcula sustinet caput machine, quæ Græce κανών μεσικός appellatur: in cujus longitudine canales si tetrachordos est fiunt quatuor, si hexachordos sex, si octachordos octo. Singulis autem canalibus singula epistomia sunt inclusa, manubriis ferreis collocata: que manubria cum torquentur, ex arca patefaciunt nares in canales. Ex canalibus antem canon habet ordinata in transverso foramina respondentia in naribus, quæ sunt in tabula summa, quæ tabula Græce πίναξ dicitur. Inter tabulam et canona regulæ sunt interpositæ ad eumdem modum foratæ et oleo subactæ, ut faciliter impellantur et rursus introrsus reducantur, quæ obturant ea foramina, pleuritidesque† appellantur, quarum itus et reditus, alias obturat, alias aperit terebrationes. Hæ regulæ habent ferrea choragia fixa et juncta cum pinnis, quarum pinnarum tactus motiones efficit regularum. Continentur supra tabulam foramina, quæ ex canalibus habent egressum spiritus. Regulis sunt annuli agglutinati, quibus lingulæ omnium includuntur organorum. E modiolis autem fistulæ sunt continenter conjunctæ ligneis cervicibus, pertingentesque ad nares, quæ sunt in arcula, in quibus axes sunt ex torno subacti et ibi collocati, qui, cum recipit arcula animam, spiritum non patientur obturantes foramina rursus redire. Ita cum vectes extolluntur, ancones deducunt fundos modiolorum ad imum, Delphinique, qui sunt in verticulis inclusi chalantes in os, cymbala replent spatia modiolorum, atque ancones extollentes fundos intra modiolos vehementi pulsus crebritate, et obturantes foramina cymbalis superiora, aera, qui est ibi clausus, pressionibus coactum, in fistulas cogunt, per quas in lignea concurrit, et per ejus cervices in arcam: motione vero vectium vehementiore, spiritus frequens compres-

<sup>†</sup> Melius forsan plinthides a Græc. πλίνθις.

an area (cistern), made of brass, is disposed; and to the right and left, upon the base, timbers united in the manner of ladders are erected; between these are included brass buckets, with moveable pistons, very carefully turned, and having bent and jointed irons fixed to their middle, with levers adjoined, and being covered with unshorn sheep skins: in the upper surface (of the buckets) are holes of about three digits; near to which holes are brass dolphins fixed on turning joints, and having cymbals hanging by chains from their mouths below the holes of the buckets.

"Within the area which contains the water is a kind of inverted funnel, under which wedges, of about three digits high, are laid, to level the space between the under lip of the pnigeus and the bottom of the area. Upon the neck of this (pnigeus) is fixed the little eistern which supports the head of the machine, called by the Greeks canon musicus. In the length of this (canon) are channels, in number four if tetrachordie, six if hexachordie, and eight if octachordie. In the several channels are epistomia (stoppers), having iron handles; which handles, when turned, open orifices from the area (areula) into the channels. The eanon has also holes ranged transversely, communicating with the channels, and corresponding to orifices in the upper table, which in Greek is called pinax. Between the table and canon are disposed rulers, which, being perforated in the same manner, and anointed with oil that they may be easily moved to and fro', stop these holes, and are called pleuritides; the passing and repassing of which alternately stops and opens the holes.

"These rulers have iron choragia affixed to them, and are united to pinnæ, the touching of which pinnæ causes the motion of the rulers. Upon the table are the holes, through which the air from the channel passes. To the rulers are fixed rings, in which the tongues of all the organic pipes are inclosed. From the buckets proceed tubes, united to the neck of the pnigeus, and communicating with the orifices that are in the arcula; in these tubes are fixed well-turned valves, which, when the arcula has received the air, stop their apertures, and prevent its return.

"Thus, when the handles of the levers are raised, the pistons of the buckets are drawn to the bottom; and the dolphins that are fixed on axes lowering the cymbals that hang from their mouths, the cavities of the buckets become filled (with air). Then the pistons being raised into the buckets again, with frequent and strong pulsations, and thereby causing the cymbals to stop the upper holes, the air, which is there confined, is by the pressure forced into the tubes, from whence it passes into the puigeus, and through its neck into the area (arcula); and the frequent motion of the levers still vio-

sus epistomiorum aperturis influit, et replet anima canales. Itaque cum pinnæ manibus tactæ propellunt et reducunt continenter regulas, alternis obturando foramina, alternis aperiundo, ex musicis artibus multiplicibus modulorum varietatibus sonantes excitant voces. Quantum potui," &c.—M. Vitruvii Pollionis Architectura. Utini, 1825-1830, tom. iv, pp. 169 et seqq.

lently compressing the air, it rushes through the apertures of the epistomia, and fills the channel with wind: when, therefore, the pinnæ are touched by the hand, they thrust forward and draw back the rulers, alternately stopping and opening the holes; and thus, by the art of music, sounds in an infinite variety of modulations may be produced.

"I have thus endeavoured to explain, as well as I could by writing, this complex machine; but the construction thereof cannot be easily understood, except by those who are practised in things of this sort: those, however, who understand a little from the description, will, when they see the machine itself, more easily comprehend it, and will find the whole curiously and ingeniously contrived."

From this description, it seems that the water which forced the air into the pipes was pumped by men. Indeed, it has been much disputed whether the instrument was played with *fingers*, by means of levers or *keys*. The latter was impossible, as they were not invented until, perhaps, a *thousand* years afterwards! Yet, it has been remarked, the description of the *hydraulicon* by Claudian seems such a one as would suit a modern organ, only blown by the aid of water:—

"Vel qui magna levi detrudens murmura tactu, Innumeras voces segetis moderator aënæ; Intonat erranti digito, penitusque trabali Vecte laborantes in carmina concitat undas."

Thus Englished by Busby:—

"With flying fingers, as they lightsome bound, From brazen tubes he draws the pealing sound. Unnumber'd notes the captive ear surprize, And swell and thunder as his art he plies: The beamy bar he heaves! the waters wake! And liquid lapses liquid music make\*.

Kircher in his Musurgia (lib. ix, p. 332) has given a lengthy description of the Vitruvian hydraulicon, and has accompanied his account by an engraving of the instrument, such as he conceived it to have been from the description handed down to us. Isaac Vossius, in his treatise De Poematum Cantu et Viribus Rhythmi, p. 100, gives another fancied representation of the instrument; and a third may be seen in Perrault's† notes upon Vitruvius; but, as all three differ considerably from each other, they cannot be received as authorities.

Burney says, "Neither the description of the Hydraulic-Organ in Vitru-

<sup>\*</sup> General Hist. of Mus. 1819, vol. i, p. 220.

<sup>†</sup> This author mentions, in his commentary on *Vitruvius*, a method of swelling and diminishing the force of each note in an organ: it is to communicate wind to one pipe, or to two, three, or more pipes, in proportion to the pressure of the key. This method has lately been introduced into the Harmonium.

vius, nor the conjectures of his immumerable commentators, have put it in the power of the moderns either to imitate, or perfectly to conceive the manner of its construction; and it still remains a doubt whether it was ever worthy of the praises which poets have bestowed upon it, or superior to the wretched remains of the invention still to be seen in the grottos of the vineyards, near the city of Rome\*."

Athenaus, who flourished in the third century, has left us an account of the hydraulic-organ, which is probably the most ancient and authentic extant†. He tells us that it was invented in the time of the second Ptolemy Euergetes, by Ctesibius, a native of Alexandria (B. C. 200), and by profession a barber; or rather that it was improved by him, for Plato furnished the first idea of the hydraulic-organ, by inventing a night-clock, which was a clepsydra, or water-clock, that played upon flutes the hours of the night at a time when they could not be seen on the index.

The mechanical operation of the water-organ, as we have said, is scarcely intelligible; this much, however, is certain, that the hydraulicon was provided with pipes and a wind-chest, and registered like the wind-organ. We must not suppose that the water directly produced the wind, but that it served merely to give the wind, by means of counterpressure, equality and power. Ctesibius' object was "to employ a row of pipes of great size, and capable of emitting the most fanciful, as well as the softest sounds." He is also said to have invented, or perfected, the perforated slide, by which means he was enabled to open and shut the mouths of the pipes with greater facility.

Instruments of the hydraulic kind were made of different sizes, and in different forms. Athereus, in his chapter on musical instruments, before mentioned, mentions a water-organ small enough to be transported from place to place like the portable hand-organs of the Savoyards. A representation of this instrument is rudely indicated on a contorniate coin of the Emperor Nero, in the collection of antiquities bequeathed to the Vatican by Christiana, Queen of Sweden. It is a medal of Valentinian, showing an organ of eight pipes placed upon a round pedestal. No performer or mode of performing appears; but two figures, one on each side, are engaged in pumping the water by which it is worked§.

Kepler, the celebrated mathematician, had a mean opinion of this instrument. He says, "The water-organ, though it might have registers like the

<sup>\*</sup> Reflections on the Construction of Musical Instruments, Hist. of Mus. i, 491.

<sup>†</sup> Lib. iv, p. 174.

<sup>‡</sup> Dr. Smith's Dictionary of Greek and Roman Antiquities, who cites, as authorities, Athenœus, Vitruvius, Drieberg, Brunck's Anal. ii, 403, Claud. de Mall. Theod. Const, 316, Tertullian's De Anima, 14, &c.

<sup>§</sup> This coin is engraved in Rich's Companion to the Latin Dictionary and Greek
Lexicon, p. 342; and in Dr. Smith's Dictionary of Greek and Roman Antiquities,
p. 503.

wind-organ, was not an admirable invention of the ancients, but mere bag-piping\*!"

Tertullian, the patriarch, who declares Ctesibius, of Alexandria, to be the *inventor*, and Archimedes the *improver* of the water-organ, expresses himself in the following extravagant terms of eulogy:—"Observe the extraordinary genius of Archimedes: I mean the water-organ; so many members, so many parts, so many joinings, so many roads or passages for the voices, such a compendium of sounds, such an intercourse of modes, such troops of tibiæ, and all composing one great whole! The spirit or air which is breathed out from this engine of water, is administered through the parts, solid in substance, but divided in operation†."

A curious representation of an hydraulic-organ is exhibited in a poem by Publilius Optatianus, describing the instrument: it is composed of verses so constructed as to show both the lower part which contained the bellows, the wind-chest which lay upon it, and over this the row of twenty-six pipes. The latter are represented by twenty-six lines, which increase in length each by one letter, until the last line is twice as long as the first‡.

The hydraulic-organ was occasionally used down to a comparatively late period. Vossius tells us that, in the French annals of an anonymous writer, he is informed that, in the year 826, a certain Venetian called Georgius, or rather Gregorius, constructed an hydraulic-organ for Louis the Pious, at Aix la Chapelle, and that after the manner of the ancients§.

Dom Bedos, an industrious Benedictine monk, who wrote, about the middle of the eightcenth century, a voluminous work, entitled L'Art du Facteur des Orgues||, cites a very curious passage from the Chronicle of William of Malmesbury, which is thus translated. Speaking of Pope Silvester II (who died in 1003), he says:—"In the church of Rheims are still extant (A. D. 1125), as proofs of his science, a clock constructed on mcchanical principles;

<sup>\*</sup> Harmonices Mundi, bk. iii.

<sup>†</sup> The original passage, cited by Vossius, *De Poematum*, p. 106, is as follows:— "Specta portentosam Archimedis (Ctesibii rectius dixisset) munificientiam: organum hydraulicum dico, tot membra, tot partes, tot campagines, tot itinera vocum, tot compendia sonorum, tot commercia modorum, tot acies tibiarum, et una moles erunt omnia. Spiritus ille qui de tormento aquae anhelat, per partes administratur, substantia solidus, opera divisus."

<sup>‡</sup> Wernsdorf's Poetae Lat. Min. vol. ii, p. 394.

<sup>§</sup> De Poematum, 106.


<sup>||</sup> This splendid work, containing 137 plates, was published at Paris in 1766-1778. The author styles himself "Dom Francois Bedos de Celles, Benedicton de la Congrégation de Saint Maur, dans l'Abbaye de Saint Denys en France; de l'Academie Royale des Sciences de Bordeaux, et Correspondant de celle de Paris." He is generally called Don Bedos de Celles. (Monks in the early ages were styled Dominus, afterwards Domnus, and finally abbreviated by the French into Dom. Celles is the name of the place where Bedos was born.) A copy of the original work is preserved in the King's Library, British Museum. It has lately been reprinted at Paris, and forms one of the numbers of the Encyclopédie-Roret. Par M. Hamel, 1849; 3 vols. 12mo. and folio.

and an *hydraulie-organ*, in which the air, escaping in a surprising manner, by the force of *heated water*, fills the eavity of the instrument, and the brazen pipes emit modulated tones through the multifarious apertures\*."

Mason, commenting on this passage, says, "I here suspect, that by the word ventus the monk meant steam; because the sound was produced by hot water, aque calefactæ violentia; and if so, we have a new purpose, to which the ingenious steam engineers of the present time may, if they please, employ it†."

Dr. Powell, in his curious volume, Humane Industry, or a History of most Manual Arts, 12mo. 1661 (p. 109), mentions this instrument, but adds that it was self-acting:—" Pope Sylvester the Second made, in his younger years, a pair of organs that should play without an organist; he used only warm water to give them motion and sound. Such hydraulics are frequent in Italy, that are moved with cold water as well as hot."

A curious representation of an *hydraulie-organ* is given in Häuser's *Kirchenmusik*‡, which seems to illustrate the description of Pope Sylvester's organ. The following is its figure:

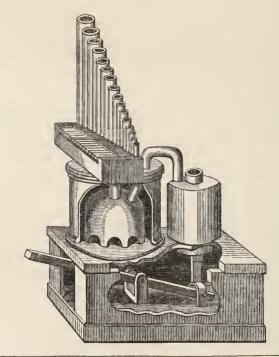

<sup>\*</sup> Bohn's edition of William of Malmesbury, by Dr. Giles, p. 175.

<sup>†</sup> Essays, Historical and Critical, on English Church Music; York, 1795, p. 35. The original Latin is as follows:—"Aquæ calefactæ violentia ventus emergens implet concavitatem barbiti, et per multiforatiles transitus æneæ fistulæ modulatos clamores emittunt."

<sup>†</sup> Geschichte des christlichen, insbesondere des evangelischen Kirchengesanges und der Kirchenmusik, 8vo. Quedlinburg, 1834.

Dr. Powell, in another chapter of the book just referred to (De Aquaticis Machinis\*) gives some curious notices of the water-organs of the seventeenth century. He says, "There are in sundry places of Italy and elsewhere certain Organa Hydraulica, that is, Organs that make good Musick of themselves, only by forcing the water up the pipes, and by the collision of the Ayr and Water therein: The lower part of the pipes are placed in the water (as Petrus Victorius describes them), which water being forced up with a scrue, or such device, doth inspire the pipes, as well as the wind that is made with a bellows. Among the water-works in the Duke of Florence his garden, there was an Hydraulie Organ that with the turning of a cock would make sweet harmony, as Mr. Morison relates; the invention is ancient, for Ammianus Marcellinus makes mention of one, and Claudian describes one thus in his Poem de Consulatu Mullii Theodori.

Et qui magna levi detrudit murmura tactu Innumeras voces segetis moderatus Aënæ Intonat erranti digito penitusq. trabali Vecte, laborantes in carmina concitat undas."

Which invention is by some ascribed to Ctesibius, an ingenious artist of Alexandria; by others to Archimedes of Syracuse, as Tertullian writes, of which he speaks thus, *Specta potentissimam Archimedis*," &c.

As to the hydrautic-organs of modern Italy, of which Grassineau† says there were several in the grottos of vineyards, particularly one belonging to the family d'Este, near the Tiber, described by Baptista Porta, they were very different, and no way resembled the ancient hydrautia. These, perhaps, as Sir J. Hawkins remarks‡, will be found to be nothing more than the common organ played on by the barrel, which by a very easy contrivance is set in motion by a small stream of water.

# 3. The Pneumatic-Organ.

The various contrivances to introduce the wind into the pipes by means of water were not found to be successful, in spite of their seeming superiorities. A return was therefore made to the ancient bellows filled by manual labour. The Emperor Julian, called the Apostate (who died A. D. 363), is the reputed author of the following Greck enigmatical epigram, the solution of which is evidently the *pneumatic-organ*.

'Αλλοίην δρόω δονάκων φύσιν' ἦπου ἀπ' ἄλλης Χαλκείης τάχα μᾶλλον ἀνεβλάστησαν ἀρούρης, 'Αγριοι, οἰδ' ἀνέμοισιν ὑφ' ἡμετέροις δονέονται, 'Αλλ' ὑπο ταυρείης προθορών σπήλυγγος ἀήτης,

<sup>\*</sup> Humane Industry, p. 38.

<sup>†</sup> Musical Dictionary, 1743, p. 171.

<sup>†</sup> Hist. of Mus. bk. ii, chap. 14.

Νέρθεν ἐὖτρήτων καλάμων ὑπὸ ῥίζαν ὁδεύει. Καί τις ἀνήρ ἀγέρωχος ἔχων θοὰ δάκτυλα χειρὸς, "Ισταται ἀμφαφόων κανόνας συμφράδμονας αὐλῶν" Οἱ δ" ἀπαλὸν σκιρτῶντες, ἀποθλίβουσιν ἀοιδήν.\*

Thus literally translated:—

"I see a species of reeds: surely from another and a brazen soil have they quickly sprung—rude. Nor are they agitated by our winds, but a blast rushing forth from a eavern of bull's hide makes its way from below the root of reeds with many openings; and a highly-gifted man with nimble fingers handles the yielding rods of the pipes, while they, softly bounding, press out a sound."

This passage is highly interesting, as showing the state of the instrument at this early period. From it we learn that the organ was still unprovided with a *clavier*, or key-board, and that the bellows were made of a bull's hide. These facts have escaped the researches of former writers who have alluded to the enigma, from their *mistranslation* of the original Greek†.

We have here a eurious representation of an organ of this period, which shows a singular mode of giving weight to the bellows. It is eopied from the



\* Anthologia Græca, Edit. Lips. 1794, tom. iii, p. 111; also Du Cange, Glossarium et infimæ latinitatis, v. organum.

† Burney translates the passage thus: "I see reeds of a new species, the growth of another and a brazen soil, such as are not agitated by our winds, but by a blast that rushes from a leathern cavern beneath their roots; while a robust mortal, running with swift fingers over the concordant keys, makes them, as they smoothly dance, emit melodious sounds.' — Hist. of Mus. ii, 65. Busby gives a metrical translation:

"Reeds I behold, of earth the rigid spoil,
Reeds of a novel growth, and brazen soil:
That not heav'n's wind, but blasts mechanic breathe,
From lungs that labour at their roots beneath;
While a skill'd artist's nimble finger bounds
O'er dancing keys, and wakes celestial sounds."

—Hist. of Mus. i, 263. Both these learned writers use the word keys, which cannot, by any forced application, be found in the original. The word κανόνας (canonas) means

senlptures on the obelisk at Constantinople, erected by Theodosius, who died A. D. 395\*.

Another eurious description of the pneumatic organ is given by Cassiodorus, who flourished under King Vitigas, the Goth, A. D. 514, in his Commentary on the 150th Psalm†. "The organ," says he, "is an instrument composed of divers pipes, formed into a kind of tower, which, by means of bellows, is made to produce a loud sound; and, in order to express agreeable melodies, there are, in the inside, movements made of wood, that are pressed down by the fingers of the player, which produce the most pleasing and brilliant tones‡."

At the latter end of the seventh and beginning of the eighth century, the organs of the Anglo-Saxons appear to have resembled, even in their external decorations, those now in use. The following passage from Aldhelm§, who died A.D. 709, will show that our ancestors at that time were accustomed to gild the external pipes:

"Maxima millenis auscultans organa flabrio, Mulceat auditum ventosis follibus iste, Quamlibet auratis fulgescant cætera capsis."

## 4. Its Introduction into the Church.

The organ was early used in the public service of the church. Platina tells us || that it was first employed for religious worship by Pope Vitalian I, A.D. 666; but, according to Julianus (a Spanish bishop, who flourished A.D. 450), it was in common use in the churches of Spain at least 200 years before Vitalian's time T. The use of instruments in churches was much earlier; for

<sup>&</sup>quot;any straight rod or pole, especially to keep a thing upright or straight—to regulate and order it."—See Liddell and Scott's *Greek and English Lexicon*. Burney translates  $\grave{\alpha}\gamma\acute{\epsilon}\rho\omega\chi_{0}\varsigma$ , "a tall, sturdy fellow;" and then adds, "alluding to the force necessary to beat that kind of clumsy *carillon* keys of this rude instrument of new invention." This Greek enigma on the organ is given by Mr. Wackerbarth, in his *Music and the Anglo-Saxons*, p. 9, who adds—"It is obvious, from the sixth line, that it was played with finger-keys, and not by large carillon-keys." He then blames Dr. Burney for missing "the sense of the passage," but does not attempt a new translation. It is necessary to add that Mr. Wackerbath's copy of the eight Greek lines contains no fewer than twenty errors.

<sup>\*</sup> Didron's Annales Archéologiques, Paris, 1845, contains an article on Organs by M. Coussemaker. Our engraving is derived from this valuable work.

<sup>†</sup> The passage is also quoted by Bede, tom. viii, 899, 900.

<sup>†</sup> Organum itaque est quasi turris quædam diversis fistulis fabricata, quibus flatu follium vox copiosissima destinatur; et ut eam modulatio decora componat, linguis quibusdam ligneis ab interiori parte construitur, quas disciplinabiliter magistrorum digiti reprimentis, grandisonam efficiunt et suavissimam cantilenam. In Psalm cl.

<sup>§</sup> De laude Virginum. Bibliotheca Maxima Patrum, tom. xiii, p. 3. This passage was first pointed out by Mr. Sharon Turner, Anglo-Saxons, iv, 447.

<sup>||</sup> Lives of the Popes; Rycaud's translation, p. 114.

<sup>¶</sup> See Lorinus, Psal. 33.

we are told that St. Ambrose joined instruments of music with the public service in the cathedral church of Milan; which example of his was so well approved of, that, by degrees, it became the general practice of other churches. Nay, the antiquity of instrumental church-music is still higher, if we may credit the testimony of Justin Martyr and Eusebius, the latter of whom lived fifty, and the former two hundred, years before the time of St. Ambrose\*.

We have seen, from the Epigram of the Emperor Julian, before quoted, that an organ capable of being used in religious ceremonies existed long before the erection of Christian churches; we cannot then refuse to eredit the testimony of Julianus, as to its admission into the service of public worship at an earlier period than that commonly assigned.

It was some time before organs became common in the churches of Europe. Pepin (the father of Charlemagne), king of the Franks, an ardent worshipper of God, first introduced singing and the ceremonies of the Romish church into France. He soon perceived the urgent need of an organ, both as an aid to devotion, and as a proper accompaniment and support to the choir. Accordingly (as the instrument was unknown at that time both in France and Germany), this pious king applied to the Byzantine Emperor Constantine, surnamed Copronymus, soliciting him to forward one to France. The emperor complied with the request, and in the year 757, or thereabouts‡, sent him as a present, in charge of a special embassys, a great organ with leaden pipes ||, which was placed in the church of St. Corneille, at Compiegne. It also appears that an organ, constructed by an Arabian named Giafar, was sent to Charlemagne by the renowned "Commander of the Faithful," the caliph Haroun Alraschid — an incident introduced with considerable effect by Madame de Genlis, in her romance, Les Chevaliers du Cygne. This was the instrument, in all probability, which Walafrid Strabo described as existing in the ninth century in a church at Aix-la-Chapelle. Its softness (query?) of tone, he adds, caused the death of a female¶. The French artists were eager

<sup>\*</sup> Hawkins, bk. iv, chap 32.

<sup>†</sup> Bingham (Christian Antiq. bk. viii, c. 7—16), and his followers, assert that the organ was first introduced into churches by Marinus Sanutas, in 1290! The authorities cited in the course of the present section completely refute this notion. Cardinal Bona supposes organs to have been used in churches in the fourth century.—De Divin Psal. 1653.

<sup>‡</sup> Siegebert says 766: but Walter Odington, of Evesham (who wrote in the 13th century), is a preferable authority. His words are, "Anno Domini 757, venit Organum primo in Francium missum a potissima Rege Grecorum Pipino imperatori."—De speculatione Musica.

<sup>§</sup> The deputation to King Pepin was headed by Stephanus, a Roman Bishop.—Aventini, Annales Bavariæ.

<sup>|</sup> Alax. Sardus, De rerum Inventoribus, lib. i.

<sup>¶</sup> Eginhard, in his Annals of Louis le Debonnaire, and Nigellus, in his poem on the life and actions of Louis the Pious, printed in the Scriptores Italici de Muratori, both

to equal these specimens of foreign ingenuity; and so successful were their efforts, that, in the uinth century, it is said, the best organs were made in France and Germany. Their superiority was acknowledged by John VIII, in a letter to Anno, Bishop of Friesingen, from whom he requested an organ, and a master for the instruction of the Roman artists. The passage runs thms: "Precamur ut optimum organum cum artifice, qui hoc moderari, et facere ad omnem modulationis efficaciam possit, ad instructionem musicæ disciplinæ nobis aut deferas, aut mittas\*."

Soon afterwards, we find them in common use in England, constructed by English artists, with pipes of copper fixed in gilt frames†. St. Dunstan, in the reign of Edgar, erected or fabricated an organ, the pipes of which were made of brass‡. The following notice of this instrument is preserved by William of Malmesbury:—"Ideo in multis locis munificus, quæ tune in Anglia magni miraeuli essent, decusque et ingenium conferentis ostenderent offerre credo. Itaque signa sono et mole præstantia, et organo ubi per æreas fistulas musieis mensuris elaboratas, 'dudum conceptas follis vomit anxins auras.' Ibi hoc distichon laminis æreis impressit—

Organo de Sancto Præsul Dunstanus Aldhelmo; Perdat hic æternum qui vult hinc tollere regnum?."

This worthy prelate also caused an organ to be crected in the Abbey-church of Glastonbury.

In the same century, Count Elwin presented an organ to the Convent of Ramsey, on which it is said, "The earl devoted thirty pounds to make copper pipes of organs, which resting with their openings in thick order on the spiral winding in the inside, and being struck on feast days with a strong blast of bellows, emit a sweet melody, and a far resounding peal."

In the old ehurch of Winchester was a monster organ, according to its

speak of the organ at Aix-la-Chapelle; but they allude to the *hydraulicon*, not to the *pneumatic-organ*. The former was in the palace of the King, the latter in the church. Historians have strangely confounded the two.

<sup>\*</sup> Sandini, in Vit. Pont. i, p, 294. See also Dr. Lingard's Antiquities of the Anglo-Saxon Church, ii, p. 376.

<sup>†</sup> Aldhelm in Gale, pp. 266, 420, cited by Lingard, Anglo-Saxon Church, ii, p. 376. See also the curious passage from Aldhelm quoted in a previous section, ante, p. 13.

<sup>†</sup> St. Dunstan died A. D. 988.

<sup>¿</sup> Gale, tom. iii, p. 366; Wackerbarth's Music and the Anglo-Saxons, p. 19.

<sup>||</sup> The original Latin of this passage is thus given in the Acta Sanctorum:—" Triginta practerea libras ad fabricandum cupreos organorum calamos erogavit, qui in alveo suo, super unam cochlearum denso ordine foraminibus insidentes, et diebus festis follium spiramento fortiore pulsati, prædulcem melodiam et clangorem longius resonantem ediderunt.

De Ædnotho juniore, qui, senescente altero Ædnotho, curæ exterioris pro eo occepit administrationem.—Acta S. S. Ord. Benedict Sæculo v, p. 756. See also Gale, tom. iii, p. 420.

description by the monk Wulston\*, whose fidelity, as Lingard remarks, eannot be questioned, since he dedicated his poem to Bishop Elphege†, by whose order the organ was built about the close of the tenth century. The portion of Wulston's poem relating to the organ is as follows:—

" Talia et auxistis hic organa qualia nunquam Cernuntur, gemino constabilita solo. Bisseni supra sociantur ordine folles, Inferiusque jacent quatuor atque decem, Flatibus alternis spiracula maxima reddunt Quos agitant validi septuaginta viri; Brachia versantes, multo et sudore madentes, Certatimque suos quisque movet socios, Viribus ut totis impellant flamina sursum Rugiat et pleno capsa referta sinu Sola quadringentas quæ sustinet ordine musas Quas manus organici temperat ingenii. Has aperit clausas, iterumque has claudit apertas Exigit ut varii certa camæna soni. Considuntque duo concordi pectore fratres, Et regit alphabetum rector uterque suum. Suntque quaterdenis occulta foramina linguis, Inque suo retinet ordine quæque decem: Huc aliæ currunt, illuc aliæque recurrunt Servantes modulis singula puncta suis; Et feriunt jubilum septem discrimina vocum Permixto lyrici carmine semitoni: Inque modum tonitrus vox ferrea verberat aures, Præter ut hunc solum nil capiat sonitum. Concrepat in tantum sonus hinc illincque resultans, Quisque manu patulas claudat ut auriculas, Haudquaquam suffere valens propiando rugitum, Quem reddunt varii concrepitando soni: Musarumque melos auditur ubique per urbem, Et peragrat totam fama volans patriam. Hoc decus Ecclesiæ vovit tua cura Tonanti, Clavigeri inque sacri struxit honore Petriţ."

Thus translated by Mr. Waekerbarth §:-

"Such organs as you have built are seen nowhere, fabricated on a double ground. Twice six bellows above are ranged in a row, and fourteen lie below. These, by alternate blasts, supply an immense quantity of wind, and are worked by seventy strong men, labouring with their arms, eovered with perspiration, each ineiting his companions to drive the wind up with all his

<sup>\*</sup> Called Wulston or Wolston the Deacon. He died A. D. 963.

<sup>†</sup> Elphegus Calvus received the Bishopric of Winchester in A. D. 935, and held it till 951.

<sup>‡</sup> Acta Sanctorum Ordinis Benedict Sæc. v, p. 631—2.

<sup>&</sup>amp; Music and the Anglo-Saxons, p. 12-15.

strength, that the full-bosomed box may speak with its four hundred pipes which the hand of the organist governs. Some when closed he opens, others when open he closes, as the individual nature of the varied sound requires. Two brethren (religious) of concordant spirit sit at the instrument, and each manages his own alphabet. There are, moreover, hidden holes in the forty tongues, and each has ten (pipes) in their due order. Some are conducted hither, others thither, each preserving the proper point (or situation) for its own note. They strike the seven differences of joyous sounds, adding the music of the lyric semitone. Like thunder the iron tones batter the ear, so that it may receive no sound but that alone. To such an amount does it reverberate, echoing in every direction, that every one stops with his hand his gaping ears, being in no wise able to draw near and bear the sound, which so many combinations produce. The music is heard throughout the town, and the flying fame thereof is gone out over the whole country. This honorable ehureh has your care dedicated to the Ruler of the thunder, and built up in honour of the key-bearing St. Peter\*."


Although this eurious description gives the idea of an instrument of large size and complicated mechanism, its construction must have been of a very primitive kind. Mr. Wackerbarth imagines that it possessed registers or stops; a key-board furnished with semitones; and a compass of three and a half octaves. Of the first position, we have no proof whatever in the poem itself. Of the second, all the writer says is that it was provided with the seven sounds and the "lyric semitone," which latter clearly means the B flat. The alphabet alluded to was the handles of the rods or levers by which the instrument was played; the key-board was not yet invented. Of the third position, it is clear that the compass did not exceed ten notes, "and for each note forty pipes," which makes up the number of four hundred. The seventy stout bellows-blowers must still remain a perplexing question. The brethren of Winchester were a rich and a large body, and the writer probably meant that it was the office of seventy inferior monks, at different periods, to succeed

<sup>\*</sup> Mason (Essays on English Church Music, p. 37) gives the following metrical translation of eight lines of Wulstan's poem. He was not aware of the original, but quoted from Dom Bedos, who in his turn took the passage from Du Cange's Glossary:

<sup>&</sup>quot;Twelve pair of bellows, rang'd in stated row,
Are join'd above, and fourteen more below:
These the full force of seventy men require,
Who ceaseless toil, and plenteously perspire;
Each aiding each, till all the wind be prest
In the close confines of th' incumbent chest,
On which four hundred pipes in order rise
To bellow forth the blast, that chest supplies."

caeh other in this labour. Or probably seventy may be a corruption of the text for seven.

An interesting representation of the pneumatic organ of about this period is preserved in a MS. Psalter of Eadwine, in the library of Trinity College, Cambridge\*. It is here copied:

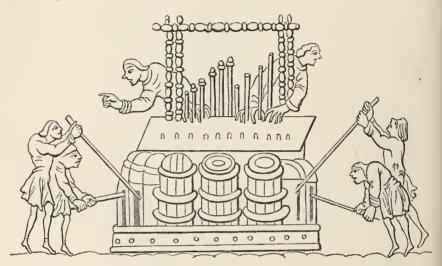

At the close of the tenth century many organs existed in the churches of Germany. Michael Prætorius, in his Syntagma Musica, mentions (under the date 944) those in the Paulina Church at Erfurt, in St. James's Church at Magdeburg, and in the Cathedral at Halberstadt. Notwithstanding the imperfection of these instruments, they everywhere produced the greatest astonishment, and the churches were desirous of possessing so efficacious a means of attracting a congregation. We therefore find, in this century, that organs multiplied not only in the cathedral churches of the episcopal seats, but also in many churches and monastic establishments.

# 5. Organ-Building in the Eleventh Century.

The following very eurious treatise upon the *Construction of Organs* is part of a larger work upon *Divers Arts*, by a monk named Theophilus.

There is a considerable diversity of opinion as to the exact period at which the writer flourished. Lessing, Leist, Raspe, and Emeric David, have placed him in the *tenth* century, a period too early. Guichard, Didron, and Texiér consider that he belongs to the *twelfth* or *thirteenth* century. Mr. Hendrie,

<sup>\*</sup> Under the press mark Insig. R, 17, 1. It is engraved in Strutt's Horda, i, pl. 33.

in his learned preface to the English translation of Theophilus\*, shows, pretty clearly, that the work in question may be assigned to the early half of the *eleventh* century.

The most ancient manuscripts that have descended to us, are of the latter part of the twelfth, or the early part of the following century. One is preserved at Wolfenbüttel; another in the Imperial Library, Vienna; a third is in the University Library, Cambridge; and a fourth among the Harleian MSS. in the British Museum. The three first-named manuscripts end abruptly, closing with the first chapter on the Construction of the Organ. The Harleian MS. curiches the musical enquirer with *three* new chapters upon the mode of building the "King of Instruments" in the eleventh century†.

Theophilus's treatise has escaped the notice of all writers, both foreign and English, who have devoted their time and talents to the consideration of musical antiquities. Such being the case, the author has considerable pleasure in being the first to introduce it into that department of musical history to which it particularly belongs.

<sup>\*</sup> Theophili, qui et Rugerus, Presbyteri et Monachi Libri III, de Diversis Artibus. Opera et Studio Roberti Hendrie. Londini, Johannes Murray, MDCCCXLVII. 8vo. The author owes his knowledge of this curious treatise on the organ entirely to Mr. Hendrie's valuable book. The following translation is taken (with permission) from that gentleman's publication.

<sup>†</sup> This manuscript is upon vellum, in octavo, and is written in a clear German character of the very commencement of the thirteenth century. Sir F. Madden, the keeper of the manuscripts at the British Museum, and whose authority is conclusive, states that it is of that period, and that it was certainly written in Germany. It contains 115 folios of the books of Theophilus, and five folios of recipes relating to the arts, written by another hand of the period. A treatise, "De Unguentis," follows; it is a collection of medical recipes. The title and preface to the first book are unfortunately wanting; in so voluminous and superior a copy something might have been otherwise adduced from these which would have unravelled the mystery which shrouds the age and country of our author. The credit of discovering this important manuscript is entirely due to Mr. Hendrie. See his preface to Theophilus, p. xxvi.

# Theophili Libri Tertii de Diversis Artibus\*.

(ORIGINAL.)

#### CAPUT LXXXI.

DE ORGANIS.

Facturus organa primum habeat lectionem mensuræ, qualiter metiri debeant fistulæ graves et acutæ et superacutæ; deinde faciat sibi ferrum longum et grossum ad mensuram, quam vult habere fistulas, quod sit in circuitu, rotundum summâ diligentiâ limatum et politum, in una summitate grossius et modicè attenuatum, ita ut possit imponi in alterum ferrum curvum per quod circumdatur, juxta modum ligni in quo volvitur runcina, et in alterâ summitate gracile, sccundum mensuram inferioris capitis fistulæ, quæ conflatorio debet imponi. Deinde attenueter cuprum purum et sanissimum, ita ut unguis impressus alterâ parte appareat. Quod cum fuerit secundum mensuram ferri lineatum et incisum ad longiores fistulas, quæ dicuntur graves, fiat secundum præceptum lectionis foramen, in quo plectrum imponi debet, et circumradatur modicè ad mensuram festucæ (fistulæ), ac superliniatur stagnum ferro solidatorio, radaturque in orâ longitudinis interiùs, in alterâ orâ exteriùs eâdem mensurâ, et superstagnetur tenuè. Quæ stagnatura, priusquam rasi tractus noviter facti, modicè calefacto cupro liniantur cum resina abietis. ut stagnum facilius adhæreat. Quo facto, complicetur ipsum cuprum circa ferrum et circumligetur filo ferreo mediocriter grosso fortiter, ita ut stagnati tractus conveniant sibi. Quod filum primo induci debet parvulo foramini, quod est in gracili summitate ferri, et in co bis contorqueri, sicque deduci in volvendo usque ad alteram summitatem, ibique similiter obfirmari. Deinde juncturis sibi convenientibus et diligenter conjunctis, ponatur ipså ligaturå pariter cum ferro ante fornacem super prunas ardentes, et sedente puero et mediocriter flante, teneatur dexterâ manu lignum gracile, in cujus summitate fissâ, adhæreat panniculus cum resina, et sinistrâ teneatur stagnum longum gracile percussum, ut mox cum fistula incaluerit, liniat juncturam cum panniculo resina infecto, appositumque stagnum liquefiat, ipsamque juncturam (addidimus) diligenter consolidet. Quo facto, refrigerata fistula, ponatur ferrum in instrumento tornatoris morc parato, inpositoque curvo ferro et filo soluto circumvolvat unus ferrum curvum, alter vero, utrisque manibus chirothecis indutis, fistulam fortiter tencat, ita ut ferrum circumducatur et fistula quieta maneat, donce omnino oculis gratiosa sit, quasi tornata sit. Deinde educto ferro percutiatur ipsa fistula cum malleo mediocriter juxta foramen

<sup>\*</sup>  $\Lambda$  few corrections have been made in the text, such as the grammatical construction obviously suggested.

# Theophilus's Treatise on Organ=Building.

(TRANSLATION.)

CHAP. I.

OF ORGANS.

The manufacturer of organs should first possess the knowledge of the measure, how the grave and sharp and treble pipes should be meted out; he may then make for himself a long and thick iron to the size which he wishes the pipes to possess; this must be round, filed and polished with great eare, thicker at one extremity and slightly diminished, so that it can be placed in another eurved iron, by which it is encompassed, after the fashion of the wood in which the auger is revolved, and at the other extremity let it be slender, according to the size of the lower end of the pipe which should be placed on the bellows. Then pure and very sound copper is thinned, so that the impression of the nail may appear on the other side. When this has been marked out and cut according to the size of the iron for the longer pipes, which are called grave, an opening is made according to the precept of the lesson, into which the valve should be placed, and it is rasped round a little to the size of the rod\*, and tin is anointed over it with the soldering iron, and it is rasped upon one edge of the length inside, and outside, upon the other edge, and it is tinned over thinly. Which tinnings, before the newly made lines are seraped, are slightly anointed, the copper being warmed with resin of the fir, that the tin may the more easily adhere. Which being done, this copper is folded around the iron and is strongly bound round with an iron wire moderately thick, so that the tinned lines may agree with each other. This wire should be first earried through a very small hole which is at the thin extremity of the iron, and be twisted twice round in it, and so be earried down revolving to the other extremity, and be there similarly fastened. Then with its joinings agreeing together and earefully fastened, it is placed with its ligature, as with the iron, before the furnace upon the glowing embers, and the boy sitting and slightly blowing, in the left hand is held a thin wood, at the split top of which a small cloth with resin is fixed, and in the right can be held a long piece of tin beaten thin, so that directly the pipe has become hot he can anoint the join with the rag filled with resin, and the tin applied may liquefy, and he must earefully solder the join together. Which being done, the pipe cold, the iron is placed in the instrument prepared like that of a turner, and the curved iron being placed on, and wire loosened, one

<sup>\* &</sup>quot;Pipe," in the Wolfenbüttel MS.

inferius et superius, ita ut pene usque ad medium descendat ipsa rotunditas spatio duorum digitorum; fiatque plectrum ex cupro aliquantulum spissiori, quasi dimidia rotula, et superstagnetur circa rotunditatem sicut fistula superius, sicque ponatur in inferiori parte foraminis, ut sub ipsus ora æqualiter stet, nec procedat inferius ant superius. Habeat quoque ferrum solidatorium ejusdem latitudinis et rotunditatis, quâ plectrum est. Quo calefacto ponat modicas particulas stagni super plectrum, parumque resinæ, et diligenter circumducat calidum ferrum ne plectrum moveatur, sed liquefacto stagno sic adhæreat ut in circuitu ejus nichil spiraminis exeat, nisi tantum in superiori foramine. Quo facto apponat ori et sufflet primum modice, deinde amplius, sicque fortiter, et secundum quod auditu discernit, disponat vocem, ut si eam vult esse grossam, foramen fiat latius; si vero graciliorem, fiat strictius. Hoe ordine omnes fistulæ fiant; mensuram vero singularum, a plectro superius, secundum magisterium lectionis faciat, a plectro autem inferius, omnes unius mensuræ et ejusdem grossitudinis erunt.

## CAPUT LXXXII.

#### DE DOMO ORGANARIA.

Domum vero facturus super quam statuendæ sint fistulæ, vide utrum volueris eam ligneam habere aut cupream. Si ligneam, acquire tibi duo ligna de platano, valde sicca, longitudine duorum pedum et dimidii, et latitudine modicè amplius, quam unius, unum quatuor, alterum duobus digitis spissum, quæ non sint nodosa sed pura. Quibus diligentissimè sibi conjunctis, in inferiori parte spissioris ligni fiat in medio foramen quadrangulum, amplitudine quatuor digitorum et circa quod relinquatur de eodem ligno limbus, unius digiti latitudinis et altitudinis, in quo conflatorium inponatur. In superiori parte verò lateris fiant cavaturæ, per quas flatus ad fistulas possit pervenire. Altera vero pars ligni, quæ et superior esse debet, metiatur interius æqualiter, ubi disponantur septem vel octo cavaturæ, in quibus diligenter jungantur linguæ, ita ut habeant facilem cursum educendi et reducendi, sic tamen ut nichil spiraminis inter juncturas exeat.

In superiori autem parte tonde cavaturas, contra inferiores, quæ sint aliquantulum latiores, in quibus jungantur totidem ligna, ita ut inter hæc et majus, ligni cavatura remaneat vacua, per quam ventus ascendat ad fistulas, nam in eisdem lignis foramina fieri debent, in qvibus fistulæ stabiliendæ sunt. Ca-

(hand) can revolve the curved iron, the other, both hands being provided with gloves, can hold the pipe firmly, so that the iron may be carried round and the pipe remain still, until it appear elegant to the eyes, as if turned. The iron being then taken out, the pipe is struck slightly with the hammer near the opening, above and below, so that this round shape may depress almost to the centre for a space of two fingers; the valve may be made from copper somewhat thicker, like a half wheel, and be soldered over about the round part, as the pipe above, and be so placed in the lower part of the opening that its edge may stand equally under it, nor protrude below or above. He can have also a soldering iron of the same breadth and roundness as is the valve. With this, heated, he can place small particles of tin upon the valve, and a little resin, and can carefully pass over the hot iron that he may not move the valve, but that the tin being melted it may so adhere that no wind can come out in its circumference, unless only into the upper opening. Which being done he can bring it to his mouth and blow at first slightly, then more, and then strongly; and according to what he discerns by hearing, he can arrange the sound, so that if he wish it strong, the opening is made wider; if slighter, however, it is made narrower. In this order all the pipes are made; he can make the measure of each, from the valve upwards, according to the rule inculcated, but from the valve below, all will be of one measure and of the same thickness.

#### CHAP. II.

#### OF THE ORGAN ERECTION.

In the manufacture of the construction, upon which the pipes are to stand, see whether you intend to have it of wood or copper. If of wood, procure for yourself two pieces of wood of the plane tree, very dry, two feet and a half in length, and in breadth rather more than one; one four, the other two fingers thick, which must not be knotty, but without blemish. Which being carefully joined together, in the lower part of the thicker wood a square hole must be made in the centre, four fingers in breadth, and about which, borders must be left of the same wood of one finger in breadth and height, in which the bellows can be placed. In the upper part of the side, however, small hollows are made, through which the wind can arrive at the pipes. But the other part of the wood, which should also be uppermost, is measured out inside equally, where seven or eight small openings are disposed, in which the stops are carefully joined, so that they may have an easy means of being drawn out or restored, so, however, that no air can come out between the joins.

In the upper part, however, cut small openings opposite the lower ones, which may be rather wider, in which may be joined so many pieces of wood,

vaturæ in quibus linguæ junctæ sunt in anteriori parte, procederc debent quasi obliquæ fenestræ, per quas ipsæ linguæ introducantur et extrahantur.

In posteriori vero parte, sub fine ipsarum linguarum, fiant foramina æqualiter lata et longa, mensura duorum digitorum, per quas ventus possit ascendere ab inferioribus ad superiora, ita ut cum linguæ impinguntur, illa foramina ab eis obstinantur, cum vero retrahuntur denuò patcant. In his vero lignis quæ super linguas junguntur fiant foramina diligenter et ordinatè, secundum numerum fistularum, uniuscujusque toni, in quibus ipsæ fistulæ imponantur, ita ut firmiter stent, et ab inferioribus ventum suscipiant. In caudis autem linguarum scribantur litteræ secundum ascensum et descensum cantus, quibus possit cognosci quis ille, vel ille tonus sit. In singulis autem linguis fiant foramina singula gracilia, longitudine dimidii digiti minoris, in anteriore parte, juxta caudas in longitudine, in quibus ponantur singuli clavi cuprei capitati, qui pertranseant in medio fenestellas, quibus inducuntur ipsæ linguæ a superiori latere domus usque ad inferius, et appareant clavorum capita superius ita, ut cum linguæ cantantibus organis educuntur, non penitus extrahuntur. His ita dispositis conglutinentur hæc duo ligna, quæ domum organorum conficiunt glutine casei; deinde partes illæ quæ super linguas sunt junetæ, in quibus foramina stant, sieque circumcidantur diligenter et radantur.

# CAPUT LXXXIII.

#### DE CONFLATORIO.

Conflatorium facturus, conjunge tibi duo ligna de platano modo quo supra, longitudine pedis unius, quorum sit unum palma spissum, alterum tribus digitis, sintque in unâ fronte rotunda in modum scuti, et ibi pede et dimidio lata; in alterâ fronte obtusa, latitudine unius palmi. Que cum diligenter conjuncta fuerint incide in spissiori ligno in rotunda fronte foramina quod volueris, secundum numerum follium, et in obtusa fronte unum, quod sit majus. Deinde incide ab unoquoque foramine fossam unam deductam usque ad majus, per quas viam possit habere ventus flantibus follibus. Sicque conglutinabis ipsa ligna glutine casei, et circumdabis panno lineo novo et forti, quem linies eodem glutine ut adhæreat, facies quoque ligaturas ferreas fortes, interius et exterius circumstagnatas, ne possint ex tigneâ (tignariâ?) dissolvi, quas configes clavis longis capitatis atque stagnatis, ita ut inter duo foramina

so that between these and the larger, the openings of the wood may remain empty through which the wind can mount to the pipes; for in these same pieces of wood openings should be made in which the pipes are to be made fast. The openings in which the stops are fitted in the front part should increase, like slanting windows, through which these stops are introduced and removed.

In the hinder part, under the end of these stops, holes are made equally wide and long of the size of two fingers, through which the wind can ascend from the lower to the upper parts, so that when the stops are pressed upon them these holes may be stopped by them; when, however, they are with-drawn, they may again lie open. In those pieces of wood which are joined upon the stops openings are made, earefully and in order, according to the number of the pipes of every tone, in which these pipes are placed, so that they may stand firmly and receive the wind from the lower parts. But in the handles of the stops letters are marked, according to the rise and fall of the sound, by which it can be known which tone it may be. In each one of these stops single slender holes are made, half of the little finger in length, in the front part, near the handles, lengthwise, in which single copper-headed nails may be placed, which may pass through the small windows in the middle, by means of which these stops are drawn from the upper side of the construction down to the lower, and the heads of the nails appear above, so that when the stops are withdrawn from the sounding instruments, they cannot be quite These things being thus arranged, these two pieces of wood, which perfect the organ-house, are joined together with cheese-glue; then those parts which are joined over the stops, in which the holes exist, are also pared round earefully, and scraped.

## CHAP. III.

## OF THE BELLOWS.

In making the wind-chamber, join together two pieces of wood of the plane tree, in the above mode, of one foot in length, one of which may be a palm thick, the other three fingers, and let them be round at one end, like a shield, and there a foot and a half wide, at the other end blunt, a palm in breadth. When these have been carefully fitted together, cut, in the round front in the thicker wood, the openings which you wish, according to the number of the bellows, and in the blunt end one, which must be larger. Then cut, from each opening, a hollow leading to the larger opening, through which the wind may have way to the working bellows; and you will thus glue these woods together with the cheese-glue, and you will bind them round with a linen cloth, new and strong, which you anoint with the same casein glue that it may adhere: you also make strong iron bindings tinned over

ligatura sit, quæ comprehendat utrumque lignum a superiore latere usque ad inferius. Deinde acquire tibi lignum curvum de quereu, sanum et forte, quod habcat in una fronte, a curvatura longitudinem pedis unius, in altera duorum, quod perforabis in utrâque fronte terebro magno, quo forantur modioli in rotis aratri. Sed quia foramina non possunt sibi obviare propter curvaturam, fac tibi ferrum quod habeat caput rotundum in modum ovi, et caudam longam gracilem, que imponatur manubrio, sitque juxta caput modicè curvum, cum quo calefacto, combures foramina interius in curvaturâ, donce sibi æqualiter conveniant. Quo facto, incide ipsum lignum quadrico (quadrato?) statum, ita ut in unoquoque latere uno palmo latum sit, ad mensuram conflatorii in obtusâ parte. Post hac conjunge ipsum lignum in longiori parte, ad inferius foramen domus organariæ, ita ut eidem ligno cauda incidatur, unius pollicis longa, quæ ipsi foramini imponatur, vel inferatur, et junctura tam subtilis sit, ut nichil flatus inter cam exirc queat. Alteram vero frontem conjunges eodem modo ad conflatorium, et ipsum lignum glutine casci firmabis, atque circumvolves panno totum lignum cum juncturâ, cui etiam circumfiges cuprum latum quod utriusque ligni oram capiat. His ita completis, si volueris organa ultra maceriam muri stabilire, ita ut infra monasterium nichil appareat, nisi sola domus cum fistulis, et ex alterâ parte muri folles jaceant, ita oportebit te ipsam domum convertere ut linguæ versus folles extrahantur, et in ipso muro arcus fiat in quo cantor sedcat, cujus sedcs ita aptetur, ut pedes supra conflatorium teneat. Est autem foramen quadrum in medio arcus trans maceriam, per quod domus cum fistulis exponitur; et super collum conflatorii, quod in muro infra foramen lapidibus obfirmatum est, in suâ juncturâ sistitur, atque super duos clavos ferreos æqualiter in muro confixos nititur, cui foramini fenestra lignea appendet, quæ dum clausa, scrâ et clave munitur, nemo ignotus superveniens cognosecre valet quid in eâ contineatur. Exterius quoque, super organa, pannus spissus lignis interius extensus, in modum domunculæ, a laqueari in funiculo ad arcendum pulverem dependeat, qui funiculus super ipsum laquear circa rotulam arte compositus, dum cantandum est organis trahitur, et domunculam elevat, finitoque cantu, denuò super organa deponitur. Habet quoque ipsa domuncula pinnam ex eodem panno, lignis quatuor in speciem trianguli extensam, in cujus summo sperula (sphærula?) lignea stet, cui funiculus inhæret. Folles et instrumentum super quod jaceant, secundum situm loci ad libitos tuos dispone.

within and without, that they may not become dismited from the woodwork, these you will fix on with long nails, headed and tinned, so that between the two openings a binding may exist, which may include each wood from the upper to the lower side. Then procure for yourself a curved piece of oak wood, sound and strong, which must have at one end, from the curve, the length of one foot, in the other of two, which you will pierce in each end with a large auger, with which the middle portions are pierced in the wheels of ploughs. But because the openings cannot meet together, on account of the curve, make for yourself an iron which may have a round head, like an egg, and a long thin stem, which is fitted with a handle, and let it be slightly curved, near the head, with which, made hot, you burn the holes curved inside, until they meet together in an even manner. Which being done, cut this wood in a square manner, set so that it be one palm wide in each side, to the size of the wind-chamber in the blunt part. After these things join this wood on the longer part, to the lower opening of the organ construction, so that a projection may be cut to the same wood a thumb in length, which can be placed, or forced into this opening, and that the join be so subtle that no wind ean escape from it. You join on in the same manner the other end to the bellows, and will fasten this wood with cheese-glue, and will wrap round the whole wood, with the join, with cloth, to which you also fix a wide piece of copper which may also compass the edge of each wood. These things being thus completed, should you wish to establish the organ beyond the masonry of the wall, so that nothing may appear beneath the cloister, unless the erection alone with the pipes, and that the bellows may extend from the other side, you must so turn the construction that the stops may be drawn out towards the bellows, and an arch may be made in the wall itself in which the chanter can sit, whose seat is so adapted that he can keep his feet above the bellows. There is also a square opening in the middle of the arch through the masonry, through which the construction with the pipes is laid out; and upon the neck of the bellows which is in the wall beneath, the opening is made firm with stones, it is supported at its junction, and is rested upon two long iron nails evenly fixed in the wall; to this opening a wooden window hangs, which, when shut, is defended by a lock and key, that no stranger coming unawares be able to learn what may be contained in it. Outside also, above the organ, a thick drapery, extended inside with wood like a dome, for warding off the dust, can hang by a rope from the ceiling, which rope, arranged with art around a wheel above the ceiling itself, is drawn whilst the organ is sounding, and thus raises the roof, and the chant being finished, it is lowered upon the organ. This dome also has a spire, made from the same cloth, extended by four pieces of wood in shape of a triangle, at the top of which a small wooden ball can stand, to which the rope cleaves. The bellows, and the instrument upon which they may lie, arrange at your pleasure according to the situation of the spot.

## CAPUT LXXXIV.

#### DE DOMO CUPREA ET CONFLATORIO EJUS.

Secundum abundantiam fistularum dispone longitudinem et latitudinem domns, et fae formain in argillà maceratà, siceatamque diligenter incide quâeunque mensurâ volueris, et cooperi ecrâ, diligenter inter duas æqualiter spissas hastulas cum rotundo ligno attenuatâ. Deiude incide foramina linguarum iu ipsâ cerâ, et foramen inferius, per quod ventus introcat; additis spiraculis, cum infusorio cooperi eâdem argillâ semel, et iterum ae tertio. Cumque siccata fuerit forma, eodem modo funde quo supra formam turibuli. Conflatorium quoque formabis in argilla procedentibus undique inferius venti aditibus, ad sinuilitudinem radicis unius arboris, et in summo in unum foramen Quod cum mensurate dispositum eultello ineideris, cooperi eonvenientibus. cerâ, et fae sieut supra. Cumque domum fuderis conjunges interius altitudine unius digiti a fundo, tabulam eupream ductilem sub foraminibus linguarum æqualiter, ut supra eam ipsæ liuguæ jaceant, ita ut possint æqualiter produei et induci, illitisque ipsis linguis tenui argillâ, reliquum domûs perfuudes liquefacto plumbo, per omnia, super ipsas linguas usque ad summum. Quo facto, ejicies ipsum plumbum diligenter designabisque foramina fistularum in linguis; deinde in ipso plumbo et eum gracili ferro, vel terebro, perforabis diligentissime. Deinde sub linguis ventorum aditus facies, induces ipsas linguas singulas iu suis loeis, atque repones plumbum et eum malleo in percutiendo conjunges domui, ut nichil spiraminis exeat, nisi per foramina quibus fistulæ imponendæ sunt. Cum vero eonflatorium fuerit fusum et limatum, atque uniuscujusque follis fistula suo iuductorio coaptata, conjungi et firmiter eonsolidari debet ad domum organariam inferius, ita ut ventus suos aditus liberè inveniat, et per alias juncturas nullatenus exeat. Hoc quoque sollertius\* procurandum est, ut in capite uniuscujusque follis, ante foramen fistulæ sue, cuprum tenue dependeat; quod spiraminis elaudat aditum, ita ut cum follis flando deponitur illud euprum se elevet, et ventus pleniter excat; cumque follis elevatur ut per ventilabrum suum flatum resumat, illud cuprum os ejus penitus claudat, et ventum quem emisit redire non permittat.

<sup>\*</sup> In MS. sollerterius.

#### CHAP. IV.

#### OF THE COPPER CONSTRUCTION AND ITS BELLOWS.

Dispose the length and width of the ease according to the number of the pipes, and make a mould in beaten elay, and, being dry, cut it to whatever size you may wish, and cover it with wax carefully thinned, between two rods equally thick, with the round wood. Then cut the openings of the stops in this wax, and the hole below through which the wind can enter; the air-holes with the funnel being added, cover altogether with the same clay, and again, and a third time. And when the mould has become dry, cast in the same manner as the form of the censer above mentioned. You will also fashion the bellows in elay, the wind-issues proceeding everywhere below in the similitude of the roots of a tree, and meeting at the top in one opening. Which, when disposed in rule you have cut with a knife, cover with wax and act as above. when you have cast the ease, you join, inside, at the height of one finger from the bottom, a beaten copper plate, in an even manner under the openings of the stops, that these stops may rest upon it, so that they can be smoothly drawn forth and returned; and lining these stops with thin clay, you pour over the rest of the case some melted lead everywhere, over these stops up to the top. This being done, you east out this lead and will carefully mark the openings of the pipes in the stops; then you will most carefully perforate in this lead with a thin iron or with a bore. Then you make the issues for the wind under the stops; you introduce these stops singly in their places, and you replace the lead and you fit them to the construction by beating with the hammer, so that no wind can issue, unless through the openings in which the pipes are placed. When the wind-case has been cast and filed, and the pipe of each air-issue fitted to its conductor, it should be joined together and firmly soldered below to the organ construction, so that the wind may find its access freely, and can in nowise issue through the other joints. This also is to be carefully provided, that a thin piece of copper may hang down before the opening of its pipe, which can close the access of the air-hole, so that when by the breathing of the bellows this copper is displaced, it may rise, and the wind may freely issue; and when the bellows is raised, so that it may recover air through its own ventilator, this copper can quite close its mouth and not permit the wind which it emitted to return.

Such is the highly interesting and valuable paper left us by this ancient monk—valuable in many points, but particularly so as clearing up the debated point of the invention of the clavier or key-board. The Organ of Theophilus was unprovided with one.

In a Saxon MS. of the eleventh century, preserved in the British Museum (Cott. Tiberius, B. 6) is a drawing of the "Bumbulum eum fistula aereâ," with brass pipes. This Bumbulum appears to be an organ, played upon in the same manner as that described by the monk. But a better representation is preserved in Gori's Thesaurus Diptychorum (said to be from an ancient MS. of the time of Charlemagne), which is here copied:



King David is depicted sitting on a throne, striking a lyre with his left hand, and holding a seeptre in his right. His head is accompanied by two different kinds of ornaments. One is the glory, the emblem of sanctity and eternity, and the other a turreted erown, representing a city with a gate. This is, perhaps, the holy Jerusalem, or that happy Sion, "whose gates the Lord loveth," as David himself sings. He is probably engaged in singing psalms, assisted by four musical instruments; the *pneumatic* organ, a sort of violin, a trumpet, and a set of bells.


## SECOND EPOCH.

THE MEDIEVAL ORGAN, AFTER THE INVENTION OF THE KEY-BOARD.

# 6. The First Key-board.

The close of the eleventh century forms an era in the history of organ-building, when an organ is said to have been erected in the Cathedral at Magdeburg, with a *key-board* consisting of *sixteen* keys. In the earlier organs, the number of notes was very limited. From nine to eleven was nearly their greatest extent, and the execution of the plain-chant did not require more. Harmony, it will be remembered, was still unknown.


The keys of the Magdeburg organ were an ell long and three inches broad. The following diagram, showing their form, is copied from Prætorius, *Theatrum Instrumentorum seu Sciagraphia*. 4to. Wolfenbüttel, 1620.



Dom Bedos speaks of some early organs whose keys were five inches and a half wide. The manner of performing upon these instruments was of course conformable to the size of the keys. They were struck down by the *fist* of the player, even to a considerable depth, whence, according to Seidel, arose the expression Organ-beater. This method resembles that of Carillon-playing\*, still in use in some parts of France, Germany, and Holland.

<sup>\*</sup> Burney gives an interesting account of his ascent of one of the belfries at Ghent, to witness a performance on the chimes. "The Carilloneur," he says, "was literally at work, and hard work indeed it must be; he was in his shirt, with the collar unbuttoned, and in a violent sweat. There are pedals communicating with the great bells, upon which, with his feet, he played the base to several sprightly and rather difficult airs, performed with the two hands upon the upper species of keys. These keys are projecting sticks, wide enough asunder to be struck with violence and velocity by either of the two hands edgeways, without the danger of hitting the neighbouring keys. The player had a thick leather covering for the little finger of each hand, otherwise it would be impossible for him to support the pain which the violence of the stroke necessary to be given to each key, in order to its being distinctly heard throughout a very large town, requires."—Present State of Music in Germany, the Netherlands, &c. 1775. Vol. i, p. 14. An engraving of a Carilloneur, performing in the exact manner described by Burney, may be seen in the fourth book of Mersennus's Harmonie Universelle: Paris, 1636.

The annexed very curious engraving, showing an organist performing upon an instrument with broad-keys, is copied from Franchinus Gaffurius's *Theorica Musica*, printed at Milan in 1492\*.



7. The Bellows.

We cannot but wonder at the perseverance of our aneestors, when we consider the various ineffectual efforts that were made, from time to time, to improve the bellows. For centuries they remained in the most imperfect state—sometimes twenty or more being necessary to supply the wind to a

<sup>\*</sup> This engraving also occurs in the same author's De Harmonia Musicorum: Milan, 1518. Mr. Wackerbarth, in his Music and the Anglo-Saxons (p. 8), says, "Now it has been so generally asserted by modern writers, though I know not on what authority, that the keys of the organ were originally some inches wide, and played on, like Carillons, with a blow of the fist, that I dare not altogether reject, as untrue, so much concurring testimony." It is presumed that the writer of this passage will accept the names of Dom Bedos, Prætorius, and Gaffurius, as authorities.

moderate sized organ. According to Wulstan (in the passage before quoted), the organ at Winehester was provided with twenty-six bellows. The great organ of the Cathedral at Halberstadt had twenty, and that of Magdeburg twenty-four small bellows. They were fashioned in folds like the forge or smith's bellows, and were not provided with weights as in our modern organs. Our ancestors had no idea of proportioning the wind; but its force depended solely on the strength of the bellows-blowers. It is easy to conceive that by this means the organ could never have been in tune; because the wind was admitted unequally. Prætorius has left us a singular representation of the ancient mode of blowing, which is here copied from the *Theatrum Instrumentorum*, Wolfenbüttel, 1620:




Upon each bellows is fixed a wooden shoe; the men who work them hang by their hands on a transverse bar, and each man, placing his feet in the shoes of two bellows, alternately lowers one and raises the other.

We copy another curious representation of an early bellows, which is given by Mersennus, in his *Harmonie Universelle*: folio; Paris, 1636. It shows that the *horizontal* bellows, though only brought into general use in the last century, was by no means a modern invention\*.

The bellows is here placed at the top of the organ, and worked by a chain in the place of a feeder. Mersennus calls it bellows "à la lanterne."

<sup>\*</sup> The horizontal bellows is an improvement upon the old one; as a column of air by this machine is both supplied and drawn at the same moment, by the action of a crank and other appendages, instead of levers, &c.

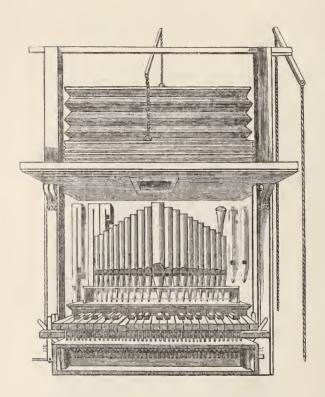

S. Supposed Origin of the Mixture Stops.

Seidel, in the introduction to his work on the organ\*, has the following passage:—"In the twelfth century, the number of keys was increased, and afterwards each note (or tone) multiplied by two, three, or more pipes, tuned to the fifth or octave, or to the third and tenth. By this alteration the organ became a mixture; and so remained until the idea occurred of classifying the pipes, by which means this mixture register received a separate slide." Forkel also, in his Geschichte der Musik (part ii, p. 368), says that, even in the oldest organs, the mixture, as associated with  $\frac{12}{5}$ , was introduced, not as a stop or register, for there was nothing of the kind at that period, but as being invariably united to each tone†.

Burney‡ is inclined to ascribe the origin of harmony to this invention.

<sup>\*</sup> The Organ and its Construction, a Systematic Hand-book for Choristers, Organists, Schoolmasters, and Musical Students. 2nd edit. Breslau, 1844. An English translation of this book has lately appeared.

<sup>†</sup> Forkel cites Sethus Calvisius and Michael Prætorius, as his authorities.

<sup>†</sup> Hist. of Music, vol. ii, p. 133.

His words are, "With respect to the term *Organum*, as used by musical writers of the middle ages for a voice part; if we could imagine, when the first organ was creeted in churches and convents, that each of them was furnished with such a stop as is now called the *Sesquialter*, or any other com-

pound stop, consisting of 4ths, 5ths, and 8ths; thus:

it might not only help to account for the introduction of such strange harmony into the church as that of Hubald, Odo, and Guido, but even give a probable reason for the name by which it was called: for, whether we suppose singers to have imitated such sounds as every *single key* produced, or such as were produced by the fingers from *different keys* of the organ, it was natural to eall the part which was added to the plain-song, *Organum*, and the art of producing it, *Organizare\**."

Dr. Crotch† is of an exactly opposite opinion. He says, "The method of accompanying the chants of the Christian church by a succession of fifths, octaves, or fourths, used in and before the eleventh century, called Organum, has been supposed to be the origin of harmony. The organ took its name from it; and the stops called cornet, sexquialtera, twelfth, tierce, principal, fifteenth, &c. are thought to have been invented to facilitate the performance of this accompaniment‡. But if the effect of this accompaniment was similar to that of the above stops of an organ,—if, by being performed comparatively soft, it only enriched the tone, without disturbing the melody,—then it should not be considered as the origin of harmony, having no more to do with it than the harmonies which constantly accompany the melody of a single voice or instrument. The invention of harmony may be said rather to have commenced when these fifths, fourths, and octaves begun to be avoided."

Kiesewetter, in his charming History of the Modern Music of Western Europe §, has the following conclusions on the subject: "But in what manner, then, the organum may nevertheless have been, and really was, an imitation of the organ, and received its name from that instrument, may thus be explained. The oldest organs, of exceedingly coarse manufacture,—the broad six-inch keys of which, separated from each other by a large space, must have been pressed down with the fists or elbows,—were in truth as little adapted to harmonic performances as to harmonic experiments; these instruments may, notwithstanding, have afforded the first opportunity of representing to

<sup>\*</sup> Organizare, according to Du Cange, is eanere in modum organi; and, among his authorities, he gives the following definition from the Catholicon or Lexicon of John de Janua, written in 1286: Organizare, Organo cantare; Joer ou chanter en orgres, organiser; "to play or sing like the organ."

<sup>†</sup> Note in the second edition of Elements of Musical Composition, 1833, p. 33.

<sup>‡</sup> This could not have been the case, as these stops were not invented till the *fifteenth* century, when the old *organum* had been discarded for something better.

<sup>¿</sup> Translated by Robert Müller. 8vo. 1848.

our senses in a permanently continuous manner the physical effects of the then admissible consonances, at least in single unisons, by the pressing down and holding out at the same time a second key; moreover, the organ-'thumper' might, whether intentionally or through awkwardness, have hit upon the idea of eausing one key to remain sounding, whilst the singers, to whom he had given the note, proceeded with their melody above it, as in the bagpipes; or it might also have happened that, at one time or another, he would accidentally, perhaps, press down the fifth to the fundamental note, and thus have eaused an agreeable surprise by its pleasing effect. With this, indeed, there might not as yet have been a proper harmony discovered; but effects would have been perceived calculated to produce, in speculative musieians, matter for reflection, and for hazarding other systems; the union of different human voices, which now occurred to their thoughts, was an imitation, not altogether happy perhaps, of that which in various instances they had discovered with the organ, and thus their diaphony, or polyphony, received the somewhat appropriate name of organum."

## 9. The First Monastic Organs.

In the thirteenth century, the priests of the Greek and Roman churches thought the use of organs in divine service scandalous and profanc. They preferred rendering divine worship as simple as possible, in order to distinguish it from that of the Jews and Pagans. Even to this day, the Greek church does not tolerate the use of organs in their public services. Notwithstanding these opinions, the use of organs, and even other instruments, became almost universal, not only in great churches, but in those of monasteries, convents, and small towns. The historians of this era celebrate several monks, distinguished for the art of playing on the organ, and for their general musical abilities. For some time, however, organs were only used on great feasts and solemn occasions; they were not used in the ordinary celebration of the offices\*.

The first monastic and conventual organs were very small, being merely

<sup>\*</sup> On particular occasions, the performance of a band of minstrels was added to the organ. Minstrels' galleries are often seen in the continental churches, but are rarely met with in this country. There is a gallery of this sort over the altar-screen at Chichester Cathedral, and another, much more remarkable, near the middle of the north side of Exeter Cathedral. It is supported on thirteen pillars, between every two of which, in a niched recess, there is a sculptured representation of an angel playing upon some musical instrument. Among these are the cittern, bagpipe, harp, violin, pipe, tambourine, &c. The roof of Outwell church, Norfolk, and the minstrels' column at Beverley, also exhibit a great variety of musical instruments anciently used in churches.

used to play the melody of the plain-song with the voices. These organs were called *Regals*.

# 10. The Regal, or Portative.

The term regal or rigol appears to have come from the Italian Rigabello. Sir Henry Spelman tells us "That in the church of St. Raphael, at Venice, the figure of a certain musical instrument, called a rigabello, was to be seen; it was wont to be used in churches before organs came into vogue. Another instrument, called turcello, succeeded the rigabello, the use of which was introduced at Venice by a German\*." This passage clearly shows the word regal to be a corruption or contraction of rigabello†.

Musical writers have not explained the nature of the *regal*, which was evidently to give out and sustain the melody of the plain-song. Carter, the well-known antiquary, ealls it "a portable organ, having one row of pipes, giving the treble notes.‡." A writer in Rees's *Eneyelopedia* says that "the *regal*, in all Roman Catholic countries, is a portable organ used in processions, earried by one person, and played upon by another." This explanation is not quite accurate, as the representations in early manuscripts invariably exhibit the instrument carried and performed upon by the same person.

Snetzler, the eelebrated organ-builder, remembered the regals in use, in Germany§; and, until near the end of the last century, an officer of the Royal Chapel at St. James's was styled "a tuner of the regalls"."

In the accounts of the Weavers' Pageant, performed at Coventry in the sixteenth century, we have the following entries:

- "1554. Payd to James Hewet for hys reyggals, viiid.
- "1556. Payd to James Hewet for playing of his *regols* in the payggeant, viijd."

<sup>\* &</sup>quot;In Æde Sancti Raphaelis Venetiis, instrumenti musici cujusdam forma extat, ei nomen rigabello: cujus in ecclesiis usus fuerit ante organa illa pneumatica quæ hodie usurpantur. Rigabello successit aliud quod Turcello dictum est, cujus Venetias usum induxit homo Germanus."—Sansovinus, lib. vi, Descript. Venetiarum.

<sup>†</sup> Skinner, the etymologist, upon the authority of an old English dictionary, conjectures the word Rigals or Regals to signify a stringed instrument,—namely, a clavichord. In this mistake he has been followed by numerous writers. Walther is more particular in his description of the Regal: he makes it to be a reed-work in an organ, with metal and also wooden pipes and bellows adapted to it, so contrived as that it may be taken out and set upon a chest or a table. He says that the name Regal is frequently given to that stop in an organ called the Vox humana; and in this sense Mersennus uses it, in his Harmonie Universelle liv. vi, Des Orgues, Prop. viii. See Walther's Musicalisches Lexicon, Leipzig, 1732. Cotgrave and Florio write the word rigols and rigoles.

<sup>‡</sup> Gent.'s Mag. 1804, Part i, p. 328.

<sup>§</sup> See the Archæologia, published by the Society of Antiquaries, vol. iii, p. 32.

<sup>||</sup> In 1767, Bernard Gates received a salary of 56l. as "tuner of the regalls" in the Royal Chapel. The same gentleman, in 1770, is styled "tuner of the organs."

The regals are mentioned in Edwards' play of Damon and Pythias, 1571; and in Jacobo Peri's opera of Euridice, composed for the royal nuptials of Mary de Medici with Henry IV of France, in the year 1600.

In the Household Book of the Princess Mary, afterwards Queen Mary\*, under the year 1538, we have the following entry:

"Item, payd for a payr of regalls, iiij li. x s."

And in an Inventory of Henry the Eighth's Musical Instruments, taken after his death†, we read of "thirteen pair of single regalls," and "five pair of double regalls." Double regalls were furnished with two rows of pipes.

Representations of regals of various kinds may be seen in the *Chronicon Nurembergense*, printed in 1493; and in Willemin's admirable work entitled *Monuments Français inédits*.

This instrument is also exhibited among the sculptures in the cornice of St. John's church, Circneester; and on the crosier of William of Wykeham, preserved in New College, Oxford.

The following carly form of the regals is taken from Luseinius's *Musurgia*, seu Praxis Musicæ, Strasburg, 1536:



The regals were also called *portatives*, from the Latin word *portare*, "to carry." The old poets frequently allude to them under this name. Thus Gawin Douglas:

"On crowd, lute, harpe, with monie gudlie spring, Schalmes, clariouns, portatives, heard I ring."

Again, in the ancient romance of Clariodus and Meliades:

"The dulcet playit also with *portative*, Sad hevie myndis to make exultative."

Also in the poem of the Houlate, written in 1450:

" Clarions loud knellis,

Portativis and bellis."

In the codicil to the will of Richard Fitz-James, Bishop of London, proved 22nd May, 1522‡, is the following bequest:

"Item, I will that my payre of *portatyves*, being in my chapels in the palace of London, mine organs, also being and standing in my chapels within

<sup>\*</sup> Edited by Sir Frederick Madden, 8vo. 1831.

<sup>†</sup> See Sir Henry Ellis's Original Letters, illustrative of English History, Second Series, vol. i, p. 272.

<sup>‡</sup> Testamenta Vetusta, by Sir Harris Nicolas, vol. ii, p. 598.

my three manors of Fulham, Hadham, and Wykeham, shall there stand still and remain to my successor, next Bishop of London, that they may be used there to the honor and service of God."

In a curious account of the moveables of certain abbeys, at the dissolution of these establishments (dated 1538)\*, we read:

"Item, sold an old payre of portatyffes organs to Mr. Besum, ij s."

#### 11. The Positive.

In contradistinction to the portative, we have the *positive* organ; from the Latin word *ponere*, "to set down." This instrument was provided with a key-board of full compass, and was of course played upon with both hands†.

In the series of wood-cuts known as the *Triumphe de l' Empereur Maximilian*, drawn by Hans Burgmair, in 1516, and first printed at Vienna in 1796, is an engraving of Paul Hofhaimer, organist to the Emperor Maximilian‡, playing upon a *positive* organ. The instrument is placed upon a table, an attendant blowing the bellows behind; the whole being drawn upon a car, which forms part of the procession. In the descriptive letter-press which accompanies these plates, it is said, "In the car is a *regal* and a *positif*; Paul Hofhaimer, master organist, touches the *last* instrument." The regal may be seen in the same engraving, behind the organist.

The following figure of the *positive* organ is copied from Ambrosius Wilphlingseder's *Erotemata Musices Practica*, Nuremberg, 1563.

Sir John has entirely mistaken the nature of the *positive* organ, as will be seen by the passages cited in the text.

<sup>\*</sup> Letters relating to the Suppression of the Monasteries, printed for the Camden Society, p. 269.

<sup>†</sup> Sir John Hawkins says, "It is true when we speak of the organ we are to understand that there are two kinds of instrument distinguishable by that name; the one, for the smallness of its size, and simplicity of its construction, called the *portative*; the other, the *positive*, or immoveable organ; both of these are very accurately described by Ottomarus Luscinius, in his *Musurgia*, printed at Strasburg in 1536. As to the first, its use was principally to assist the voice in ascertaining the several sounds contained in the system, and occasionally to facilitate the learning of any cantus. The other is that noble instrument, to the harmony whereof the solemn choral service has, ever since its invention, been sung, and which is now degraded to the accompaniment of discordant voices in the promiscuous performance of metrical psalmody in parochial worship."—*Hist. of Music*, vol.ii, p. 163.

<sup>‡</sup> Luscinius speaks highly of Paul Hofhaimer. He says "he has received great honours from the Emperor Maximilian, whom he delights as often as he plays upon the organ. Nor is he more remarkable for skill in his profession than for the extensiveness of his genius and the greatness of his mind. Rome owes not more to Romulus or Camillus, than the musical world does to Paulus."—Musurgia, 1536. Burgmair's engraving is evidently a good portrait of this eminent musician.



The *positif* was afterwards added to the larger organ. In our musical dictionaries we find it thus explained: "Positif, the small organ which is placed before the great one in all churches where there is an organ sufficiently large to be divided into two parts. The organist is placed between the positif and great organ, if the claviers or sets of keys are all attached to the great one, and of which the lowest belongs to the positif\*."

We here see the origin of the *choir* organ, which was the *smaller* organ, called the positive, used in monastic times to accompany the voices of the choir. Afterwards, when the organs were joined together, and the organist took his seat between them (or rather in a half-circle taken from the small organ), the *choir*-organ became corrupted into the *chair*-organ†. It has now reassumed its ancient and original signification.

# 12. The Meaning of "a Pair of Organs."

This seems the proper place to explain a term which has frequently puzzled the enquirers after medieval remains; i. e. the common expression of "a pair of organs."

"It appears," says Mr. Albert Way‡, "that the usual term 'a pair of organs' has reference to the double bellows, whereby continuous sound was produced." This, however, cannot be the case; as we often meet with "a pair of virginals," in which instrument wind was not required.

Douce §, a high authority in these matters, tells us that a pair of organs meant an instrument "formed with a double row of pipes." This explanation is obviously erroncous; as the *single* regals, always termed "a pair," had but *one* row of pipes. The *double* regals, mentioned in the curious inventory of Henry the Eighth's musical instruments (before alluded to), had two rows of pipes.

Nichols, the learned historian of Leicestershire||, says, "a pair of organs

<sup>\*</sup> Danneley's Musical Encyclopedia, 1825—a work (in spite of a few errors) of much more merit than is generally assigned to it.

<sup>†</sup> In one of Matthew Locke's organ pieces, printed in his *Melothesia*, 1673, the "great organ" and the "chair organ" are mentioned.

<sup>‡</sup> Promptorium Parvulorum, published by the Camden Society, tom. ii in v, Organo.

<sup>¿</sup> Cited by Mr. Way, in the before-mentioned work.

<sup>|</sup> Illustrations of the Manners and Expenses of Ancient Times in England. 4to. 1797.

was the term at that time, when there were two kinds of organs, the one fixed and the other portable, adapted perhaps to the size of the church and its revenues." A recent writer\*, improving upon this statement, adds, "a payre of organs, consisting of two organs conjoined, with two sets of keys, one above the other: one small and ealled the choir, or more probably the chayre organ; and the other the great organ, built, as its name imports, on a large scale, and used in forte passages." This is by far the most erroneous explanation of the term yet given. The slightest acquaintance with ancient documents would have convinced the writer of its absurdity.

Some authorities tell us that "a pair of organs" meant an organ with two stops. But this could not have been the case; as, in Henry the Eighth's Household Book, we read of "a payer of virginalls with *four* stoppes."

The truth is, that "a pair of organs" meant simply an organ with more pipes than one. Jonson, Heywood, and other of the older poets, always use the term pair in the sense of an aggregate, and as synonymous with set: thus we have "a pair of chessmen," "a pair of beads," "a pair of eards," "a pair of organs," &c.† When speaking of a flight of stairs, we often say a pair of stairs. Therefore this ancient form of expression, although obsolete in most cases, is still in use at the present day.

## 13. The Improved Key-board, and the Invention of the Pedal.

The Monks and Friars, those zealous guardians and preservers of learning and the fine arts, in the dark times of the middle ages, not only took great interest in the building and adornments of their churches and convents, but employed themselves in making improvements in the art of organ-building.

In the course of the fourteenth century they set about improving the clumsy clavier or key-board. In particular, they made neater keys, increased their number both upwards and downwards, to the extent of nearly three octaves, and so reduced their fall and breadth, that they no longer required to be struck down by the fist, but were capable of being pressed down by the fingers, as in the organ of modern times.

<sup>\*</sup> A paper "On Organs in Churches," by Arthur Ashpitel, in the Transactions of the British Archæological Association, 1846, p. 289.

<sup>† &</sup>quot;A pair of cards, Nicholas, and a carpet to cover the table."

A Woman killed with Kindness. Heywood. Printed before 1604.

<sup>&</sup>quot; Have you ne'er a son at the groom porters to beg or borrow a pair of cards?"

Jonson's Masque at Christmas, 1616.

<sup>&</sup>quot;Go, get a pair of beads, and learn to pray, sir."

A Wife for a Month. Fletcher. 1624.

<sup>&</sup>quot;Was there no talk of a fair pair of organs, a great gilt candlestick, and a pair of silver snuffers?"—A mad World, my Masters. Middleton. 1608.

In 1359 or 1361, Nieholas Faber, a pricst, built the great organ in the Cathedral at Halberstadt. It had fourteen diatonic and eight ehromatie keys,

the compass extending from great  $\underbrace{{\bf D}}$ : to  $\underbrace{{\bf D}}$ : The great B

stood in front, was thirty-two feet long, and three and a quarter inches (?) in diameter. According to Prætorius\*, who gives us this account, this organ had four claviers, one being *pedals* for the feet, and twenty bellows, requiring ten men to supply the wind.

This is the earliest authentic account of an organ provided with the semitones of the scale. Dom Bedos†, indeed, tells us that "half-notes were invented at Venice in the twelfth century;" but as his statement is unsupported by proof, we prefer following the earlier authority of Prætorius, who assigns their introduction to the middle of the fourteenth century—a period more in accordance with what we know respecting the progress of harmony in the middle ages.

Prætorius is, perhaps, wrong in fixing so early a date for the invention of the pedal. The Halberstadt organ was probably provided with this important addition by Gregorius Kleng, who restored that instrument in 1494.

The invention of the pedal is commonly attributed to a German, named Bernhard, Organist to the Doge of Venice, between the years 1470-80‡; but it was certainly anterior to this date. A writer in the Leipsic Musical Gazette, 1836, states that, in the year 1818, a new organ was creeted in the church of Beeskow, four miles from Frankfort on the Oder; on which occasion, the organ-builder, Marx (senior), took some pains to ascertain the age of the old organ he had to remove. On a careful investigation, it appeared that the organ had been built just four hundred years, the date of 1418 being engraved on the upper side of the partition (kern) of the two principal pedal pipes; for that these two pipes did belong to the pedal, was clear from their admeasurement. From this fact, it may reasonably be concluded that the pedal may have been in use towards the end of the fourtcenth century. Bernhard probably made some improvements in the pedal board which tradition has associated with the invention.

Marinus Sanutus, a eelebrated Venetian patrician, and a zealous promoter of Christianity, eaused, in 1312, an organ to be built for the church of St. Raphael, in Venice§. This was the first *organ* creeted in that city. It was

<sup>\*</sup> Syntagma Musica, vol. ii, p. 98.

<sup>†</sup> L'Art du Facture des Orgues.

<sup>‡</sup> It is sometimes claimed for Albert Van Os, who is said to have built an organ for St. Nicholas' Church, Utrecht, in 1120. Traxdorf, in 1468, also (with more reason) has his advocates for the invention.

This organ had so many admirers in Venice, that Marinus Sanutus received the
 honorable title of Torcellus, organs being at that time called Torcelli, in Italy.—Seidel.

If this organ was the first erected at Venice—and we have reason to believe the state-

probably a large one, and the builder was a German. Hence we see that the Germans, at this early time, had acquired a considerable reputation for organ-building, which had even passed the limits of their fatherland; and it will be observed, in the further progress of these pages, that the great improvements in this instrument almost exclusively proceeded from these thoughtful people.

### 14. Monastic Organs in England.

In England, as we have seen, a large organ existed at Winchester in the tenth century; and probably, even at this early period, other cathedrals were supplied in a similar manner. Gervase, the monk, of Canterbury, describing the burning of that eathedral in 1174, mentions the destruction of the organ; but does not allude to it as if it were an unusual thing in a church\*. The organs of the Abbeys of Malmesbury and Glastonbury we have already mentioned; and long before the close of the fourteenth century, all our abbeys and churches were plentifully supplied with instruments of this class†.

Chaucer, in his tale of the Coek and the Fox, speaking of Chauntielere, the hero of the poem, says:

"His vois was merrier than the merry orgon,
On masse days that in the churches gon."

Again, speaking of St. Cecilia, the same Poet says:

" And while that organs maden melodie,

To God alone thus in her heart sung she."

In the fourteenth century, it became the practice to place two organs in large churches; one large, the other small. The *great* organ was provided

with two manuals, from D: to to the upper manual

forming the *treble*, the lower one the *bass*. This arrangement, according to Seidel, suggested the invention of the *eopula*. The pipes of these instruments were always exposed; and such an organ (according to Fosbroke‡) was, and perhaps is now, at Uley Church, in Gloucestershire. The organist

ment—it is a sufficient refutation of Dom Bedos' story that "half-notes were invented at Venice in the twelfth century."

<sup>\*</sup> Gervas. Dorobern. apud decem Scriptores de incendio, &c. "Organa quæ supra fornicem in australi cruce."

<sup>†</sup> In Cotton MS. Nero, D. VII, in the British Museum, numerous curious particulars are recorded respecting the use of organs in England; as at St. Alban's, and Croyland, where there were "organa solemnia in introitu ecclesie superius situata," as well as smaller organs in the choir.

<sup>‡</sup> British Monachism; or Manners and Customs of the Monks and Nuns of England, edit. 1843, p. 204.

was usually one of the monks, when little more was required than to accompany the plain-song or chant. Afterwards, as musical composition improved, and more skill was required for its performance, lay organists were hired\*.

Beneath the great niche over the west door of York Minster, is an organ earved in the pediment. The pipes appear without a ease: it has a single row of keys, on which an angel is playing, from a music-book held by two small figures of boys or choristers below, while another is behind, blowing the organ with a common chamber bellows. A similar device is carved over a door in the north wall of the Cathedral of Utrecht.

Davies, in his Ancient Rites and Monuments of the Monastical and Cathedral Church of Durham, 12mo, 1672†, has left us a curious passage eoneerning the organs of that monastery: "There were," says he, "three pair of organs belonging to the said quire, for maintenance of God's service, and the better eelebrating thereof. One of the fairest pair of the three stood over the quire door, only opened and play'd upon on principal feasts, the pipes being all of most fine wood, and workmanship very fair, partly gilt upon the inside, and the ontside of the leaves and eovers up to the top, with branches, and flowers finely gilt, with the name of Jesus gilt with gold. There were but two pair more of them in all England of the same making; one in York, and another in Paul's.

"Also there was a lantern of wood like unto a pulpit, standing and adjoining to the wood-organs over the quire door, where they had wont to sing

<sup>\*</sup> In ancient times, no distinct officer by the name of organist was appointed in churches or colleges. This duty was subordinate, and appears to have been commonly performed by one of the clerks. In the statutes of Corpus Christi College, at Oxford, given in 1517, two chapel clerks are established; one of whom is also to be the organorum pulsator. The first instance of the mention of an organ in any collegiate statutes, occurs in those of Eton College, made about the year 1440; where one of the four clerks who is appointed to instruct the choristers is moreover ordered jubilare organis. Here also, for the first time, Cantus organicus is mentioned. In the new cathedral-foundations of Henry the Eighth, a master or teacher of the singing boys is appointed: and, besides, he is to be "Cantandi, et organa pulsandi, peritus." At New College, Oxford, King's at Cambridge, and Winchester College, in each of which are ample choirs, there is no provision by statute, not even for an Informator Choristarum-although such an officer occurs in the early rolls of New College. At Magdalen College, Oxford, founded about the year 1459, there is also no mention of an organist: but it is enjoined that one of the chaplains, or clerks, or some other skilful person, shall educate the choristers in the plain-chant and pricked song. In the year 1446, the Abbot and Convent of Muchelney, in Somersetshire, granted a corrody of five marks, with seven gallons of ale, and seven loaves, every week, and a gown and four loads of wood annually, to Ralph Drake, cantor, or chanter, pro servicio nobis in illa sciencia musica; and on condition that he attend the choir every day, and teach four boys, and one of the monks, or as many as chose, to play on the organ.—See Warton's Life of Sir T. Pope, Appendix, p. 425, for further information.

<sup>†</sup> Compiled from ancient MSS. before the dissolution of the monasteries. J. Davies, of Kidwelly, was the editor. Another edition of this curious volume was printed in 1733, with some additions.

the nine lessons, in the old time, on principal dayes, standing with their faces towards the high altar.

"The second pair stood on the north side of the quire, being never play'd upon, but when the four doctors of the church were read, viz. Augustine, Ambrose, Gregory, and Jerome, being a pair of fair large organs, called the *Cryers*. The third pair were daily used at ordinary service."

In an inventory of the plate, jewels, ornaments, &c. belonging to the late Priory of Ely, Cambridgeshire, we read of "two paer of organs in the quyer," and "a paer of organs in the Ladye Chaple\*."

In the ancient Cathedral of Worecster, the chapel of St. Edmund had a pair of organs; that of St. George, another pair; and in the choir was the *great* organ†.

Some of the entries in ancient documents respecting the organ are interesting, not only as showing its very general use in churches and monastic establishments in the fifteenth and sixteenth centuries, but also as exhibiting the progress—slow as it evidently was—of the art of organ-building, whilst it remained in the hands of the monks.

In the churchwardens' accounts of St. Mary's, Sandwich, are the following:

8 .		
"	1444.	Ress <sup>d</sup> [Rcc <sup>d</sup> ] the bequeth of Thomas Boryner unto a
		payre of Orgonys iiij li.
"		To Sir John‡ for the amendyng of the Organs xii d.
"	1462.	To a Preyst for the amending of the Organys iiij d.
"		To a Preist that playth at Organys iiij d.
"	1463.	To Sir John for hys playyng at Organys vi s. viij d.
"	1496.	Payd for mendyng of the lytell Organys iij s. iv d.
"		Item, for shepeskyn to mend the gretc Organyse iij d.
"	1502.	Paid for mending of the gret Organ Bellowis, and the
		small Organ Bellowis v d.
"		Item, for a shepis skyn for both organys, and for trying
		of the wax for the Paschall ij d.
"	1521.	Payd Winsborough the Monke of Crists Churche [Can-
		terbury] for mendyng the grete Organys iij. iv d.§"

<sup>\*</sup> Bentham's History of Ely Cathedral, p. 225.

<sup>†</sup> Storer's English Cathedrals, vol. iv.

<sup>‡</sup> This person was a priest. Sir was formerly a designation of an inferior member of the clergy. Bishop Percy says, "Within the limits of my own memory, all Readers in chapels were called Sirs, and of old have been writ so; whence, I suppose, such of the laiety as received the noble order of knighthood, being called Sirs too, for distinction sake had knight writ after them; which had been superfluous, if the title Sir had been peculiar to them."—See Boswell's Shakespeare, vol. viii, p. 8.

<sup>§</sup> Some of these entries are printed in Boys' History of Sandwich, but without the dates. They are here copied from the original transcripts now in the possession of his grandson, W. H. Rolfe, Esq. of Sandwich.

In the accounts of Shipdam, Norfolk, is this entry:						
"1513. Payde to ye Clarke for mendynge ye organiys, and he						
shall take charge of ye pypes and ye bellows ye space						
of ij yeres at hys owne charge v s."						
Mr. Goddard Jonson, who quotes this entry in his <i>Illustrations of Ancient</i>						
Manners, See. during the 16th and 17th Centuries, says, in a note, "The organs						
appear to have been a very considerable annual charge upon the parish, as						
is shown by the various entries in the books."						
In the churchwardens' accounts of Lambeth are the following items:						
"1517. Paid to Sir William Argall for the Organs x s.						
"1568. Paid to Father Howe* for his fee for keeping the						
organes one yere i s."						
The old accounts of St. Mary at Hill, London, contain, among numerous						
interesting entries, several notices of the organ: i. e.—						
"1519. For bringing the organs from St. Andrew's Church, against						
St. Barnabas' eve, and carrying them back again† v d.						
"1521. To the organ maker for a pair of new organs, and for						
bringing them home x s. viij d."						
Again, in the old books of St. Andrew Hubbard, Eastcheap:						
"1504. Item, payd for mendyng of the organs viij d.						
"1506. Item, paid to John Smyth, organ plaier, for a quarter						
ending at our Lady Day in Lent v s.						
"1568. Paid to Hewe [probably <i>Howe</i> , before mentioned], the						
organ marker, for the kepinge of our orgaynes, his						
fee, for ij yeres v s."						
As regards the prices paid for organs in ancient times, we have no very						
satisfactory information.						

Whethamstede, Abbot of St. Alban's, about the year 1450 gave to his church a pair of organs; for which, and their erection, he expended fifty pounds. No organ in any monastery in England was comparable to this instrument, for its size, tone, and workmanship‡. About the year 1476, Thomas Wyrcester, Abbot of Hyde, near Winchester, gave eight marks and a horse to purchase an organ for his church. " Octo Marcus et unum equum bonum pro nobis organis musicalibus \sqrt{."} Organs were sometimes imported

<sup>\*</sup> This person was also employed in attending to the organ of St. Helen's Church, Bishopsgate. Mr. Burgon, in his Life and Times of Sir Thomas Gresham (vol. ii, p. 466), says, "Father Howe's fee for the organes for a hole yere" was 2s."

<sup>†</sup> It seems to have been customary, in the sixteenth century, for churches to lend their organs. In the accounts of St. Margaret's, Westminster, we read:

<sup>&</sup>quot; 1508. For bringing the organs of the Abbay into the church, and bering them home agayne, ij d."

<sup>‡</sup> Chron. Whethamst. per Hearne, vol. ii, p. 539.

<sup>&</sup>amp; MSS. Archiv. Wolves. apud Winton.

from the Continent, as appears by the Louth accounts, about 1500. The price of a pair of *Flemish* organs, suitable to be set up in the rood-loft of that noble church, was 13l. 6s. 8d.\* Grey, Archdeacon of Berkshire, bequeathed 1l. in 1521, to St. Mary's Church at Oxford, "for a new payr of organs†." A new organ was bought, in 1529, for the large and beantiful church of Holbeach, in Lincolnshire, for 3l. 6s. 8d.‡ In 1536, the churchwardens of St. Helen's, Abingdon, paid 8l. for "a pairc of organs\$."

According to Dugdale, an organ was erected in the church of Sutton-Colfield, Warwickshire, by Vesey, Bishop of Exeter, in the reign of Henry

the Eighth, at the cost of 14l. 2s. 8d.||

"A fair payr of organs" was placed in the chapel of Trinity College, Oxford, in 1557, which, "with the earryage from London to Oxford, cost 101. \mathbb{T}"

These instances could readily be multiplied; but the present are sufficient for our purpose.

‡ Stukely's Itin. Curios. p. 20.

<sup>\*</sup> Arehæologia, vol. x, p. 91.

<sup>†</sup> Registr. Univ. Oxon. Archiv. A, 166.

<sup>§</sup> Nichols' Illustrations of Expenses, &c. 1797.

<sup>||</sup> Dugdale's Warwickshire, p. 667.

<sup>¶</sup> Warton's Life of Sir T. Pope, p. 344.

#### THIRD EPOCH.

THE FIRST ORGAN-BUILDERS BY PROFESSION.

## 15. Early German Builders.

THERE can be no doubt that many of the carly organ-builders were ceclesiasties. Even down to a comparatively late period, as we have seen by the foregoing extracts, the latter continued to exercise a considerable influence over the art.

It is very difficult to distinguish the first organ-builders by profession from the priesthood; but that such existed as early at least as the fifteenth century, there cannot be a question.

Albert Van Os, emphatically called "Albert the Great," the earliest known organ-builder, was certainly a priest; so were his followers, Ulrie Engelbrecht and Nicholas Faber. Van Os built the organ of St. Nicholas' Church, Utrecht, in 1120; Engelbrecht, that of Strasburg Cathedral, in 1260; and Faber, that of Halberstadt, in 1359 or 1361, before mentioned.

Heinrich Traxdorf, who built an organ at Nuremberg in 1455, and another at St. Mary Magdalen, at Breslau, in 1466, was propably a *layman*; but this is by no means certain. Erhart Smid, of Peyssenberg, in Bavaria, whom Duke Ernest, in 1433, exempted from every species of impost and contribution, on account of his skill in constructing organs,—and Andrè, who built, in 1456, the organ of St. Ægidia, at Brunswick, were certainly laybuilders.

In 1475, Conrad Rosenburger, or Rothenburger, built an organ in the church of the Barefooted Friars, at Nuremberg; and, in 1493, a still larger one in the Cathedral of Bamberg. The organ in the Cathedral at Erfurt was built, in 1483, by an artist of Breslau, named Stephen Castendorfer; who also built, in 1490, an organ for St. Ulrich's Church, at Augsburg, for 107 florins (£8:18:4). The great organ in the Collegiate Church of St. Blasius, at Brunswick, was built, in 1499, by Henry Kranx. Prætorius eelebrates Frederick Krebs and Nicholas Muller as skilful organ-builders. Probably all these eminent men were organ-builders by profession.

# 16. Early English Builders.

The earliest organ-builder by *profession* in this country, of whom any account has descended to us, is William Wotton, of Oxford, who flourished

in the latter part of the fifteenth century\*. An indenture exists, which was made in 1487, between R. Fitzjames, warden of Merton College, and William Wotton, of the town of Oxford, by which he undertakes to make a pair of organs like the organs of the chapel of St. Mary Magdalene College, against the vigil of Whitsunday, 1489, for the price of 28l. The organ in Magdalene Chapel had been set up by him not long before, as appears by an entry in the Libri Computi of that college, for the years 1486-7, of a payment to him of 13l. in part for one pair of organs:—"Sol. Willielmo Wotton, Orkynmaker, pro uno pari organorum in parte 13l.;" and, two or three years after, a further payment occurs to him for repairs to this organ—"1488-9, Sol. Willo. Wotton, pro reparacione organorum 40s."

John Chamberlyn, or Chamberlaine, and Thomas Smyth, were organ-builders, residing in London, in the early part of the sixteenth century. A payment to the latter, in 1514, is thus recorded in the accounts of the churchwardens of St. Margaret's, Westminster:—" Item, paid to Thomas Smyth, orgone maker, for mendyng of the grete orgones xl s., and for the small orgones v s."

In the list of Henry the Eighth's musical establishment, we find, under the year 1526, the name of "John de John, organizater." Again, in the king's household-book—"May, 1531. Item, the 2d daye, paid to Sir John, the organ-maker, in rewarde, by the king's commandement..... xl s."

This person, who was a *priest*, was succeeded in the royal establishment by William Beton, or Betun, an organ-builder of some pretensions,—if we may judge from the fact of his having built the organ for the old cathedral of St. Paul.

In Rymer's Fædera (Pro Capitoli Organista Regis) is a grant of 201, sterling per annum to William Betun, bearing date 1537; which annual stipend he appears to have received until the year 1544. He was retained in the royal service by Edward the Sixth and Mary. In the list of the musical establishment of the former, we find—

"Makers of Swilliam Beton, Organ Maker.
Instruments, William Tresorer, Regal Maker†.

<sup>\*</sup> See Warton's Life of Sir Thomas Pope, 2nd edit. Appendix, p. 345; also the Rev. Sir William Cope's valuable paper on "Early Organ Builders in England," inserted in the Parish Choir. The writer is indebted for the notices of Chamberlyn and Smyth to the last-named authority.

<sup>†</sup> There is an exceedingly curious licence preserved in the Cottonian MS. Galba C. 11, fol. 253, from which it appears that "William Treasorer, a maker of musical instruments, his heirs and assigns," had letters patent for eight years, from King Phillip and Queen Mary, dated July the 11th, in the first year of their reign, "to provide and buy within the realm of England, in any place or places, one hundred thousand lasts of ashes, and four hundred thousand dozens of old worn shoes, and export the same to foreign parts." Queen Elizabeth, on the 13th March, in the second year of her reign, confirmed

An eminent English builder of this period was named Wyght, or White. Entries of payments to him for work done to the organ of Magdalenc College Chapel, Oxford, occur in the books, from 1531 to 1545. One of them runs thus—

"1531, Magistro White, organorum faetore, pro reparat, duorum par organorum in ehoro."

From the title, *Magister*, here given him, it has been conjectured, with every appearance of probability, that he was the same person as Robert White, a well-known church composer, who may have united the art of constructing organs with his higher musical pursuits\*.

John Schowt, or Stut, who flourished in London about the same period, 1529-30, seems, from his name, to have been a German.

A little later, an organ-builder, named Broughe, set up a new organ at St. Margaret's, Westminster, thus noticed in the churchwardens' accounts there:—

"1590, payde to Mr. Broughe, for changing of our organs for a payre of his.....viij. "i."

John Chapington appears to have built an organ for Westminster Abbey, about 1596; at least, we find him in that year selling the old organ of the collegiate church to the churchwardens of St. Margaret's:—

"1596. Paid to Mr. Chapington for the organs of the eolledge, xiij l. xiij s. iiij d., and the old organs do remayne in the parish church to be sold by the churchwardens." One organ, at least, of Chapington's, remains to this day, viz. that which he built in 1597, for Magdalene College, Oxford; and of the payment of which a memorandum exists in the Libri Computi of that society.

Impensæ pro organis Mro. Chapington . . . xxxv l. xiij s. viii d. Pro eolor. et deaurat. cadem . . . . . . . . . . . ij l. ij s. Pro wainseot eirea eadem . . . . . . . . . . . . . . iij l. xiv s.

At the beginning of the following eentury there was an organ-builder living in London, named Gibbs. Alleyn, the founder of Dulwich College, records in his diary, under the date April 27, 1618, "Bought a pair of organes of Mr. Gibbs, of Powles, 8l. 2s.;" which organs were put up in the College chapel†.

the same for an additional term of twelve years. Treasorer, as a consideration for the renewed patent, "having devised, and given to the Queen a new Instrument Musicall, sending forth the sound of Flutes and Recorders; and likewise promised and took upon him, at his labour, cost, and charges, to repair and amend before the feast of St. Michael next ensuing the great organs in the Queen's chapel at Greenwich."—Ellis's Original Letters, second series, vol. iii, p. 202.

\* Sir William Cope's paper, before mentioned. The writer is also indebted to the same authority for the following curious notices concerning Broughe and Chapington.

† See the European Magazine for June, 1792, p. 192; and Collier's Memoirs of Alleyn, p. 157. From the latter it appears that, a year afterwards, Alleyn had "a dia-

Among the eminent English organ-builders who belong to the seventeenth century, are the names of Preston, of York; Thamar, of Peterborough; Loosemore, of Exeter; and the Dallams', or Dallams', of London.

Of the two first, no particulars, farther than their mere names, appear to have come down to us. Of the latter, our information is not much more.

John Loosemore constructed the organ in the cathedral of his native city, Exeter, very shortly before the restoration of Charles the Second\*. This instrument is pointed out as worthy of especial notice, on account of its Double Diapason. The Hon. Roger North, in the *Life of the Lord Keeper Guilford* (mentioning his brother's visit to Exeter), adds:—"His lordship, agreeably to his great mastership of musick, took great notice of the organ in the Cathedral church of Exeter, where the two side columns that carry the tower are lined with organ pipes, and are as columns themselves. His lordship desired the dimensions of the great Double Diapason; and the account, as returned, is thus:

Speaking	p	art,	lon	g					20 feet	6 inc.
Nose									4	0
Circumfe	rei	nce							3	11
Diameter									1	3
Content	of	the	spe	aki	ug	pai	t		3 hogs	. 8 gall.
Weight									360 lbs.	

"This is heard plainer at a distance than when near, as also louder; and, behind that, and the other large doubles, are placed large wooden pipes to help them into their sound, which otherwise would come on very slow, or perhaps not at all. One, being near enough, may, by the touch of the hand, discern when it speaks, and when not. How it is tuned, whether by measure or the beats, we were not informed; and, bating their account of it, which was curious and diverting enough, I could not be so happy to perceive that, in the musick, they signified any thing at all, but thought them made more for ostentation than use: for there are terms in sound which will not be exceeded; for, when the vibratory pulses are so slow as may be distinguished, sound vanisheth; which is nearly the ease with this great pipe†."

In the Choristers' Singing School, attached to the Cathedral, is a small instrument of the same maker. Its stops, which are all of wood, are as follows:—

Stop Diapason. Twelfth.

pason stop" put to the organ by a person of the name of Barett, and "other alterations," which cost 5s. 10d.

<sup>\*</sup> On the outside of the instrument is an inscription:—"John Loosemore made this organ, 1665." Henry Loosemore, M. B., organist of King's College, Cambridge (afterwards of Exeter Cathedral), and George Loosemore, M. B., organist of Trinity College, Cambridge, were brothers to our organ builder.

<sup>†</sup> Lives of the Norths, vol. i, p. 246.

Open Diapason. Fifteenth. Principal. Flute.

The eompass is C C (short oetaves) to C in alt.

The following agreement between Loosemore and a customer is not devoid of interest:—

"February the 1st, 1665. Then made a bargaine w<sup>th</sup> S<sup>r</sup> G<sup>co</sup> Trevilyan, for an organ w<sup>th</sup> these stops in it, as follows:—

And for this organ I am to have one hundred pound, 20l. whereof at the 25th day of March next, and fourescore residue thereof when the work is finished.

"John Loosemore\*."

This builder died on the 8th of April, 1681, aged 68†.

There appears to have been three organ-builders of the name of Dallans, or Dallam; i. e. Robert Dallam, Ralph Dallans, and George Dalham.

Robert Dallam was born in 1602, and died in 1665: he was buried in the cloisters of New College, Oxford.

He built the organ in New College Chapel, and the small one in the Music School, Oxford; but his principal work appears to have been the organ in York Minster, destroyed when that noble building was partially burnt. The circumstances connected with its erection were these.

In July, 1632, a fine of £1000 having been laid on Edward Paylor, Esq., for the erime of ineest, the Dean and Chapter petitioned the King, who, in November, granted that sum to them, for repairing the church, setting up a new organ, furnishing the altar, and maintaining a librarian; whereupon, in March, 1632, articles of agreement were entered into by Dean Scott and the Residentiaries, with Robert Dallam, of London, blacksmith, who engaged to build a great organ for £297, with £5 more for his journey to York; and in

<sup>\*</sup> See the preface to A Short Account of Organs built in England from the Reign of King Charles the Second to the present Time. Lond., J. Masters, 1847. 8vo. The work is published anonymously, but the author is understood to be Mr. Sutton, of Jesus College, Cambridge.

<sup>†</sup> The following inscription is on his gravestone in the transept of Exeter Cathedral, near the south aisle of the choir:—"Hic jacet spe Resurrectionis Johannes Loosmore, quondam Decano et Capitulo hujus Ecclesiæ Curator fidelissimus: et inter Artifices sui Generis facile Princeps. Sit Organum hoc angustum prope situm perpetuum ipsius Artis et Ingenii Monumentum. Obiit 8º Aprilis An. 1681. Æta. suæ 68."

which the price of each stop is distinctly specified. The following is a copy of this interesting agreement:—

"Articles of agreement, indented, made, concluded, and agreed upon, the one and twentieth day of March, anno dmi 1632, and in the eighth years of the reigne of our soveraigne Lord Charles, by the grace of God, Kinge of England, Scotland, France, and Ireland, defender of the Faith, &c. Betweene the right worshippfull John Scott, doctor of divinitie, deane of the eathedrall and metropoliticall church of St. Peter of Yorke; Phinees Hodson, doctor of divinitie, chancellor and canon residentiary of the said church; George Stanhope, doctor of divinity, precentor and canon residentiary of the same church; and Henry Wickham, doctor of divinitie, archdeacon of Yorke, and canon residentiary of the said church, of the one party; and Robert Dallam, cittizen and blacksmith, of London, of the other party; touchinge the makeinge of a great organ for the said church (as followeth):

"The names and number of the stoppes or setts of pipes for the said great organ, to be new made; every stopp containing fiftic one pipes; the said great organ containing eight stoppes.

"Imprimis two open diapasons of tynn, to stand in sight, many	
of them to be chased	lxxx li.
Item one diapason stopp of wood	x li.
Item two principals of tynn	xxiiij <i>li</i> .
Itm one twelft to the diapason	
Itm one small principal of tynn	vi <i>li</i> .
Itm one recorder unison to the said principall	vi li.
Itm one two and twentieth	v li.
Itm the great sound-board with conveyances, windchestes,	
carryages, and conduits of lead	xl li.
Itm the rowler board, carriages, and keyes	xx li.
"The names and number of stoppes of pipes for the chaire	
organ, every stopp containing fifty one pipes, the said chaire	
organ containinge five stoppes.	
"Imprimis one diapason of wood	x li.
Itm one principal of tynn, to stand in sight, many of them to	
be chased	xii li.
Itm one flute of wood	viij li.
Itm one small principall of tynn	v li.
Itm one recorder of tynn, unison to the voice	viij li.
Itm the sound bord, windchest, drawinge stoppes, conveyances	J
and conduits	xxx li.
Itm the rowler board, earriages, and keyes	x li.
Itm the three bellowes with winde truncks, and iron workes	
and other thinges thereto	x li.
Sume total . eelxx	

"It is agreed by and between the parties above said, and the said Robert Dallam doth covenant, promise, and grant, for him, his executors and administrators, to and with the said Deane and Canons residentiary above named by these presents, that he the said Robert Dallam, his executors or administrators, shall and will well and sufficiently and workemanlike new make and finishe the said organ in every the particulars before mentioned, accordinge to the true intent and meaninge hereof, before the feast of the nativitie of Saint John Baptist, which shall be in the yearc of our Lord God one thousand six hundredth thirtie foure. In consideracion of which worke undertaken to be done as aforesaid, the said Deane and Canons residentiary above named have paid unto the said Robert Dallam in hand one hundred pounds, and doe promise to pay unto him the residue of the said sume of eelxxxxvii li. as soone as the said worke shall be finished; and for the more speedy finisheing of the said worke, the said Deane and residentiaries are pleased to appointe the said Robert Dallam some convenient roome neare unto the said Cathedrall church to worke in. And further the said Deane and residentiaries doe promise to pay to the said Robert Dallam, towarde the charge of himselfe and servants in comeinge from London hither about the said worke, the sume of five pounds. In witnes whereof the parties above said to these present articles indented have interchangeably sett their hands and seals the day and yeare first above written."

It will be observed that this agreement does not provide for any thing more than the pipes, sound-boards, and three pair of bellows. The account of the chamberlain, relative to the appropriation of the £1000, is dated 1634; from which it appears that a workman from Durham was engaged for fifty-two weeks, at 20s, per week, to build the case. King Charles visited York in May, 1633, and on the 26th he went to the top of the great tower, at which time it is presumable that he directed the placing of the organ, then recently contracted for, on the north side of the choir, which conjecture is strengthened by the entry of charges for work done at the *pillars* to support the organ loft\*.

Ralph Dallans built the organ for St. George's Chapel, Windsor, at the Restoration; an organ for the parish church, Rugby; and the old organ of Lynn Regis, which was removed by Snetzler†. This is all we know of him,

<sup>\*</sup> Crosse's Account of the York Musical Festival, 4to, 1825, pp. 134-5, and Appendix.

<sup>†</sup> Dr. Burney says, "Part of the old organ at Lynn had been made by Dallans, the rest by some more ancient workman; as the wooden pipes were so worm-eaten as to fall to pieces when taken out to be cleaned. Upon the churchwardens asking Snetzler what this old instrument would be worth if repaired, he said, "If they would lay out a hundred pounds upon it, perhaps it would then be worth fifty."—Hist. of Music, vol. iii, p. 438.

The organ which Dallans built for the Royal Chapel at Windsor is still preserved in the church of St. Peter in the East, St. Alban's. A representation of it may be seen in Ashmole's Order of the Garter.

except what is contained in the following inscription, formerly existing in the old church of Greenwich:—

"Ralph Dallans, organ-maker, deceased while he was making this organ; begun by him Feb. 1672. James White, his partner, finished it, and erected this stone, 1673."

George Dalham has the following advertisement at the end of John Playford's *Introduction to the Skill of Musick*, 1672 (6th edit.), which is the only record of his having existed:—

"Mr. George Dalham, that excellent organ-maker, dwelleth now in Purple Laue, next door to the Crooked Billet, where such as desire to have new organs, or old mended, may be well accommodated."

## 17. Notices of English Organs.

During the period that these various organ-builders flourished, our cathedrals were being supplied with organs on a much larger scale than those which had been used in the ancient monasteries.

In the British Museum, among the Lausdowne MSS. (No. 213), is preserved An Account of a Tour made through a great part of England, A.D. 1634\*. This curious MS. contains some interesting notices of organs, which are worth extracting.

"York. There we saw and heard a faire, large, high organ, newly built, richly gilt, carv'd and painted: and deep and sweet snowy row of quiristers."

"Durham. Away then were were eall'd to prayers, where were wrapt with the sweet sound and richnesse of a fayre organ, which cost £1000; and the orderly, devout, and melodious harmony of the quiristers."

"Carlisle. The organs and voices did well agree, the one being like a shrill bagpipe, the other like the Scottish tone."

"LITCHFIELD. And no sooner were we lighted, but the Cathedral knell call'd us away to prayers: there we entred a stately, neat fabricke; the organs and voyces were deep and sweet, their anthems we were much delighted with, and of the voyces, 2 trebles, 2 counter-tennors, and 2 bases, that equally on each side of the quire most melodiously acted and performed their parts."

"HEREFORD. There we heard a most sweet organ, and voyces of all parts, tenor, counter-tenor, treble, and base; and amongst that orderly, snowy crew of quiristers, our landlord guide did act his part in a deep and sweet diapason."

<sup>\*</sup> The full title is "A Relation of a Short Survey of Twenty-six Counties, briefly describing the Cities and their Scytuations, and the Corporate Townes and Castles therein: observ'd in a Seaven Weekes' Journey begun at the City of Norwich, and from thence into the North,—on Monday, August 11th, 1634, and ending at the same Place. By a Captaine, a Lieutenant, and an Ancient [Ensign]; all three of the Military Company in Norwich."

"GLOUCESTER. Here were wee admiring and whispering till the Cathedrall voyees whisper'd us away to prayers, and so soon as wee heard those voyees and organs, and had view'd their fayrely glass'd and carv'd work cloyster, wee hasted away."

"Bristol. In her wee found (besides that fayre and strong fabricke of the Cathedrall, which was newly finish'd) 18 churches, which all are fayrely beautify'd, richly adorn'd, and sweetly kept; and in the major part of them are neat, rich, and melodious organs, that are constantly play'd on. In her [the Cathedrall] are rich organs, lately beautify'd, and indifferent good quiristers."

"Wells. The Cathedral was beautify'd with ancient monuments and rich organs."

### 18. Improvements by German Builders.

In Germany, and other parts of the continent, the reformer, Ulrie Zuingle, had succeeded in banishing, for a time, the use of organs in public worship. But, early in the sixteenth century, this noble instrument was reinstated in the church, and many improvements were made in its construction. It was in this century, according to Prætorius\*, that registers, by which alone a variety of stops could be formed, were invented by the Germans. Improvements at this period were also made in the pipes, particularly the invention of the stopped pipe, whereby expense was saved, and that soft, pleasing tone obtained, which open pipes are unable to yield.

By employing the *small scale*, a number of registers with a penetrating, yet pleasing, tone were obtained, in imitation of the *violin*, *viol de gamba*, &e. By the *large scale*, on the contrary, was preserved that full, round tone which we always hear in good organs. Besides these, certain kinds of pipes were made to *taper upwards*, whereby some other registers were added to the former, such as the *spitz-flute*, the *gemshorn*, &e.

In the course of the sixteenth century, reed registers were invented, with which it was sought to imitate the tone of other instruments, and even the voices of men and animals—for instance, the posaune, trumpet, shalm, voxhumana, bears-pipe, &c.

In the same century the key-board was extended to four octaves; but the lowest octave was seldom or never complete. An instrument of this kind was called an organ with a *short octave*.

In 1570, Hans Lobsinger, of Nuremberg, invented the bellows with one fold, which is still found in old organs. In 1576, an organ with sixty practicable registers and a "back choir" was creeted at Bernan, in the Russian province of Brandenberg. This organ, which is still in existence, has fortycight keys in the manual, and sixteen in the pedal. It has four bellows, each

of which is twelve feet long, and six feet wide. The workmanship is said to be masterly, the whole mechanism bearing evidence of the great progress in organ-building at this period.

"Great organs and great organists," says Dr. Burney\*, "seem, for more than two centuries, to have been the natural growth of Germany. The organ which is still subsisting in St. Martin's Church, at Groningen, in North Holland, and of which some of the stops are composed of the sweetest toned pipes I ever heard, was partly made by the eelebrated Rodolph Agricola, the elder†. And, from that time to the present, the number of organ-builders whose names are well known to the lovers of that noble instrument, in Germany, is hardly eredible in any other country. But, to show my English readers what a serious concern the erection of an organ is in this part of the world, I shall close my account of the progress of music in Germany, during the sixteenth century, by relating the manner in which the magistrates of Groningen contracted with David Beek, of Halberstadt, to construct an organ for the eastle church of that eity.

"In the year 1592, articles were drawn up between the magistrates and organ-builder, in which it was agreed by the former, that, for an instrument, the contents of which were minutely described, a certain sum stipulated should be paid to the latter upon its completion, provided it was approved, after trial and examination by such organists as they should nominate for that purpose. The instrument, in its construction, employed the builder four years; and, in 1596, the most eminent organists in Germany being invited, the names of all those who signed the certificate of approbation, to the amount of fifty-three in number, are recorded in a book called *Organum Gruningense redivivum*, published by Andrew Werekmeister, 1705‡."

## 19. Italian Organ Builders.

The mechanism of the organ appears to have been well understood by the

"Invida clauserunt hoc marmore fata Rudulphum Agricolam, Frisii spemque decusque soli. Scilicet hoc uno meruit Germania, laudis Quicquid habet Latium, Græcia quicquid habet."

A fine portrait of Rodolph Agricola is preserved at Knole House, in Kent, the seat of Lord Amherst.

<sup>\*</sup> Hist. of Music, vol. iii, p. 255.

<sup>†</sup> A learned priest, born in the year 1442, at Bafflen, a village in Friesland. He is said to have been a prodigy in literature and science. Vossius says he was a great philosopher; that he understood Latin, Greek, and Hebrew, and was a great musician. He died in 1485, at Heidelberg, and was buried in the Minorite church of that city, where is the following inscription to his memory:—

<sup>‡</sup> This voluminous writer on Music was born in 1645. He held the posts of inspector-general of organs in the Prussian dominions, and organist of the church of St. Martin, at Halberstadt. He died in 1706. His two books, called *Orgel Probe*, contain some interesting notices of the history and construction of organs in Germany.

Italians in early times. The family of the Antegnati, of Breseia, were amongst the earliest famous organ-builders in Italy, in the fifteenth and sixteenth centuries. Zarlino, in his *Institutioni Harmoniche*, fol., Venice, 1558, mentions "Vineenzo Columbi and Vincenzo Columa, two Italian organ-makers of the sixteenth eentury, inferior to none in the world." Columbi built the magnificent organ in the church of St. John Lateran at Rome, in 1549, which was afterwards enlarged by Luea Blasi Perugino, in 1600. Perugino built the organ for the church of Constantine at Rome, by order of Pope Clement VIII.; also the organs in the Cathedrals of Orvieto and Trent\*.

In later times, Hermann, a Jesuit, acquired considerable fame in this department of art. He built the organ in the Church of St. Ambrogio, at Genoa, in 1648; that in the Carignana Church, in the same city, in 1649; and one of the organs in the Cathedral of Como, in 1650†.

## 20. Notices of Foreign Organs.

In the journals of some of our travellers in the seventcenth eentury, are scattered many eurious notices of foreign organs, a few of which are here extracted.

First,—of Tom Coriat, the "Odeombian traveller," whose *Crudities* were published in 1611. Speaking of the Cathedral of Bergamo, he says, "There are here two very rich paire of Organs on both sides without the Quire, most sumptuously gilt and imbossed, with many very excellent works."

In the Church of the Augustine Friars, in the same city, "they have a wonderfull rich paire of Organs (lately made) and decked with execeding faire pillars; made indeed but of wainscot, but so curiously handled, that it yieldeth a very faire shew: it is said it shall be all gilt."

At Verona, Coriat says, "The fairest organs that I saw in Italy, or in any other country, are in this domo."

In the Cathedral of St. Mark, Venice, "at both sides of the choir are two exceeding faire payre of Organes, whose pipes are silver, especially those on the left hand as you come in from the body of the church, having the brasch winged lyon of St. Mark on the top, and the images of two angels at the sides: under them this is written in faire golden letters, *Hoc rarissimum opus Urbanus Venetus F.*"

The philosophical John Evelyn, writing in 1641, says, "generally all the churches in Holland are furnished with organs." He speaks of the "organs at Haerlem;" and of that at Vienna (which place he visited in 1644), as being "exceedingly sweet and well-tuned." In 1645, he tells us that the

<sup>\*</sup> Padre Bonanni's Gabinetto Armonico, 4to. Rome, 1722.

<sup>†</sup> In the eighteenth century there were in Italy many celebrated organ-builders, amongst whom, Serassi, of Bergamo, and Callido, of Venice, each constructed upwards of three hundred organs.

organ at the Columna at Rome, is "accounted one of the sweetest" in that city. Mentioning the Cathedral at Milan, in 1646, he adds, "here are two very fair and excellent organs."

Sir John Reresby, in his Travels (in the middle of the seventeenth century), says, "at Venice are reckoned seventeen hospitals, sixty-seven parish churches, fifty-four convents of friars, twenty-six numeries, eighteen oratories, and six schools. In these churches are the bodies of fifty saints, one hundred and forty-three pair of organs, &c. Speaking of the Church of Santo-Croche, at Florence, he observes, "the making of an organ in this church, besides the materials, cost four thousand crowns."

William Carr, "gentleman, late consul for the English nation in Amsterdam," in his Remarks of the Government of severall parts of Germanie, &c., 12mo, 1688, makes mention of several interesting particulars concerning organs. In allusion to the city of Amsterdam, he says, "I will not say much of her churches, but only that they are in general large and well built. one of them the States have spared no cost to exceed the whole world in three things, (viz.) an organ with sets of pipes that counterfeit a corus of voyces; it hath 52 whole stops, besides halfe stops, and hath two rowes of keyes for the feet, and three rowes of keyes for the hands. I have had people of quality to heare it play, who could not believe but that there were men or women above singing in the organ, until they were convinced by going up into the organ roome," &c. At Hamburgh, the same writer tells us, "The churches are rich in revenues, and ornaments, as images and stately organs, wherein they much delight. They are great lovers of musick; in so much that I have told 75 masters of severall sorts of musick in one church, besides those who were in the organ-gallery. Their organs are extraordinarely large. I measured the great pipes in the organs of St. Catherine and St. James's Churches, and found them to be 3 foot and 3 quarters in eigeumference, and 32 foot long: in each of which organs there are two pipes, 5 foot and 8 inches round." At Haerlem, we are told, "Here is one of the fairest and largest churches of the 17 provinces; in the walls whereof there remain to this day sticking, canon bullets, shot by the Spaniards during the siege thereof. In this church are three organs."

# 21. The Ancient Position of the Organ.

Though it is not the object of this work to enter upon the subject of the eeclesiastical fitting-up of the chancel or choir, it will not be out of place to say a word or two as regards the *ancient* position of the organ\*.

<sup>\*</sup> It will be right to mention, that a pamphlet has lately appeared, entitled, Choirs and Organs; their proper Position in Churches; by William Spark, Organist and Choir Master, Leeds. The brochure is merely an expression of the writer's opinion on the subject. He concludes, "that, as historical data do not furnish any uniform rule for our

In the medieval ages, this instrument was placed on one side of the choir; a position which seems to have been almost universal throughout Europe. Gervase, the monk of Canterbury, whose curious account of the burning of that Cathedral, in 1174, has descended to our times\*, informs us, that the organ stood upon the vault of the south transept. After the rebuilding of the Cathedral, the instrument was placed upon a large corbel of stone, over the arch of St. Michael's Chapel, in the same transept†. In Dart's view, the organ is shown on the north side of the choir, between the pillars three and four; where it still remained in the time of Dr. Burney.

The organ in the old Cathedral of St. Paul, was placed under one of the north pier arches of the choir, just above the stalls; having a choir organ in front, and shutters to close in the great organ. The case was gothic, with a crocketted gable. It occupied the same place during the Protectorate, and was destroyed in the great fire of 1666.

The organ of Westminster Abbey, upon which Purcell played, stood on the "north side of the choir," over the stalls; and seems, from the view of it in Sandford's *Coronation of James II*, to have been a small instrument with diapered pipes.

At York, the Cathedral organ, built by Dallam, in 1632 (before mentioned), was, by the express command of Charles the First, placed on the "north side of the choir," nearly opposite the bishop's throne. The reason given by the king was, that (placed on the screen which divides the choir from the nave) the organ was an impediment in viewing the interior of the church. King Charles's judicious decision was put aside in the year 1690, when Archbishop Lamplugh ordered the instrument to be removed to the stone screen.

The organ of Winchester Cathedral, ercctcd at the Reformation, was placed upon the screen between the nave and choir. It was removed, by the order of Charles the First, to the "north side of the choir¶."

At Chester Cathedral, says Burney, "the small primitive organ is still

guidance in the locating organs and choirs," we are justified in placing them just where we please.

<sup>\*</sup> Dart's Canterbury Cathedral, p. 7; and Gentleman's Magazine for 1772.

<sup>†</sup> A representation of this corbel, with the organ as it then stood, over the screen, may be seen in Britton's Canterbury Cathedral, pl. iv. The corbel has since been removed.

<sup>†</sup> See an engraving of the choir, showing the organ, in Dugdale's St. Paul's.


<sup>§</sup> It would be interesting to know what became of this organ, hallowed by the fingers of Purcell. One account is, that, when it was removed from the Abbey, in 1730 (the date of the present instrument), it was given or sold to the parish of St. Margaret's, Westminster; and the remains of it, after lying for many years in the tower, were disposed of by the churchwardens, some thirty or forty years ago. Another account is, that it was removed to Vauxhall Gardens; and is, in fact, the instrument still in the orchestra of the royal-gardens.

<sup>||</sup> Crosse's Account of the York Musical Festival in 1825.

<sup>¶</sup> Milner's History of Winchester Cathedral.

standing on the left side of the choir, though that which is now used is at the west end\*."

In the interior view of Lincoln Cathedral, in Dugdale's *Monasticon*, the organ is shown on the north side of the choir, above the stalls; a copy of which is here given.



The organ of Rochester Cathedral (styled an "old instrument," as far back as 1668), stood in the north transcpt. It remained in that situation in 1791, when it was taken down, and the present organ erected on the screent.

In Durham Cathedral, the "large organ," erected at the Reformation, occupied a place on the north side of the choir, and it is so depicted in Hollar's rare engraving of the interior of this eathedral.

Previously to the year 1550, the "great organ" of the Cathedral of Worcester stood at the side of the choir; and such undoubtedly was the situation of the other eathedral organs, of which the writer's industry has not succeeded in finding a record.

The practice of placing the organ at one side of the choir existed also in our college chapels.

At New College, Oxford, the organ given by William Port, in 1458, stood at the stall end of the "north side of the choir," near the vestry, supported by pillars §. This instrument was destroyed by the rebels in 1646. The

<sup>\*</sup> History of Music, vol. iii, p. 440,

<sup>†</sup> MS. Archives of Rochester.

I MS. Archives of Worcester.

<sup>¿</sup> MS. Archives of New College.

present organ (improved by Green) was erected by Dallam, in 1663; but the beautiful screen upon which it is placed (without any design of supporting the organ) was constructed in 1636\*.

Previously to the year 1740, the organ of Magdalene College, Oxford, stood on the "south side of the choirt."

The organ of St. John's College, in the same university, built in 1660, was placed in a little ante-chapel "on the north side of the choir‡." It was in that situation in 1768, when Byfield erected an organ on the present screen.

Quaint old Thomas Fuller, speaking of the Cambridge Colleges, under the date 1633, adds, "Now began the university to be much beautified in buildings; every college either easting its skin with the snake, or renewing it with the eagle..... But the greatest alteration was in their chapels, most of them being graced with the accession of organs§."

The organ of Christ's College still remains on the south side of the choir; and tradition assigns similar situations for the instruments of King's College, St. John's College, &c.

The same position, "at the side of the choir," is still retained in Winchester College; the Royal Chapels at St. James's and Hampton Court; and within memory it was so in Christ's Church, Dublin||.

As regards parish churches, the common situation for the organ, both before and after the Reformation, was in the chancel¶.

Adam de Shakelsthorpe, by will, dated 1376, gave his organ, "then standing in Cawston Chancel," to Hickling Priory, Norfolk\*\*. And, at a later date, George Preston, Esq. repaired the chancel of Coutmel Church, Westmorland, "at his own great cost," in the year 1590, "and placed therein a paire of organs of great valewe."

The author of the Oxford Glossary of Architecture, edit. 1840, thus speaks of the ancient position of the organ:—" The large instruments now in use were not put up in their present conspicuous situation, in the place of

<sup>\*</sup> Warton's Life of Sir T. Pope, p. 344.

<sup>†</sup> MS. Archives of Magdalene College.

<sup>†</sup> Warton's Life of Sir T. Pope, p. 344.

<sup>¿</sup> Fuller's History of the University of Cambridge, folio, 1655.

<sup>|</sup> The Rev. John Jebb, On the Choral Service of the Church, p. 197.

To for course other positions were occasionally adopted. In Neale's Views of the Churches of Great Britain (vol. ii), there is an extract from a MS. account of Melford Church, in Suffolk, written about the time of the Reformation, in which the following notice occurs: "There was a fair Rood Loft with the Rood, Mary and John, of every side, and with a fair pair of Organs standing thereby." In Britton's Arch. Antiq. (vol. iv), the agreement for building the Beauchamp Chapel at Warwick, in the fifteenth century, is quoted; where the carpenter covenants to make a parclose of timber about an organ to stand over the west door of the chapel. See Jebb, On the Choral Service, p. 197, note.

<sup>\*\*</sup> Blomefield's History of Norfolk, edit. 1805, vol. vi, p. 263.

the ancient rood-loft, until after the Reformation. On the continent, they were also introduced in the course of the seventeenth and eighteenth centuries; but were usually placed at the west end of the church. In this country, previously to the Reformation, the organ was frequently placed on the north side of the choir, or in the north transept."

From the instances we have quoted, it will be seen that, in England, the present usual position of the organ over the choir screen does not appear to have been *general* till the Restoration.

On the continent, the large organs are invariably placed in "lofts;" some at the west end, some over the doors, and very often against one of the piers. We particularize *large* organs, because it is a rare thing to find a church on the continent, of any pretensions, without its two, three, four, and sometimes six organs.

The Duomo at Milan has two large organs, one on each side of the choir; so also has the Duomo at Verona. The church of St. John, in Monte, at Bologna, has two "immense" organs in similar situations. At Florence, the two organs are placed in the north-east and south-east of the octagon.

The church of Sau Antonio, at Padua, has four large organs. At the entrance into the choir, the majestic appearance of these instruments is very striking. The front pipes are of tin, highly polished, and have the appearance of burnished silver. The frame-work is richly carved and gilt; there are no panels to the frames, but the pipes are seen on three sides of a square\*. These four organs exactly correspond in internal as well as external arrangement.

The church of St. Mark, at Venice, possesses six organs; two very large ones, and four small portable instruments that are used in the various chapels.

The only organs in St. Peter's, at Rome, were (and perhaps still are) two moveable ones on wheels, in the side chapels. The distance between the west door and the great altar is wholly a free and unbroken space.

At Ratisbon, the organ is placed behind the high altar; an arrangement totally unworthy of this magnificent structure. The organ of the *Frauen Kirehe*, or great Lutheran Church of our Lady, at Dresden (one of the finest of old Silbermann's), is also placed at the *east* end of the church, over the eommunion table†.

At Treves there is a small organ on the north side of the choir, and a larger one at the west end.

<sup>\*</sup> Burney's Present State of Music in France and Italy, p. 129.

<sup>†</sup> The organ is in a similar situation in the chapels of Versailles and the Tuilleries; and, in England, at Little Stanmore, near Edgware. The latter is very slightly raised above the communion table, and is viewed through an arch, supported by Corinthian columns.

The organ of the Collegiate Church of Notre Dame, at Courtray, is disposed of in a very singular manner: it is placed in a gallery at the west end of the building; but, in order to preserve the window, which is necessary to light the body of the church, the organ is divided in two parts, one of which is fixed on one side of the window, and one on the other. The bellows run under the window and communicate with both parts of the instrument. The keys are in the middle, under the window\*. The organ at the Jesuit's Church, in Ghent, is disposed in a similar way: in fact, it is no uncommon thing in the German and Flemish churches to divide the organ, in order to preserve a window\*.

The organ in the church of St. Bavo, Ghent, is placed under the arch of the left side aisle, at the entrance into the choir.

The Cathedral of Antwerp contains three organs; one very large, on the right hand side, at the west end of the choir; and two small ones, in chapels on each side of the broad aisle.

The Cathedral of St. Stephen, at Vienna, has *five* organs; a large one at the west end of the church, and four smaller ones in various chapels.

The Cathedral of Prague has three organs: the large organ, at the west end of the church, is only used on the great festivals of the year; the two smaller organs are used alternately on common days.

At Strasburg, the magnificent organ of Silbermann's is on the left side of the nave, about fifty feet above the pavement.

The organ at Amiens Cathedral (perhaps the oldest in France) was built in 1492, at the expense of Alphonso de Myhre, one of the chamberlains to

<sup>\*</sup> Burney's Present State of Music in Germany, &c. p. 12.

<sup>†</sup> The fine church of St. Nicholas, at Prague, has an organ at the west end, arranged in this manner. The frame-work, pillars, base, and ornaments of this instrument are of white marble.

<sup>‡ &</sup>quot;A word now about the great Organ. If Strasbourg has been famous for architects, masons, bell-founders, and clock-makers, it has been not less so for organ-builders. As early as the end of the thirteenth century, there were several organs in the Cathedral, very curious in their structure, and very sonorous in their notes. The present great organ, on the left side of the nave, on entering at the western door, was built by Silbermann, about a century ago, and is placed about fifty feet above the pavement. It has six bellowses, each bellows being twelve feet long and six wide; but they are made to act by a very simple and sure process. The tone is tremendous-when all the stops are pulled out-as I once heard it, during the performance of a particularly grand chorus! Yet is this tone mellow and pleasing at the same time. Notwithstanding the organ could be hardly less than three hundred feet distant from the musicians in the choir, it sent forth sounds so powerful and grand, as almost to overwhelm the human voice with the accompaniments of trombones and serpents. Perhaps you will not be astonished at this, when I inform you that it contains not fewer than two thousand two hundred and forty-two pipes. This is not the first time you have heard me commend the organs upon the continent."-Dr. Dibdin's Tour in France and Germany, 2nd edit. vol. ii, p. 392.

Charles VI. It is placed over the entrance to the nave, at the western extremity, thus allowing the eye to embrace the whole structure at one view.

At Chartres Cathedral, the organ is placed over the sixth arch of the nave on the sonthern side, and at the height of the triforium, or gallery, which is continued all round the church. This organ was built in 1513, and was originally placed over the great western doorway.

In the church of St. Roch, at Paris, there are four organs; but the organ of the church stands over the west door.

## 22. The Curiosities of Organ-Building.

Foremost among the instruments demanding a place in this category, are the organs of the Byzantine Emperor, Theophilus, who reigned from 829 to 841.

This renowned patron of poetry and music is said to have had "two great gilded organs, embellished with precious stones and golden trees, on which a variety of little birds sat and sung, the wind being conveyed to them by concealed tubes."

Practorius tells us that a certain Duke of Mantua received from a Neapolitan artist an organ of which the keys, pipes, key-board, nay, even the outside of the bellows, were of alabaster.

Dr. Powell, in his curious volume, *Humane Industry*, or a History of the Manual Arts, 12mo. 1661, alludes to this organ in the following passage, which also makes mention of some other "curiosities of organ-building:"

"A Neapolitan artizan made a pair of organs all of alabaster stone, pipes, keys and jacks, with a lond lusty sound, which he afterwards bestowed upon the Duke of Mantua, and which Leander Alberti saw in the said duke's court, as he relates in his description of Tuscany. The same Leander saw a pair of organs at Venice made all of glass, that made a delectable sound. This is mentioned also by Mr. Morison, in his Travels . . . . Gandentino Merula, in his 5th book de Mirabilibus Mundi, makes mention of an organ in the church of St. Ambrose in Milan, whereof the pipes were some of wood, some of brass, and some of white lead; which, being played upon, did express the sound of cornets, flutes, drums and trumpets, with admirable variety and concord."

Ertel, who, in his celebrated Atlas, describes the treasures of the Bavarian Electorate Court Chapel, relates that the organ was of ebony, and ornamented with many precious stones; the keyboard "glittered with pearls," and the bellows were "covered over with silver." And we are told that in the convent of the Escurial, near Madrid, are eight organs, one of which is of solid silver\*.

The author of a rare volume published at Bologna in 1590, under the

<sup>\*</sup> Amongst the odd materials used by the old builders for organ-pipes, we may add to those mentioned in the text, paper, burnt clay, porcelain, &c. Those who are curious in such matters may consult Jacob Adlung's *Musica Mechanica Organoedi:* 4to. Berlin, 1768: Part 1, Sections 85, 86, and 87.

title of Il Desiderio, mentions some curions musical instruments that he saw in the palace of the Duke of Ferrari. He says some were preserved there for the sake of their antiquity, and others in respect of the singularity of their construction. Among these, he takes notice of a curious organ formed to the resemblance of a serew, with pipes of box-wood all of one piece like a flute; and a harpsichord, invented by Don Nicola Vicentino, surnamed Arcimusico, comprehending in the division of it the three harmonic genera. He adds, that the multitude of chords in this astonishing instrument rendered it very difficult to tune, and more so to play; and that, for this latter reason, the most skilful performers would seldom care to meddle with it: nevertheless, he adds, that Luzzasco, the ehief organist of his highness, who it is supposed must have understood and been familiar with the instrument, was able to play on it with wonderful skill. He says that this instrument, by way of preeminence, was called the Archicembalo; and that after the model of it two organs were built; the one at Rome, by the order of the Cardinal of Ferrara; and the other at Milan, under the direction of the inventor.

Don Nicola is reported to have died of the plague, in or about the year 1575, soon after the latter instrument was finished.

Father Bonanni, in his singular collection of engravings of musical instruments, entitled *Gabinetto Armonico*, 4to, Rome, 1722, gives a representation of a curious organ, fabricated by Michele Todino, of Savoy, for Signor Verospi, of Rome. It seems to be an organ with three "Spinette" attached to it; the description tells us that they may be used "separately," or "all together." The worthy priest calls it a "prodigious artifice;" but we question its claim to anything more than a mere curiosity.

Worthy Master Mace's "Chamber Organ," made by himself, at his house in Cambridge, of which he gives an engraving in his Musicks Monument, fol. 1676, certainly comes under our notice in this place. His own account of the instrument is too quaint to be omitted: "Now as to the description of This Table Organ, I cannot more conveniently do it, than first, in giving you a view of it, by this figure here drawn, and then by telling you all the dimensions, and the whole order of it (I mean my Second, which is the Largest and the best), and take as here followeth. Two of such organs only (I believe) are but as yet in Being, in the World; They being of my own contrivance; and which I caus'd to be made in my own House, and for my own Use, as to the maintaining of Publick Consorts, &c.

"It is in its Bulk and Height of a very Convenient, Handsom, and Compleat Table Seize; (which may Become and Adorn a Noble-Mans Dining Room) all of the Best sort of Wainscot. The Length of the leaf 7 foot and 5 Inches; the breadth 4 foot and 3 inches; the Height 3 Foot, Inch, and Better.

"Beneath, the Leaf, quite Round, is Handsom Carv'd, and Cut-Work, about 10 inches Deep, to let out the Sound: And beneath the Cut-Work Broad Pannels, so contriv'd, that they may be taken down at any time, for the

amending such faults as may happen; with 2 shelv'd embords at the end behind, to lock up your Musick Books, &c. The Leaf is to be taken in 2 pieces at any time for conveniency of Tuning, or the like, Neatly Joyn'd in the Midst.

"The Keys, at the upper End, being of Ebony, and Ivory, all cover'd with a Slipping Clampe, (answerable to the other End of the Table) which is to take off at any time, when the Organ is to be us'd, and again put on, and Loek'd up; so that none can know it is an Organ by sight, but a Compleat New-Fashion'd Table.

"The Leaf has in it 8 Desks, eut quite through very neatly (answerable to that Up-standing One, in the Figure) with Springs under the Edge of the Leaf, so contriv'd that they may Open and Shut at pleasure; which (when shut down) Joyn closely with the Table-Leaf; But (upon occasion) may be Opened and so set up (with a spring) in the manner of a Desk, as your Books may be set against Them.

"Now the Intent of Those Desks, is of far more Excellent use, than for mere Desks; For without those Openings, your Organ would be but of very slender use, as to Consort, by Reason of the Closeness of the Leaf; but by the help of them, each Desk opened, is as the putting in of another quickning, or enlivining stop; so that, when all the 8 Desks stand open, the Table is like a Little Church Organ, so sprightfully lusty, and strong, that it is too loud for any ordinary private use; but you may moderate that, by opening only so many of those Desks as you see fit for your present use.

"There are in this Table Six Stops, the first is an Open Diapason; the second a Principal; the third, a Fifteenth; the fourth, a Twelfth; the fifth, a Two-and-Twentieth; and the sixth, a Regal. There is likewise (for a pleasure and light content) a Hooboy Stop, which comes in at any time with the foot; which stop (together with the Regal) makes the voice Humane.

"The bellows is laid next the ground, and is made very large, and driven either by the foot of the player, or by a cord at the far end."

A passing notice of the grotesque decorations and machinery of old organeases is worthy of a corner in our cabinet of "curiosities." Scidel has a capital passage on this point. He says, "In the course of the seventeenth and carly part of the eighteenth centuries, great industry and expense was bestowed upon the external decoration of the organ. The entire case was ornamented with statues, heads of angels, vases, foliage, and even figures of animals. Sometimes the front pipes were painted with grotesque figures, and the lips of the pipes made to resemble lion's jaws. This, perhaps, might have been tolerated, as in the course of time such artifices would naturally be rejected as uscless and inappropriate. But people went farther, and threw away the money which might have been expended in a worthier manner on the display of the most tasteless and absurd tricks of art, degrading thereby—doubtless unintentionally—a noble instrument, intended for sacred purposes, into a raree-show. Among these ornaments, the figures of angels played a very conspicuous part; trumpets were placed in their hands, which by means of mechanism could be moved to and from the mouth\*. Carillons too and kettle-drums were performed upon by the moveable arms of angels. In the midst of this heavenly host, sometimes a gigantic angel would be exhibited hovering in a glory over the organ, beating time with his baton as the conductor of this super-earthly orchestra!

"Under such circumstances, the firmament of course could not be dispensed with. So we had wandering suns and moons, and jingling stars in motion. Even the animal kingdom was summoned to activity. Cuckoos, nightingales, and every species of bird, singing, or rather chirping, glorified the festival of holy Christmas, and announced to the assembled congregation the birth of the Redeemer. Eagles flapped their wings, or flew towards an artificial sun†. The climax, however, of all these rarities was the fox-tail! It was intended to frighten away from the organ all such inquisitive persons who had no business near it. Thus, when they pulled out this draw-stop, suddenly a large fox-tail flew into their faces! It is clear that by such absurd practices, curiosity was much rather excited than stopped, and that all this host of moving figures and their ridiculous jingling disturbed meditation, excited the curiosity of the congregation, and thus disparaged the sublimity of Divine Service."

These absurd doings were not peculiar to the continent: records of such practices (although not to the full extent) formerly existed in England.

A correspondent of the *Gentleman's Magazine*, 1772, p. 562, who signs himself W. L. [William Ludlam], says: "The old organ at Lynn, in Norfolk, had on it a figure of King David playing on the harp, cut in solid wood, larger than the life: likewise several moving figures which beat time, &c."

Dr. Donne, the eminent English satirist, alludes to these moving figures, evidently as no uncommon thing in his days. His words are—"As in some organs, puppets dance above, and bellows pant below which them do move.‡"

<sup>\*</sup> We must confess that we do not admire the "loud, uplifted angel-trumpets" on the case of the Antwerp Cathedral organ one whit more than the Gorgons and Hydras on that of the Dominicans' Church in the same city.

<sup>†</sup> Seidel seems to have had in view the ludicrous outside of the organ in the Garrison Church, Berlin. Burney, in his entertaining Tour in Germany (p. 104), describing his visit, says, "I found a large organ in this church, built by Joachim Wagner; it is remarkable for compass, having 50 keys in the Manuals, and for its number of pipes, amounting to 3220; but still more so for the ornaments and machinery of the case, which are in the old Teutonic taste, and extremely curious. At each wing is a kettle drum, which is beat by an angel placed behind it, whose motion the organist regulates by a pedal; at the top of the pyramid, or middle column of pipes, there are two figures representing Fame, spreading their wings when the drums are beat, and raising them as high as the top of the pyramid; each of these figures sounds a trumpet and then takes its flight. There are likewise two suns, which move to the sound of cymbals, and the wind obliges them to cross the clouds; during which time, two eagles take their flight as naturally as if they were alive."

<sup>‡</sup> Johne Donne, his Satires, Anno Domini, 1593." This curious work is preserved among the Harleian MSS. (No. 5110) in the British Museum.

When these figures were abolished, the organ-builders (perhaps in compliance with an absurd canon) set up the royal arms on the front of the organ; and in place of the angel beating time, or King David playing on the harp, we had the British lion, with goggle eyes and shaggy mane, grinning enough to frighten each member of the congregation from the house of prayer. Let us rejoice that these abominations no longer exist in our own country\*. If they are still occasionally to be met with on the continent, the increased feeling of true devotion will soon number them among the things that were.

### 23. The Destruction of Organs in England during the Great Rebellion.

An ordinance being passed in the House of Lords, dated January 4th, 1644, establishing a new form of divine worship, in which no music was allowed but plain psalm-singing, it was thought necessary, for the promotion of true religion, that no organs should be suffered to remain in the churchest; that choral books should be torn; painted glass windows broken; sepulchral brass inscriptions defaced; and in short, that the cathedral service should be totally abolished. In consequence of this ordinance, collegiate and parochial churches were stripped of their organs and ornaments: some of the instruments were sold to private persons, who preserved them; some were totally, and others but partially, destroyed; some were taken away by the clergy in order to prevent their being destroyed, and some few were suffered to remain‡.

The puritanical spirit which doomed organs to destruction had long been gaining ground. Even as early as the reign of Elizabeth (Aug. 18, 1589), it was agreed, at a parish meeting of St. Chad's, Shrewsbury, "that for the better providing and accomplishing the reparation of the bells, fencing the church-yard, and purchasing one decent and semely cuppe of silver for the use of the Communion, the organs should be sould to any of the parishe

<sup>\*</sup> There is great room for improvement in organ-cases in England. We may walk many a weary mile without seeing a truly catholic design. Mr. Faulkener published, in 1838, a volume of *Designs for Organs*; but they are little more than an echo of what we see every day. Of a far different character are the designs of the late Mr. Pugin, appended to Mr. Sutton's *Short Account of Organs built in England*, &c. 1847. But then these would be termed *Roman* Catholic.

<sup>†</sup> A copy of the ordinances preserved in the library of the London Institution has the following title:—" Two Ordinances of the Lords and Commons assembled in Parliament, for the speedy demolishing of all organs, images, and all matters of superstitious monuments in all Cathedralls, and Collegiate or Parish-churches and Chapels, throughout the Kingdom of England and the dominion of Wales; the better to accomplish the blessed reformation so happily begun, and to remove all offences and things illegal in the worship of God. Dated May 9th, 1644."

<sup>‡</sup> See an article on the Organ of St. Paul's Cathedral, in the Musical Gazette, No. 1. Jan. 1819.

for the sume of £4, if any desyred the same: otherwise the said organs should presently bee sould to hym whosoever would give £4 or more for the same!'\*\*

Some idea of the devastation committed by the Puritans upon organs may be gathered by a few extracts from Mercurius Rusticus; the Country's Complaint recounting the sad Events of this Unparraleld Warr. 12mo. 1647†. At Westminster, we are told, "the soldiers of Westborne and Cawoods' Companies were quartered in the Abby Church, where they brake down the rayl about the Altar, and burnt it in the place where it stood: they brake downe the Organs, and pawned the pipes at severall ale-houses for pots of ale. They put on some of the Singing-mens surplices, and in contempt of that canonicall habite, ran up and down the Church; he that wore the surplice was the hare, the rest were the hounds." At Exeter Cathedral, "they brake downe the organs, and taking two or three hundred pipes with them, in a most seornefull contemptuous manner, went up and downe the streets piping with them; and meeting with some of the Choristers of the Church, whose surpliees they had stolne before, and imployed them to base servile offices, seoffingly told them, Boyes we have spoyled your trade, you must goe and sing hot pudding pyes." At Peterborough Cathedral, after committing all kinds of destruction, "when their unhallowed toylings had made them out of wind, they took breath afresh on two pair of organs;". At Canterbury, "they violated the monuments of the dead, and spoyled the

<sup>\*</sup> Two years before the passing of the Ordnance just mentioned, a tract appeared, entitled "The Organs Funerall, or the Quiristers Lamentation for the Abolishment of Superstition and Superstitious Ceremonies. In a Dialogicall Discourse between a Quirister and an Organist, An. Dom. 1642. London, Printed for George Kirby." 4to.

<sup>†</sup> Edited by Dr. Bruno Ryves, an unflinching opponent of cant and hypocrisy. At the Restoration, he was rewarded with the Deanery of Windsor. The *Mercurius Rusticus* was originally published in numbers. In its collected form, it went through many editions.

<sup>‡</sup> Gunton is more particular in his account of the devastations here:—"The first that came was a foot regiment, under one Colonel Hubbard's command; upon whose arrival, some persons of the town, fearing what happened afterwards, desire the chief commander to take care the soldiers did no injury to the church; this he promises to do, and gave order to have the church doors all locked up. Some two days afterwards comes a regiment of horse, under Colonel Cromwell, a name as fatal to minsters as it had been to monasteries before. The next day after their arrival, early in the morning, these break open the church doors, pull down the organs, of which there were two pair. The greater pair, that stood upon a high loft over the entrance into the choir, was thence thrown down upon the ground, and there stamped and trampled on, and broke in pieces, with such a strange, furious, and frantick zeal, as cannot be well conceived, but by those that saw it."—History of the Church of Peterborough, p. 333." Will modern writers tell us any more, after this, that "Cromwell himself was partial to the organ?" The story about his protecting the organ of Magdalene College, Oxford, we shall presently show to be false.

organs\*;" and at Chichester Cathedral, "they leave the destructive and spoyling part to be finished by the common soldiers; brake down the organs, and dashing the pipes with their pole-axes, scoffingly said, Harke how the organs goe." At Winehester, "they entered the Church with eolours flying, and drums beating: they rode up through the body of the Church and Quire, until they came to the altar, there they rudely pluck downe the table and brake the rayle, and afterwards carrying it to an ale-house, they set it on fire, and in that fire burnt the Books of Common Prayer, and all the Singing Books belonging to the Quire: they threw downe the organs, and break the Stories of the Old and New Testament, curiously cut out in carved work."

Sir William Dugdale, in his Short View of the Late Troubles in England, folio, 1681, says, "and when their whole (the Parliamentary) army, under the command of the Earl of Essex, came to Worcester, the first thing they there did, was the prophanation of the Cathedral; destroying the organ; breaking in pieces divers beautiful windows, &c."

The sacrilegious profanations of Norwieh Cathedral is graphically described in Bishop Hall's Hard Measure, 1647†: "Lord, what work was here, what elattering of glasses, what beating down of walls, what tearing up of monuments, what pulling down of seats, what wresting out of irons and brass from the windows and graves, what defacing of arms, what demolishing of eurious stone work, that had not any representation in the world, but only the eost of the founder, and skill of the mason; what toting and piping upon the destroyed organ pipes, and what a hideous triumph on the market day before all the country, when in a kind of sacrilegious and profane procession, all the organ pipes, vestments, both copes and surplices, together with the leaden cross, which had been newly sawn down from over the green yard pulpit, and the service books and singing books that could be had, were carried to the fire in the public market place; a lewd wretch walking before the train, in his cope, trailing in the dirt, with a service book in his hand,

<sup>\*</sup> In Culmer's Cathedral News from Canterbury, p. 19, we read, "The news was that the troopers fought with God Himself in the cathedral Quire at Canterbury. But the truth is that on the 26th of August. 1642, some zealous troopers, after they had (by command) taken the powder and ammunition out of the malignant Cathedral, they fought (it seems) with the Cathedral goods; namely, altars, images, service-books, prick-song-books, surplice, and organs: for they hewed the altar rails all to pieces, and threw their altar over and over and over down the three altar steps, and left it lying with the heels upward: they slashed some images, crucifixes, and pricksong-books, and one greasy service-book, and a ragged smock of the whore of Rome, called a surplice, and began to play the tune of the Zealous Soldier on the organs or case of whistles, which never were in tune since."

<sup>†</sup> Dr. Joseph Hall was successively Bishop of Exeter and Norwich.

imitating, in an impious scorn, the tune, and usurping the words of the Litany, used formerly in the church; near the public cross all these monuments of idolatry must be sacrificed to the fire, not without much ostentation of a zealous joy in discharging ordnance to the cost of some who professed how much they had longed to see that day. Neither was it any news, upon this Guild day, to have the Cathedral, now open on all sides, to be filled with musketeers, waiting for the major's return, drinking and tobacconing as freely as if it had turned ale-house."

At the Nunnery, at Little Gidding, in Huntingdonshire, the same feats were carried on. We are told that "Soon after Mr. Ferrar's death, certain soldiers of the Parliament resolved to plunder the house at Gidding. The family being informed of their hasty approach, thought it prudent to fly; while these military zealots, in the rage of what they called reformation, ransacked both the church and the house; in doing which, they expressed a particular spite against the organ. This they broke in pieces, of which they made a large fire, and at it roasted several of Mr. Ferrar's sheep, which they had killed in his grounds. This done, they seized all the plate, furniture, and provision, which they could conveniently carry away. And in this general devastation, perished the works which Mr. Ferrar had compiled for the use of his household, consisting chiefly of harmonies of the Old and New Testament\*."

Similar examples of ignorant fanaticism might readily be adduced; but the passages cited are sufficient for our purpose.

After the parliamentary ordinance of 1644, and the zeal of the Sectarians in putting their orders into force, it is somewhat remarkable that any Church organs should have escaped demolition. But that some instruments were suffered to remain, we have accredited evidence. Among the number, were those of St. Paul's, York, Durham, and Lincoln Cathedrals; St. John's and Magdalene Colleges, Oxford; Christ's College, Cambridge; and probably many others†. That the organ of St. John's escaped destruction, is the more extraordinary, as it had been erected under the patronage of Archbishop Laud, and as Cromwell's visitors had ordered Sir William Paddy's donation for founding the choral Service in that chapel to be entirely applied to the augmentation of the President's salary.

The popular account of the organ of Magdalene College is, that during the rebellion it was conveyed by order of Cromwell to Hampton Court, where

<sup>\*</sup> See Izaak Walton's Lives of Donne, Wotton, Hooker, &c. edit. 1845, note, p. 336.

<sup>†</sup> The author of A Short Account of Organs built in England, &c. makes a startling assertion at the commencement of his first chapter:—" During the Rebellion, all the Organs in England were destroyed by order of the Parliament, with all other Church furniture, which was considered as appertaining to the Romish ritual."

it remained in the Great Gallery till the Restoration, when it was restored to the College\*.

This story, like many others of a similar kind, is probably apocryphal. From the following passage in John Evelyn's Diary, under the date July 12th, 1654, we learn that the organ was then in its original place; and the inference is that it had never been removed: "Next we walked to Magdalen College, where we saw the library and chapel, which was likewise in pontifical order, the altar only I think turned tablewise; and there was still the double organ, which abominations (as now esteemed) were almost universally demolished; Mr. Gibbon [Christopher Gibbons], that famous musician, giving us a taste of his skill and talents on that instrument."

The devastation committed upon organs by those misguided ruffians, the soldiers and commanders of the Parliamentary army, was not easily remedied. It was not until some time after the restoration of monarchy that these instruments could be reinstated. Pepys, that entertaining old gossip, has two or three interesting entries in his *Diary* bearing upon this point.

"July 8, 1660. (Lord's day). To White-Hall Chapel, where I got in with ease, by going before the Lord Chancellor with Mr. Kipps. Here I heard very good musique, the first time that ever I remember to have heard the *organs*, and singing men in surplices, in my life."

"April 5, 1667. To Hackney, where good neat's tongue, and things to cat and drink, and very merry, the weather being mighty pleasant; and here I was told, that at their church they have a fair pair of Organs, which play while the people sing, which I am mighty glad of, wishing the like at our church at London, and would give £50 towards it."

"April 21, 1667. To Hackney Church, where very full, and found much difficulty to get pews, I offering the sexton money, and he could not help me. . . . . That which I went chiefly to see was the young ladies of the schools, whereof there is great store, very pretty; and also the organ, which is handsome and tunes the psalms, and plays with the people; which is mighty pretty, and makes me mighty earnest to have a pair at our church; I having almost a mind to give them a pair, if they would settle a maintenance on them for it."

"As to organs," says Burney, "the difficulty of procuring them, upon short notice, seems to have been greater than of finding either performers or music to perform. . . . . . After the suppression of Cathedral Service and prohibition of the Liturgy, some of the ecclesiastical instruments had

<sup>\*</sup> This anecdote may be traced to Warton (Observations on the Fairy Queen of Spenser, Lond. 1762, vol. ii, p. 236), who probably received his information from his father, a Fellow of Magdalene College. Gutch, Chalmers, Hawkins, Burney, and Ingram, copy Warton.

been sold to private persons, and others but partially destroyed; these being produced, were hastily repaired and erected for present use\*.

"A sufficient number of workmen for the immediate supply of cathedrals and parish churches with organs, not being found in our own country, it was thought expedient to invite foreign builders of known abilities to settle among us; and the premiums offered on this occasion brought over the two celebrated workmen, Smith and Harris."

The establishment of these two eminent men in this country, forms a new epoch in the History of Organ-building.

\* It was not until the lapse of more than half a century after the Restoration that our parish churches began commonly to be supplied with organs. In 1708, when Hatton published his New View of London, a very large number of our places of public worship were without them. To what an extent other English cities were deficient in this particular, may be gathered from Drake, who, at p. 338 of his Eboracum, published in 1733, says, "There is now only one parish church in the whole city of York that possesses an organ; and that came from the Popish chapel, the curators of which purchased it from Durham Cathedral."

As to English organs, prior to the Rebellion, very few are in existence. An old organ, said to be "the *first* made in England," may be seen at Ightam Moat-House, in Kent. Another old instrument, called in Mr. Brady's Catalogue "the *second* organ made in England," is preserved at Knole House, in the same county. Similar instruments may be found at Hatfield House, and at an old mansion—the reputed residence of Cardinal Wolsey—at Cheshunt.

#### FOURTH EPOCH.

THE FOUNDERS OF MODERN ORGAN-BUILDING.

#### 24. Father Smith.

"Bernard Schmidt, as the Germans write the name, brought over with him from Germany, of which country he was a native, two nephews, Gerard and Bernard, his assistants; and to distinguish him from these, as well as to express the reverence due to his abilities, which placed him at the head of his profession, he was called Father Smith. The first organ he engaged to build for this country, was for the Royal Chapel at Whitchall, which being hastily put together, did not quite fulfil the expectations of those who were able to judge of its excellence. An organ is so operose, complicated, and comprehensive a piece of mechanism, that to render it complete in tone, touch, variety, and power, exclusive of the external beauty and majesty of its form and appearance, is perhaps one of the greatest efforts of human ingenuity and contrivance. It was probably from some such carly failure, that this admirable workman determined never to engage to build an organ upon short notice, nor for such a price as would oblige him to deliver it in a state of less perfection than he wished. And I have been assured by Snetzler, and by the immediate descendants of those who have conversed with Father Smith, and seen him work, that he was so particularly careful in the choice of his wood. as never to use any that had the least knot or flaw in it; and so tender of his reputation, as never to waste his time in trying to mend a bad pipe, either of wood or metal; so that when he came to voice a pipe, if it had any radical defect, he instantly threw it away, and made another. This, in a great measure, accounts for the equality and sweetness of his stops, as well as the soundness of his pipes to this day\*."

Such is the brief and unsatisfactory account of this eminent artist handed down to us by Dr. Burney. We are not told the period of his birth or decease; the particular part of Germany from whence he came; the builder or builders under whom he acquired the knowledge of his art, nor indeed any of those minute facts which it is the business of a faithful biographer duly to chronicle. This is the more to be regretted, because both Burney and Hawkins lived with many who could easily have supplied information, which at this period of time we look for in vain.

<sup>\*</sup> Burney's History of Music, vol. iii, p. 436.

In the middle of the seventeenth century, Germany and Holland possessed many organ-builders whose fame had gone forth beyond their own countries. Christian Former, of Wettin (near Halle); Schnitker, of Hamburgh; and Eugène Casperini, were foremost in the ranks; and under the able tuition of one of these builders Smith most likely learnt his art. Tradition, indeed, points out Christian Former as his master, and this seems to us more than probable\*.

Father Smith was certainly in this country in the year of the restoration of King Charles the Second; and his first organ, that of the Royal Chapel at Whitehall, was built before the 8th of July, 1660. Pepys thus alludes to it, in his Diary under that date:—"(Lord's Day). To Whitehall Chapel, where I got in with ease by going before the Lord Chancellor with Mr. Kipps. Here I heard very good musique, the first time that ever I remember to have heard the organs, and singing men in surplices, in my life."

In 1662, Smith built a new organ for Westminster Abbey; and in 1671, an instrument for the parish church of St. Gilcs's in the Fields. In 1675, he built an organ for St. Margaret's, Westminster; and on the 5th of April in the following year, he was elected "organist" of the same church.

Smith was now rapidly acquiring fame, and high in the favour of the King, who appointed him his "organ-maker in ordinary," and allotted him apartments in Whitehall, called, in consequence, "The Organ-builder's Workhouse‡." He had, however, to contend with a formidable rival in Renatus Harris, who arrived in this country from France shortly after Smith came from Germany.

We now turn again to the pages of Burney's History for his account of the famous contention between these two rival builders concerning the Temple organ.

"About the latter end of King Charles the Second's reign, the master of

<sup>\*</sup> There is a curious note in Warburton's History of Dublin, 1818, vol. i, p. 483; but the dates will not reconcile it with the subject of our memoir. Speaking of St. Patrick's Cathedral, Dublin, the writer adds, "The organ is said to have been the gift of the Duke of Ormond: it was the work of Smith, the Father of Rotterdam, and intended for a church in Vigo, in Spain, where, however, it never was erected: when the Duke assisted in the attack made by the combined fleets of England and Holland on the ships in the harbour of that town in 1702, it had not been landed from the vessel which conveyed it from Rotterdam, and, of course, fell into the hands of the assailants."

The Cathedral Church of St. Canice, Kilkenny, is said to contain an ancient organ from St. Vigo, in Spain, from whence it was removed by Sir Francis Drake, when he plundered that town in 1587! Both stories partake of the marvellous, and seem to point at the same blundering origin.

<sup>†</sup> By an order of August 7, in the same year, his salary was fixed at £20 a year. His predecessors in the same office were John Egglestone, John Parsons, and John Hilton. See the Rev. M. Walcott's *Memorials of Westminster*, p. 128.

<sup>‡</sup> Ibid.

the Temple and the benchers, being determined to have as complete an organ creeted in their church as possible, received proposals from both these eminent artists (i. e. Smith and Harris), backed by the recommendation of such an equal number of powerful friends and celebrated organists, that they were unable to determine among themselves which to employ. They therefore told the candidates, if each of them would erect an organ, in different parts of the church, they would retain that which, in the greatest number of excellences, should be allowed to deserve the preference. Smith and Harris agreeing to this proposal, in about eight or nine months, each had, with the utmost excrtion of his abilities, an instrument ready for trial. Dr. Tudway, living at that time, the intimate acquaintance of both, says that Dr. Blow and Purcell, then in their prime, performed on Father Smith's organ, on appointed days, and displayed its excellence; and, till the other was heard, every one believed that this must be chosen.

"Harris employed M. Lully\*, organist to Queen Catherine, a very eminent master, to touch his organ, which brought it into favour; and thus they continued vying with each other for near a twelvemonth.

"At length, Harris challenged Father Smith to make additional reedstops in a given time; these were the vox-humana, Cremorne, the double Courtel, or double bassoon, and some others.

"The stops which were newly invented, or at least new to English ears, gave great delight to the crowds who attended the trials; and the imitations were so exact and pleasing on both sides that it was difficult to determine who had best succeeded. At length, the decision was left to Lord Chief Justice Jefferies, afterwards King James the Second's pliant chancellor, who was of that society, and he terminated the controversy in favour of Father Smith; so that Harris's organ was taken away without loss of reputation, having so long pleased and puzzled better judges than Jefferies.

<sup>\*</sup> This should be Baptist Draghi, Organist to Queen Catherine, at Somerset House. See the curious anecdotes of him and M. Locke in the Hon. Roger North's *Memoirs of Music*, first printed from the original MS. by the present writer. Dr. Tudway (from whom Burney derived this account) wrote *Baptist*, which Burney interpreted to mean *Baptist* Lulli: hence the mistake, which has been repeated ad infinitum, by writers who ought to have known better.

<sup>† &</sup>quot;The efforts of Smith and Harris were brought into and heard by an open court, supported by counsel, who exerted their best abilities in their defence, had a respectable variety of jurors, and Judge Jefferies gave sentence, which was in Smith's favour. In other words, the organ made by Harris was placed on one side of the church, and that of Smith on the other; the former played by Draghi, the latter by Dr. Blow and Mr. Purcell. Near a year elapsed before the contention ceased, and Jefferies made his fiat." Malcolm's Londinum Redivivum, vol iii, p. 106.

Jefferies' conduct seems to have been somewhat misrepresented in this affair. It has been suggested by a learned templar, that this famous contest was decided by *vote*. Jefferies happened to be "of the house," and it fell to his lot to give the *casting* one. Surely he is entitled to no obliquity on this account! Jefferies has much to answer for; but there is no evidence of "bribery and corruption" in the present case.

"The Hon. Roger North, who was in London at the time of the contention at the Temple church, says, in his Memoirs of Musie, that the competition between Father Smith and Harris, the two best artists in Europe, was earried on with such violence by the friends of both sides, that they 'were just not ruined.' Indeed, old Roseingrave assured me, that the partizans for each candidate, in the fury of their zeal, proceeded to the most mischievous and unwarrantable acts of hostilities; and that in the night, preceding the last trial of the reed-stops, the friends of Harris cut the bellows of Smith's organ in such a manner, that when the time came for playing upon it, no wind could be conveyed into the wind-chest\*."

Smith's next large organ was the noble instrument for Durham Cathedral, a copy of the agreement for which possesses many points of interest to the curious in such matters.

"A. D. 1683.

"Articles of agreement eovenanted, concluded, and agreed upon the eighteenth day of August in the five and thirtieth year of the reign of our Sovereign Lord Charles the Second by the grace of God, King of England, Seotland, France and Ireland, Defender of the Faith. Between the Rt. Hon. John Sudbury, Doctor of Divinity, Dean, and the Chapter of Durham of the Cathedral Church of Christ and blessed Mary the Virgin, of the one part, and Bernard Smith of the city of London, Organ-maker, of the other part as followeth.

"Imprimis. It is agreed by and between the said parties and the said Bernard Smith for himself, his executors, and administrators, doth hereby covenant, promise, and agree to and with the said Dean and Chapter and their successors by these presents that he the said Bernard Smith for and in consideration of the severall sums of money herein after mentioned shall and will before the first day of May which will be in the year of our Lord one thousand six hundred and eighty five, at his own proper cost and charges make and fitt up in the Organ loft of the said Cathedrall Church of Durham, a good, perfect, laudable, and harmonius great Organ and Choir Organ with a case of good sound and substantiall Oak wood, according to a draught or modell of an organ in parchment whereon or whereunto all the said partys have subscribed their names at or before the time of scaling and delivering of these presents.

"Item it is agreed by and between the said partys that the said Bernard Smith shall make in the said great organ these seventeen stops, viz.:

"Two open diapasons of Metall containing one hundred and eight pipes. A stop diapason of wood containing fifty four pipes.

<sup>\*</sup> Burney's History of Music, vol. iii, p. 437. The substance of this account is derived from a letter written by Dr. Tudway to his son, and preserved in the Harleian Collection of MSS.

A principall of Metall containing fifty four pipes.

A cornet of Metall containing ninety six pipes.

A quinta of Mittall containing fifty four pipes.

A super octave of Mitall containing fifty four pipes.

A Holfluit of wood containing fifty four pipes.

A Block flute of Mittall containing fifty four pipes.

A small quint of Mittall containing fifty four pipes.

 $\Lambda$  Mixture of three ranks of pipes of Mittall containing one hundred and sixty two pipes.

A trumpett of Mittall containing fifty four pipes.

And in the Choir organ five stops, viz.:

A principal of Mittall in the front containing fifty four pipes.

 $\Lambda$  stop diapason of wood containing fifty four pipes.

A voice Humand of Mittall containing fifty four pipes.

A holfluit of wood containing fifty four pipes.

And a super octave of Mittall containing fifty four pipes.

"Item it is agreed by and between these parties that the said great Organ shall have a back front towards the body or west end of the Church which shall be in all things and respects like to the fore front both in pipes and carving. And all the pipes belonging to the two diapason stops shall speak at will in the said back front as in the fore.

"Item in consideration of which work by the said Bernard Smith to be done and formed in the manner and form aforesaid the said Dean and Chapter for themselves and their successors do covenant and grant to and with the said Bernard Smith his Executors and administrators by these presents in manner and form following, that is to say that the said Dean and Chapter shall and will well and truly pay or cause to be payd unto the said Bernard Smith, his executors, administrators, or assigns the sum of seven hundred pounds of good and lawful money of England at three several payments, that is to say two hundred thirty three pounds six shillings and eightpence thereof in hand at or before the sealing and delivering hereof the receipt whereof the said Bernard Smith doth hereby acknowledge and confess thereof and of every part and parcel thereof doth clearly acquit, exonorate, and discharge the said Dean and Chapter [blank in decd] by these presents other two hundred thirty three pounds six shillings and eightpence thereof when the said whole organ or organs is or are brought into the said Cathedral Church and ready for fitting up, and other two hundred thirty three pounds six shillings and eightpence being the residue thereof and in full amount of the said sum of seven hundred pounds when the whole organ is sitt up and in every respect finished according to the true intent and meaning of these articles. And further that the said Bernard Smith shall have and take to his own use, benefit, and charge the old organ now belonging to the said Cathedral Church and all the Materialls thereunto belonging. Provided the said Bernard Smith shall not

or do not remove, take nor carry away the said old organ till the new organ be ready for fitting up as aforesaid.

"And lastly, whereas the pipes of the two fronts of the said great organ and the front pipes of the said choir organ are to be painted and guilt according to the best way and mode of painting and guilding of organs, at the proper cost and charges of the said Bernard Smith. It is hereby agreed, by and between the said parties, that if the said Bernard Smith do well and sufficiently perform all the aforesaid works, in making, finishing, and sitting up the said new organ, to the ample satisfaction and content of the said Dean and Chapter; that the said Dean and Chapter shall pay, or cause to be payd unto the said Bernard Smith, his executors, administrators or assigns, the sum of fifty pounds, of good and lawfull money of England, and in full satisfaction for the painting and guilding the said organ.

"In witness whereof to the one part of these articles remaining with the said *Bernard Smith*, the said Dean and Chapter have put this Chapter seal, and to the other part remaining with the said Dean and Chapter, the said *Bernard Smith* hath put his hand and seal the day and year above written.

"Signed, scaled and delivered in the presence of

WILLIAM WILSON.
Jo. SIMPSON."\*

In consequence of the reputation which Father Smith had acquired by these instruments, he was made choice of to build an organ for St. Paul's Cathedral, then in the course of crection. A place was accordingly fitted up for him, in the cathedral, to do the work in, but it was a long time before he could proceed with it, owing to a contention between Sir Christopher Wren and the Dean and Chapter. Sir Christopher Wren wished the organ to be placed on one side of the choir, as it was in the old cathedral, that the whole extent and beauty of the building might be seen at one view: the

I say recd
By me
Ber: Smith."

<sup>\*</sup> In the year 1691, Smith made some additions to the organ, and the following is a copy of his receipt, preserved by the Dean and Chapter:

<sup>&</sup>quot;Received of John Rowell Twenty four pounds being the last payment and in full of Fifty Pounds given to me by the Worsh! The Dean and Chapter of Durham for work done at ye Organ.

Dean, on the contrary, wished to have it at the west-end of the choir; and Sir Christopher, after using every effort and argument to gain his point, was at last obliged to yield.

Smith, according to his instructions, began the organ; and, when the pipes were finished, found that the case was not spacious enough to contain them all: and Sir Christopher, tender of his architectural proportions, would not consent to let the case be enlarged to receive them, declaring the beauty of the building to be already spoilt by the d——d box of whistles. Three of the stops were in consequence obliged to be kept out; viz. a bassoon, a clarion, and another stop of minor consequence, which were kept in the Cathedral for several years after; Smith hoping he might get them in at some future period: but he died a few years before Sir Christopher Wren.

After all this contention, the architect, sorely against his will, was obliged to make an addition to the ease. He not only had been niggardly in regard to the depth of it, where another foot would have been of no consequence whatever, but also in the height; for when Smith came to put in the large open diapason pipes in the two side flats, they appeared through the top nearly a foot in length, and spoiled the appearance entirely. Smith now entertained hopes of having a new ease, but Sir Christopher, who before would not suffer any ornaments on the top, was now obliged to add several feet, or else alter the ease, which vexed him exceedingly. These ornaments consist of angels with trumpets, standing at the side of a small altar. The eolour of the wood, of which these are made, being lighter than the rest of the organ ease, the addition is soon discoverable. The organ ease (to the top of the ornaments) stands near thirty feet high; the distance from the floor of the building being about forty-six feet. It is eighteen feet wide, and eight feet deep. The carving about the ease is very good; it was executed by Grinlin Gibbons, whose decorations embellish every part of the choir. The organ was opened with Divine Service, at the thanksgiving for the Peace of Ryswick, Dec. 2, 1697\*; but the Cathedral was not entirely finished till 1715†.

Another famous instrument of Smith's, is the organ in the Chapel of Trinity College, Cambridge. It was built in 1708, during the Mastership of the eelebrated Dr. Bentley, of whose elub in London Father Smith was a member. The erection of this organ, together with the repairs of the ehapel, which were carried on under the auspices of the Master, in direct opposition

<sup>\*</sup> The writer has in his library an original MS. Anthem, subscribed at the end—"This was made by Dr. Blow, Oct. ye 15, 1697, at Hamton town, for the opening of St. Paul's Cathedral.

<sup>†</sup> The above account of the Organ of St. Paul's Cathedral is copied from the first number of the *Musical Gazette*, January, 1819; a work which appears to have existed only a few months. The editor was Dr. Busby.

to the wishes of the Fellows, gave rise, amongst other things, to the serious quarrels which took place between Bentley and his College, and which nearly cost him his Mastership. Smith died before the instrument was finished, as will be seen from the following extract from a college document, quoted in Bishop Monk's Life of Dr. Bentley, p. 161:—"He (Smith) did not live to complete the organ of Trinity; it was finished by tuning and voicing by his son-in-law, Xtopher Schrider, according to a resolution of the Master and Seniors, May 3, 1708." Sir John Hawkins seems doubtful as to the exact time of Smith's death, but tells us "That the name of Smith occurs in the lists of the Chapel establishment, from 1703 to 1709 inclusive, as organ-maker to the Chapel, and also to Queen Anne." An entry, however, in the parish-books of St. Margaret's, Westminster, sets the matter in question at rest:—"On the 6th day of April, 1708, Henry Turner was elected Organist of St. Margaret's, Westminster, in the room of Bernard Smith, deceased\*."

It would be interesting to give an account of all the organs built by Father Smith, but this is impracticable. The following list has been drawn up with some care, and is probably as complete as it can now be made.

# List of Father Smith's Organs.

# 1. The Royal Chapel, Whitehall. 1660.

Part of an organ by Smith still remains in the present Whitehall Chapel. Little of the original work, however, exists; as it was partly melted down in 1814, and a new inside put into the old case, by Elliot. This organ is said to have been the instrument built by Smith immediately after his arrival in this country; but this can hardly be the fact, as that organ must have been burnt in the great fire which consumed so many of the ancient buildings of Whitehall, in 1697.

Paterson, in his *Pietas Londinensis*, 1714, p. 282, says:—"Whitehall was unfortunately laid in ashes by that dismal fire in Jan. 4, 1697; at which time the Royal Chapel was also consumed; wherefore his late majesty erected a new one, in that most spacious and beautiful room called the Banqueting House, built by King James I; and so it continues the Royal Chapel, for the use of the nobility, gentry, and other inhabitants thereabout."

# 2. Westminster Abbey. 1662.

This was the organ on which Blow, Purcell, and Croft played. It appears, by the treasurer's books of the Abbey, to have cost £120.

<sup>\*</sup> A memoir of Smith, chiefly extracted from Hawkins, may be seen in Noble's Continuation of Granger's Biographical History of England, vol. ii, p. 362; and a more elaborate notice in Mr. Sutton's Short Account of Organs in England, &c. p. 17. An excellent painting of Father Smith still adorns the walls of the disused Music-school, Oxford, which has been wretchedly copied in Hawkins's History.

#### 3. St. Giles's in the Fields. 1671.

The original cost of this organ is not given in the Parish Books. In Parton's History of the Parish of St. Giles's, p. 287, is this entry:—"1698. The sum of £166–14s. 1d. was collected towards repairing the organ; and the celebrated Smith, who had built it, offering completely to set it to rights for £200, was employed, and finished the same this year."

Again, in the following year, is this notice: "1699. Paid £200 to Mr. Christian Smith (the builder's nephew), for making and setting up the organ in the church."

This instrument is the one still in use.

## 4. St. Margaret's, Westminster. 1675.

Malcolm, in his *Londinum Redivivum*, vol. iv, p. 165, has preserved the following entry respecting this organ:—"1675. Item, to Mr. Bernhard Smith, for the charge of the organ newly erected in the parish church, £200."

Sir John Hawkins, in his *History of Music*, vol. iv, p. 510, speaking of the children of the celebrated Henry Purcell, says; "Of these children we have been only able to trace one, viz. a son, named Edward, who was bred up to music, and, in July, 1726, was elected Organist of St. Margaret's, Westminster. Upon inspection of the parish books, for the purpose of ascertaining this fact, it appears the organ of this church was built by Father Smith in 1676, and that he himself was first organist there, and played for a salary." The learned historian is in error *one* year as to the date of the erection of this organ. Smith was appointed organist, April 5, 1676; but the instrument, as we see from Malcolm, was built in 1675. Smith's organ was removed in 1804, and a new one supplied by Avery.

## 5. Christ Church Cathedral, Oxford. 1680.

# 6. St. Peter's, Cornhill, 1681.

This organ originally cost £210, inclusive of "painting and gilding,"

Paterson (*Pietas Londinensis*, p. 231), speaking of this church, adds: "Within it's beautified with a stately new organ, maintain'd by the gift of Mr. Benjamin Thorowgood, in 1682."

# 7. St. Mary, Woolnoth. 1681.

Hatton, in his New View of London, 1708, vol. ii, p. 411, says; "The organ case is enriched with three large figures of Fame; and on the front are, in gold letters, some texts of Scripture, relating to praising God with Church Musick." The date above given is also on the exterior of the case.

# 8. The Temple Church. 1682.

The date usually assigned to this noble instrument is 1687; but it is manifestly incorrect, as contemporary authorities tell us that it was erected in the reign of Charles II, who ceased his career in 1685. The true date is undoubtedly that above assigned; when Hatton tells us, "The Temple Church having narrowly escaped the flames in 1666, it was in 1682 beautified, and the curious wainscot screen set up."

The swell-organ was added by Byfield at a subsequent period.

#### 9. Durham Cathedral. 1683.

Smith received £700, and the materials of the old organ, for this noble instrument. (See ante, p. 78.) It was repaired in 1748, by Abraham Jordan, who probably added the swell.

## 10. St. Mary-at-Hill, Billingsgate. 1693.

Hatton, in his New View of London, 1708, vol. ii, p. 376, says: "And here is a pretty organ, composed of these stops, and set up anno 1692-3." Then follows the following curious list of stops: "A stop-diapason of wood. A recorder of wood. A fifteenth of metal. A mixture of 3 ranks of metal. A vox-humane. A trimeloe. A principal of metal. A cornet of 5 ranks, all of metal advanced exactly. A tierce of metal. A trumpet of metal throughout. An echo to the whole. To draw all in whole stops, except the great 12th, the 15th, the tierce, the mixture, the vox-humane, and the trumpet; all which are broken, and made to draw in half stops, for the benefit of increasing the variety in the organ." This organ has long been removed.

#### 11. St. Paul's Cathedral. 1697.

"Bernhard Smith entered into a contract with the commissioners, Dec. 19, 1694, to erect the great organ and a chair organ, for £2000." Malcolm's Londinum Redivivum, vol. iii, p. 105.

The organ was opened Dec. 2, 1697; but the cathedral was not entirely finished till 1715.

- 12. St. Mary's (University Church), Cambridge. 1697.
- 13. Ripon Cathedral.
- 14. St. David's Cathedral.

The case and the diapason-pipes alone remain.

- 15. St. Mary's (University Church), Oxford.
- 16. The Theatre, Oxford.

This organ was taken down by Byfield about a century ago, and placed in the Church of St. Peter in the East, Oxford.

# 17. St. George's Chapel, Windsor.

This organ remained in the Royal Chapel until 1788; when the king, upon the completion of the new organ, by Green, presented it to Old Windsor Church. It is now in the New Church at Haggerstone, Middlesex.

- 18. The Chapel of Eton College.
- 19. Southwell Collegiate Church.

Repaired and completed by Snetzler in 1766.

# 20. Hampton Court Palace Chapel.

This organ is in a recess on the south-side of the choir; the case is richly carved by Gibbons.

#### 21. Manchester Cathedral.

The choir organ only; it still remains in its original state.

- 22. St. James's, Garlick Hill.
- 23. St. Clement Danes.
- 24. St. Dunstan's, Tower Street.

This organ is now in St. Alban's Abbey.

25. High Church, Hull, Yorkshire.

Traditionally said to have been intended for St. Paul's Cathedral, in addition to the present instrument.

- 26. All Saints, Derby.
- 27. St. Margaret's, Leicester.

This organ has been rebuilt.

28. West Walton Church, Norfolk.

The case only remains.

29. All Saints, Isleworth, Middlesex.

Much improved by Green in 1776.

- 30. Pembroke College Chapel, Cambridge.
- 31. Emanuel College, ditto.
- 32. Christ's College, ditto.

The three last-named organs remain in nearly their original state; they have been disused for more than half a century. We have assigned them to Father Smith, upon the authority of Sir W. Cope, Bart.

- 33. St. Catherine Cree, Leadenhall Street.
- 34. Woreester Cathedral.

In Valentine Green's Survey of the City of Woreester, 8vo. 1764, p. 54, is the fol lowing notice of a former organ:—"The organ of this church, which, with its gallery, terminates the west-end of the choir, is esteemed a fine instrument, consisting of nine stops: The trumpet stop is justly allowed to be the finest of that sort in the kingdom. The last reparation of it cost three hundred pounds, which sum was raised by a voluntary contribution of several noblemen and gentlemen, whose arms are emblazoned on the west-front of its gallery. \* \* \* The east-front of this gallery, towards the choir, has a pretty deception of marble, well imitated; and presents a view of the lesser or choir organ, which has communication with the great one, and consists of five stops."

35. Chester Cathedral.

This organ was removed in 1844. A small organ, probably by the same maker (formerly used to accompany the choir), is still preserved in an apartment in the cloisters.

- 36. Hereford Cathedral.
- 37. St. Olave's, Southwark.
- 38. Trinity College Chapel, Cambridge. 1708.

#### 25. Renatus Harris.

According to Dr. Burney, "Smith had not been many months here, before Harris arrived from France, with his Son René or Renatus, an ingenious and active young man, to whom he had confided all the secrets of his art. However, they met with but little encouragement at first, as Dallans and Smith had the chief business of the kingdom; but upon the decease of

Dallans, who died while he was building an organ for the old church at Greenwich, 1672, and of the elder Harris, who did not long survive him, the younger became a formidable rival to Smith\*."

If the Harrises arrived in this country a few months after Father Smith, they were some time making way in their profession; for we have no record of their having built any organs before the year 1670. In this year they constructed the fine instrument for St. Sepulchre's Church, Newgate Street; and an organ for the Cathedral of Gloucester. These two organs seem to be the only ones in this country in which the elder Harris had any share, as his death is recorded to have taken place in 1672.

After this period, the younger Harris seems to have been much employed, and to have been Smith's rival upon all occasions. The memorable "battle of the organs," at the Temple Church, has already been detailed; and not long afterwards (upon the accession of James the Second), we find Harris rivalling his opponent in court patronage. The evidence of this is contained in the following curious entries, extracted from Moneys received and paid for Secret Services of Charles II and James II, lately printed for the Camden Society†. The dates range between 1686 and 1688.

"To René Harris, by advances for an organ to be provided for the chappell in Whitehall—£300."

"To René Harris, by advance, the same being intended to be employed in the making and buying a new organ for the chappell in Whitehall—£200."

"To René Harris, for fitting and repairing an organ for the chappell in Whitehall, and for altering and preparing an organ for the chappell at Windsor, and removing that organ from Winchester thither—£137:13.",

"To René Harris, in full payment for making and finishing the organ in ye chappell at Whitehall—£600."

Harris built a noble instrument for the Cathedral at Salisbury; the only record of which seems to be an engraving fortunately extant. This curious print measures thirty-three inches by sixteen, and purports to be "The East Front of the New Organ in Salisbury Cathedral, made in the year 1710, by Mr. Renatus Harris, Organ-Builder." "John Lyons, delin." "Francis Dewing, sculp." Running along the top of the engraving is this line:—"Vitalianus, the 74th Bishop of Rome, about the year 662, ordained organs first to be used in the Church. He was born in Segni, a city of great antiquity, on ye top of a Mountain in Italy; in this city organs were first invented, or first brought to perfection." And on each side of the engraving (at the top of the print), is the following very curious description: "This Instrument, consisting of four sets of keys, and fifty stops, stands over the choir door, and is above 40 foot high and 20 foot broad; the arch under which

<sup>\*</sup> History of Music, vol. iii, p. 437.

<sup>†</sup> Edited by J. Y. Akerman, from a MS. in the possession of W. L. Lowndes, Esq. The entries occur, pp. 144, 169, 180, 196.

it stands, being lofty and but narrow, would admit no larger extention in breadth; and yet it was judged necessary to carry the finishing very high, to render this figure more lively and proportionable to the structure of the church (which is, from the pavement to the vaulting thereof, 80 foot high). The organ blower, as well as the bellows which are very large, have room in the body of y° case, in which are all y° movements, keys, rollar boards, and eleven stops of Echos, and yet the sight of the work is conceal'd from him, as he is from the people in the Church or Gallery. This organ is a new contrivance, and on it may be more varietys express'd, than by all y° organs in England, were their several excellencies united. The figures designed for the finishings of the choir organ are not as yet set up, neither are y° finishings of y° great organ fore shortned in this print according to perspective, because all parts of the Instruments should answer the Seale\*."

It seems as if Harris had been a candidate for building the organ of St. Paul's Cathedral, as well as that at the Temple; for, in the Spectator (No. 552, for Dec. 3, 1712), a proposal of Mr. Renatus Harris is recommended in the following words: "The ambition of this artificer is to creet an organ in St. Paul's Cathedral, over the west door, at the entrance into the body of the church, which in art and magnificence shall transcend any work of that kind ever before invented. The proposal in perspicuous language sets forth the honour and advantage such a performance would be to the British name, as well as that it would apply the power of sounds in a manner more amazingly forcible, than perhaps has yet been known, and I am sure to an end much more worthy. Had the vast sums which have been laid out upon operas without skill or conduct, and to no other purpose but to suspend or vitiate our understandings, been disposed this way; we should now perhaps have an engine so formed, as to strike the minds of half a people at once, in a place of worship, with a forgetfulness of present care and calamity, and a hope of endless rapture, joy, and Hallelujah hereafter."

"In the latter part of his life," says Sir John Hawkins, "Renatus Harris retired to Bristol, and following his business there, made sundry organs for the churches in that city, and in the adjacent parishes, as also for churches in the neighbouring counties. He had a son named John, bred up under him, who followed the business of organ-making, and made a great number of very fine instruments†."

Renatus Harris died in or about the year 1715; and his latest organ seems to have been that in St. Mary's Church, Whitechapel.

<sup>\*</sup> A copy of this rare engraving, which seems to have been unknown to Gough and Upcott, is in the possession of the writer.

<sup>†</sup> Hist. of Music, vol. iv, p. 356. Sir John adds, "In the Mercurius Musicus for September and October, 1700, is a song inscribed: "Set by René Harris." Father Smith and Renatus Harris, following the example of their predecessors, united a knowledge of the science of music with the more mechanical art of organ-building.

## List of Renatus Harris's Organs.

## 1. St. Sepulchre's, Newgate Street. 1670.

Two dates are assigned to this organ, 1667 and 1677; but a document in the author's possession gives it (probably correctly) as above. The date 1667 is evidently wrong, as the following extract from Hatton's *New View of London*, 1708, vol. ii, p. 546, will testify; "St. Sepulchre's being almost demolished (except part of the wall and steeple) by the fury of the devouring flames in 1666, it was again re-erected and finished, *anno* 1670.

#### 2. Gloucester Cathedral. 1670.

This and the previous organ were built by Renatus Harris in conjunction with his father.

## 3. St. Botolph, Aldgate. 1676.

Upon the front of the organ is this inscription: "This Organ is ye gift of Thomas Whiting to the hole [sic] parish, 1676.

## St. Dunstan's, Stepney. 1676.

The case of this organ is beautifully carved in oak; and the instrument is said to be a very fine one.

## 4. St. Nicholas, Newcastle-upon-Tyne. 1676.

A trumpet stop was added in 1699, and in 1710 the instrument was thoroughly repaired. Snetzler added the swell in 1749.

## 5. Chichester Cathedral. 1678.

A trumpet stop was added by Byfield in 1725; a choir organ some twenty years later; and a swell in 1778.

# 6. St. Giles's, Cripplegate. 1680.

In Malcolm's Londinum Redivivum, vol. iii, p. 274, is the following curious extract from the parish books: "1672. Mrs. Charnock shall have thanks given her, for her affection in bestowing a faire organ upon the parish church of St. Giles: and that some convenient place shall be found for setting it up." The double duty of organist and sexton was performed by James Brookes, who was "chosen by the King's Majesties letter." It was provided, that if he did not, or could not play, he should find an organist.

In 1726, a proposal was made (and accepted) by Abraham Jordan, organist, to take the organ to pieces, the builder having left it in a very imperfect state, and repair it *gratis*, on condition of having his salary secured to him for 21 years.—See Malcolm, Ibid. p. 279.

# 7. Allhallows, Barking, Middlesex. 1680.

This church escaped the flames of 1666. Hatton, speaking of the organ, says, "There is likewise a handsome organ case enrich'd with Fames, and the figures (about 6 foot high) of Time and Death, carved in basso relievo and painted." Vol. 1, p. 98.

- 8. Lambeth Old Church. 1680.
- 9. Winchester Cathedral. 1681.

Subsequently rebuilt by Avery in 1794.

10. Winchester College Chapel. 1681.

Rebuilt by Green, in 1780.

#### 11. St. Michael's, Cornhill. 1684.

#### Bristol Cathedral. 1685.

In the years 1681 and 1685, in the Deaneries of Towgood and Levett, £300 or more was laid out in mending the floor and beautifying the church, painting the east-end of the choir and other works, and in making a fine timber case for the new organ, erected by the contribution of the Dean and Chapter and many other well-disposed persons, at the expense of £550 in the whole, to Mr. Renatus Harris, organ-builder.—Barrett's History of Bristol, p. 290.

### 13. St. Lawrence, Jewry. 1687.

Paterson, in his *Pietas Londinensis*, 1714, p. 131, calls it "a fine organ;" an opinion in which the writer concurs. The case, with its choir organ in front, is one of the finest specimens of its kind in London.

### 14. St. James's, Piccadilly. 1687.

This organ was made for James II, and designed for his Popish chapel at Whitehall. His daughter, Queen Mary, presented it to the church. On the front was this inscription: "The Gift of the Queen, in the year 1691." Some valuable entries respecting it have already been given (see ante, p. 86).

Ambrose Warren, in his curious tract, entitled *The Tonometer*, 1727, p. 8, tells us, "About the year 1707, when Father Smith, the organ-builder, died, I was hy the honourable vestry of St. James's parish chosen to keep their organ in tune and order in his stead, which I found to be in a very mean condition in many respects. And, in 1708, I was by the same authorities ordered to reform divers stops, and put in several new ones, which I with help performed, to the full satisfaction of all concerned, as well as myself."

- 15. St. Mary's, Ipswich. 1690.
- 16. Christ Church, Newgate Street. 1690.
- 17. St. Ann's, Westminster. 1691.

Hatton says, "Here is a fine organ, made by Mr. Harris" (p. 132); Paterson adds, "given by King William III" (p. 27). It was formerly in one of the royal apartments at Whitehall, and was presented to the church by the King in 1691. It is now in the church of St. Michael, Paternoster Royal.

## 18. Allhallows, Lombard Street. 1695.

This church was opened in 1695, which is the probable date of the organ. Paterson (*Pietas Londinensis*, p. 11) speaks of its "fine altar-piece and pulpit, and stately organ, made by Mr. Harris, by the contributions of forty-two benefactors." Hatton says, "the names of the benefactors to the organ" are inscribed in gold letters on the gallery."—New View of London, vol. i, p. 109.

## 19. St. Andrew's, Undershaft. 1696.

Paterson (*Pictas Londinensis*, p. 22) calls it "a most excellent and costly organ made by Mr. Harris." Hatton (*New View of London*, p. 124) calls it "a fine *large* organ," and adds, "several gentlemen (whose names I am not allowed to mention) contributed for the organ, &c. the sum of £1400."

This organ was opened on the 31st of May, 1696, when Dr. Towerson preached a sermon on Vocal and Instrumental Music in the church.

# 20. St. Patrick's Cathedral, Dublin. 1697.

The following extracts are from the old chapter book:—"12th August, 1695. The Dean and Chapter agrees with Renatus Harris, of London, organ-builder, to make and set

up a Double Organ for the sum of £505. In the great organ—Open Diapason of metal, Stop Diapason of wood, Principal of metal, Nason of wood, a great 12th of metal, 15th of metal, a Cornet of metal. In the little organ—a Principal of metal, Stop Diapason of wood, 15th of metal, Nason of wood, being in all 13 stops, consisting of 800 pipes, sound-board, &c. &c. The pipes of the old organ to be removed, and to allow £65 for the same."

"11th March, 1697. Organ erected and examined by the several Vicars."

"10th May, 1697. Further contract for additional stops for £350, to be paid at Strongbow's Tomb, in Christ Church, on stated times named—viz. Trumpet stop, Echo stop, *Time* stop [sic] entire, Open Diapason, Flute of metal, Great Furniture of 3 ranks."

#### 21. St. Andrew's, Holborn. 1699.

Harris's organ, after its rejection at the Temple, was part of it erected at St. Andrew's, Holborn, and part in the Cathedral of Christ Church, Dublin. Sir John Hawkins records the following anecdote in his *History of Music*, vol. iv, p. 539:—"Dr. Sacheverell, having been presented to the living of St. Andrew's, Holborn, found an organ in the church, of Harris's building, which having never been paid for, had from its erection in 1699 been shut up. The Doctor, upon his coming to the living, by a collection from his parishioners, raised money enough to pay for it."

### 22. St. Bridget, alias St. Bride's, Fleet Street.

Hatton, in his *New View of London*, vol. i, p. 175, says:—"Here is a very fine organ, and a curious carved case adorned with two large Fames, &c. This organ was made by Mr. Harris."

- 23. Ely Cathedral, Cambridgeshire.
- 24. Jesus College Chapel, Cambridge.

This instrument is now in All Saints' Church, Cambridge.

25. Wolverhampton Collegiate Church.

This organ, with that of St Andrew's, Holborn, was constructed out of the rejected Temple organ. Burney says, "That part of the organ for the Temple church by Harris, and sent to Dublin, was sold after the death of the elder Byfield, to Wolverhampton for £500. It still stands in the church of that town, and is thought a very good instrument."

## 26. St. Clement's, Eastcheap. 1709.

"A pretty organ, made by Mr. Harris."—Hatton, vol. i, p. 208. This instrument was probably built in 1709, when the church "was repaired and beautified."

#### 27. Norwich Cathedral.

This organ is attributed to Harris. Sir Thomas Browne, in his Repertorium, or the Antiquities of Norwich, thus alludes to the earlier Cathedral organs:—"There was formerly a fair and large, but plain, organ in the church, and in the same place with this at present. It was agreed in a Chapter by the Dean and Prebends, that a new organ be made, and timber fitted to make a loft for it, June 6, Anno 1607, repaired 1626, and £10 which Abel Colls gave to the church, was bestowed upon it. That, in the late tumultuous time, was pulled down, broken, sold, and made away. But since his Majesty's restoration, another, a fair, well-tuned, plain organ was set up by Dean Crofts and the Chapter, and afterwards painted and beautifully adorned, by the care and cost of my honoured friend, Dr. Herbert Astley, the present worthy Dean."—Posthumous Works of the Learned Sir Thomas Browne, 8vo. 1712, p. 31.

## 28. Salisbury Cathedral. 1710.

See the account of a curious engraving of this organ, ante, p. 86. This noble instrument was probably removed in 1792, when Green erected the present organ.

### 29. St. Mary's, Whitechapel. 1715.

This organ was opened on the 29th of May, 1715. See the Parish Clerks Remarks on London, 1732, p. 246.

## 26. Father Smith's Nephews.

Upon Father Smith's arrival in this country, he was accompanied (according to Hawkins, and after him Burney) by his two nephews, Bernard and Gerard. There is reason to believe that the historian was in error as to the name of the first nephew. Horace Walpole, in his corrected copy of Hawkins's History, altered the name of Bernard to Christian, and evidently upon some good authority, as we find, in the case of the repair of the organ of St. Giles' in the Fields (before quoted), Christian Smith received payment, and signed the receipt for the same.

No organs of this maker are known to exist.

Gerard Smith is so little known, that his name has hitherto not been registered amongst our organ-builders. Nevertheless, he built several fine instruments.

In Chamberlayne's Magnæ Britanniæ Notitia for 1755, we find among the officers of Chelsea Hospital, "Organ Repairer, Mr. Gerard Smith." This person was probably Father Smith's grand-nephew. The date almost precludes the possibility of his being his nephew.

# Organs built by Gerard Smith.

# 1. Parish Church, Bedford. 1715.

This instrument was sold by the parish, when the church was restored in 1832, for £50—about the price of its case. It is now in the Moravian Chapel at Bedford.

# 2. All Hallows, Bread Street. 1717.

An echo was added to this organ, by the original builder, in 1722; the whole cost being £422.

# 3. Finedon Church, Northamptonshire. 1717.

This organ was built at the cost of Dr. Dolben, of Finedon, a great patron of music and musicians. In A Collection of Anthems, as the same are now Perform'd in the Cathedral Church, Durham, Durham, 8vo. 1749, p. 159, is one beginning, "Praise God in his sanctuary," "Compos'd for and Perform'd at the Opening a new Organ at Finedon, in Northamptonshire, May 17, 1717," by Dr. Croft.

The instrument is in its original state: the pipes are diapered.

# 4. Little Stanmore Church, near Edgware. 1720.

This church was opened on the 29th of August, 1720, for which occasion, it is probable, Handel composed his sacred drama of Esther. Whilst the Duke of Chandos resided at Cannons, the church service was performed here with all the aid of the first vocal and instrumental music. Handel, who resided at Cannons as chapel-master, composed his anthems for the use of this choir. This organ is sometimes attributed to Jordan.

## 5. St. George's, Hanover Squarc. 1725.

"This organ was erected, in 1725, by Smith, nephew to the great artist of that name; and the choice of an organist is thus mentioned in the St. James's Evening Post of Nov. 16; On Friday last came on the election of an organist of St. George's, Hanover Square; and the salary being settled at £45 per annum, there were seven candidates: Mr. Rosengrave: Mr. Cole, organist of the chapel of the Royal Hospital of Chelsea, and of St. Mary Hill, London; Mr. Monro, organist of St. Peter's, Cornhill; Mr. Stanley, the ingenious blind youth, aged 13 years and a half, organist of Allhallows, Bread-street; Mr. Centlivre, organist of Oxford Chapel, near Oxford Square; Mrs. Sweet, organist of the Chapel in Duke-street, Westminster; and Mr. Obbel, organist of St. Bartholomew the Great, in West Smithfield. The vestry, which consists of above 30 lords and 70 gentlemen, having appointed Dr. Crofts, Dr. Pepusch, Mr. Bononcini, and Mr. Geminiani, to be judges which of the candidates performed best; each of them composed a subject, to be carried on by the said candidates in the way of fuguing; and one hour was allowed for every one to play upon the four subjects so appointed, one not to hear another unless himself had done before; only the four first performed, and all of them very masterly. In the conclusion the judges gave it for the famous Mr. Rosengrave, who made that way of performance his study great part of his life; and he was accordingly chosen." -- Malcolm's Londinum Redivivum, vol. iv, p. 234.

This organ is often erroneously attributed to Snetzler.

## 27. John Harris and John Byfield.

John Harris, the son of Renatus, seems to have been overlooked by all who have written upon the subject of our early organ-builders since the time of Sir John Hawkins. Indeed so little attention has been paid to dates, that we are told, "Harris's most celebrated organs are those of St. Sepulchre's, London, which, however, is now much changed since its first erection in 1667; and Doncaster, Yorkshire, 1738\*." (!)

John Harris had a brother, named after his father, Renatus, the only notice of whom occurs on the fly leaf of an old MS. Collection of Voluntaries for the Organ; i. e. "John Harris, given me by my brother Renatus, A. D. 1712†."

In 1738, March 19, articles of agreement were entered into "Between John Harris, of Red Lion-street, in the Parish of St. Andrew, Holborn, in the County of Middlesex, organ maker of the one part, and the Reverend Hollis Piggot, Vicar of the Parish of Doncaster, in the County of York, William Seaton, John Hancock, James Buckley Wilford, and John Gibbons, Churchwardens of the said Parish of Doncaster, of the other part." Harris undertakes for the sum of Five Hundred and Twenty-five pounds, "to make, compleat, finish and erect," on or before the 24th day of June 1740, "a Good, Tuncful, and compleat Organ with One Handsome Front and a Case according to the Modell or Draught." "The said Organ to contain the severall stops and other particulars hereinafter mentioned, without any com-

<sup>\*</sup> A short Account of Organs built in England, &c. p. 60.

<sup>†</sup> In the possession of Mr. Smce, Jun. of the Bank of England.

munication or any Sett of Pipes made to serve in a double capacity in or upon both Organs (that is to say) The Great Organ to contain Twelve Stops (to wit) One open Diapason of Mettal in the front, with fifty-two speaking pipes. One open Diapason in the inside, with fifty-two Pipes. One Stop'd Diapason with fifty-two Pipes. One Principall of Mettal with fifty-two Pipes. One Twelfth of the like. One Fifteenth of the like. One Tierce of the like. One Sesquialtra of five rows of Pipes. One Cornet of five rows of Pipes. Two Trumpets with One Hundred and four Pipes. And One Clarion with Fifty-two Pipes. The Choir or Quoir Organ, to contain One Stop'd Diapason with Fifty-two Pipes. One Flute with Fifty-two Pipes. One Fifteenth with Fifty-two Pipes. And one Bassoon with Fifty-two speaking Pipes. The Eccho Organ to contain the following Stops, which shall Eeeho and Swell to express passion in degrees of Loudness and Softness as if inspired by human breath (viz.) One open Diapason with twenty-seven Speaking pipes. One stop'd Diapason with twenty-seven pipes. One Principall with twenty-seven pipes. One Cornet of three Rows with Eighty-one pipes. One Trumpet and One Hautboy with twenty-seven speaking pipes to each. For the Great and Choir Organ, fifty-two pipes in each Sett, being from G G to D la sol. The Keys of the Eechos and Swelling from C sol fa ut Cliff, to D la sol, in all being twenty-seven keys, and the Speaking Pipes in the whole Organ to be in number one thousand three hundred and thirty-nine, and the front to be gilt with Leaf Gold\*."

John Harris was probably in partnership with John Byfield; at any rate, he built most of his organs in conjunction with the latter. The connection between the two builders was still closer, by Byfield's marriage with Harris's daughter. They resided at Red Lion Street, Holborn, and were living there when they built the Doneaster organ.

According to a power of attorney, dated September 16, 1740, signed John Harris, and sent from London; "John Byfield, organ-builder, of the Parish of St. George the Martyr, but now at Doneaster," is empowered to receive the money due to Harris; and on the 2nd of October in the same year, Byfield signs a receipt for Five Hundred and twenty-five pounds, "by order and for ye use of Mr. John Harris."

# Organs built by Harris and Byfield.

- 1. St. Bartholomew the Great, Smithfield. 1720.
- 2. St. Alban's, Wood Street. 1728.

<sup>\*</sup> Communicated by Mr. W. Sheardown, the well-known bookseller of Doncaster, to the Doncaster Chronicle, some few years back.

## 3. St. Mary Redeliffe, Bristol.

"The entrance into the church is at the great west door to which you ascend by steps. The door is 8 fect in breadth and 12 high, within which is built a great stone gallery, on which is a grand magnificent organ, being in all 53 fect high from the ground to the top of the crown pannel; the great case about 20 feet square, contains one great and lesser organ; the musical part executed by Messrs. Harris and Byfield, and the whole cost £846:7s." Barrett's History of Bristol, 1789, p. 574.

### 4. St. Mary's, Shrewsbury. 1729.

There was an organ in this church in the 16th century; and on the 31st of August 1589, it was agreed at a parish meeting that—"the organs should be sould to any of the parishe for the sum of £4, if any desired the same; otherwise the said organs should presently be sould to him whosoever would give £4 or more for the same." In 1590, it appears that the Dean of Worcester, "at the motion of Mr. John Tomkins, gave that sum for them, and an additional present to the churchwardens of a communion booke worthe 7s. 4d."

- 5. St. Thomas's, Bristol.
- 6. St. James's, Bristol.

This and the previous organ are assigned to Harris and Byfield, upon the authority of Rob. Broderip of Bristol.—See the Preface to his *Organists' Journal*, 1802.

### 7. Parish Church, Doncaster. 1739.

The agreement for this organ (before cited at length) is dated March 19, 1738. The money for the organ was raised by subscription, and the Corporation agreed to pay £20 per annum for a salary, "when and so soon as a good and complete organ shall be set up."

The celebrated Snetzler was employed upon the instrument in 1758, as appears by the following receipt—"April 26, 1756. Received of Mr. Francis Caley, church-warden, the sum of Twenty pounds for Repairing and Tuneing the Organ, by me, John Snetzler."

# 8. St. Thomas Southover, Lewes, Sussex.

Traditionally said to have been made for the Duke of Chandos, and removed here from Cannons in 1749.

# 28. Christopher Schrider.

Schrider, or Schreider, a German, was a workman in the employ of Father Smith, and, previous to the year 1708, had attained a closer connection, by becoming his son-in-law\*. After the death of Smith, he succeeded to his

<sup>\*</sup> He probably married again, as we find the following entry in an old register of burials in the library of St. Peter's, Westminster:—"Mrs. Hellen Shrider died March 21, 1752, aged 65 years, and was buried ye 27, in the South Cloyster, on her father, Mr. Thos. Jennings." Jennings was a Gentleman of the Chapel Royal, and of the Choir at Westminster. Many notices of Schrider's family occur in the same volume. The present entry may refer to the wife of Christopher Schrider, jun.

business; and, in the year 1710, to the appointment of Organ-builder to the Royal Chapels. His organs, as far as we know, are not very numerous, that of Westminster Abbey being his *chef-d'auvre*.

The date of his death is not recorded, but it probably took place in 1754; as, in the following year, among the "Servants in Ordinary to the King," in Chamberlayne's *Magnæ Britanniæ Notitia*, we find "Organ Maker, Mr. Christopher Shrider, son of the *late* Mr. Schrider."

The following quibbling epitaph, upon the subject of our notice, appeared in Webb's Collection of Epitaphs, 1775 (vol. ii, p. 76):

#### ON THE CELEBRATED MR. CHRISTOPHER SHRIDER.

"Here rests the musical Kit Shrider,
Who organs built when he did bide here:
With nicest ear he tun'd 'em up;
But Death has put the cruel Stop:
Tho' Breath to others he convey'd,
Breathless, alas! himself is lay'd.
May he, who us such Keys has giv'n,
Meet with St. Peter's Keys of Heav'n!
His Cornet, Twelfth, and Diapason,
Could not with Air supply his Weasand:
Bass, Tenor, Treble, Unison,
The loss of tuneful Kit bemoan."

## Organs built by Christopher Schrider.

# 1. The Chapel Royal, St James's. 1710.

This organ was removed in 1819, and, after undergoing the necessary repairs, was purchased for the Episcopal Chapel in Long Acre, for £200, where it now remains.

# 2. St. Mary Abbot's, Kensington. 1716.

Faulkner, in his *History of Kensington*, says: this instrument was built by subscription at a cost of £500, in the above-named year.

John Harris appears to have added the swell in 1730.

#### 3. St. Martin's in the Fields. 1726.

This organ was the present of George the First, as the following note from Dr. Burney shows: "Schreider, who built the Organ of St. Martin's in the Fields, which King George the First presented to the Church upon being chosen churchwarden of the parish, soon after his Majesty's arrival in England."

Malcolm, writing in 1807, says: "The instrument has however been worn out and replaced." Londinum Redivivum, vol. iv, p. 195.

Schrider's organ is now in a church at Wotton-under-Edge, and is said not to be worn out.

# 4. Westminster Abbey. 1730.

The following memorandum occurs in a MS. book in the custody of the Precentor of Westminster: "The new organ built by Mr. Schrider and Mr. Jordan, was opened on the 1st August, 1730, by Mr. Robinson; the Anthem, Purcell's O give thanks."

From the treasurer's accounts, we learn that the cost of the instrument was £1000. Jordan's share in building this noble organ is not defined; but it was, in all probability, the swell, of which, as we shall presently show, he was the inventor.

#### 29. Thomas Schwarbrook.

This eminent artist, who was also a German, was in the employ of Renatus Harris. Early in the eighteenth eentury, he seems to have left the metropolis, and taken up his quarters at Warwiek, at which place he probably lived until his death, about the year 1750. He built many noble instruments; but his masterpiece is said to be the organ of St. Michael's, Coventry. Henry Schwarbrook was Organist of Hereford Cathedral in 1730; but it is not known if he was any relation.

## Organs built by Thomas Schwarbrook.

1. St. Saviour's, Southwark. 1703.

This organ is commonly ascribed to Schwarbrook. If so, it must be one of his earliest instruments.

Hatton, in his *New View of London*, 1708, vol. ii, p. 538, says: "The organ-case is also of oak, very lofty, elevated on 10 square pillars, the upper part whereof is adorned with 3 Fames, carved, standing in full proportion about 42 feet from the area of the isle."

2. St Chad's, Shrewsbury. 1716.

At the west-end of the Church of St. Chad, Shrewsbury, in a gallery, supported on Corinthian pilasters, was a large and remarkably handsome organ, in a case profusely adorned with carving. On the summit stood a figure of St. Chad, in his episcopal vestments. This noble instrument is said to have cost £1500, raised by subscription, towards which £100 was contributed by the Drapers' Company. It was made by Thomas Swarebrick, a German artist of considerable eminence in his day, and erected in 1716. There is a tradition that the small organ in the Collegiate Church of Wolverhampton once belonged to St. Chad's, and preceded this.

This organ was removed in 1794.

3. Trinity Church, Coventry. 1732.

This instrument cost £600, and the old organ.

4. St. Miehael's, Coventry. 1733.

This noble instrument (Schwarbrook's masterpiece), cost £1400.

It originally contained three remarkable stops—the harp, lute, and dulcimer; but. in consequence of the "difficulty of keeping the strings in tune," they were removed in 1763.

- 5. Magdalene College, Oxford. 1740.
- 6. Litchfield Cathedral.

Removed in 1789.

- 7. St. Mary's, Warwiek.
- 8. Stratford upon Avon Church.

Now removed.

### 30. The Jordans, Father and Son.

Sir John Hawkins, in his *History of Music*, tells ns—"About the year 1700, one Jordan, a distiller, who had never been instructed in the business, but had a mechanical turn, and was an ingenious man, betook himself to the making of organs, and succeeded beyond expectation. He had a son, named Abraham, whom he instructed in the same business; he made the organ for the chapel of the Duke of Chandos, at Cannons, near Edgware, and many organs for parish churches\*.

These two builders are especially deserving of our notice, as to them we are indebted for the invention of the *swell*. Among the advertisements in the original edition of the *Spectator* (Feb. 8, 1712), is the following announcement: "Whereas, Mr. Abraham Jordan, senior and junior, have, with their own hands, joynery excepted, made and erected, a very large organ in St. Magnus' Church, at the foot of London Bridge, consisting of four sets of keys, one of which is adapted to the art of emitting sounds by swelling the notes, *which never was in any organ before*; this instrument will be publicly opened on Sunday next, the performance by Mr. John Robinson. The above-said Abraham Jordan gives notice to all masters and performers, that he will attend every day next week at the said church, to accommodate all those gentlemen who shall have a curiosity to hear it.

Many of the old English organs (as we have seen by the specifications quoted) contained a department called the *Echo*. This consisted in a duplicate of the treble portion of some of the stops enclosed in a wooden box, which rendered their sound softer and more distant. Jordan's improvement was that of a sliding shutter, which was made to open and shut at the performer's pleasure, thus producing a "swelling" effect. The invention of the *swell* was well received, and Jordan soon found sufficient employment in carrying out his contrivance in many of the London organs.

With regard to the introduction of this important improvement upon the continent, Burney has some interesting passages in his *Tours*, which we beg leave to extract.

Writing in 1771, he says, "It is very extraordinary that the *swell* which has been introduced into the English organ more than fifty years, and which is so capable of expression and of pleasing effects that it may well be said to be the greatest and most important improvement that ever was made on any keyed instrument, should be utterly *unknown* in Italy; and now I am

<sup>\*</sup> Although this is the *only* biographical notice of the Jordans handed down to us, yet, strange to say, their names are omitted in the index to the new edition of Hawkins's elaborate work.

<sup>†</sup> This curious advertisement was first noticed by Malcolm (see his Londinum Redivivum, vol. iv, p. 234); it was afterwards copied into Hone's Every Day Book, and the Chronicles of London Bridge.

on this subject, I must observe, that most of the organs I have met with on the Continent seem to be inferior to ours by Father Smith, Byfield, or Snetzler, in every thing but size! As the churches there are often immense, so are the organs; the tone is indeed somewhat softened and refined by space and distance; but when heard near, it is intolerably coarse and noisy; and though the number of stops in these large instruments is very great, they afford but little variety, being for the most part duplicates in unisons and octaves to each other, such as the great and small 12ths, flutes, and 15ths; hence, in our organs, not only the touch and tone, but the imitative stops are greatly superior to those of any other organs I have met with\*."

Again, in another of his works, a few years later, he says, "Before I left England, M. Snetzler had told me that I should doubtless find swells in Berlin organs, though he was not certain that this improvement, which was English, had been adopted in other places on the Continent; for Mr. Handel, several years ago, had desired him to describe in writing, the manner in which the swell was produced, that he might send it to a particular friend in Berlin, who very much wished to introduce it there. But I enquired in vain of musical people in that city, whether they knew of any such machine as a swell, worked by pedals, in any of their organs; no such contrivance had ever been heard of, and it was difficult to explain it."

The first swell introduced into Germany appears to have been in Hildebrand's organ for the church of St. Michael, at Hamburgh, built in 1764†. Burney says, "A swell has been attempted in this instrument, but with little effect; only three stops have been put into it, and the power of crescendo and diminuendo is so small with them, that if I had not been told there was a swell, I should not have discovered it.;"

Very little more remains to be said of the Jordans. In the parish books of St. Giles's, Cripplegate, under the date 1726, "a proposal was made (and accepted) by Abraham Jordan, organist, to take the organ to pieces, the builder having left it in a very imperfect state, and repair it *gratis*, on condition of having his salary secured to him for 21 years§." This entry, we presume, relates to the younger Jordan, whose latest work appears to have been the repair of the Durham Cathedral Organ, in 1748.

<sup>\*</sup> Present State of Music in France and Italy, Svo. 1771, p. 375.

<sup>†</sup> Present State of Music in Germany, the Netherlands, and United Provinces. 8vo. second edit. 1775, vol. ii, p. 103.

<sup>‡</sup> Ibid. p. 275.

<sup>§</sup> Malcolm's Londinum Redivivum, vol. iii, p. 279.

## List of Organs built by the Jordans.

### 1. St. Michael's, Paternoster Royal. 1700.

In the Parish Clerks Remarks on London, 1732, it is said that this church has "no organ." Tradition, however, says that an instrument was given to this church by Abraham Jordan, in the year 1700.

### 2. Fulham Church, Middlesex. 1701.

An excellent instrument; it still remains in almost its original state.

## 3. The Chapel of the Duke of Chandos, at Cannons. 1712.

Handel used to perform upon this organ. When the Duke of Chandos died, the magnificent mansion being thought to require an establishment too expensive for the income of his successor, was pulled down, and the materials sold by auction in the year 1747. The organ, by the Jordans, forms an item in the sale catalogue. It is said to be now in Spa Fields Chapel.

## 4. St. Magnus the Martyr, London Bridge. 1712.

This organ was the gift of Sir Charles Duncomb. It is exceedingly interesting, as being the first instrument in which the swell was used. (See the curious advertisement, ante, p. 97.) It has been much altered and modernized by Parsons; three only of the original four sets of keys remain.

### 5. St. Bennet Fink, Threadneedle Street.

"Madam Sarah Gregory of this parish, gave four hundred pounds for building an organ, and a gallery for it; which is now perfectly finished, and built by Mr. Jordan, besides ten pounds per annum to keep it up." Paterson's Pietas Londinensis, 1714.

# 6. St. Dunstan's, Fleet Street.

Ascribed to Jordan, upon the authority of William Russell's MS. account of English Organs. It is not mentioned by Hatton in 1708, or Paterson in 1714: but is noticed in the Parish Clerks *Remarks on London*, 1732. It must therefore have been erected some time between the two last-named dates.

# 7. Parish Church, Southampton. 1731.

In the St. James's Evening Post, for Feb. 13th and 24th, 1731, the following satirical notice occurs: "Whereas it has been advertised, that an organ had been lately set up by the ingenious Mr. Jordan, in the parish church of Holy-rood, in the town and county of Southampton; this is to give notice, that the churchwardens of the same parish are willing to shew all manner of encouragement to any one who shall offer himself as organist, provided he understands nothing of his business; the candidates to be approved of by the clerk of the said parish, who, according to his profound judgment and skill in music, promises, on his part, to determine the controversy fairly and impartially in favour of him that shall perform the worst."

"N.B. If any one, who is an ingenious man in his profession (though never so strongly and with justice recommended by the ablest masters in the kingdom), should, notwith-standing this advertisement, presume to offer himself, he must expect to be rejected: it being fully resolved that none but bunglers, or those who know the least of their business, shall be entitled to the place. The latter are desired to meet in the said town of South-ampton, on Lady-day next, being the 25th March, 1731, where they may be assured to find a very kind reception and a suitable encouragement."

8. St. Luke's, Old Street. 1733.

A MS. note by Pennant (the London Historian) ascribes this organ to Jordan. The church was consecrated by Dr. Hare, Dean of St. Paul's and Bishop of Chichester, Oct. 18, 1733. The organ was presented to the parish by Mr. Buckley, an eminent brewer of Old Street.

- 9. St. Paul's, Shadwell.
- 10. The Portuguese Chapel.
- 11. St. Antholin's, Watling Street.
- 12. The Abbey Church, Bath.

## 31. Richard Bridge.

This artist enjoyed eonsiderable celebrity, and it is to be regretted that nothing is known of his biography. According to an advertisement in the *General Advertiser*, for Feb. 20, 1748, "Bridges, organ-builder," probably the same person, then resided in Hand Court, Holborn. We learn ineidentally, from a note in Burney's *History*, that he died before 1776.

## Organs built by Richard Bridge.

- 1. St. Bartholomew the Great. 1729.
- 2. Christ Church, Spitalfields. 1730.

This is esteemed the maker's best instrument. Its original cost was £600, not half its value. In point of number of pipes and stops, it is one of the largest parish organs in London.

- 3. St. Paul's, Deptford. 1730.
- 4. St. George's in the East. 1733.
- 5. St. Anne's, Limehouse. 1741.
- 6. St. Leonard's, Shoreditch. 1757.
- 7. Enfield Church, Middlesex. 1753.
- 8. Eltham Church, Kent.

# 32. Organs built by Byfield, Jordan, and Bridge, conjointly.

In consequence of the many new churches that were erected at the commencement of the last century, an equal number of organs were required, which induced many persons who were totally unskilled in the art and mystery of voicing organ-pipes to become builders. To prevent, therefore, the sad consequences which must naturally follow, a coalition was formed between the three eminent artists of the day, Byfield, Jordan, and Bridge; who undertook to build organs at a very moderate charge, and to apply their united talents to each. The result of which was a fair, though moderate, compensation to themselves, and superior instruments to our churches.

The writer regrets that he can name only three instruments in which the joint efforts of these eminent men were united.

1. St. Dionis Back-Church, City.

Hatton, whose New View of London was published in 1708, says, "this church has no organ." Paterson, in 1714, is silent on the subject. But the Parish Clerks Remarks on London, 1732 (p. 57), notices an organ in this church. It was therefore set up between the years 1714 and 1732.

This magnificent instrument is in its original state.

2. Yarmouth Church, Norfolk. 1733.

An instrument celebrated for its many beauties.

3. St. George's Chapel, Yarmouth.

## 33. John Byfield, Jun.

This is the next builder that eomes under our notice. Nothing whatever is known of his biography; in faet, he is not named, as far as we can learn, by any writer upon the subject of organs, or organ building. The works of the two Byfields pass current under one head.

According to a MS. Note of Dr. Benjamin Cooke's, he died in 1774.

# Organs built by John Byfield, Jun.

1. The Chapel of Greenwich Hospital.

Destroyed in the fire which consumed the chapel in 1779.

- 2. St. Botolph, Bishopsgate. 1750.
- 3. Christ Church Cathedral, Dublin. 1751.
- 4. St. Mary's, Rotherhithe. 1764.
- 5. Grantham Church, Lincolnshire. 1767.
- 6. St. John's College, Oxford. 1768.
- 7. Magdalen College Hall, Oxford.
- 8. Berwick Street Chapel, Soho. 1768.
- 9. The Theatre, Oxford. 1768.
- 10. Barking Church, Essex. 1770.
- 11. Newbury Church, Berks. 1770.
- 12. St. Mary's, Islington. 1771.
- 13. Reading Church, Berks. 1771.

The six last-named organs were built jointly with Green.

# 34. Messrs. Glyn and Parker.

The above names are new in the annals of organ-building, as their eelebrity was rather of a local character. They resided at Salford, near

Manchester, and built a number of instruments for Laneashire and the neighbouring counties. One organ, that of Poynton church, attracted the notice of Handel, who is reported to have been so pleased with it, that he employed Parker to creet the famous instrument for the Foundling Hospital\*.

The following is a list of organs by these builders.

# Organs built by Glyn and Parker.

- 1. Collegiate Church, Manchester. 1730.
- 2. St. Ann's Church, Manchester.
- 3. St John's Church, Manchester.
- 4. Bury Church, Laneashire.
- 5. Poynton Church, Laneashire. 1748.
- 6. Chapel-on-the-Frith, Derbyshire.
- 7. Prestbury Church, Gloueestershire.
- S. Leek Parish Church, Staffordshire.
- 9. Foundling Hospital, London. 1749.
- 10. All Hallows the Great, Thames Street. 1749.

#### 35. John Snetzler.

This truly eminent builder was born at Passau, in Germany, about the year 1710, where several of his organs are still to be seen. He acquired some fame by his restoration of the Cathedral Organ in that city, and was afterwards induced to settle in England. After building several excellent organs, he creeted the noble instrument at Lynn Regis, in Norfolk, being recommended to the Corporation of that town by Dr. Burney. The double Diapason and Dulciana stops in this organ were novelties which attracted attention, and fully established his fame in this country.

Snetzler had but an imperfect pronunciation of the English language, which gave him, like many foreigners, a very quaint way of expressing himself. Two stories are current of his peculiarities in this respect. One was,

<sup>\*</sup> Dr. Burney, in his "Sketch of the Life of Handel," prefixed to his Account of the Commemoration, 4to. 1785, says, "The organ in the chapel of this hospital was a present from Handel." But how are we to reconcile this statement with the following notice in the European Magazine for February, 1799?—"Handel did not give the organ to the Foundling Hospital. It was built at the expense of the charity, under the direction of Dr. Smith, the learned Master of Trinity College, Cambridge, who added demitones, &c. and some of the niceties not occurring in other organs." Handel conducted the performance at the opening of this organ in 1749.

on the occasion of the erection of his new organ at Halifax, in Yorkshire. Wainwright (afterwards Dr. Wainwright, and organist of the Collegiate Church, Manchester) and Herschel (subsequently known as the great Astronomer) were amongst the candidates for the situation of organist. The former so annoyed Snetzler by his rapid playing, that he paced the church, exclaiming "He do run over de keys like one cat, and do not give my pipes time to speak." He also told the Churchwardens of Lynn, upon their asking him what their old organ would be worth if repaired, "If they would lay out a hundred pounds upon it, perhaps it would be worth fifty."

Snetzler lived to a very advanced age, and died either at the end of the last, or the commencement of the present century. He is said to have saved sufficient money to return and settle in his native country, which he accordingly did; but, having been so long accustomed to London porter and English fare, he found in his old age that he could not do without them, so he came back to London, where he died.

## Organs built by Snetzler.

- 1. Finchley Church, Middlesex. 1749.
- 2. St. Paul's, Sheffield. 1750.
- 3. St. Mary's, Hull, Yorkshire. 1750.
- 4. St. Margaret's, Lynn Regis, Norfolk. 1754. Built under the superintendence of Dr. Burney, at a cost of £700.
- 5. Christ Church, Broadway, Westminster. 1760.

This organ is said to have been originally built for the Duke of Bedford.

- 6. Leatherhead Church, Surrey. 1760.
- 7. Halifax Church, Yorkshire, 1766.
- 8. Louth Church, Lincolnshire. 1769.
- 9. Beverley Minster, Yorkshire. 1769.

This organ was opened with the performance of two Oratorios, Sept. 20 and 21, 1769.

- 10. Richmond Church, Surrey. 1770.
- 11. Edmonton Church, Middlesex. 1772.
- 12. St. Martin's, Leicester. 1774. A remarkably fine instrument.
- 13. Scarborough Church, Yorkshire. 1780.
- 14. Pontefract Church, Yorkshire.
- 15. Chesterfield Church, Derbyshire.
- 16. St. Mary's, Nottingham.
- 17. Huntingdon Church.

- 18. Rotherham Church, Yorkshire.
- 19. Whitehaven Church, Cumberland.
- 20. St. John's (anciently St. Augustine's), Hackney.
- 21. St. Clement's, Lombard Street, City.
- 22. St. Margaret's Chapel, Bath.
- 23. St. Peter's College, Cambridge.

This instrument is remarkable for having the Echo (the predecessor of the swell) remaining.

24. The German Lutheran Chapel in the Savoy.

According to the late Charles Wesley, this was the first instrument in this country provided with a pedal clavier.

25. The German Calvinist Church, Savoy. Presented by the builder.

## 36. Messrs. Crang and Hancock.

Crang was a Devonshire man, and, after settling in London, became a partner with Hancock, a good voicer of reeds. Hancock added new reeds to many of Father Smith's organs. Crang appears to have been chiefly employed in altering the old cchos into swells. He made this improvement in the organs of St. Paul's Cathedral; St. Peter's, Cornhill; St. Clement Daues; &c.

The only organs of these builders known to the writer, are St. John's, Horsleydown, built in 1770, and a fine instrument at Barnstaple.

#### 37. Samuel Green.

Although generally considered a cotemporary of Snetzler, this eminent artist was not born till 1740; thirty years after the birth of the former. In all probability he was brought up in the establishment of Byfield, Bridge, and Jordan, as in the earlier part of his career he was in partnership with the younger Byfield. He seems to have been greatly patronized by King George the Third, and, in consequence, to have been employed in all parts of the kingdom.

The organs built by Green are characterized by a peculiar sweetness and delicacy of tone, entirely original; and, probably, in this respect he has never been excelled.

"We possess more Cathedral and Collegiate organs of this builder's construction than of any other; and, although patronized as he was by his Majesty George the Third, and long at the head of his profession, this admirable artist scarcely obtained a moderate competency. His zeal for the mechanical improvement of the organ consumed much of his valuable time in experimental labours, which to him produced little or no emolument; and

it is painful to know that a man so eminent in his profession should not, at his decease, be able to leave even a slender provision for his family\*."

The newspapers of the day record "Mr. Samuel Green, organ-builder to the King, died at Isleworth, Sept. 14, 1796, at the age of 56."

The following list of Green's organs is taken *verbatim* from the *Gentle-man's Magazine* for June, 1814, as extracted from the Builder's own Account Book. We have added a few dates, &c. in brackets.

# Organs built by Samuel Green.

## Cathedral and Collegiate Organs.

- 1. Canterbury (1784).
- 2. Wells (1786).
- 3. Windsor (1790).
- 4. Litchfield (1789).
- 5. Salisbury (1792).
- 6. Rochester (1791).
- 7. Bangor (1779).
- 8. York (restoration only).
- 9. Cashel (1786).
- 10. New College, Oxon (restoration only).
- 11. Trinity College, Dublin.
- 12. Winchester College (1780).

# London Organs.

- 13. St. Katherine's Hospital (1778).
- 14. St. Botolph, Aldersgate Street.
- 15. St. Peter-le-Poor.
- 16. St. Mary at Hill.
- 17. St. Michael's (Cornhill).

<sup>\*</sup> Christian Remembrancer, Jan. 1834. One of a series of excellent papers on old organs and organ-builders.

- 18. St. Olave's, Hart Street (1781).
- 19. Broad Street Chapel, Islington.
- 20. Magdalen Chapel.
- 21. Freemasons' Hall.

## Local Organs, &c.

- 22. St. Petersburg.
- 23. Greenwich Hospital (1789).
- 24. Sleaford, Lineolnshire.
- 25. Manehester (St. Thomas Ardwick, 1787).
- 26. Helston, Cornwall (1799).
- 27. Walsal, Staffordshire.
- 28. Wrexham.
- 29. Wycombe.
- 30. Nayland, Essex.
- 31. Wisbcaeh, Cambridgeshire (1789).
- 32. Cireneester.
- 33. Maeclesfield.
- 34. Stockport (St. Peter's, 1788).
- 35. Bath.
- 36. St. Michael's.
- 37. Tunbridge.
- 38. Loughborough.
- 39. Tamworth.
- 40. Walton.
- 41. Leigh.
- 42. Chatham.
- 43. Bolton (Lancashire, 1795).
- 44. Crambourne, Cornwall.
- 45. Aberdeen Episeopal Chapel.
- 46. Kingston Church, Jamaiea.

## 38. John Avery.

Very little is known of this builder. He is said to have been a dissipated character: he was certainly an excellent workman. The dates of his organs range between 1775 and 1808. He died in the latter year, during the time he was engaged in finishing the organ of Carlisle Cathedral, his last work.

# Organs built by Avery.

- 1. St. Stephen's, Coleman Street, City. 1775.
- 2. Croydon Church, Surrey. 1794. Avery considered this instrument his best work.
- 3. Winchester Cathedral. 1799.
- 4. Christ Church, Bath. 1800.
- 5. St. Margaret's Church, Westminster. 1804.
- 6. King's College Chapel, Cambridge. 1804.
  The case of this organ is of the time of Henry VIII, the date of the stalls.
- 7. Seven Oaks Church, Kent. 1798.
- 8. Carlisle Cathedral, 1808.

## 39. The Englands, Father and Son.

These two organ-builders are generally confounded. George England flourished between the years 1740 and 1788, and George Pike England (his son) between 1788 and 1814.

The elder England built many noble organs, a few of which we shall enumerate.

# Organs built by George England.

- 1. St. Stephen's, Wallbrook. 1760.
- 2. Gravesend Church, Kent. 1764.
- 3. Ashton-under-line, Lancashire. 1770.
- 4. St. Michael's, Queenhithe. 1779.
- 5. St. Mary, Aldermary. 1781.

The last two organs were built in conjunction with Hugh Russell.

- 6. St. Matthew's, Friday Street.
- 7. St. Mildred's, Poultry.
- 8. German Lutheran Church, Goodman's Fields.
- 9. The Chapel of Dulwich College.

With regard to the son, our information is more satisfactory; the following list of organs built by him being copied from his own account book, kindly lent to the writer by Mr. Hill, the eminent organ-builder.

## Organs built by G. P. England.

- 1. St. George's Chapel, Portsmouth Common. 1788.
- 2. St. James's Church, Clerkenwell. 1790.

This organ cost £500 and the old organ, which was valued at £105. It was afterwards sold by England to the parish church of Beccles, Suffolk, for £220.

- 3. Fetter Lane Chapel. 1790.
- 4. Warminster Church, Wiltshire. 1791.
- 5. The Adelphi Chapel. 1791.
- 6. Gainsborough Church, Lincolnshire. 1793.
- 7. Newington Church, Surrey. 1794.
- 8. Blandford Church. 1794.
- 9. Carmarthen Church, South Wales. 1796.
- 10. St. Margaret's, Lothbury. 1801.
- 11. The Sardinian Chapel. 1802.
- 12. Newark Church, Nots. 1803.
- 13. Parish Church, Sheffield. 1803. This organ cost £770.
- 14. St. Philip's, Birmingham. 1805.
- 15. St. Martin's Outwich. 1805.
- 16. Hinckley Parish Church. 1808.
- 17. Stourbridge Church. 1809.
- 18. Richmond Church, Yorks. 1809.
- 19. High Church, Lancaster. 1809. This organ cost £672.
- 20. Shiffnall Parish Church. 1811.
- 21. Ulverstone Parish Church. 1811.
- 22. St. Mary's Chapel, Islington. 1812.

# 40. Progress of Organ Building in Germany.

During the eighteenth century, Germany was especially prolific in large organs, and most of these instruments still remain as honourable memorials of the talents of their builders.

### 41. Andreas Silbermann.

Amongst the most renowned organ-builders that the world has produced are the celebrated Silbermann family. The founder of this race of talented men was Andreas Silbermann, born at Frauenstein, in Saxony, in 1678. The particulars of his life are not recorded; but, during the space of twenty-seven years in which he flourished, he built thirty organs. He died in 1733.

# Organs built by Andreas Silbermann.

- 1. St. Nicholas, Strasburg. 1707.
- 2. Convent of St. Margaret, Strasburg. 1709.
- 3. Protestant Church of St. Pierre, Strasburg. 1709.
- 4. Mauerstein, Lower Rhine. 1710.
- 5. Basle Cathedral. 1711.
- 6. Convent of Guillelmines, Strasburg. 1712.
- 7. Oberenheim. 1713.
- 8. Giedertheim. 1715.
- 9. Strasburg Cathedral. 1716.
- 10. St. Etienne, Strasburg. 1716.
- 11. Andlau, 1717.
- 12. The Madeleine Convent, Strasburg. 1718.
- 13. Ebersheimmünster, 1718.
- 14. St. Leonard's, Basle. 1718.
- 15. Hanau. 1719.
- 16. Grendelbach. 1719.
- 17. Lautenbach, Upper Rhine. 1719.
- 18. St. Jean, Weissemburg. 1720.
- 19. St. Leonard's, near Oberenheim. 1721.
- 20. Altenheim, near Offenburg. 1722.
- 21. Kolbsheim. 1722.
- 22. Church of the Dominicans, Colmar. 1726.
- 23. St. Guillaume, Strasburg. 1728.
- 24. Bischweiter. 1729.
- 25. Altorf, Lower Rhine. 1730.
- 26. Ebersheimmünster, Lower Rhine. 1731.

- 27. Kænigsbrük Abbey, Lower Rhine. 1732.
- 28. Hospital Church, Colmar. 1732.
  - 29. Protestant Church, Colmar. 1733.
  - 30. Rosheim. 1733.

## 42. Gottfried Silbermann.

Gottfried Silbermann, brother of the preceding, was born at Frauenstein, in 1684. After remaining some years in the workshop of his brother, he went into France, where, we are informed, "he worked and resided many years\*." He was the inventor of the "Clavecin d'amour," and one of the earliest makers of the pianoforte. He died in 1754, during the period in which he was engaged on the Royal Catholic Church Organ at Dresden, which noble instrument was completed by his nephew, Jean Daniel Silbermann.

## Organs built by Gottfried Silbermann.

- 1. Freiberg Cathedral. 1714.
- 2. St. Pierre, Frieberg. 1720.
- 3. The Royal Church of the Evangelists, Dresden. 1720.
- 4. St. Sophia, Dresden. 1722.
- 5. Church of Notre Dame, Dresden. 1736.
- 6. Poenitz, near Altenburg. 1737.
- 7. The Royal Catholie Church, Dresden. 1754.

### 43. Johann Andreas Silbermann.

This branch of the Silbermann family was the eldest son of Andreas, and consequently the nephew of the last named. He was born at Strasburg, where his father resided, in 1712. He enjoyed considerable reputation as an organ-builder, and was beloved by his fellow citizens for his social qualities. He died at Strasburg in 1783, with the title of Member of the Council of that city, leaving two sons, one of whom, Johann Josias, afterwards distinguished himself as a maker of musical instruments.

<sup>\*</sup> Burney tells us that "The French organ-builders are much esteemed by the Germans themselves, for the simplicity of their movements and the mechanism of the whole."—Tour in Germany, vol. i, p. 21. During the period that Gottfried Silbermann studied in France, the best builders were Charles Dallery and Francois Clicquot. These builders chiefly worked together, and among their organs we may name those in the churches of St. Gervais, St. Nicolas des Champs, St. Méry, St. Sulpice, the Chapel at Versailles, and the Abbey of Clairmarais. Pierre Dallery built the organ of Notre Dame, and those in the Churches of St. Lazarre and St. Suzanne, at Paris. A descendant, Pierre Francois Dallery, was living as late as 1833.

Johann Andreas Silbermann built fifty-four organs, the most important of which are:

- 1. St. Thomas, Strasburg.
- 2. The College of Colmar.
- 3. St. Etienne, Basle.
- 4. St. Theodore, Basle.
- 5. The Abbey of St. Blaize in the Black Forest.

#### 44. Johann Daniel Silbermann.

This builder, the last of the family whom we shall particularize, was the second son of Andreas. He was born in 1717, at Strasburg, and studied organ-building under his uncle Gottfried, at Dresden. Upon the death of the latter, in 1754, whilst constructing the noble organ of the Royal Catholic Church at Dresden (as we have before mentioned), he succeeded to his uncle's business. He died at Leipzig, in 1766.

#### 45. Cotemporaries and Successors of the Silbermanns.

The family just mentioned had many cotemporaries and successors, some few of which, if not equally eminent, are deserving of a notice in these pages. Zacharius Thessner built, in 1702, the great organ in the Cathedral of Merseberg: it had 68 registers, 5 manuals, and pedal. Adam Sterzing built, in 1707, a noble organ for the Court Church at Eisenach: it had 58 registers, 4 manuals, and pedal. Eugenius Casparini (then an aged man), in conjunction with his son Adam Horatius, built, in 1703, an organ for the Church of St. Peter and St. Paul at Göerlitz, in Upper Lusatia: it had 82 registers, 57 of which were whole stops. Henrich Herbst and his son built, in 1718, an organ at Halberstadt, with 74 registers, 3 manuals in front, 2 manuals at the sides, and pedal.

Michael Engler of Silesia, who flourished between 1688 and 1760, built many noble instruments; amongst which we may instance those in the churches of Saint Salvator and Saint Elizabeth at Breslau. He was succeeded by his son and grandson, Theophilus Benjamin, and Jean Theophilus. The latter flourished between 1775 and 1822.

Johann Michael Roder, of Berlin, built the great organ in the Church of St. Mary Magdalen, at Breslau. It was erected in 1726. Then we have Joachim Wagner, who, in 1725, built the instrument in the Garrison Church at Berlin, of which Dr. Burney has left us a curious description, in his German Tour.

The Hildebrands—Zacharie, who flourished between 1680 and 1743, and Johann Gottfried, his son—were eminent artists. The latter built the noble organ in St. Michael's Church, Hamburg, in 1762, at an expense of £4000.

But the two best-known organ-builders of the latter half of the eighteenth century, are Johann Gabler of Ulm, and Christian Müller of Amsterdam; the former, by his glorious organ in the Benedictine Abbey of Weingarten; the latter, by the "world-famed" Haarlem Organ.

# THE ORGAN,

Α

COMPREHENSIVE TREATISE, &c.

BY

EDWARD J. HOPKINS.



#### ADDENDUM TO SUBSCRIPTION LIST.

Baker, J. A. Esq.—Organist of St. Luke's Church, Birmingham.

Buckton, George, Esq.—Leeds.

Church, George, Esq.—Organist of the Parish Church, Wymondham.

Holdich, Mr. G. M.—Organ-builder, 4, Judd Place East, King's Cross, New Road. Lydden, John, Esq.

Lonsdale, Mr. C.—26, Old Bond Street. 2 copies.

Meadowcroft, J. Esq.—23, Wilton Street, Oxford Street, Manchester.

#### ERRATUM.

In the title of addition to Mr. Cooper's name, read F.R.A.S. (Fellow of the Royal Astronomical Society), instead of F.R.S.A.—viz.

Cooper, Joseph Thomas, F.R.A.S.—Organist of St. Paul's Church, Islington.



### THE ORGAN.

#### PRELIMINARY OBSERVATIONS.

THE Organ, as it is usually met with in cathedrals and large churches, is divided interiorly into four principal parts. The chief of these divisions or *departments* is that styled the Great Organ; the others are the Pedal Organ, the Choir Organ, and the Swell Organ.

These several departments are, in one sense, so many separate and distinct organs. This is the case so far, that each has its own sound-board, stops, clavier, &c.; but the whole of them being generally enclosed in one case (the choir organ sometimes excepted), with the different claviers so arranged as to be under the control of one performer, they are thus made to assume the appearance of one vast and comprehensive instrument. The choir organ is occasionally enclosed in a separate case, placed in front of and below the chief one: as at St. Paul's Cathedral; St. Sepulchre's, Snow Hill; St. Lawrence, Jewry; &c.: though not so arranged as to give it the appearance of being a detached portion, but harmonizing with the main body of the instrument; so that, when viewed from the church, the two present one handsome and noble façade.

The several departments above named have, generally speaking, certain fixed situations allotted to them in the organ. For instance:

The Great Organ is generally placed immediately behind the front pipes of the instrument (see fig. 1); many of which "show pipes" form a portion of those belonging to that department.

The Choir Organ, when not located "in front," is stationed behind and at a convenient distance from the great organ (fig. 2), a foot-way (marked 3, in the general section) about a foot wide, being left between the two, as a pathway for the convenience of tuning, &c. called the passage-board.

The Swell Organ is placed above the choir organ, when the latter is not situated in front (fig. 4). In small instruments, where the choir organ is altogether omitted, the swell is often stationed over the great organ.

The Pedal Organ is either placed, in an entire state, behind and parallel with the others (as shown in fig. 5), or it is divided, and a part arranged on each side of them. When there is no choir organ, or when that department appears in front, the pedal organ is frequently stationed to the rear of the great organ (occupying the usual position of the choir organ), with the swell above.

The structural portions of an organ are classed into three great divisions; namely, (1) the machine by which the wind is collected for the production of sound, the channels through which it is conducted to the various departments of the instrument, and then redistributed among the numerous pipes of each; (2) the mechanism by which the several departments are individually or conjointly brought into use, and their stops brought under perfect control; and (3) the sound-producing parts—namely, the pipe-work.

These several divisions, together with the case, constitute what is known, par excellence, as "THE Organ;" the construction and operation of which form the subject-matter of the following chapters.

#### DIVISION L

#### THE EXTERIOR OF THE ORGAN.

#### CHAPTER I.

#### THE ORGAN-CASE.

Its nature and use, and the materials of which it is formed.

I. Most organs are enclosed, at the back, sides, and front, which it is formed.

In a case of wood—a covering of the greatest service to the instrument, as it protects the inechanism and pipe-work from external injury, and renders the working of its movements, when in operation, less audible. The case, moreover, is of great utility in rendering the instrument an ornament to the church, by bringing its appearance into perfect keeping with the other carved wood-work of the edifice. The organ-case is usually constructed either of oak, mahogany, walnut-tree wood, or of deal. When made of the lastmentioned material, it is either grained to imitate one of the fore-mentioned woods, or it is stained. The case to the choir organ, in the chapel of Magdalen College, Oxford, is of stone.

The general structure of the organ-case, and the means of ingress.

2. The organ-case is usually divided into two stages, either by an impost or by a bold horizontal moulding; and, vertically, into numerous compartments, by pilasters or by buttresses. The compartments below the impost are usually filled in with panelling work all round, except in front, towards the centre, where the claviers are, generally speaking, located. The upper divisions are also similarly filled in with panelling work, except where intended to receive pipes. Some of the panelled parts are hung on hinges, or are otherwise made moveable, so as to form entrance doors, for the purpose of tuning, or for facilitating admittance to the mechanism and other work.

3. The front of the organ-case above the impost is generally formed into a series of open-work compartments—an arrangement that is so far advantageous to the tone of the instrument, that it admits of many of the pipes of some of the chief stops being placed in these openings, whereby the predominance of their tone is more effectually secured; the interstices between the bodies and feet of the pipes being calculated to assist the egress of the sound produced by those inside.

The general arrangement of the front pipes.

4. The front pipes never succeed each other according to the sound they produce in the musical scale, like the keys, semitonally; for, in that case, all the large ones would be on one side, and the small on the other, like the strings of a harp; but they are placed so as to

present a symmetrical appearance.

5. The first and most obvious arrangement is into groups of large and small pipes, forming separate compartments. The admixture of these large and small compartments constitutes one of the principal features in the design.

The various figures in which the front pipes are arranged.

6. Next, the pipes occupying the large and small compartments are arranged according to many different plans, and in varied forms, with the view to gaining greater contrast and ele-

gance in the appearance of the organ.

7. The chief of these diversified figures, and the names by which they are known, are as follow:

8. Pipes that are placed in a projecting semicircle are said to form *Towers*. (See a a, fig. 6.) Examples of this kind of pipe-arrangement occur in the graceful cases of the organs at Whitehall Chapel;

St. Clement's, Strand; and indeed in most organs.

9. Pipes standing in an angle are termed *Pointed Towers* (a a, fig. 7); specimens of which may be seen at St. Sepulchre's, Snow Hill; and at St. Nicholas's, Newcastle-on-Tyne.

10. Groups of pipes inclining inwards, semicircularly, are said to form *Niches* (b, fig. 3); of which an example occurs in the centre of the case of the organ at St. Philip's, Stepney.

11. A Breasted compartment is that of which the middle part is a little rounded, forwards; as shown at a, in fig. 9. Examples occupy the centre of the handsome organ cases at St. Mary's, Islington; and St. John's, Horsleydown.

12. If the pipes are placed curvilinearly, the compartment is said to be of the Ogee form. (See fig. 10,) Of this kind of pipe-arrangement, examples exist at St. Olave's,

Southwark; and at St. Helen's, Bishopsgate.

13. When the pipes are continued in a straight line, they are called *Flats*. (See *figures* 11, 12, 13, 14; also b b, figs. 6 and 7.)

14. Some organ-cases have what are denominated *Flat Towers*; of which very fine examples occur at St. Paul's Cathedral. Such are formed by arranging the pipes, that in some organ-cases stand in a semi-circle or in an angle, parallelwise. Others, again, have what are called "circular ends;" i. e. the case, instead of being flanked at each side by a tower, has a curved compartment, resembling half a circular tower, furnished with a greater number of narrow pipes. The organ at Exeter Hall has circular ends.

The arrangement of the front pipes are generally planted in tonal succession in each half of the case; that is to say, those which occur in the compartments to the left of the centre, give one or other of the following six sounds; namely, C, D, E, F sharp, G sharp, or A sharp: the

pipes occupying those to the right, sounding either C sharp, D sharp, F, G, A, or B. This alternate distribution may readily be discovered by, first, drawing the open diapason, or whatever other stop may have most of its pipes appearing "im prospect" (as the Germans have it), and then slowly playing the chromatic scale in its ascending form; when the sounds will be observed to proceed first from the left, and then from the right hand side of the front. Occasionally, however, the order is reversed.

- 16. As to the precise *situation* in the front where these alternate speaking pipes will be found, this depends on the design of the case. It will, however, generally be found that the pipe which on the second side *replies* to a particular one on the first, will occupy the corresponding position *on* the second side. Thus, supposing the CC pipe of the open diapason to stand in the middle of the tower on the left side of the case, the CC sharp pipe will probably be in the centre of the similarly situated tower on the right: the DD and EE pipes will stand one on each side of the CC; while those giving DD sharp and FF will appear immediately on the right and left respectively of the CC sharp pipe.
- 17. The alternate assortment of the front pipes materially facilitates the power of giving to the organ a symmetrical appearance. The CC sharp pipe differs so slightly from the CC in its diameter (in a decreasing ratio), that the eye fails, at a distance, to discover the deviation; hence the two pipes—as indeed any other two, of which the sounds are only separated by a semitone—are placed in corresponding positions, without the slightest ill, but, on the contrary, good, effect resulting.
- 18. The necessary deviation in *length*, however, would be sooner detected; hence both pipes are made to agree in this respect; but the one that is to give the higher sound has an opening cut in the back, at the top, which produces the same influence as slightly shortening the pipe.
- 19. The next pipe on the "CC side," FF sharp (supposing the towers already spoken of to contain three pipes each only), will probably appear in another compartment; perhaps in a smaller tower, or in a flat, or in one of the ogee or the breasted form; and so on. When the pipes become too small to appear externally, the few remaining ones are disposed inside, and members of other stops brought into prominence, if more pipes are required in sight to complete the design.
- 20. The pipes in the flats are arranged in a far greater number of different ways than are those in the towers. In compartments of the fore-mentioned kind, the largest pipes are sometimes placed outside, and the small ones in the middle, as represented in *fig.* 11:

## 

at others, the small ones occupy the extreme positions right and left, and the large ones the centre (fig. 12):



while occasionally they are disposed in a graduated series; the largest being at one end, and the smallest at the other; as in figs. 13 and 14:

Of the decoration of the front pipes of most English organs the front pipes.

In former times, the front pipes were more commonly diapered; i. e. figured in various colours; and many of Smith and Harris's organs were so ornamented. That, by the former builder, at Finedon, in Northamptonshire, still retains its original embellishments of this nature: so also does the old organ in the chapel of Christ College, Cambridge. A few instances have of late occurred of the revival of this kind of pipe-decoration. The instruments in Westminster Abbey and the Temple Church have their front pipes both gilded and diapered.

22. The front pipes of the organs in Holland, some parts of France, and most of the German states, being frequently made of pure tin, are simply polished or burnished, giving them the handsome appearance of bright silver.

#### DIVISION 11.

#### THE WIND-COLLECTING PORTION OF THE ORGAN.

#### CHAPTER II.

#### THE BELLOWS.

Their use. 23. The use of the bellows is to collect and enclose a quantity of atmospheric air; and, after compressing it, to propel it through the various windchannels up to the pipes. These are, in fact, the lungs of the organ: without their aid, it would be but a voiceless machine.

The different kinds of organ bellows ordinathe oldest; their names; and why so ealled.

24. There are two kinds of bellows to be met with in organ behowsordinarily met with; which church organs; namely, diagonal and horizontal bellows. these two varieties, the diagonal is the older kind; previous to the introduction of which, organ bellows were made very similar to those still used in smith's forges. But such primitive


machines, from being made chiefly of leather, were liable to frequent injury from the friction to which their folds were unavoidably subject whenever they were worked; and their constantly recurring unsoundness from this cause, gradually led to the adoption of a more durable material in their construction. Thus wood came to be used in lieu of leather for the folds (with leather for the hinges), which substitution rendered the bellows far less liable to destruction from attrition. Of this more substantial kind of bellows, specimens are still occasionally to be seen in the small cabinet organs of Father Smith. In the church organs, however, of that celebrated artist, and also in those of his worthy competitor, Harris, only diagonal bellows-the kind represented in fig. 15—were used. These bellows are said by some to have been first introduced by Lobinger, of Nuremberg, in 1570. According to other accounts, they were invented by Hennings, of Hildesheim, in the seventeenth century. At any rate, they were of German origin.

25. The diagonal bellows continued to be almost exclusively\* employed in church organs till towards the latter part of the last century, when a new kind was brought forward in this country, which was considered, by the English organ-builders of the time, to present so many advantages over that previously used for church-work, that,


<sup>\*</sup> It will have been seen, from one of the illustrations in the historical introduction, that a reservoir similar to the upper member of a horizontal bellows was known in the time of Praetorius, 1620; but, being made without a feeder, it was the same in principle as the old diagonal bellows; i. c. it was inflated by raising the top. Although somewhat similar to the modern bellows in appearance, it was as different in the method of its working, as it was inferior in actual utility.

soon after the commencement of the present century, the construction of bellows of the diagonal species was entirely abandoned. The fine organ in St. Margaret's Church, Westminster (built by Avery, in 1804), appears to be one of the latest instruments made with bellows of the single or diagonal kind.

- 26. At the present time, the horizontal is the only description of bellows made by English and French organ-builders; though, in Germany, the diagonal still remain in greatest favour.
- 27. The names given to the two kinds of organ bellows sufficiently indicate the distinctive principle upon which each operates. The diagonal—or, as it has sometimes been denominated, the wedge-shaped bellows—is so called because, when blown, the top rises diagonally; that is to say, one end ascends while the other remains stationary; thus giving to the bellows a wedge-shaped appearance (as shown in the following engraving) when charged with air.



28. A horizontal bellows (fig. 16), on the contrary, preserves its level surface in all stages of its operation, whether it be wholly distended, quite empty, or at any intermediate point between the two extremes. Hence its distinctive appellation.



Particulars concerning the diagonal bellows.

29. Diagonal bellows are, as already mentioned, seldom, if ever, now made in England. Numerous specimens, however, still exist in our old town and village church organs. Of such kind

of bellows, two, at the least, are found in even the smallest church organs; one for supplying the instrument while the other is being replenished. As, during the process of inflation, the top of the bellows is gradually raised, and therefore the weights on its surface exercise no compressing influence on the contained air, it follows that, for the time being, the wind within that bellows can be of no greater density than the air without, and therefore is of no service in supplying the organ. A practical proof of this fact may be obtained, where there are two diagonal bellows, by pressing the handles of both down at once, when the organ will become for the time quite silent. Hence arises the necessity for a second bellows, to supply wind while the first is being charged, and vice versá.

Their number. 30. And while small and moderate-sized organs have from 2 to 6 diagonal bellows, many large instruments have 8, 10, 12, or even as many as 14. Thus the Meresburg organ has 6 bellows; that at Wismar, 8; the organs at Frankfort and Haarlam, 12 each; while that at St. Sulpice, in Paris, had, until lately, 14 bellows. The organ in St. Paul's Cathedral had originally 4 large diagonal bellows, measuring 8 feet by 4.

Arrangement. 31. The several diagonal bellows are usually placed in a row, side by side, sometimes outside the case; or, when too numerous to be so disposed, they are often ranged in two rows, one over the other. In the latter case, the upper row of bellows is generally furnished with ropes, by means of which the same blower is enabled to work both rows. The bellows of the organ at the church of St. Ouen, at Rouen (12 in number), are thus situated and worked. The blower depresses the handles of the lower row of bellows as he leisurely walks across the platform behind the organ from one side to the other, and draws down the ropes of the upper row as he returns. In many of the Continental organs, the bellows are inflated by means of treadles instead of handles. The illustration numbered 15 represents a bellows worked in this manner. The treadles lie in a row near the ground, and the blower, stepping from one treadle to another, by his weight lowers each of them, and thus the bellows are distended.

32. The wind supplied by the several diagonal bellows is received into a chief or head canal, consisting of a long square and (generally) horizontally disposed wooden tube; from which canal it is distributed among the several sound-boards, through smaller tubes shooting forth from it and traversing the organ in all necessary directions. Such are the general arrangements for collecting and compressing, for receiving and distributing, the organ-wind. To an enumeration of these, may be added the following details.

Method of operation. 33. Diagonal bellows are blown by pressure upon the near end of the governing handle or treadle (a, fig. 15). On this descending, the other end (b) ascends, raising with it the moveable end of the top of the bellows (c). As this is taking place, some of the external air rushes in through the bottom of the bellows, at openings or gratings made for the purpose, and fills the cavity of the bellows. Valves placed over the apertures then fall over them and close in the wind. The surface weights (ii) now exercise their influence, by pressing heavily on the top of the bellows (oo); and the top of the bellows, by descending, in its turn, forcibly on the enclosed wind, compresses it and so prepares it for use; in which state it rushes towards the chief wind-receiver. As the air in the bellows is by degrees exhausted, the top descends, the handle as gradually rising: when the latter reaches its full height and becomes stationary, it indicates that the contents of the bellows are exhausted. The wind from the several bellows does not enter the receiver at the same time; but that from one bellows is first consumed, and then the supply is continued by the next. So that the bellows do not all sink down together, but one after the other, as is indicated by the consecutive rising of the handles.

34. This successive transmission of the wind from the several bellows is brought under regulation by means of valves or traps, one between each bellows and the chief

wind-receiver, which act in the following manner. The wind from the first bellows not only supplies the organ, but by its force alone keeps the traps of the other bellows closed so long as the wind lasts. When this supply is just exhausted, then the trap of the second bellows suddenly opens, the condensed air from which not only keeps the traps of the remaining bellows still closed, but also shuts that of the one just emptied, and so prevents the entrance of any of the wind which the bellows now in operation is supplying. On the stock of wind from the second bellows being exhausted, the trap of the third opens and continues the supply, that of the second closing; and so on with all the remaining bellows. Sometimes a certain number of the bellows supply one department only of the organ. Thus, of the 14 originally at St. Sulpice, 6 were devoted to the great organ, 4 to the pedal, the remaining 4 supplying the smaller departments of the organ. The description just given must therefore be understood as referring to the working of one set or series of bellows only, of which an organ may contain 1, 2, or 3, according to circumstances.

Their original de-35. The diagonal bellows, in their early form, were open to the grave objection of not producing a wind of uniform intensity during the sinking; but a comparatively light one when fully distended, and a gradually increasing one as they collapsed; the consequences being that the organ did not always produce precisely the same strength of tone, neither did it always sound strictly in tune. The causes of this inequality in the strength of the wind were as follow. A diagonal bellows, on being charged with air, would have the top-board ( o o, fig. 15, and b, fig. 17) raised to its greatest height; the side and end ribs taking as nearly a perpendicular position as a (cc, cc, fig. 17) 17 bility of the bellows would allow, and having or points of conjunction  $(d \ d)$  inclined inwards. regard to the statheir middle joints would then present an obtuse angle to the wind; as shown in fig. 17, which is a cross section of a diagonal bellows. But as the top-board descended, the angle they described would become more and more acute; as illustrated at e e, in fig. 18. As the contents therefore of the bel-18 lows were gradually exhausted, either the space within the bellows lessened, but also the length and breadth. The wind within, consequently, was not simply influenced by the calculated pressure of the surface-weights, but also by the compressing power of the inward folding ribs, which, pressing forward, wedge-fashion, into the confined air, gave it more force.

36. Another circumstance that tended to bring about the inequality complained of, was the irregular influence of the surface-weights, which did not press with the same effect on the bellows in all stages of its sinking. A weight will, according to one of the simplest laws of mechanics, operate with its fullest effect only upon a level surface. Now, when a diagonal bellows was distended, at which time the top-board presented an inclined \* plane, the weights could only press obliquely on the wind, and therefore with something less than their greatest effect. This imperfect pressure gradually disappeared as the bellows closed; that is to say, as the top gradually

<sup>\*</sup> Diagonal bellows were originally fixed with the under-board (  $x \ x$  , g. 15) in a perfectly horizontal position.

approached the *horizontal* line; the result being that the bellows completed its work by the production of a stronger wind than was the case at the commencement of its sinking.

37. These were the defects which existed in the diagonal bellows, as originally made, and which the German organ-builders succeeded in rectifying, by means as simple in their nature as they were successful in their effect.

How remedied. 38. Instead of the bellows being fixed with the under-board (x x, fig. 15) perfectly level, as heretofore, they were now placed with the spreading end somewhat below the other end; as illustrated in fig. 15; so that, when expanded, the top (o o), instead of the bottom, formed the horizontal line. This slight alteration of position secured to the wind the full influence of the surface-weights (i) at the commencement of the bellows' sinking, instead of at the end; and therefore at the time when the ribs would be producing the least effect. As the top descended below the level, the weights would lose some of their influence; the closing ribs, however, pressing in on all sides, at the same time increased theirs. To counteract the greater influence which the inward folding ribs still exercised, a long wooden spring was applied, which operated during the earlier stages of the bellows' sinking, in addition to the surface-weights; but by degrees ceased to do so as the influence of the ribs was more and more felt.

- 39. This spring, consisting of a long rule of box-wood (fig. 15, fff) was laid under the bellows, and fastened down at one end (k), the other having a rope attached (g), communicating with the wooden rod (k) that lifts the top of the bellows. On raising the top-board, the rope and free-end of the box-wood spring were drawn up; the latter, from its own elasticity of course, operating with the greatest force when most curved upwards. Additional compressing power was thus brought to bear upon the wind when the ribs pressed inwards but slightly; but as they gradually did so more acutely, giving to the wind more strength, the elastic power of the spring gradually became less, and finally became powerless.
- 40. Thus was a uniform strength of wind secured throughout the sinking of the diagonal bellows.

The horizontal bel-41. The hope of securing an equal and satisfactory supply lows. of wind from bellows of the diagonal species, does not seem to have been confidently entertained in England; for, while Continental organ-builders were engaged in effecting the several improvements just enumerated, with that view, an Englishman, Samuel Green, was seeking to attain the same end by the introduction of a bellows of an entirely different construction. The date of the first introduction of the horizontal bellows is not positively known; but it would appear to be between the years 1785 and 1790. The beautiful little organs erected in St. Thomas's Church, Ardwick, Manchester, in 1787, and in St. Peter's Church, Stockport, in Cheshire, in 1788, by Green, were both originally furnished with horizontal bellows. On the other hand, the organ in Lichfield Cathedral, by the same admirable builder. which was erected a year later, i. e. in 1789, originally had diagonal bellows, 3 in number, and which were replaced by new ones of the horizontal species, by Messrs. Kirtland and Jardine, of Manchester, in 1849. The one main fact, at any rate, is

certain, as well as satisfactory—namely, that this great improvement in the art of organ-building is of English origin.

- 42. A horizontal bellows (see fig. 16) comprises two separate and distinct chambers, one immediately over the other. The lower one (a), closely resembling a diagonal bellows, is called the feeder, from its supplying or "feeding" the upper division with wind. The upper chamber (xx) is called the reservoir, because it receives the great body of wind collected by the feeder for compression, and holds it in "reserve" for after-distribution among the various departments of the organ.
- 43. One circumstance connected with the horizontal bellows—and a very important one it is—is, that one of this kind will with ease supply an organ that would require perhaps half-a-dozen of the diagonal species. How this should be the case, is soon explained. A feeder, as already stated, closely resembles a diagonal bellows. Now supposing a horizontal bellows to be supplied by a feeder of a given size, and that six full charges therefrom are necessary to fill the reservoir, it follows that the supply from that one reservoir will be as plentiful and efficient as that from six bellows of the diagonal species of the dimensions of the feeder (a). This fact is the more apparent, when it is borne in mind that diagonal bellows do not all afford their supply at the same time.

Their structural features.

44. On examining a horizontal bellows, it will be seen to consist of three stout horizontal layers or plates of wood, called respectively the top-board (c, figs. 16 and 23, also figs. 19 and 20); the middle-board (d, figs. 16 and 23, also fig. 21); and the bottom-board (e, figs. 16 and 23, also fig. 22): which "boards" are joined together all round by side and cross-fold boards called ribs. (See ffff, in figs. 16 and 23; also figs. 24, 25, and 26.)


45. The top-board is usually made of pine, an inch or more in thickness; and, in small bellows, consists simply of a plain, substantial board, ledgered near to each end, as shown in fig. 19. The top-board for larger bellows is frequently composed of a stout frame, divided crossways and lengthways by rails, resembling the stiles, &c. of a common door (fig. 20); with the interstices filled in, or in some instances covered in, with thick wooden panels. Moveable panels offer an easy means of getting at the valves of the middle-board below, if they become deranged from damp, excessive heat, or any other cause.

46. The middle-board (fig. 21) is made of rather larger dimensions than the top-board; a slight additional portion being required all round to form a substantial ridge for the support of the bellows on their sustaining frame-work. This is clearly shown at d, in fig. 16; also in fig. 34. To the middle-board are attached, at the sides and ends, and marking as nearly as may be the outline of the top-board, four thick boards (e e e e, fig. 21), some four or five inches broad, and set up edgeways (g, fig. 16), called the trunk-band, or lining, which "band" permits the various wind-trunks to be joined to the bellows at any part most convenient to fix them. See o and v, fig. 23. In some bellows, pieces of wood, of the same height as the band,




19

20





and of the same width as the ribs, are placed inside the band, and at right angles to it, which, with the band itself, form a firm resting place for the ribs. Besides this, 3 or 4 posts are inserted down the centre of the middle-board, of the same height as the trunk-band, with the thickness of the ribs, &c., added, which bear up the top-board and weights. Or, in very long bellows, instead of a few posts, a rib of inch pine (of the same height as the posts) is carried through the whole length of the middle-board (inside the band, glued to the middle-board and screwed through from the under side), which not only supports the top-board from end to end, down the middle, but also serves as a brace to the middle-board. These several insertions add materially to the stability of the bellows. The middle-board and trunk-band together form a kind of large, shallow trough, in the bottom of which lie the several "valves' or "suckers," marked fff in the adjoining figure. Sometimes the middleboard, like the top, has moveable panels, to facilitate the repairing or cleaning of the valves in the bottom-board, when required.

47. The bottom-board (fig. 22) is made of good substance, like the other "boards" of the bellows. It is provided with suckers, like the middle-board, and forms the bottom to the feeder, as already exemplified in fig. 16. It is therefore ledgered on the under side, to prevent its "springing," when in forcible operation. The bottom-board sometimes approaches the top-board in dimensions; at other times, not nearly so; this often depending on the kind of feeder by which the reservoir is fed.





2 2





48. The *ribs* are the variously shaped pieces of wood that form, chiefly, the folds of the bellows. They measure about 3-8ths or half an inch in thickness, or perhaps rather more when the ribs are broad or very long.





24

bellows, and the spreading end of the feeder (fig. 17); the latter (fig. 26), for the sides of the feeder. Those constituting the sides and ends of the reservoir are nar-

row and long, measuring usually three or four inches in breadth, and from three or four to ten or twelve feet in length, or even more, according to circumstances.


- 50. The parallel ribs are classified into direct and inverted, in regard to a certain peculiarity in their shape. The former kind are those which have their shorter sides hinged together: the latter, those which have their longer sides so united. The direct ribs (25) are used in the formation of the lower half of the reservoir: the inverted (24), for the upper half—at least, in modern bellows. In addition to this classification, the parallel ribs are further divided into side-ribs and end-ribs, in reference to the position which they occupy.
- 51. The triangular-shaped ribs are made broadest at the end where the feeder opens widest (o, fig. 26; also a, fig. 16, and fig. 23); from whence they gradually diminish in width towards the other end, finishing off in a point. In the formation of the reservoir of a horizontal bellows, sixteen ribs are used; four on



each side, and as many at each end. These ribs are divided all round into two series of two each, by a frame called the middle-frame; of which, however, only the edges are to be traced in a completed bellows. (b, figs. 16 and 23.)

52. The valves in the middle and bottom boards are formed of one, two, or three thicknesses of leather, glued together. They are made rather larger than the openings which they are designed to cover, that the closing may be effectual.

figures 27 and 28 for the plan and section of the valves.) The valves are usually hinged on at one end (b) to the "board," the other end and both sides being left quite free to rise and fall. The end forming the hinge consists of one thickness only of leather (figs. 27 and 28), that it may be perfectly flexible. Occasionally the valves are attached with pieces of tape; one piece at each of the four corners, with the other ends nailed to the The entire valve then rises; the pieces of tape preventing its shifting from over the orifices or gratings.



- These several openings or gratings are technically called suckers. They are sometimes made of an oblong form; as shown at fff, in fig. 21, and at w w, in fig. 23, and filled in with a metal or wooden grating; or they consist of clusters of circular holes; as shown at ff, in fig. 22, and, on an enlarged scale, in figs. 27 and 28. The gratings in the square suckers, and the wooden substance that separates the holes of each circular cluster from one another, prevent the compressed air from forcing the valves downwards through the suckers.
- 54. As their names imply, the bottom-board forms the bottom to the feeder; the middle-board occupies the intermediate position, and so serves the double purpose of roof to the feeder and bottom to the reservoir; while the top-board forms the top to the reservoir.
  - 55. Of these three great layers of wood-work, the middle-board is the fixture,

and supports the entire bellows. Below hangs the feeder, and above rests the reservoir. The bottom and middle-boards are furnished with perforations or gratings, with leather valves lying over the upper sides; the use of which will be the most clearly understood from an explanation of the manner in which a horizontal bellows is worked.

The working of the horizontal bellows; and the room which external air throws back the valves (w) in the bottom-board, the compressed air and rushes through the gratings (xx), filling the cavity of the makes for itself between the plates and feeder; after which the valves descend again over the gratings folds of the reservoir. and close in the wind. The hanging end of the feeder is then drawn upwards, by which movement the enclosed air is strongly pressed against the surface above—that is, against the underside of the middle-board (d). The exercise of this force throws back the valves (ss) that lie over the apertures in the middle-board—the valves not being intended to resist the pressure of the wind in this direction, but only downwards,—and the wind having thus cleared a way for itself, passes from the feeder into the reservoir. The valves of the middle-board (ss) then in their turn fall over the openings and prevent the return of the wind into the feeder.

- 57. At the moment wind is being thus transmitted, the top-board (c) rises, and the folds (ffff) extend so as to form a sufficiently capacious receptacle for it.
- 58. While the several processes just detailed are going on, some of the wind is, under the pressure of the surface weights (ttt), constantly flowing through the various exits or wind-trunk holes (o and v) into wooden tubes (y) or wind-trunks, and thence to the several departments of the organ supplied by that bellows; the top-board of the bellows descending and the folds collapsing as the quantity of the wind in the reservoir is reduced, and rising again and the sides expanding as more wind is supplied. In figs. 16, 23, 34, and also in the general section, the reservoir is represented as being fully distended or charged with wind; and in fig. 32 it is shown in a collapsed or resting state.
- 59. The folds of the bellows are subject to a constant strain in consequence of the antagonistic powers exercised by the feeder on the one hand, and the compressing weights on the other; the former forcing air upwards, while the latter press the top-board downwards.
- 60. To give them the power of resisting the outward pressure of the contained air, arising from these circumstances, a piece of frame-work of about three-quarters of an inch in thickness, some three or four inches in breadth, and of nearly the same outer measurement as the top-board (see *fig.* 29) is inserted between the two series of ribs.
- 61. This *middle-frame* holds the ribs so firmly in their proper positions, that there is no liability of the folds bulging from the force above alluded to.


The construction of the reservoir.

62. The several parts of the reservoir already described are worked together in the following manner. The ribs are first assorted into pairs; the proper sides of each couple being brought close together. A long strip of white-dressed leather is then glued over the contiguous edges; a second piece being attached in a similar manner to the same edges on the other side. These pieces together form a strong hinge, which is called the middle-joint.


63. All the other couples of the ribs are then firmly united together in like manner.

64. The lower edge of the under series of ribs is then fastened to the lining: secondly, the upper edge of the upper ribs is united to the edges of the top-board: thirdly, the lower edge of the upper series is bound to the inner edge of the middle-frame; and, fourthly, the upper edge of the lower series is joined to the outer edge of the middle-frame. The openings at the four angles or corners, where the ends of the ribs nearly meet, and marked a a a, in fig. 30, are then closed with leather, which form what are technically called the gussets. The adjoining figure (No. 30) is a plan of the folds of the reservoir.

The construction of are joined together in much the same manner, only that the end of the bottom-board is strongly fastened to the middle-board with several pieces of shoe-leather, rope, girth-webbing, or something of the sort, to form the working part of the great hinge. Over these is glued a stout coating of white leather, to render this joint equally air-tight with the others. A piece of wood running across the end of the feeder (cc, fig. 31), and about equal in thickness to the folds when they are closed against the middle-board, admits of the feeder being drawn up without straining the hinge. Both corners, where the end of this cross-piece and the points of the side-ribs



30



nearly meet, are covered in with leather *corner-pieces*. The adjoining figure (No. 31) is a plan of the folds of a single feeder, which are formed of six ribs, two to form each side, and two for the hanging end.

The blowing-action. 66. The apparatus by which the feeder of the bellows is put in motion, is called the blowing-action, one of the simplest kinds of which, namely that for a single feeder, consists of a vertical pump-rod, a horizontal bellows-handle, and an upright standard, to which must be added the fork-shaped piece of wood that projects from the hanging end of the feeder, called the lug. The lower end of the pump-rod (a, fig. 34) is placed between the two prongs of the lug (w) and secured by an iron bolt (v); the upper is placed in a mortise cut in the near end of the bellows-handle, and similarly secured, while the bellows-handle itself rests in a deep cutting made in the upper part of the standard to receive it, where also it is secured by a bolt. Where there are double feeders, there are of course also two pump-rods (aa), which then communicate with a large lever (oo),

from which latter a rod (c) communicates with the bellows-handle (d). (See fig. 35.)

67. The disengaged end of the bellows-handle usually passes through a high and narrow cutting in the organ-case, and is worked outside. As, however, it is necessary that the bellows-blower should at all times know at what rate the wind in the reservoir is being consumed, which will at times be rapid, and at others slow, and as the bellows themselves are generally hidden from view, a kind of index, or, as it is commonly called, a tell-tale, is introduced to convey this necessary intelligence. This consists simply of a plummet fastened to a piece of whip-cord, which whip-cord is carried over a little wheel in the organ-case near to the bellows-handle, and then fastened to the top-board. As the reservoir fills and the top rises, the weight descends; as its contents are exhausted and the top descends, the weight rises. When the weight is down, the bellows are understood to be "full;" and when up, "empty." The most proper place to keep the weight is about midway between the two extremes.

An early defect, and The horizontal bellows was not always the efficient its remedy. machine we now see it. Like its predecessor, it had at first many defects, which only subsequent improvements have removed. For instance, the two pairs of ribs with which the reservoir is furnished at the sides and ends, originally folded the same way, that is, inwards. The consequence was, a tendency to an inequality in the strength of the wind; one of the main causes being the same in this case as in that of the diagonal bellows, namely, the compressing influence of the inward-folding ribs. This fault, so fatal to the steady articulation of the pipes, led to the action of the upper series of ribs being reversed, by making which fold outwards while the lower continued to do so inwards; the former gave more space to the wind as they closed, just in proportion as the latter gave less. Thus any disadvantageous influence exercised by the one set was neutralised by the action of the other. These circumstances led to the upper series being called "inverted" or "compensating" ribs. This important improvement was effected by Cummins, a clock-maker by trade, who, however, did but little with its discovery; and the merit of introducing it more publicly, and in proportion to its merits, is due to the late Mr. Flight.

The counter-balances. 69. One condition, however, necessary towards securing the corrective influence of the direct and inverted ribs, was, that both sets should always be at the same relative degree of openness and closeness; for otherwise an unequal wind would still result. To obtain this proportionate action, some light, moving, directing frame-work (fig. 16, w w) was applied to the two sides (or sometimes to the two ends) of the reservoir, and attached to the trunk-band (y), middle-frame (h), and top-board (c) of the reservoir, which "guide-work" always kept those three portions at equal distances apart, and so effectually secured the required and exact contrary action of the two series of ribs which occurred in the spaces between them. The counter-balances, as the adjuncts in question were called, served the additional purpose of preventing the top-board, with its heavy weights, swerving to the right or to the left, instead of rising and falling. In large bellows the influence of ribs is far less than in small ones, as the width of the ribs is by no means increased in propor-

tion to the superficial measurement of the bellows. The ribs, therefore, of large bellows are narrower in proportion than in small ones, and their influence consequently less perceptible.

The waste-pallet. 70. Another cause of inequality in the wind first existed. The consumption of wind would, under certain circumstances, be very slow and gradual; the rate of the fresh supply from the feeder being then, most probably, much greater than that of the outflowing. This additional wind, accumulating in the reservoir, would soon fully distend it. If, while in this inflated state, more wind were attempted to be introduced, as the reservoir could expand no farther, the extra wind could only make room for itself by compressing that which was already within into a still smaller space. By doing this, the density of the organ-wind would be increased beyond the required degree. Besides causing the pipes to produce a shrill scream rather than a musical sound, the soundness of the reservoir itself would be endangered by the consequent over-tension, and the leather hinges liable to be strained or even rent by the violence. To obviate such evils, a clever contrivance, called the wastepallet, was devised. This, in its earliest form, much resembled the key of a wind instrument on an enlarged scale, and consisted of a plate covering a vent, with a lever (or tail) working on a centre, by which the plate could be raised. This pallet occupied the centre of the top-board, and was so disposed that when the top-board had risen to a certain and its proper height, the tail of the waste-pallet came in contact with some wood-work. If more wind were now passed into the reservoir—the retention of which would involve a farther distension of the reservoir, and consequently a farther rising of the top-board,—the tail of the pallet struck against this wood work; the other end was lifted up, the vent uncovered, and the extra wind thus allowed to escape. A spring, placed either above the pallet or under the tail, kept the pallet closed, except when purposely opened.

- 71. With a view to the saving of room, and other circumstances, the wastepallet was, after a time, transferred from the upper to the underside of the opening, as shown in fig. 23, z, also at a and d in figs. 19 and 20, and there hinged on at one end to the top-board. It was, therefore, changed in plan from the key to the valve kind. The waste-pallet was now worked by a piece of rope (fig. 23, k k) or a leathern thong, one end of which was fastened to the pallet, and the other to the middleboard. This rope or thong was just long enough to allow the top-board (c) to rise to the desired height, without checking the pallet, and no farther. If any more wind were now attempted to be introduced, the top-board would, indeed, rise somewhat higher, but the pallet would be held stationary by a rope, now stretched at full length; and the vent consequently being uncovered, the superfluous air would escape.
- 72. In modern bellows, the waste-pallet is often situated in the middle-board, to which part it was removed, because dust or *cuttings* sometimes worked their way on to the edges of the pallet and prevented its closing properly. When so placed, it consists simply of a reversion of that just described. The vent is cut in the middle-board; the pallet is laid over it, and raised by a rope fastened to the top-board, which latter, after rising to a certain extent, draws it up, allowing the wind to escape underneath, outside the feeder. Some organ bellows have two waste-pallets, one opening into each feeder. In this case, as superfluous wind is introduced by one feeder, an equal amount is discharged into the other.

- 73. But whatever may be its situation, the waste-pallet is always introduced to serve the same end, in regard to the reservoir of a bellows, that a safety-valve does to the boiler of a steam-engine; namely, to guard it from more than the intended strain, by letting off all that might otherwise peril its soundness.
- 74. The above are the most important improvements for equalising the wind made in the horizontal bellows up to within the last thirty years.

The unsteadines of the organ-wind arising from unskilful of the organ-wind might be disturbed, besides those arising from blowing, or from irregular compression of the weights and ribs of the reserveillar consumption.

The irregular compression of the weights and ribs of the reserveillar consumption.

The irregular compression of the weights and ribs of the reserveillar consumption.


The irregular compression of the weights and ribs of the reserveillar consumption.

The irregular compression of the weights and ribs of the reserveillar consumption.

The irregular compression of the weights and ribs of the reserveillar consumption.


The irregular compression of the weights and ribs of the reserveillar compressed down gradually—as it always should be,—it were thrust down with a jerk, the wind in the feeder would be forced into the reservoir so suddenly that there would not be time for the top and sides to rise and unfold to receive it; the result for the moment being an over-compression of the wind.

- 76. Whether the modifications made on the original kind of feeder were introduced partly with the object of lessening this evil, does not clearly appear. At any rate, as some bellows have one description of feeder, and others another, it will be necessary to give a brief notice of the several kinds in common use.
- 77. The feeder, as originally made (see *figs.* 16 and 23), gave its entire and copious supply of wind all at once with the single down-stroke of the handle. This supply was afterwards divided, and transmitted more gradually and continuously by means of a feeder made on the principle of the little bellows of the common cuckoo toy, and hence called the *cuckoo feeder*. In this feeder, the bottom-board, instead of being fastened to the middle-board at one end, as in the instance of the *single feeder*, was hung about midway between the two ends to a cross-board running transversely beneath the middle-board (see *e e, fig.* 32, which presents a side view of a bellows



with a cuckoo feeder). Each half was provided with two end-ribs and four side-ribs, the latter with their points (oooo, fig. 33) towards the cross-board. These several parts were fastened together in the usual way, and, with the addition of an underlining, of the same depth in the centre as the cross-board, but inclining upwards towards each end (aa, fig. 32), formed two separate though smaller feeders. On referring to fig. 32, the two feeders will be distinctly traced.

78. A cuckoo feeder gives a supply of wind with the upstroke of the bellows-handle as well as with the down, which was not the case with the single feeder; and the quantity of wind pumped in by the two strokes is about equivalent to that supplied by the one stroke from the older kind of feeder.




79. In some cuckoo feeders, the under-lining (a a, fig. 32) is transferred from the under-side of the middle-board to the upper side of the bottom-board, and reversed, as shown at a a, in fig, 34. This has the effect of greatly strengthening the feeder, the bottom-board of which is subjected to a considerable strain across the middle, where there is consequently a possibility of its "springing," but which tendency is entirely removed by placing the lining as shown in the figure below. This transfer of the under-lining does not weaken the middle-board, which is amply strengthened by the trunk-band and the inside bracings.



80. A third kind, called the *double* feeder, differs from the cuckoo feeder, in having a separate bottom-board to each feeder, instead of one long board to serve for the two. Feeders of this class are not simply "separate" feeders, as in the cuckoo, but are also "independent" feeders (*e f*, *fig.* 25), like those of the single species.

35



They usually extend the cross-way of the reservoir, as shown in the accompanying engraving; though occasionally they run lengthways. Double feeders present this advantage; if one becomes unsound, the other still can be used while the repair of the first is being proceeded with, which could not be the case with the cuckoo feeder. The several kinds of feeder, however, have all a tendency to excite an occasional unsteadiness in the supply of wind, if operated upon by an unskilful blower.

81. But there were discovered other causes of unsteadiness in the wind. The wind became agitated—as indicated by the altered speech of the pipes—when many bass keys (the pipes of which consumed a great quantity of wind) were pressed down simultaneously; and a similar effect was also noticed on their being suddenly allowed to rise. The disturbing cause in the former case originated with the large pipes, which consumed so much of the wind in the wind-chest, that what remained expanded by its own elasticity. Having thus lost some of its intensity or strength, the smaller pipes of the keys higher up in the scale supplied by it would in consequence speak with a kind of hesitation, which would continue till the flow of wind from the bellows had been accelerated in proportion to the increased demand, and the general mass had thus regained its accustomed power.


- 82. The agitation in the second case arose from the wind continuing to flow in the same rapid and copious manner into the wind-chest for an instant after the great demand for it had ceased. The wind there, meeting with a check, accumulated, causing an over-compression; and, by its thus acquiring greater force for the moment, brought about the defect the other way.
- 83. Some apparatus, therefore, was required, possessing the power of adding a small quantity of wind to the usual supply, when that supply, from extraordinary circumstances, would be scarcely sufficient, and of deducting some, when, from opposite causes, it would be too great and too strong. Such a wind-regulating apparatus Mr. Bishop devised, whose invention is now so generally known as the *concussion-bellows*.

The concussion-bellows.

84. This apparatus for steadying the wind is usually formed of a board and six ribs (see fig. 36),

36

like a single feeder; though occasionally it is composed of a board and eight ribs, resembling the top and lower ribs of a reservoir. These form a small wedge-shaped reservoir (see fig. 36), which is fixed around and over a hole cut through one side of the wind-trunk ( $\alpha$ ), or sometimes through the bottom of the wind-chest, with a metal spring behind (b), the strength of which is so adjusted as precisely to balance the ordinary pressure of the compressed wind. When the bellows are blown, the concussion-bellows immediately becomes partly charged from the windtrunk, or wind-chest, to which it is attached; and, partly expanding, is then ready to operate either way. If any jerking now occurs at the bellows, or if the consumption of wind be suddenly reduced-either of which circumstances would cause a momentary over-compression of the wind,-the concussion-spring gives way, and the concussion-bellows opens further. More room being thus afforded to the wind, its density is reduced to the proper strength, and its extra force is in consequence removed, instead of being expended on the pipes that are speaking.




- 85. On the other hand, when a large and sudden demand is made on the wind, and the supply is likely to run short, the concussion-bellows, now acting in the opposite manner, collapses, as it always has a tendency to do under the influence of the spring when the wind-resistance from within decreases, and, returning so much of the wind previously contained as the exigency of the occasion requires, raises the strength of the organ-wind to its proper force.
- 86. When the organ is not being played upon, but the "wind is in," the coneussion-bellows remains about halfway open.

The Anemometer. 87. The organ-wind is required to enter the pipes with not less than a certain prefixed and uniform force. This required strength the bellows do not give to the wind unassistedly; hence slabs of iron or large lumps of stone are placed on the top of the bellows to compress the wind. Stones are, however, very unfitted for the purpose; for, in *damp* weather, they absorb a great deal of *moisture* 

and gain weight; and in hot weather, the moisture again dries out and they lose weight; the organ, in consequence, continually changing both in tone and tune. Slabs of iron are best, although they are of course more costly. The exact amount of weight to be used depends partly on the size of the bellows, and partly on the "strength of wind" they are desired to produce.

The precise power of the blast from the bellows is ascertained by the aid of a little machine, called the anemometer, or wind-gauge; and the process is termed "weighing the wind."

89. The anemometer consists of a glass tube, bent in the manner represented in fig. 37, having the lower end (d) fixed into a socket, with the other (a) open to the atmosphere. When the wind-gauge is about to be used, a small quantity of water is poured in at the upper end, some of which passes through the bent part and finds its level on the other side (bb). The socket is then placed over one of the holes in the upper-board of the sound-board, through which one of the pipes is to receive its supply of wind; and the bellows are inflated. Under the influence of the surface-weights, the wind, on the opening of the pallet, rushes up to the soundboard with great force, and, entering the socket, traverses the glass tube till it reaches the surface of the water, which it depresses, raising that on the other side to a corresponding extent. At first, the water oscillates; but when it has ceased to do so, the deviation between the two surfaces is ascertained with a rule; and if it is



found to be, say two and a half inches, the bellows are said to give a "two and a half inch wind."

- 90. If a "stronger" wind than this is required, more weights are gradually added to those on the surface of the bellows, till the index shows the desired difference by a still further rising and falling of the water in the anemometer.
- 91. The "weight of wind," to which the manual portions of a church organ are usually "voiced," ranges from two and a half to three inches. The pedal stops, when supplied by a separate bellows, are usually voiced to a wind a quarter or half an inch stronger than the above, which accelerates the speech and improves the tone of the large pipes. The amount of surface-weight necessary to produce the compressed organ-wind, is about three pounds and a quarter per superficial foot of the top-board, to give an inch wind. This is the average, for the thickness of the top-board makes a little difference. In large bellows, with inch-and-a-half timber in the top-board, the weight will only be about three pounds and two ounces; while in small bellows, with only inch timber in the top-board, the weight required will be about three pounds and six ounces; the variation in the weight of the timber accounting for the difference. On a bellows, therefore, that produces a three-inch wind, the average amount of surface weight will be nine pounds and three quarters per superficial foot.
- 92. Some of the French builders use different weights of wind for even their manual stops, and without increasing the number of bellows. This they manage by placing two or three smaller reservoirs over that of the bellows, with expanding windtrunks (like the sides of an accordion), reaching from the latter to the former. The upper reservoirs are then loaded with different proportionate amounts of surface weights, thus producing the varied pressures of wind.

#### DIVISION III.

#### THE WIND-DISTRIBUTING PORTIONS OF THE ORGAN

#### CHAPTER III.

THE WIND-TRUNKS.

The wind-trunks. 93. The wind, having been collected and compressed in the manner detailed in the preceding chapter, is next distributed among and conveyed to the several main divisions or departments, i. e. great, swell, pedal, &c. of the organ, through the medium of wooden tubes, called wind-trunks.

- 94. When organs were made with bellows of the diagonal species, only one wind-trunk, or chief canal, issued from the bellows, communicating with the great organ wind-chest; and from that one, those for the choir and "echo" branched out. Conjointly, however, with the introduction of the horizontal bellows, a more independent method of winding the several divisions of the organ was introduced; each wind-chest then having a separate wind-trunk devoted to it, proceeding directly from the bellows.
- The original wind-trunks of many old organs were not large enough to allow 95. the quantity of wind to pass that was necessary to supply modern demands. This circumstance, however, was not the result of any miscalculation on the part of those who made them, but arose solely from certain alterations in the general style of organplaying which were introduced subsequently to their construction. The old system of English organ-playing was very "light" and "thin," as compared with the modern; that is to say, but few keys were held down at a time, seldom more than three or four. Moreover, old English organs seldom possessed the advantage of "double stops" (which would exhaust much wind), neither were there even pedals to draw down the lower keys of the manual, the occasional use of which, therefore, had to be made with the fingers. The old wind-trunks, consequently, must have been amply sufficient for all cotemporary purposes. But, as a "fuller" style of playing has since come into vogue, and the bass of, not simply one, but both or even all the manuals (if there be 3), are brought under the unrestricted use of the feet, the demand on the wind has been considerably augmented. Hence the insufficiency of most of the old trunks for modern purposes, and also of the necessity, in most "restorations," for new and larger wind-trunks—increased means for distributing the wind being of as much importance as increased means for supplying it by new horizontal bellows.
- 96. The size of a wind-trunk varies according to circumstances; i.e. according to the number and size of the stops to be supplied through it, the distance at which the sound-board on which they stand is placed from the bellows, and so forth; and, thus governed, it ranges from four or five to sixteen or eighteen inches in width; from

three to about six inches in depth; and from two or three to twelve or fifteen feet in length.

97. The course that a wind-trunk follows, in traversing an organ, is direct or circuitous, according to circumstances; but the organ-builder makes the route as short as possible, for the important reason, that the nearer the bellows and sound-boards are to each other, the more prompt and decided will be the speech of the pipes. The wind is apt to become weakened by a long passage,—to compensate for which, the wind-trunk has to be made larger, as well as longer, whereby a needless expense is incurred,—besides which, the wind becomes more susceptible of disturbance, from the greater elasticity of the then lengthened column.


98. As the bellows and the wind-chests are seldom, if ever, on the same level, the direction of the wind-trunks is changed after their advance from the bellows, and turned towards the particular wind-chest which each has to supply. They are, for this purpose, jointed in one or more places, and the contiguous parts glued and nailed together, either at right angles, or in such other relative positions as will direct the wind to its destination by the least circuitous route (y, fig. 23). To render these joints thoroughly air-tight and strong, they are covered with pieces of parchment, leather, or paper. Parchment or leather is best for the purpose, though the most costly: paper is very perishable, and therefore almost useless. Some organ-builders cover the whole wind-trunk, internally, with a thin coat of glue, to fill up the pores of the wood; and externally, as well as a great portion of the wood-work, including much of the wooden pipe-work, with a coat of colouring mixture, compounded of glue and red-ochre, called red-size. A more agreeable looking compound for the last-mentioned purpose is of a dark slate colour, on which ground the lettering of the pipes, in white capitals, stand out very distinctly.

#### CHAPTER IV,

#### THE WIND-CHEST.


The wind-chest; its 99. The wind thus conveyed from the bellows is received into what are called wind-chests. And now that the more minute distribution of the wind is about to be traced, it will be well, for the sake of perspicuity, to confine the remaining observations on this subject to a single division of the organ; more especially as the arrangements for the further distribution of the wind are the same in principle in every part of the organ; and, consequently, one description will serve for all its departments.

- 100. A wind-chest is a long and broad, but rather shallow, wooden case or box, a cross section of which is shown at p p, in fig. 39; and a front view at c c, in fig. 49. It is made of the same length as the sound-board above, to which it belongs; from half to two-thirds the breadth of the same; and about equal to it in depth, or perhaps a little deeper.
- 101. These general dimensions refer to modern work. The wind-chests of old organs, in some instances, measure little more than *one-fourth* the breadth of the sound-board, and are therefore, of course, far less efficient than the later examples, and for the reason before explained, when speaking of the smaller wind-trunks of old organs.
- 102. In the wind-chest the compressed air accumulates; and there it remains in a state of readiness for further and more minute distribution. A wind-chest, therefore, is in reality a *second* wind reservoir, locally disposed, and designed to receive a due portion of the great body of organ-wind collected in the *first* reservoir—viz. that of the bellows,—and to retain it for the supply of that special department or division of the organ to which the particular chest belongs.



Front view of a portion of a wind-chest.

Its attendant parts. 103. Through one of the ends (a, fig. 38), or sometimes through the bottom  $(c\ c\ c, fig. 39)$  of the wind-chest, the aperture is generally cut, at which the wind is to enter from the wind-trunk. The back, called the wind-bar (d), passes under all the sound-board-bars, crossways; and is made of very substantial material, because it serves a second purpose, namely, that of affording additional support to the sound-board above it, and so prevents the sound-board yielding under the weight of the superincumbent pipe-work.



Side view of a wind-chest.


104. The ends, bottom, and back of the wind-chest are all firmly wrought together, and to the sound-board, which forms the top thereto. The front-board (l, fig. 39), as the front is called, is made moveable, because the sound-board pallets (a, fig. 39), and (c c c, fig. 38), are immediately inside, and they are liable to temporary derangement from a variety of causes, and are therefore required to be easy of access. The front-board, then, is simply fastened on with screws (see fig. 67, e e e), so that it may be soon removed, if the pallets require cleaning or repairing.

105. Immediately under each pallet a hole is drilled in the bottom of the windchest, through which the necessary communication is established between the soundboard pallets inside the wind-chest and the key-movement without. These holes, which are ranged in a line, are made much larger than the thickness of the pieces of wire that pass through would require (see figs. 38 and 39), for that in wet seasons wood-work is very apt to swell; and the holes, if originally made so as nearly to fit, might, from their being, through this cause, smaller, prevent the pull-downs from passing freely, and so produce a "sticking." To prevent, however, an escape of wind through these enlarged holes, a long, narrow plate of brass is fixed over, or rather under, them—for it is outside the wind-chest;—and, through this, plate holes are drilled just sufficiently large to allow of the pull-downs working through them freely. The plate of brass is securely fastened on, by its edges being covered over with a small wooden beading (rr, fig. 39), which, at the same time, guards the loops (i) of the pull-downs from injury.

#### CHAPTER V.

THE SOUND-BOARD.

40

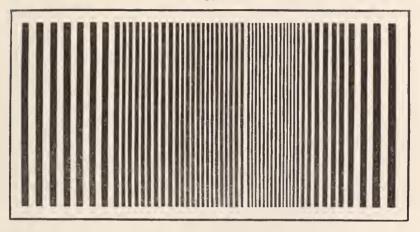

106. The air that enters the wind-chest, in the manner already described, forms a sort of reserve, from which the several pipes of each key on the corresponding clavier receive their supply of wind. The ingenious arrangements and contrivances by which some of the wind is conducted from the chest to the pipes of any one of such keys, independently and exclusively of those belonging to the rest, next demand attention.

107. For every key on the clavier, a small special channel is usually provided; so that if there be, say 54 keys on a manual, there will be the same number of *grooves* (as they are called) prepared to conduct wind to their respective pipes. This is the general rule, to which, however, there are a few exceptions, which it is necessary to point out.

108. Some manuals, of which the keys extend throughout, are entirely without sound-board and pipes of their own, to the 8-feet octave (as is the case with all "tenor c swells"), and which, therefore, would produce no sound at all below that key, were it not that the bass octave usually communicates with the corresponding twelve semitones on the choir or great organ, or even with the "pedal pipes." Again, some pedal organs, and more particularly "pedal pipes," after extending through about an octave of their scale, suddenly turn back or repeat on the remaining pedals. In all such examples, the number of grooves in their sound-boards will be less than the number of the keys.

109. On the other hand, where the pipes to a key are numerous and large, as is frequently the case in the bass of great manual organs, one groove is not always sufficient to ensure a satisfactory supply to the whole; and two grooves are accordingly devoted to each key in the "great octave." Here, therefore, the number of grooves would exceed that of the keys. John England is said to have been the first English organ-builder who introduced "double grooves" for the bass keys of the great organ sound-board.

The formation of a sound-board.

110. The manner in which the grooves are formed is as follows:—A large and strong layer of wood, that is ultimately to form the roof of the grooves, is turned upside down, so as to bring the under surface uppermost. Several pieces of wood, called sound-board-bars, having been previously cut and planed to the requisite degrees of thickness, one of them is well glued on to the so-called table. To this are attached two pieces of wood, called the fillings-in,—one piece at each end,—of the exact width that the space or groove is to be; to which again is fastened a second bar; and so on, a bar and fillings-in alternately, until the required number of channels or grooves are formed. Next, a shallow piece of wood, a few inches in length, is let a little way into each groove, to form a hold, to which the tail-pieces of the pallets, presently to be noticed, can be attached; and similar pieces are also let in, in other places, to increase the amount of surface, to which the sheet of leather, forming the bottom, can be glued.

- 111. After the sound-board has been "glued up," as the process just detailed is sometimes designated, its two long sides, presenting the rough ends of the sound-board-bars and the intermediate fillings-in, are planed down; and a stout piece of mahogany, from an inch to an inch and a half thick, is firmly glued and pinned on over them, to secure the bars, to strengthen the sound-board, and to give it a neat and finished appearance. These front and back surfaces are called the *cheeks* of the sound-board.
- 112. A large sheet of leather is then glued over the whole under surface of the sound-board, except in that part of the grooves which is to be enclosed within the wind-chest, where openings are left as entrances for the wind. The sheet of leather (in old sound-boards, parchment) usually forms the only closing the greater portion of the grooves have underneath.
- 113. The sound-boards of old organs are generally of the frame kind; that is to say, the bars are at each end let into a frame, about one inch and a half thick, instead of being separated by fillings-in; and the grooves are closed in above with wood, there then being no separate table; after which, a sheet of leather is glued over the whole, on which latter the sliders work. In Germany and France, the sound-boards are still generally made in this way; and Mr. Bishop retains the custom of making the sliders run on leather.
- 114. The grooves run parallel to one another, as represented in fig. 40. When the sound-board is turned right side upwards, about half of the underside of every groove lies immediately over the wind-chest, as shown in fig. 39; the long openings already referred to being enclosed therein.
- 115. If all these wind-entrances were to be left open, air would pass through all alike into the pipes, and thus cause every note in the scale to sound at once. To

prevent this, the wind-entrances are first of all closed beneath by moveable pieces of wood, which are so adjusted that any one of them can be drawn open at pleasure, and wind admitted into the corresponding groove. By these means the power is admirably secured of admitting wind to, or of excluding it from, the pipes of any of the keys. These pieces of wood are called *sound-board-pallets*; and from them the openings which they cover are named *pallet-holes*.

116. To ensure the pallets closing firmly against and over the pallet-holes, a spring of brass or steel wire is inserted underneath each, which presses them upwards. See fig. 39. The springs in question are, in old sound-boards, generally made of brass wire, with two or three curls; in modern examples, they are frequently of steel wire.

How the sound-board-pallets, are brought under control.

117. The orderly arrangement of the sound-board-pallets, side by side, in a row, will be found illustrated in figs. 38, c c c, and 49, c c c. As an organ cannot be played without some of the sound-board-pallets being drawn once, and as the pallets themselves are completely

sound-board-pallets being drawn open, and as the pallets themselves are completely shut up in the wind-chest, means are taken for bringing them under *outward* control.

118. A small loop of wire (fig. 39, z) is inserted into the moving end of the pallet (a), called the pallet-eye; to this is attached a piece of steel wire (h), of sufficient length to pass through one of the holes (o) bored through the bottom of the wind-chest; outside which it is finished off in a loop (i). Every pallet is similarly provided with a pull-down, as this piece of wire is called (see fig. 49); and thus the first step is taken towards making the pallets answer to the touch on the keys. To ensure their keeping their proper course, each pallet is furnished with two other pieces of wire, one placed on each side, called direction-pins (fig. 38, bbb); see also (fig. 49); which prevent the pallet turning during its opening and closing, and thus secure its closing truly and entirely over the pallet-hole. Some of the above features may now be noticed somewhat more in detail.

The sound-board bars. 119. The bars of a sound-board are all made of the same pre-arranged length and depth; but there is a considerable variation in their thickness. This is because they have a second office to perform; for, besides separating the grooves, they have to sustain and resist the pressure of the pipe-work above. As, however, the pipes belonging to the treble portion of a manual sound-board are all comparatively small and light, narrow bars afford sufficient support for them, and are therefore employed; whereas in the bass, where the pipes are both larger and heavier, bars of greater substance are necessary to ensure stability, and are consequently introduced. For the intermediate bars, two or three graduated thicknesses are adopted, according to their situation.

120. In addition to the variation in the substance of the bars in the *same* sound-board, the thickness and indeed all the proportions of sound-board-bars vary much, according to the number and size of the stops that have to be supported. Thus, the thickness of the bars ranges from one-third of an inch to an inch and a half; their length, from about two to five or six feet; and their depth, from two and a half to five inches.

121. Among the narrow bars of a sound-board, a stout bar is interspersed here and there, in order to give additional strength to the work, and to offer a good hold to the screws that fasten down the upper-boards. Two pieces of wood of extra

stoutness, resembling sound-board-bars in all other respects except their greater substance, form the extreme ends—also introduced to ensure stability—called the *end-bars*. The entire sound-board rests on a stout and substantial frame.

122. The sound-board bars are represented in fig. 38, by the white lines.

123. The grooves in a sound-board, like the bars, are fre-The sound-board grooves. quently made of three or four different widths. The narrow ones are of course for the treble keys, and the broad ones for the bass, where the pipes are large and a plentiful supply of wind is demanded. In all other respects the dimensions of the grooves are the same throughout a sound-board; an increase in their width alone being ordinarily sufficient to secure an adequate supply of wind to the same stops in the lower part of the scale or gamut. When, however, this increase is likely not to prove so, the groove is not further enlarged, but a second one is allotted to the same bass key, as already explained. For more stops, the grooves are made longer, to allow the additional pipes standing and speaking room above; and also broader and deeper, that the cubic space in each groove may be adequate to the reception of the increased quantity of wind now necessary to feed the augmented number of stops. When these conditions, or any one of them, are not sufficiently attended to, the pipes do not all get enough wind to make them speak properly, and they are then said to "rob" each other.

- 124. It will be seen then, that there are no fixed dimensions for sound-board grooves, but that they vary according to the number and size of the stops. The extent of this variation is ordinarily from one-third of an inch to about an inch and a half in breadth; from two to about five or six feet in length; and from two and a half to five inches in depth. In some instances, as in large pedal sound-boards, the grooves are sometimes made as much as four inches in width.
  - 125. The grooves are represented in fig. 38, by the dark lines.

The sound-board pallets are so many long and narrow pieces of wood, of a triangular shape (see fig. 33, c c c). One of the three flat surfaces is laid against the pallet-hole, to cover it and exclude the air from the groove. And, that the closing may be the more effectual, the surface so placed is coated with two or three thicknesses of white dressed leather (sheepskin), which allow the pallet to "bed" more closely against the pallet-hole than the bare wood could possibly do. Besides assisting in completely excluding the wind, the leather silences the return of the pallet against the sound-board; which takes place with rather a smart blow, under the combined influence of the metal spring and the compressed air in the wind-chest.

- 127. The second and third surfaces of the pallet, constituting the sides, slope off gradually downwards, and ultimately meet and terminate in a long edge. This edge, pointing downwards and presented to the wind, enables the pallet, by its sharpness, to cut its way through the compressed air with comparatively little difficulty.
- 128. The ends of the pallet (a b, fig. 39), as well as the sides (c c c, fig. 38), are bevelled off, upwards; that forming the front (nearest the front-board) somewhat acutely (a, fig. 39), and the other much more gradually (b, fig. 39). By the latter, the pallet is attached to the sound-board, by glueing a long and narrow piece of leather to the tail of the pallet, and to the under-side of the sound-board;

and, so that the pallet may not accidentally become detached, from damp, &c. a piece of wood, called the tail-piece, is nailed over the end of the leather that is glued to the sound-board, which secures it (f, fig. 39). By the front end the pallet is drawn down or "open."

that they may hold the required quantity of wind, so are the pallet-holes made gradually longer that they may admit the increased quantity of wind, and consequently the pallets themselves are also made larger. The pallet-holes range from about five to twelve inches in length, according to circumstances. The pallets are always made rather larger than the holes they govern, that they may ledge firmly against the bars and woodwork all round, and so thoroughly exclude the wind. Thus a pallet to cover a hole an inch wide, is made an inch and a quarter in width. A two-fold object has here to be attained, namely, of allowing sufficient margin to the pallet for the purpose just mentioned, without unnecessarily increasing its size, and therefore its resistance and tendency to ciphering. The less the pallet projects beyond the pallet-hole all round, of course the less space will there be for the lodgment of "cuttings," or any other substance that might fall through the sound-board on to the pallet; and an eighth of an inch on each side is amply sufficient to render a pallet perfectly "sound," if it is quite "true" in all other respects.

130. Some pedal pallets are made as much as sixteen or eighteen inches in length, and from four to five inches broad. The resistance, however, which the wind offers to so large a surface moving through it being very great, several organ-builders have devised means for overcoming this difficulty.

131. Mr. Hill, some years since, invented a new pallet, which allows of the passage of a large quantity of compressed air, without making so great a demand on the muscular powers of the performer to set it into motion as did the old *clack*-

pallet. This new kind, called the box-pallet, is formed like a small box (a a, fig. 41), the bottom of which is open, but furnished with a moveable covering. On pressing down a key, this covering is drawn sideways, and up by the side of the box, as shown in fig. 42; returning again under the influence of a spring at each end, when the pressure ceases. The circular motion enables it to escape the pressure of the wind during the opening; an edge only, instead of a broad surface, being all that is presented to it; and the calculation is, that it thus reduces the resistance to one-fourth of that presented by one on the old plan; and admits, at the same time, double the quantity of wind. The leathered faces of the valve-seat are so arranged (the centre of motion of the valve being slightly eccentric to the curvature of the valve-seat) that all the parts are thrown out of contact at the first moment of motion, consequently there is no




42




friction of surfaces. A silver medal was, in 1841, awarded by the Society of Arts to Mr. Hill, for his ingenious invention.

132. The *jointed-pallet* of Mr. Holt, of Bradford, consists of a pallet of the usual kind, with the front end (a, fig. 43) divided from the remainder, though jointed by means of the leathering above, so that the front may descend about the



sixteenth of an inch before the hinder portion is set in motion. In a pallet fifteen inches long, about two inches and a quarter is thus separately hinged. The front part descends first, admitting air into the groove; after which the button c takes hold of the fork d, and by it draws down the remainder of the pallet without the finger having to overcome more than the resistance offered by the spring. The great organ pallets of the instrument in Leeds parish church have been altered agreeably to this plan, and the average resistance has been reduced from nineteen ounces to seven.

133. The *valve-pallet*, invented by Mr. Jardine of New York, and introduced by his nephew (of Manchester) into this country, is formed, as its name would imply, by attaching a second pallet, of diminutive size, to the back of the first one, covering a small circular orifice through the free end of the latter. See b, fig. 44, in which c represents a brass wire, tapped at both ends, screwed firmly



into the large pallet above, and furnished with a strong button (a) below; the middle part—passing through a hole in the small valve of sufficient size to allow the pallet to work freely—being left smooth, to prevent friction. On pressing down the controlling key, the small valve is lowered about the sixteenth of an inch, uncovering the orifice, and allowing some of the compressed air to pass through into the groove above. The atmospheric pressure now becoming the same over as well as under the pallet, there is only the resistance of the spring—necessary to ensure the return of the key-movement—to be overcome. The small valve, in descending, touches the button a; resting on which, it now draws down the large pallet with it. The jointed-pallet and the valve-pallet are obviously the same in principle, although the manner in which the ultimate object is attained in the two is totally dissimilar. There is no disagreeable "second" touch discernible in the action of either of the last-mentioned pallets.

134. Other kinds of pallet for lightening the touch have been invented by Walker, Willis, &c.

## CHAPTER VI.

# THE TABLE.

The table. 135. The grooves, as already described, are entirely closed or roofed in by a layer of stout and tough wood-work, called the *table*. Through

							e						8					-	15				e															6		
	•	•	•		•		•				-			!			-	•					1.	1		1		0			/(  •/	0	•	•	•	•		•	9	
d	:	•	:	:	:	:	:			:		:	•				8														:		:			:	:	:	:	d
ľ	•	•	•	•			•		1	•	•		i	./	•	)"	• •	1	(-)	i	°	1	11		6	1	11	11	11	1	10		0	•	0	•		•	•	
c							٠	1.	٠.		• •	•	1	•		٠/.		•)		1	ŀ	•	10	.(:	1	1	-1	11	-1	ď	1.	0	•		Ĺ		1			c
	•	*	•				•		1.		0	1.	•	0	۰).	0	1	1	1	1.	1	1	•	1	0	(f	1	1	- 1	·ŀ		۰	•	۰	0	•		1.		
	•	•	•	•		•			1.	1	$ \cdot\rangle$	1	·	(-)	•	1			1	1		•	1	1	()	1	1	1	1	•	1.	۰	•	•	•	•	•	•	•	
	1	•	•		1.		1.	1:	1	1	1	1.	1		1	1	1	$\langle \cdot \rangle$	1	Y.		1	•	1	1	1	11	1	1			٠	•	•	•	•	•	0	1	
c				Γ	}		•	•	٠		1-1	1.	1.	-)	1	1	-		·(·)		•	7		1	1	0	1	(-	1	.):	).	•	•	•	•	1	1			c
a	8	1		•		•	٠	•	1		•)	1	1			1	1	(-)	0	1	1	1	11	1	1	1	1	( )			•	1	0	0	0	ē	11	8	E	a
			1			•		(-)	/.	(•	1		1/	•	1	1	1	1	1	1		1	1	!	11		1	1	1	1	()		•	•	•	ı	W	ä	2	
							e					e	_									$\epsilon$	,									Ī						7		

this table the wind has to make its exit. For this purpose, there are bored over each groove as many holes, or nearly so, as there are pipes to be supplied from each groove.

- 136. The accompanying engraving (fig.45) represents the table of a sound-board thus perforated. On referring to it, and comparing it with the preceding illustration, showing the grooves of a sound-board, it will be at once seen that the rows of dots, circles, and squares, that may be traced by casting the eye in a line directly across the table, as from b to b, represent the several holes which occur in the roof of a single groove. And on turning to the general section that forms the frontispiece to this volume, the reader will there see represented the several pipes belonging to a single groove in each of the four sound-boards, drawn to a comparative scale.
- 137. But other series may be detected. For instance, if the eye be now directed along the table instead of across it, as from a to a, it will select from each of the transverse series, a single aperture, with certain deviations presently to be noticed. Each longitudinal series thus compounded constitutes the outlets for the wind from the grooves to the pipes of some single and independent stop. A portion of a longitudinal series will be found represented in figs. 49, 50, and 51.
- 138. Some of the longitudinal series in the foregoing illustration are so drawn as to illustrate certain peculiarities in either the arrangement of the perforations, their boring or grouping, which require to be explained.
  - 139. In England, the room allowed for a church organ is seldom of sufficient

width to permit the pipes of the stops being arranged in a parallel and unbroken series. What is wanting therefore in width, has to be secured in the depth of the organ. Only every *alternate* pipe of a stop is therefore usually ranged in a straight line, the other pipes being planted at a short distance behind.

- 140. Now, as the holes in the table are borcd in the first instance to suit the arrangement of the pipes, each longitudinal series has the zig-zag appearance shown in the drawing. Sometimes, when the pipes of a stop are very large, as is the case with those of the manual 8-feet posaune at the upper end, only every third pipe is placed in a straight line, thus necessitating a three-fold distribution of the corresponding series of holes.
- 141. In some instances, again, the longitudinal series of holes is not continued over the entire length of the table, as indicated at c c c c. This is generally the case when the stop to be placed above is not to be of the full compass, but minus the pipes to those grooves over which a blank is left, and consequently to those keys which govern them; and which, moreover, are not to be "grooved" into the bass of any other stop. Thus the blanks at c c, over the six wide grooves at each end of the table, indicate that the stop above will have no pipes to the bass or 3-feet octave.
- 142. In other cases, instead of there being simply one hole over each groove in a longitudinal series, there will be a cluster of from two to five smaller ones  $(d\ d)$  over every treble groove, and either the same number or an oblong one over each bass groove. These groups of little holes indicate the part of the table over which a compound or mixture stop is to be planted, and which always has from two to five pipes to a key.
- 143. The holes forming a longitudinal series are not made of a uniform size, but of graduated dimensions; the smaller holes being over the treble and the larger above the bass grooves. The latter are also sometimes made square instead of round, as shown at a a, in fig. 45. Neither are the several longitudinal series of holes bored of the same size, as all stops do not require the same amount of wind. For instance, a 4-feet stop consumes little more than half as much wind as one of 8 feet; while one of 16 feet requires nearly three times as much. The size of the holes in the table, therefore, obviously depends on that of the pipes and stop to be fed through those holes.
- 144. Sometimes a little air will escape through a groove-hole, and make its way up to some pipe, and cause it to produce a low, disagreeable, and continuous humming. This is called a "running;" to prevent which, little cuttings are made in the surface of the table, or in the upper-boards, in a zig-zag or waving course, passing between some of the holes, as shown at *e e e*, in *fig.* 45. If now any wind escapes, before it can reach the next pipe, it is caught in some one of these channels, and by it conducted to the edge of the sound-board, where it escapes through a small triangular hole, without doing any mischief.
- 145. A running is sometimes caused by a sound-board-bar "springing" (i. e. becoming partially separated) from the table; thus allowing a "leakage" of wind from one groove to the next. An accident of this kind can only be thoroughly cured by taking the wind-chest to pieces; but an expedient is in such cases often resorted to, technically called "bleeding," which consists in making a small hole in the groove through the "cheek," which allows the air to escape.

## CHAPTER VII.

#### THE UPPER-BOARDS.

- 146. The detection of the several transverse series of holes just now, will assist in illustrating the next particular to be noticed.
- 147. If the pipes belonging to the grooves were to rest on the table immediately over the series of holes just described, the wind, on entering any one of them, would pervade all the pipes of that groove, and the organ would in consequence be incessantly pealing forth its tones at their greatest power; none of the numerous modifications so necessary to accommodate the strength and character of the organtone to required purposes would be attainable; but all would be powerful, monotonous, and meaningless alike. Up to the beginning of the sixteenth century, all organs were nevertheless constructed after this fashion; but at about that period the stops or ranks of pipes began to be separated from one another. The power of subduing the organ-sound even to a mere whisper, if required, is now secured by the introduction of two additional layers of wood-work over the table, by means of which, the wind from the grooves can be excluded from or admitted to any or every longitudinal series of pipes at pleasure.
- 148. The upper layer of wood-work is, as nearly as possible, a counterpart of the table, and is placed at a distance of about one-third or half-an-inch from it. (See *fig.* 46.)

46.

•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•		•		•						•	•	•	•	•	•	•
	:	:	:	:	:	:	:	:	::	:		:	::		:	::	::	::	::	:							:	:	:		:	:	:	:	:
•	•	•	•	•	٠	•	•	•	• ,	•	• •	•	•.	•	•	•	••	•	••	•	•••	•	• •	. °	٠.	• •	•	•	•	•	٠	•	٠	•	•
						6	9	•	* 4	•	• •	•	••	•		• •		•	• •	•	•	•		.*	• •	_	•	0	0						
•	•	•	•			•	9		• 4		• •	•	•	• •	•	• •	• •	•°	• '	•	•	0,1	••		۰.	ິຄໍ	0	0	•	•	•		٠	•	٠
•	•	٠	•	•	•	0	0	•	٩	•	• '	•	٠.	•	• *	• •	p 4	••	•	•	•••	•	•	•	•	•	•	•	•	•	•	•	•	٠	•
•		•	•	•	•	•	6	•	•	• *	• 1	•	•	•	• °	•	•	•	•	•	•	9	•	0	•	•	•	•	•	0	•	•	•	6	•
					•	•	0		۰,		• '	•	٠.	• •	•	••	•	•			••						٠.	•							
0	0	0	0	0	0	0	0	a	•	•	• '	•	•	•	••	••	•		. •	•		•	•	•	0 0	0	•	•	٥	0	0	0	0	0	0
٥	0	0	0	0	0	0	0	0	•	•	•	•	•	•	•	•	•	•	•	•			0			9 6	0	0 1		5	0	0	0	0	0

Indeed, it may be said to be a repetition of that part of a sound-board, rendered necessary by the introduction of the mechanical work that is to control the speech of the pipes, and which must be over the air-tight grooves, yet under the pipes. The area of its surface is similar in all respects to that of the table; the holes also correspond, for the most part, both in number, situation, and arrangement. It is not, however, like the table, made in one connected piece, but in several pieces, much narrower than the sound-board, though of the same length (at least in England), and which, when laid side by side, present a plain surface, as shown in the above figure.


- 149. A sound-board is, in consequence, said to have, not one, but several upper-boards; and it is an advantage to have as many of these as possible; a separate upper-board for every stop, if practicable. The reason of this is, that if a slider below warps or "binds," it can only be effectually set right by being first removed, and then planed; and as, by way of preliminary thereto, the upper-board must be taken off, and of course the pipes above it disturbed, this can be done, if there be a separate upper-board to each slider, without displacing more pipes than those the disarranged slider governs: but if there are one or two other stops on the same upper-board, those stops must also be removed before the upper-board can be taken off.
  - 150. A narrow upper-board is also less liable to "cast."
- 151. One exception to the general rule, that "the perforations in the upperboards agree with those in the table," occurs in the case of "conveyanced-off pipes." When the sound-board, from whatever cause, is made so short that all the pipes cannot have proper standing and speaking room thereon, a situation has to be found for some of the larger pipes elsewhere, and the wind has to be conducted from over the holes in the sound-board to their new locality. If this situation be on nearly the same level with the sound-board, a groove is cut in the substance of a kind of second upper-board, called the *groove-board*, from over the former to the latter, and then the surface outlet is made; and when the pipe is below or above the level of the sound-board, a metal tube, called a *conveyance*, is introduced, to conduct the wind from the groove or the groove-board to the pipe.
- 152. It sometimes happens, particularly in modern churches, that the site for the organ is so circumscribed that there is neither adequate width for the sound-boards, nor height for the pipes. It is this latter circumstance that renders it necessary for the organ-builder to place some of the large pipes one or two feet below the sound-board.
- 153. Another exception to the general rule sometimes occurs in the case of mixture or compound stops. In the bass part of the table, the preparation for a stop of this kind sometimes consists simply of one long hole. But as each key is provided with from two to five pipes, the upper board on which they rest is required to have an equivalent number of punctures, instead of a single hole, and so causes the deviation in question.

# CHAPTER VIII.

THE SLIDERS, BEARERS, AND PIPE-RACKS.

154. Between the table and upper-boards (the first and third layers), is the second layer of wood-work. Certain portions or longitudinal strips of this layer, like those above and below it, are fixtures; while the intermediate parts are moveable. The fixed parts are called bearers (fff, fig. 47); and the moveable, from their being so, sliders (a b c d e). The latter are the wind-regulating features.

47.

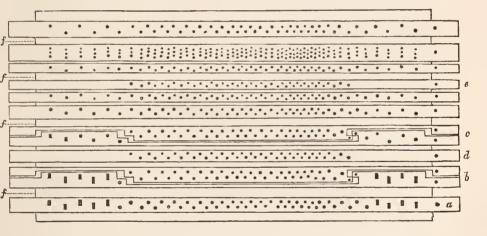

- 155. The *sliders* are so many long and flat pieces of oak or mahogany, lying over the longitudinal series of holes in the table. Each of these sliders is pierced with holes corresponding precisely with those in that part of the table on which it rests, and with those in the upper-board above.
- 156. This may be seen by comparing the accompanying wood-cut (representing the sliders and intermediate bearers) with the preceding two cuts, illustrative of the table and upper-boards.
- 157. The relative position of the three layers of wood-work, between the grooves of the sound-board and the feet of the pipes, could not of course be shown in the preceding plans; but they are represented in the "front section of a portion of a sound-board," fig. 49, where they are marked a de, and to which section the reader might here refer, as it will illustrate the following explanation of the manner in which a slider operates.

The action of a slider. 158. On drawing a slider (a) a little way out, its perforations are brought exactly *over* those in the table (e), and therefore immediately *under* those in the upper-board (d). The three series of apertures now agreeing, the air can pass up uninterruptedly from any groove into which it may be admitted, through all of them, into the pipe of the stop that stands immediately above; the pipe being thus made to sound. The grooves are, in fig. 49, represented by the *unshaded* vertical divisions.

- 159. On moving the slider back into its former position, the holes in it are brought over the sound-board bars, the *shaded* parts, and the blank substance of the slider substituted for the holes over the grooves. The wind now, instead of finding a free outlet as befere, is checked by the intervening material of the slider, against which it strikes, and is reflected back again into the groove. The wind-passage between the first and third layers of wood-work being thus intercepted, and the communication for the wind from the grooves to the pipes of this particular stop consequently cut off, it becomes silent, and the stop is said to be "in."
- 160. Every separate slider, as a rule, controls a separate stop; so that any stop may be allowed to sound or not, according as the slider is "in" or "out."
- 161. In some sound-boards certain of the sliders are "cut," so that the portion which controls the bass part of the stop above can be drawn independently of the remaining part. The stop is then said to "draw in halves." In fig. 47, the sliders marked b and c are represented as being constructed in this manner.
- 162. Other sliders again, which do extend through the whole length of the sound-board, are not perforated, in some cases, in that part which lies over the bass grooves. (See fig. 47, de.) Sliders that are thus only partially bored, are intended to control stops that are of inferior range to the manual.
- 163. When all the sliders are drawn, the organ peals forth its amplest tones; when all are in, no sound is heard, because the wind cannot reach any of the pipes.
- 164. The sliders measure from one and a half to three or four inches in breadth; from one-third to half-an-inch in thickness; and a few inches more in length than the sound-board itself. Two additional holes are cut through each slider; one in that portion which, in consequence of its greater length, projects beyond the sound-board (a, fig. 47); the other, in some other part that is convenient for the purpose. The former receives the end of the lever by which the slider is moved to and fro, on the drawing out or the pushing in of the controlling knob at the side of the manuals. The second hole receives a stout iron pin, which is fixed into the table, and allows the slider just sufficient motion to cover or uncover the holes in the table. If this motion were to exceed or to fall short of what is necessary, the holes in the table would, in either case, be partly shaded, thus cutting off a portion of the supply of wind from the pipes, and preventing their speaking with proper strength or in tune.
- 165. Other holes are sometimes cut through the opposite end of the slider. This is often the case when the "composition pedals" act directly on the sliders.

The bearers. 166. The bearers receive and support the edges of the upper-boards, which are screwed down to them, and sustain the weight of the


upper-boards and pipes above—hence their name. The sliders are thus relieved from all pressure, and left entirely free to work.

167. In modern sound-boards there is commonly a bearer between every slider and its neighbour; but in old sound-boards there is more frequently only one bearer between every two or three sliders. The modern plan is obviously the best, as one slider cannot, in moving, rub against another and disturb its position.

The pipe-racks. 168. The greater number of the pipes stand on the upper-boards, but cannot of course support themselves on their apex without more assistance: a frame-work, therefore, is used to keep them in an erect position.

169. The frame-work consists of some thin planks of wood, called rack-boards d, fig. 48), laid parallel with, but four or five inches above, the upper boards (a), and is there sustained at all corners, and in other convenient situations, either by wooden pins, called rack-pillars (fig. 48, h h) or by some other connecting woodwork. These rack-boards are furnished with holes cut immediately over those in the upper-boards. Through these rack-board-holes the lower and narrow ends of the pipe-feet pass  $(s\ s)$ , while the upper and broad ends of the pipe-feet  $(b\ b)$  are made to fit tightly into them; and to prevent the feet from shifting about, and the pipes getting out of the perpendicular, the "noses"  $(s\ s)$  of the pipes are sunk a little way into the upper-boards, which are "counter-sunk" to admit of this.

170. Most of the metal flue pipes, all the small and moderate-sized wood-pipes, and also the boots of the reed-pipes are racked in this manner.



#### CHAPTER IX.

#### THE ARRANGEMENT OF THE GROOVES AND STOPS.

The situation of the large and small grooves in the sound-board.


171. It has been explained how the grooves lie, side by side; and how some are broad, others narrow. Nothing, however, has yet been said concerning the *order* in which these broad and narrow grooves are arranged with regard to one another. In England, the grooves are seldom made to succeed each other after the manner of the keys—that is to say, semitonally,—but are generally intermixed in one way or another.

- 172. There are several ways or "plans" of distributing or assorting the grooves, the selection of the particular one from among which is influenced by many considerations; as, for instance, the size of the sound-board; the department of the organ for which it is destined; the terms on which the organ is to be constructed, &c.; some description of groove-arrangement calling for a more complicated and costly kind of *key-movement* than others.
- 173. The old organ-builders, when fixing on the situation of their sound-board grooves, were often influenced much by the design of the case in which the instrument was to be enclosed. For instance, if the case was to have three towers, with the largest one in the centre, say of five pipes each, some of the largest grooves,—namely, those for some of the lowest keys,—were placed on each side of the centre passage-board; i.e. at the *inner* end of the two halves of the sound-board; the grooves next in size, at each *outer* end of the two halves; and the smaller grooves in between the larger. In distributing the grooves after this fashion, the builders had two objects in view; (1) to keep the front pipes, which, of course, were "conveyanced off," and the grooves from which they were to receive their supply of wind, as near to each other as possible; and (2) to distribute the large and the medium sized grooves throughout each half of the sound-board; doubtless from an impression that if all the large grooves were placed at one end of the "half," and the small grooves at the other end, the consumption of wind at one end of the wind-chest might at times be so great as to risk the partial withdrawal of that required for the smaller grooves at the other end.
- 174. The peculiar and complicated "plantation" of pipes, however, which such a distribution of the grooves rendered necessary, was most inconvenient. It caused a cluster of large pipes to accumulate at each end of the halves of the sound-board; while there were the "prospect pipes" in front, and the large reeds in the rear. The small pipes were thus walled in on all sides; and although little pipes are much sooner affected by change of temperature, dirt, &c. and therefore require looking to more frequently than any other pipes in an organ, except the reeds, yet they were thus rendered the most difficult of access. Several of the large pipes had, in the majority of cases, to be removed before the tuning or cleaning could be commenced; which handling and shifting about, in addition to involving considerable trouble and loss of time, was not unattended with danger to the instrument.
  - 175. These manifest disadvantages soon led to an amelioration of the then pre-

valent method of laying out and winding an organ. The sound-board grooves were made deeper; the pallet-holes lengthened; the wind-chests made broader and deeper; and the dimensions of the wind-trunks much increased. The grooves appear generally to have been made of a satisfactory width originally; and the borings in the table, sliders, and upper-boards, were of ample size. These several improvements, and more particularly the subsequent introduction of double grooves in the bass, admitting of the introduction of conveyances of larger bore, the close proximity of the large pipes to their grooves, although at all times an arrangement most desirable, no longer remained a matter of such vital importance as before; and, as the old plan of groove arrangement was so very objectionable in all other respects, it was allowed to fall into disuse, and was entirely and finally abandoned before the middle of the last century.

176. At the present time, the English organ-builders usually adopt one of three different plans of groove arrangement, according to circumstances. Some of these plans require the adoption of a special kind of key-movement; and as it will be convenient to refer to these plans separately, the terms "first plan," "second plan," and "third plan," are here adopted; and in the description of the key-movement, they will be briefly referred to under these heads.


177. In the first plan, the grooves are placed alternately on First plan of groove arrangement. each side of the organ; i.e. the groove belonging to the CC key is planted at the extreme or outer end of one half of the sound-board, the groove belonging to the C C sharp key being similarly situated at the extreme end of the other half. The grooves throughout the sound-board are then arranged in the like alternate manner; ultimately bringing those belonging to the two upper keys (e3 and f<sup>3</sup> say), one on each side of the passage-board (see fig. 49). In this first plan, therefore, the grooves occur in tonal succession on each half of the sound-board (see fig. 49). The "half" to the left, as the performer sits at the keys, contains the grooves for CC, DD, EE, FF sharp, gamut G sharp, A sharp, and their octaves. To the right are the grooves for C C sharp, D D sharp, F F, gamut G, A and B, with their replicates. As a consequence of this distribution, the largest pipes stand at the outer extremities of each half of the sound-board, and the smallest in the centre.

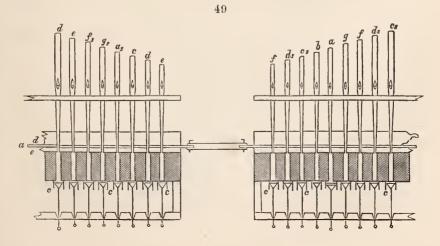

178. This groove arrangement is much used for large great-organ (chief manual) sound-boards, both on account of the symmetrical arrangement of the pipe-work to which it leads, and the facility it offers for the purpose of tuning, &c. The shortest pipes standing, as they then do, immediately on each side of the passage-board, with the largest farthest off, and those of intermediate length between; the tuner can, without difficulty, adjust either the small pipes at his feet, or, reaching over them, arrive at larger pipes, if they require his attention.

179. The half of the sound-board on which the C C groove occurs is called the C side; and the other half, the C sharp side. The "sides" are named after the lowest note on that half of the sound-board. Thus, in a G G organ, the side on which the G G groove is placed is called the "G" side; and so on.


Second plan. 180. The second plan (fig. 50) may be described as a reversion of the first plan. The groove for the lowest key in the scale, instead of the highest, is placed in the centre of the sound-board; while the other grooves, instead of increasing, decrease as they diverge from the middle. The largest pipe of each stop, therefore, is planted in the centre of the sound-board; the two smallest standing one at each end. The pipes on a sound-board having the grooves arranged in this manner, present a pyramidal outline, as shown in the accompanying wood-cut.



181. This second plan of groove arrangement is very generally adopted for swell sound-boards. It is very seldom that room can be spared inside the swell-box either for a passage-board down the contre, or for one round the pipes. The pipes are therefore arranged according to the second plan; and each side of the swell-box is furnished with a moveable panel. On removing this panel, the pipes of one half of the sound-board present themselves arranged in a graduated series from small to large; and the remaining half of the pipes are reached by the same simple means from the other side of the swell-box.

Third plan. 182. In the third plan, the smallest groove is placed some-

what to the right of the centre of the sound-board—as it is viewed from the front of the case,—and those for every semitone, as far as tenor c, are arranged in regular chromatic succession to the left of the first groove. Those for the lowest or "great octave" are then disposed alternately to the right and left, as in the "first plan," occupying, as before, the extremities of the sound-board. See fig. 51.



183. This third plan is most frequently adopted for the chief manual sound-board of small-sized church and chamber organs; and admits of a much more simple kind of key-movement than the first and second plans.

The arrangement of the stops on the sound-board.

184. The stops—or, to use the technical phrase, "contents"—of the great organ are usually so arranged that the flue stops stand in front and the recds behind; and the largest flue stops, such as the unison and double diapasons, are generally placed first, the remaining stops being planted in rotation according to their size, the mixtures thus being brought next to the reeds. This arrangement of the stops is illustrated by fig. 1 in general section. When there are duplications of any stop, as two open diapasons or two trumpets, it is usual to place other stops between the first stop and its replicate. Thus, in Harris's organ, at Doncaster, lately destroyed, the second open was placed between the two trumpets; and in the organ at Ripon Cathedral, by Father Smith, the second open diapason stands between the trumpet and the sesquialtera.

185. The inside choir organ has its stops planted the reverse way to the above, i. e. with the flue stops behind and the reeds in front, that the latter may be under the immediate inspection of the tuner. Thus, in fig. 2 in general section, the clarinet and bassoon are placed nearest the passage-board.

186. In the swell, the reeds are usually placed in front—as in the choir,—because the tubes offer less impediment to the egress of the sound than would the more bulky flue pipes. See fig. 4.

187. The pedal stops are also planted in the same manner, and for the same reason.

The mechanism of the organ.

188. Having described the apparatus by which wind is collected for the use of the organ; traced its course from that source through the various channels, great and small, till it reaches the pipes; and noticed the sound-board pallets and the sliders by which the organ-wind is made subservient to musical purposes; we will now proceed to investigate, in detail, the several systems of mechanism, through the intervention of which the pallets and sliders of the several sound-boards, and, by consequence, the several pipes and stops of the organ, are brought so admirably under the control of one performer.

189. Of those numerous distinct systems of mechanism, there remain the following to be considered; viz.

The key and pedal movements;
The draw-stop action;
The composition pedals;
The coupling movements;
The sforzando coupler;
The pneumatic action;
The swell action; and
The tremulant.

The sound-board pallets, sliders, and the blowing-action have already been described.

### CHAPTER X.

## THE CLAVIERS AND KEY MOVEMENTS.

190. Before, however, describing the appliances, through the agency of which the impulse given by the fingers or the feet of the performer is conveyed to the sound-board pallets, a few words may be said concerning the several ranges of keys assigned to *receive* such impulse; namely, the claviers.

The manuals. 191. The organ, as is well known, is played partly by the pressure of the fingers, and partly also by the pressure of the feet, upon suitable claviers or keys. A clavis (a word derived from the Latin, and signifying a key, in French called touche) is a small lever (from levare, to lift-up); and a clavier is an assemblage of such levers or "keys," rightly assorted. The various sets of keys (of which every perfect organ contains several, and among these at least one for the use of the feet\*), are classed under the one general term clavier; and those intended to be used with the hands are called "manual claviers," or simply "manuals" (from the Latin word "manus" a hand); and that for the feet, "pedal clavier," "pedal-board," or simply "pedals," from the Latin word "pedes," the feet. The keys, as well of the pedals as the manuals, are divided into long and short keys, like those of a pianoforte; and the former are readily distinguishable from the latter by their magnified scale.

192. It is necessary to bear in mind the great distinction that exists between the terms clavier, manual, and pedal-board; as, otherwise, frequent uncertainty is likely to arise. The word clavier is of general application, and means simply a set of keys; which, however, may be for the use of the hands, or for the use of the feet; while the two other words, manual and pedal, are of special application, and define for what purpose, and by which members of the body, the clavier so named is to be employed.

193. In Germany, the terms manual and pedal are used in a more extended sense than is usual in England. In that country, they refer to the department of the organ on which the *claviers operate*, as well as to the *claviers themselves*: hence we frequently find it stated that there are so many stops "on the pedal," or so many "on the chief manual." Moreover, when a manual is said to be of 8-feet compass—i. e. descends to C C,—the manual organ is understood to be of corresponding range,


194. In the present work, the word clavier will be used whenever the passing observation refers equally to the keys for the hands or for the feet. In all other cases, the more explicit terms will be employed.

<sup>\*</sup> Some continental organs have, in addition to three or four manuals, two sets of pedals. This is the case at St Paul's, Frankfort; at Fribourg, &c.

195. The keys of many old organs were made of oak, and had the *naturals* capped with ebony, and the *sharps* with ivory. This arrangement of the black and white keys, however, only remains in such specimens in which the subsequent alterations have not kept pace with the progress of modern improvement. The original keys of many of the old instruments, those of *Smith* and *Harris* for instance, were also very short, and disagreeable to play upon. Those of *Snetzler's* organs were generally longer, and therefore more pleasant to the finger. Previous to the year 1720, the thumbs were but little used in organ-playing, but usually hung down in front of the manual; consequently the portion of the naturals that projected forward in front of the short keys, was made to do so as little as possible, that the fingers might reach the so-called sharps with the more ease. It was the custom, moreover, instead of raising the fingers from the knuckles, to draw them under towards the palm of the hand, which accounts for the short naturals of old organs being scooped out into hollows in the centre by the friction of the nails.


196. When the thumbs came to be more freely used on the naturals (a change in the mode of fingering that took place about *Snetzler's* time), the front part of the naturals was made a little longer; and when at length, in modern times, they were also freely employed on the short keys, those in their turn had to be slightly elongated. Thus, from the naturals being, in old organs, little more than four inches in length in front of the cross-beading, they are in modern instruments often made from five to six, and with the short keys in proportion.

197. The manual keys of modern organs are usually made of lime-tree wood, with the surface of the long keys covered or capped with ivory; and that part of the short keys which rises above the level of the naturals, is either made of ebony or some other wood stained black. Each manual key is punctured towards its centre with a small hole, passing downwards, to admit a metal pin (a, fig. 52),



that rises from a piece of wood or pin-rail beneath (b), and which pin serves as a pivot for the key to work upon. The hole through the key is not cut exactly midway between the two ends, but rather nearer to the back end, leaving about fiveninths of the entire length in front of the pin. A second hole is bored in the underside of the front end of each key, to admit a pin that rises from a rail (c) running across under the front of the keys, and upon which pin the key descends as it falls. This pin renders the fall of the key true and steady under the finger. Two or three thicknesses of green baize, or some such woollen stuff, laid at the root of the pins, prevent the keys from coming into noisy contact with the front-rail. These two rails are strongly united to two pieces of wood, called key-checks, the front ends of which appear on each side of the set of keys, finished off in something of an ogee form, as indicated by the dotted lines in fig. 52. As the manual keys would, on the removal of the finger, spring up beyond their proper level under the influence of the returning "key-movement," unless something were done to check them, a piece of wood is laid transversely across the keys, immediately to the rear of the veneered part, so as to be just out of sight, which is loaded with lead on the upper side to make it so heavy as to stop the rise of the key, and lined underneath with green baize to silence the blow of the key against the board. This piece of wood is called the thumping-board.

The pedals. 198. The pedals are made either of oak, mahogany, beech, or some other hard wood, and are, as before said, chiefly distinguishable from the manual keys by their magnified scale; the order of the keys, long and short, being the same in both cases. The pedals work on a centre at the back (a, fig. 53),



and fall under the pressure of the foot, in front (b), that is, at the end under the manuals. A spring under each pedal (c) causes them to resume their original position on the removal of the foot. The pedals are placed at a proper distance below, and under the manuals, that they may be conveniently played upon by the feet of the performer.

The situation of the claviers. The claviers of an organ are usually placed in the front of the organ-case, in the centre, just beneath the impost; though want of room and other circumstances sometimes render other arrangements necessary. Thus they are occasionally found at the side, as at Hanover Chapel, Regent Street; or even at the back, as at Christ Chapel, Maida Vale. In some instances, the claviers are not in the instrument itself, but separate, and, to all appearance at least, unconnected with it. This is the arrangement observed in the organ at Windsor Castle, constructed on a plan suggested by His Royal Highness the Prince Albert, where the keys appear in a kind of manual table, situate twenty-two feet from the body of the instrument. At Westminster Abbey, again, the claviers are similarly detached; the great organ being in front, the swell behind, the choir to the right, and the pedal organ, with its large pipes lying horizontally, to the left of the organist. The Apollonicon had its numerous claviers so arranged that the several performers sat looking towards the audience.

200. Concert-room organs are generally furnished with what is called a "long movement," a modification of the usual mechanism that admits of the keys being placed in the front of the orchestra, while the instrument itself stands at the back. The first long movement made in England is said to be that attached to the organ in Vauxhall Gardens, by Byfield, and which served Green as a model for the long movement applied by him to the organ he erected for the Handel Commemoration in 1784. At All Saints' Church, Manchester, the communication between the keys and sound-board pallets is established by means of a movement 87 feet in length.

201. But the most remarkable long movement is that attached to the organ in the church of St. Alessandro in Colonna, at Bergamo, built by Serassi in 1782. The organ has three manuals, the first and second of which serve for the great and choir organs in the same part of the church; while the third, by means of a long movement passing underground, acts upon another great organ situated at a distance of nearly 115 feet from the keys.

202. Some organs have two, three, or even four manuals. These are arranged

one above another, and so that the lowest stands out farthest, and each succeeding one recedes.


203. In an organ having two manuals, the keys of the great organ form the bottom row, and those of the swell the upper. Where there are three manuals, the great manual is usually in the middle, with the swell above and the choir below. In Avery's organ, at St. Margaret's, Westminster, however, the great manual is below, and the choir organ keys in the centre.

The key-movement. 204. The key-movement is that system of the mechanism of an organ which establishes the communication between the keys just noticed and the sound-board pallets that control the entrance or otherwise of the wind from the wind-chest into the grooves.

205. For each clavier there is usually a separate "movement." And as the clavier and its corresponding sound-board are variously located in regard to each other, according to circumstances,—sometimes being placed in close proximity;—at other times at a long distance apart;—sometimes in a direct line with each other;—at others at right angles;—sometimes so that the performer faces the organ;—and at others so that he sits with his back to the organ;—it is obvious that the "movement" introduced for the purpose above mentioned must not only vary very much in detail in various examples, but in some cases must be far more complex than in others. This would be the case even if the grooves were always arranged in the same order; but as they are sometimes disposed agreeably to the regular semitonal "third plan," and sometimes according to the crossing first or second plans, the key-movement from this cause becomes in some respects still more diversified.

206. Yet, although so multifarious as to detail, there are in reality only two distinct kinds of key-movement in common use in England; namely, the *lever* or *fan-frame* movement, and the *roller-board* movement. A third kind is noticed in a subsequent chapter.

207. The fan-frame movement is the simpler kind of the two. It consists of three parts only; namely, a small upright rod, called the sticker (c; fig. 54) a horizontal lever, called the backfall (h); and a second vertical rod, called the tracker (f). The lower end of the sticker (c) rests on the tail (b) of the key (a), and the near end (d) of the




backfall (h) on the top of the sticker. The far end (e) of the backfall is attached to the tracker (f), which latter passes up perpendicularly and communicates with the pull-down that draws open the pallet (g).

208. The *stickers*, which are made of pine or cedar, and of a round or square shape, reach from the key-tails to the backfalls—a height varying from a few inches to a foot or two, as may be requisite. From the top of each sticker a wire pin rises about an inch (a, fig. 55), and passes through a puncture in the backfall, to prevent its slipping off instead of rising with the sticker. A small piece of woollen stuff, placed over the top of the sticker, prevents that and the backfall rattling together; a similar noise at the lower end being obviated by the leather on the tail of the key already noticed.



209. Sometimes the stickers are made to pass through a register—a rule of wood laid transversely and flatways above the tails of the keys, and perforated (c); in which case, they have each a small piece of wood or leather attached. This, by resting on the register, prevents the sticker falling through, and so allows of the temporary removal of any key, or even the entire set, without disturbing the arrangements of the stickers.

210. The backfalls are made of some hard wood, such as oak or cedar, and of the shape indicated in the adjoining cut (fig. 56).



They range from one to about three feet in length, according to the distance, in a direct line between the pallets and the keys; from one to two inches in depth; and from three-sixteenths to one quarter of an inch in thickness. A small wooden beam, called the backfall-frame, sustains them in their proper situation; the frame itself being scored crossways with numerous narrow cuttings, made to receive that portion of the backfalls which is below the centre. The centre consists of a piece of stout iron wire passed through the middle of each backfall, and fastened down with small staples.

- 211. The trackers (fig. 57) are so many strips of some light wood, as pine, measuring about five-sixteenths of an inch in width, one-eighth in thickness, and, in the situation under consideration, not more than about two feet in length. Each tracker is furnished at the lower end with a tap-wire (b)—a piece of brass wire about three inches long, incised or tapped at one end like a screw, and slightly hooked at the other, by which it is bound to the tracker with thread, afterwards covered with size. The upper end is provided with a hook (a) of copper wire, that communicates with the pull-down.
- 212. The tap-wire at the lower end is passed through a small hole in the free end of the backfall, indicated by dotted lines at c, in fig. 56; and the latter is then firmly secured to the former with a small circular piece of leather, about one-third of an inch in diameter, turned out of thick leather like that used for the soles of shoes, and called a button (c, fig. 57).


The action of the key-movement. 213. The several parts just described operate one on the next in the following manner. On pressing the key (a, fig. 54) down, which moves on a centre (k), the tail (b) rises, lifting with it the sticker (c). This in its turn raises the near end (d) of the backfall, which, by moving on the centre (h), causes the far end (e) to descend. In doing so, it draws down the tracker (f), which pulls the pallet (g) open.

- 214. Some of the wind from the wind-chest now rushes through the pallet-hole into the groove, and from thence makes its escape through such apertures in the roof as have been opened by the drawing of the sliders above; but, in doing so, it is compelled to pass into pipes placed over those holes, which makes them sound; and having thus performed its destined duty, it regains its freedom.
- 215. The key-movement just described is found chiefly in conjunction with a sound-board made according to the "third plan," and, therefore, most frequently in

57

small organs. Where the grooves follow in semitonal succession, rollers are not usually required; and, as simplicity in the mechanism is alway desirable, the above movement, as the least complex, is preferred, where and so long as the consecutive groove arrangement is observed. This accounts for the omission of rollers, as also for the presence of the backfalls as levers; though not for their taking the fun form, which latter circumstance arises from another and independent cause.

- 216. A sound-board is always wider than the manual, sometimes extending to twice its width, or even more. It follows, therefore, that the grooves, instead of running parallel with their respective keys, and differing only in being located at a higher level, are, with few exceptions, more or less *out* of the line with them. This being the case, and yet it being necessary that the far end of every backfall shall be under its own groove, at the same time that its near end shall still rest on its proper sticker, all the backfalls, with the exception of the middle two or three, which swerve but slightly, are made to diverge, until at last the extreme ones are at one end considerably out of a line with their near end.
- 217. This spreading out of the backfalls causes the set to bear a sufficient resemblance to the ribs of an open fan, to account for the adoption of the name by which this portion of the movement is generally known.
- 218. In the notice of the "third plan" of groove arrangement, it was mentioned that the grooves for the lowest or bass octave were placed alternately at each end of the sound-board. While, therefore, all the bass keys are to the left extreme of the manual, six of the corresponding grooves, at the least, are at the extreme right of the sound-board. To bring these, through the governing pallet, under the control of their respective keys, a horizontal rod or roller is provided for each key, extending along behind the backfalls, to transmit the motion the requisite distance to the right.
  - 219. These rollers—of which the accompanying engraving (fig. 58) is a plan—



- (a a) are each provided with two arms (b c), one (b) projecting immediately over the descending end of the backfall, the other (c) directly under the pallet. Instead of the tracker now drawing down the pallet as before, it lowers the first roller-arm (b); and the roller itself (a a) being thus made partly to revolve, conveys the downward motion to the second roller-arm (c), which, descending, draws with it a second tracker in communication with the pallet-wire, which latter opens the pallet. The rollers just referred to are made from an inch to an inch and a half in width, from five-eighths to one inch in depth, and from an inch or two to about five feet in length. They are each provided with two metal centre-pins, projecting about an inch from each end, which pass into holders or studs standing out from the roller-board. These pins form the centre at each end on which the roller partly revolves, while the studs hold them suspendedly over the keys.
- 220. The rollers are mostly ranged one over the other; though in some cases, where convenient, two are placed in a line. In cramped situations, wooden rollers are omitted, and iron ones substituted, as occupying much less space. The arms of the rollers, which are, in the instance of wooden rollers, made either of wood or iron,

are best of the former material, as the metal arms, coming in contact with the metal hooks of the trackers, are very apt to cause a rattling noise. They are, however, more costly.

The roller-board movement. 221. The second variety of key-movement is that known as Roller-board Movement. This description of movement is a usual accompaniment to all sound-boards in which the grooves are disposed according to the alternate or any other irregular arrangement, and is therefore a common adjunct to such as are made agreeably to the "first plan" among others.

222. In a sound-board so constructed, the CC and CC sharp grooves and pallets occur, in separate halves of the sound-board, at a distance sometimes of 7 or 8 feet from one another, while the keys lie side by side on the manual. And all the other grooves, as already explained, are arranged alternately right and left, while the keys of course continue their scale gradually and uninterruptedly upwards. In consequence of the order of the keys and grooves never agreeing, every key is generally furnished with a roller. After the motion of the key, therefore, has been conveyed inwards to the necessary distance, which is effected, in this case, either by parallel backfalls, or by squares and trackers, it is transferred to the right or left by a long or short roller, until it is brought under the right pallet. The groove arrangement therefore leads to the introduction of a great number of rollers, and the movement is in consequence named after them. The roller-board, which sustains the roller, is the large irregularly shaped board, or sometimes a frame, that may be seen placed edgeways, and occupying much of the space under the wind-chest, and extending to nearly the entire width of the sound-board.

The extension of the key-movement.

223. But, in most organs, some of the sound-boards are key-movement.

necessarily situated at a greater distance from their manuals than that to which the key-movements, in the condition already described, can reach; more particularly those for the choir and swell departments, as will be obvious on referring to the general section. A modification and extension of one of the movements just noticed—usually of the roller-board movement—therefore becomes necessary, and is effected by first dividing it. The roller-board still occupies its usual position underneath the sound-board, and the stickers theirs on the tails of the keys. The backfall frame is altogether dispensed with, and the communication between the stickers and now distant rollers is established by "square and trackerwork."

- 224. The "work" last mentioned may be familiarly compared to the crank and wire-work of bell-hangers (see general section). The trackers traverse distances either horizontally, perpendicularly, or diagonally, like the wires, while the squares transmit the motion round corners, from one tracker to the next, like the cranks.
- 225. The trackers in the modified movement now under consideration are often made very long, extending to 10 or 12 feet, or even more; or, what comes to the same end, several shorter trackers are hooked together, so as collectively to make up the necessary length. These great "lengths" of tracker are generally carried through registers or bridges, which afford them support, if they run horizontally, and also prevent their flapping together. The pedal movement, which in most examples

closely resembles the last-mentioned, is noticed in conjunction with the pedal coupling movement.



226. The squares mentioned just now are so many centres (see fig. 59), formed of some tough wood, furnished with two arms each (ab), about 3 inches in length, also of the same material as the square, or sometimes of iron, though the latter is not so good, on account of the rattling which it

causes. The angle (c) of each square is placed in a corresponding cutting made in the square-frame (d d d) to receive it, and the squares are sustained in their proper positions by a small metal rod (e), on which they move freely to and fro.

227. Occasionally, squares are cut out of a single piece of wood; but that is not a good way of making them; for, in that case, one arm must necessarily be the crossway of the grain, and will not long bear the "tug," but will snap off short. A much better kind of square is that wherein two pieces of wood are dovetailed together, at a right angle, the strong way of the wood; but these are more expensive, at the same time that they are much more durable. Mr. Forster, of Hull, has a plan of fixing his squares so that any one can be taken out separately, without disturbing the set of 50 or 60 to which it may belong.

## CHAPTER XI.


### THE COUPLERS, AND SFORZANDO PEDAL.

228. Besides the several *primary* systems of mechanism already described, which are indispensably necessary for working the organ at all, most instruments are provided with a greater or less number of members belonging to an important *sub-sidiary* class, called *coupling movements*, or, more briefly, *couplers*.

229. A coupler is an appliance by which either a second clavier and its stops can be brought into play while the performer's hands or feet are engaged upon the first, or the same clavier can be united to itself in the octave above or below; in any case, the result being an increase of the resources of the department receiving such accession. For the time being, the stops or pipes, according to whether the coupled be another clavier altogether, or the pipes of the same clavier, but united in the octave above or below, appear to belong to the key actually struck, and new combinations and effects become thus produceable, which are not otherwise attainable on the same instrument.

Manual couplers. 230. Couplers are classed under two heads; viz. Manual Couplers and Pedal Couplers. Of the former kind there are three varieties; namely, Unison, Octave, and Double Couplers.


231. The *Unison* kind of manual coupler unites any key of one manual to the corresponding key of another. One of the most usual couplers of this nature is that for uniting the upper manual to the lower; in other words, for attaching the "swell to great." This is commonly formed of a set of short stickers (v, fig. 60), one to each key, reaching from the upper



surface of the great organ key to the under side of the swell key. These stickers pass through a rod (k) extending over the great organ key-board from side to side, between the centre and tail of the keys, and between the 2 manuals. This rod is capable of being turned partially round by drawing out a handle at the side of the keys, communicating with appropriate medium work, which places the stickers in a perpendicular position, as shown in the accompanying cut. If any key of the lower manual (a) be pressed down while the "coupler is out," the sticker above will be raised, lifting the tail of the corresponding key on the upper manual (b), so that whatever is played on the lower manual is also executed on the upper. When this union of manuals is not required, the governing handle is thrust in, causing the rod and consequently the sticker to resume their original positions, as

shown by the dotted lines. That of the latter at such times is at an angle of about 45 degrees with the great manual keys; their lower ends (c), being then raised sufficiently far to admit of the keys of the under manual being set in motion without coming in contact with them. The *tumbler* coupler has a tendency to throw the fingers off the

keys, when drawn on while the great organ is being used. This defect does not appear in the *sliding* coupler represented in *fig.* 61, which is formed in the following manner: The great organ key has a portion of its upper side cut away, leaving an inclined plane (a), covered with leather and black-leaded. The under side of the swell key is similarly hollowed (b), the shape of the cutting being reversed. The coupler, when not *in action*, is stationed as indicated by the




dotted lines, the sticker (ll) dropping into the register (nl). The hollow in the great organ key then allows the key to rise without touching the sticker. When required to be used, the register, which is held and moves freely in a slot in each key frame, is carried a little backwards (ll), the sticker (ll) glides up the inclined plane (ll), is raised a little way out of the register, and brought directly under the regulating button (ll), by which it raises the swell key. The back part of the knob of the sticker is bevelled (ll), so that, in the event of a great organ key being down when the coupler is drawn on, the sticker may raise the swell key gradually without causing any jerk to the finger, and the button (ll) is rounded to assist its coming into operation smoothly and quietly. Through the swell key a tapped wire passes (ll), by which the action of the coupler is so nicely regulated that the swell key will begin to descend at the same moment that the finger commences the depression of the key of the great organ. This improvement on the tumbler coupler is due to Messrs. Kirtland and Jardine, organ-builders, of Manchester.

- 232. Another kind of mechanism for the coupler "swell to great," called from its shape the "ram coupler," also possesses the merit of being capable of being drawn while the keys are down, without causing any disagreeable resistance, and without being liable to derangement from being brought into operation under such circumstances. This kind of movement was invented by the Messrs. Robson, and has been applied by them to the pedal couplers, as well as to those for the manuals.
- 233. An organ with 3 manuals occasionally has, in addition to the coupler above described, another for uniting the lower manual to the middle one, i. e. "choir" to "great." A third kind of unison coupler unites the upper manual to the lower ("swell" to "choir"), of which examples occur in the organ at St. Paul's Cathedral, &c. Other couplers take down the octave above or the octave below the key pressed down by the finger.
- 234. An "octave manual coupler," i. e. one acting in the forementioned way, was introduced into the organ at St. James's Church, Bristol, by Smith, of that city, in the year 1824; another, and like that just noticed, forming part of the original work, occurs in the York Minster organ, built in 1829 by Mr. Hill. Both these unite the swell to the great organ in the octave above. Octave couplers are frequently

found in the organs of Italy, where they are called Terzo Mano, third hand. In England, this kind of coupler is called by the organ-builder who re-invented it—for Mr. Holdich docs not appear to have been conscious of its pre-existence elsewhere the Diaocton. A "double manual coupler" either unites one manual to another in the octave below, or a manual to itself in the same manner; generally the former. The organ in St. Dunstan's Church, Fleet Street, erected in 1834 by Robson, has one that attaches the choir organ to the great in this way. This acts on separate pallets in the sound-board, and therefore does not move the keys. Octave and double couplers sometimes take down the keys, and sometimes not. Composed usually of a series of diagonal backfalls, they either communicate with separate pallets, when the keys, of course, do not fall, or they operate upon the same set of pallets; the working of the movement being then made obvious by the motion of the keys, as in the case of the ordinary couplers, unless indeed the key-tails are weighted (as they sometimes are) to balance them. The swell manual of the organ at St. Luke's Church, Old Street, made by Gray and Davison, has both an octave and a double coupler. By the aid of such couplers "an 8-feet stop may be converted into a 16-feet, or a 4-feet (or all three), at pleasure; and a great variety of effects and combinations may be produced, which otherwise would be unattainable without increasing almost indefinitely the size of the organ\*."

The sforzando coupler.

235. The sforzando coupler is a movement for reinforcing the strength of the swell instantaneously, and to a far greater extent than is attainable by the aid of the swell pedal alone. It is worked by a pedal, on pressing down which the great organ becomes coupled to the swell. On removing the pressure from the pedal, it returns (by means of a spring), and the action is disconnected. The action simply is a backfall in connection with the swell key, and operating on the great organ key movement; as shown in fig. 62, in which a repre-




sents the swell tracker, b the great organ tracker, c the connecting backfall in question, which rises and falls on the sticker e, the pin being free, while d marks out the regulating button. In a few instances, where the swell has been provided with octave and double couplers, the sforzando pedal has been made to bring on those couplers simultaneously, and not act on the great organ; and where the swell is to C C, and is powerful, this latter kind of movement is in some respects more effective than the other, as the reinforcement is also under the influence of the swell.

236. A sforzando pedal, uniting the great to swell, was introduced by Lincoln

<sup>\*</sup> Pole, on the Musical Instruments in the Great Exhibition of 1851, p. 75.


into his organ at St. Olave, Southwark, built in 1844, and it has subsequently found admission into several other instruments.

Pedal couplers. 237. The second class, i.e. the *pedal couplers*, are such as either unite the manuals to the pedals, or cause the pedal organ to play in the octave, one way or the other, as well as in the unison. Of pedal couplers there are as many varieties as there are of manual couplers. The most common form of the pedal coupling movement is the following: First, in consequence of the pedals occupying



much more room in regard to width than the corresponding number of manual keys, rollers similar to those in the key movement are introduced (see b b, fig. 63), having one arm (a) over the controlling pedal (e), and a second (f) directly under the key to be communicated with (c). The action of the pedal having thus been brought into a line under the key, a backfall (o, fig. 64) occurs running underneath and parallel thereto. From each of these, a sticker (a) reaches thence to the under

side of the manual key (c c), to be acted upon; a pin in the lower end (e) of each sticker, descending through the end of the backfall, to render the former in one sense a fixture, the



upper end being left free to be moved forward or backward as occasion may require. The stickers pass through a register (b), which, among other purposes, serves as a support thereto. When the manual is to be coupled to the pedals, the register is drawn forward a little, the upper end of the stickers being thus brought immediately under the tails of the manual keys. They are represented as being thus situated in the last illustration. When the pedal coupling action is in operation, the two trackers, the roller arms, and the near end of the backfall, all descend when a pedal is depressed, the far end of the backfall (e) rising, lifting with it the sticker (a), which in its turn raises the tail of the manual key (c), and this, setting the key-movement in motion, produces the same effect as pressing the key down with the finger would do. When the union of the "manual to pedal" is no longer required, the handle is pushed in, which moves the register back again, the upper end of the stickers being by this guided in the same direction till they get just beyond the key-tails. The stickers now appear in a slanting position, as shown by the dotted lines in fig. 64, and miss the keys. Sometimes there are 2 or even 3 couplers for uniting the different manuals to the pedals in the same pitch; as "great to pedal," "choir to pedal," and "swell to pedal;" in which case there are as many sets of these stickers rising from the backfalls, each communicating with a particular manual.

238. Thus much concerning the *mechanism* by which the manuals are coupled to the pedal. With regard to the *pitch* in which this union is effected, great dissimilarity unfortunately prevails in England. In some organs, the key acted upon by any given pedal will be identical with the one that the finger would have touched; i.e. corresponding with the bass note written and sounding in unison with the bass voice.

This is always the case with manual organs of the C C compass. In such cases, the manual unison stops are said to give the 8-fect (their legitimate) pitch. In G G, F F F, and C C C organs, however, the pedal couplers more often attach the manuals in the octave below to the pedal, that is, in the 16-feet pitch. This want of systematic arrangement arises from there being no recognized compass as the invariable one for the manuals of English organs. Some organs of long manual compass have pedal couplers acting in the 8 and 16 feet pitch on the great manual; as in that at Westminster Abbey, built by Mr. Hill.

239. In the organ in Trinity College Chapel, Cambridge, is a coupler, called the Canto Fermo coupler, that unites the treble of the choir organ from middle c¹ npwards to the pedal, to the extent of two octaves and a third. This causes the 8-feet stops of that manual organ to produce the effect of so many 2-feet pedal stops. Other organs have a coupler for uniting the tenor c of the swell to the C C C of the pedal, as in the instrument at the Irvingite Church in Gordon Square, built by Davison, which obtains, from the unison stops of the forementioned department, a sound resembling that of so many 4-feet pedal stops.

240. Besides couplers for uniting the manuals to the pedals in various ways, others are occasionally met with which attach one octave of the pedal organ to the other. One kind (octave coupler) brings the C C pipe on to the C C C pedal, the effect being similar to that of the addition of an 8-feet principal to the 16-feet open diapason. A second kind (doubler coupler) brings the C C C pipe on to the C C pedal; thus giving the effect of a 32-feet stop on the pedals from thence upwards. Both kinds were added by Walker to the organ in Tonbridge church.


# CHAPTER XII.

THE PNEUMATIC ACTION.

241. It has already been shown that every sound-board pallet is provided with a spring beneath, to ensure the return of the key-movement on the withdrawal of the pressure from the key; and it has also been mentioned that the compressed air in the wind-chest becomes a second source of resistance to the touch of the performer. This latter fact is discernible, even in small organs, of which the sound-boards are palleted in the ordinary way, by striking a chord in the bass part of the manual, first without the bellows being blown, then with the "wind in," when the additional resistance which the organ-wind causes will be at once perceived. In larger organs which have pallets of increased size throughout the sound-boards, with two pallets in the bass, the amount of spring and wind resistance is of course much increased, particularly where there are also octave and double couplers, causing perhaps six or seven pallets to operate upon one key. But in instruments of the first magnitude, containing, as they now usually do, some stops on a heavy pressure of wind, the resistance becomes too great for even the most muscular finger to control without experiencing much fatigue. In such cases, it being beyond the power of the several devices detailed in Chapter V to remove the disagreeable stiffness from the touch, or perhaps none of them may be adopted, some contrivance is required that shall boldly overpower the resistance. The pneumatic lever performs this necessary duty most efficiently; and, in doing this, ingeniously converts that which would otherwise be the organist's antagonist, into his assistant.

242. The first idea of a pneumatic lever originated with the late Mr. Booth, organ-builder, of Wakefield; but his appliance, made in 1823, was not intended for key-movements. The merit of discovering the pneumatic lever, as a means for lightening the touch of large instruments, is claimed by, and rests between, Mr. David Hamilton, of Edinburgh, and Mr. Barker, a native of Bath, but now a resident of Paris. Mr. Hamilton added a movement of the kind to the Organ in St. John's Episcopal church in that city, in 1835. At what earlier period he had completed his model is not stated; but, in 1839, a paper was read at a meeting of the British Association at Birmingham, explanatory of a pneumatic lever which he then exhibited. Mr. Barker's first attempts were made with a cylinder and piston, which were afterwards abandoned in favor of a small bellows. "In the first instance, he

endeavoured to introduce his apparatus in England, about 1832. Experience, however, in large organs, was then wanting in this country, and his endeavours were unsuccessful; he therefore went to France, where the subject was better known, and where the value of the new principle was at once appreciated. It was introduced immediately, in the great organ, building at St. Denis (1841), and has since been applied to a considerable number of large instruments in the principal churches of France\*;" as, for instance, at the Madeleine, St. Vincent de Paul, &c.



The pneumatic action shown at large.

243. The pneumatic lever, as made by different organ-builders, varies slightly in detail; but the following is the plan and principle of all. The upper member of the lever is formed very like a small concussion valve (see a, fig. 65 and 66); the former of which shows the lever closed, the other open. Beneath the lever are two little chambers (marked c c and d d), between which passes a third (e e e). Below again is a kind of backfall (o o) which controls two circular pallets (b b) in such a manner that when one is open, the other is shut. Lastly, to the rising end of the lever a small lug (m) is attached, which draws up a tracker (t) that sets the several key-movements in motion.

244. On pressing down a key on any one of the manuals, the movement draws down the near end of the backfall (oo), causing the far end to rise, which motion places the circular pallets (bb) in the positions shown in fig. 66. Some of the wind from the chamber (cc) now passes downwards through the uncovered pallet-hole, traverses the passage (ece), raising and filling the pneumatic lever (a), which draws up the tracker (t), communicating the impulse to all the sound-board pallets that may be attached to the controlling key. The circular pallet in the second chamber (dd) at the same time closes and prevents the escape of any wind.

<sup>\*</sup> Pole, on the Musical Instruments, &c. p. 77.

- 245. When the finger is withdrawn from the key, the position of the backfall, and consequently of the circular pallets, is reversed, as shown in fig. 65. The supply of air from the wind-chamber is now cut off by the descent of the pallet. At the same time the second pallet in the chamber (dd) is raised, allowing the wind to descend through the pallet-hole (n), escaping through the opening (z) into the atmosphere. The contents of the lever being thus exhausted, it returns to its state of rest, as shown at fig. 65; the rapidity of the change being accelerated by the spring (q). In consequence of the width of the pneumatic levers, about three inches, only every fifth lever is placed in the same row; hence the pneumatic action always appears in five tiers, as shown in the "general section."
- 246. The pneumatic action, which effects such remarkable results as those already detailed, is not entirely unattended with disadvantages. In many of the specimens made by the best builders, Continental as well as English, the working of the levers is as audible as the motion of the rattling key-movements of old organs. This arises partly from the nature of the action itself, which, to be effectual, must necessarily also be very energetic. Nevertheless, the defect alluded to will, no doubt, be speedily ameliorated, if not entirely removed, under the exercise of the ingenuity possessed by so many of the English builders.


## CHAPTER XIII.

#### THE DRAW-STOP ACTION.

247. The several longitudinal series of pipes on the various sound-boards have already been explained to be governed by sliders, which either permit the wind to enter the pipes or not, as circumstances may require. The sliders that exercise this power, however, like the sound-board pallet, are always situated beyond the reach of the performer, and sometimes at a very long distance from or even behind him; hence a special system of mechanism becomes necessary to bring them under his perfect control. The mechanism introduced for this purpose is called the "drawstop action," of which there are, as with all the systems of mechanism in an organ, many varieties, designed to meet the exigencies of particular cases.

248. The first kind proposed to be noticed, is that which may be described as the Wooden-trundle Draw-stop Action.

The wooden-trundle draw-stop action. 249. To understand the necessity for the presence of the several parts of the action just named, it is requisite to point out the relative position of the performer, and the end of the sliders to be operated upon. We will suppose the sound-board to be ranged longitudinally immediately behind the front pipes—the usual position occupied by the great organ sound-board. The situation of the slider-ends, then, as compared with that of the organist, would ordinarily be inwards; to the right, we will suppose, though it may be the left; and upwards to a higher level. This route is, in the above action, followed by the draw-stop-rod (a, fig. 67) which traverses the organ inwards; the trundle (b b), which conveys the motion round an angle, the trace (c), which continues the motion at right angles with the draw-stop rod; and the lever (d) which conveys it upwards.



A description of its 250. The draw-stop rods usually measure about an inch several parts. square across, for they are made round or square according to fancy, and from about one and a half to ten feet or more in length, according to the distance of the trundle from the manuals. The front-end is made of oak, and the remainder of pine; the two parts being neatly spliced together. The near end of each draw-stop-rod is furnished with a handle, formed of some dark-coloured and handsome-looking wood, into which is inserted a circular plate of ivory, bearing an inscription, announcing the kind of stop that is controlled by that particular handle and attendant parts. The farther end of the rod has a horizontal mortise made in it to receive the trundle-arm, a small iron bolt fastening the two together, so that the one cannot be drawn forward without the other accompanying it. The drawstop rods run horizontally from the front of the case inwards, in the direction of the back of the organ, bordering the manuals (with which they run parallel) usually on each side, where they are arranged one over another, forming one, two, or three tiers, as the case may be.

- 251. The wooden-trundles are made of good thickness, to prevent their springing; which casualty, were it to occur, would prevent the perfect drawing or closing of the slider. Each trundle is furnished with a stout pin at both ends, which passes into frame-work above and below, and which form pivots for it to revolve upon. The arms (g h) are made of wood or iron; the former material, however, rendering the action more quiet in its operation. They have no fixed positions; but the first arm (g) is placed as nearly as possible in a line with the draw-stop rod (a) that is to act upon it, and which may be high or low in the row wherein it appears; while the second (h) is placed in a line with the lower end of the lever (d).
- 252. The trundles usually stand under the sound-board to which they belong, bordering the draw-stop rods perpendicularly, as the rods do the manuals horizontally.
- 253. The traces are rods of deal, reaching from the second arm of the trundle to the lower end of the lever; hence their name. They are mortised at each end; at the one (o), horizontally to receive the second trundle-arm; at the other (i), vertically, to admit the lower extremity of the lever. The traces may usually be seen under the sound-board, running in the direction of its length.
- 254. The levers are generally constructed of some hard wood, as oak, beech, &c.; though in some old organs they are met with of iron. They are hung on a centre about two-thirds from the lower end, and the lower extremity is narrowed to allow of its admission into the motise in the trace; while the upper is made altogether smaller, that it may pass into a hole prepared for its reception in the projecting end of the slider.

How the draw-stop action operates.


255. When the organ is about to be used, the inscriptions that are on the stop-handles, or sometimes over or at the side of them, are referred to, and the handle bearing the desired name is drawn forward. The rod brings with it, in the same direction, the first arm of the trundle (g, fig. 67), and the trundle itself (b) partly revolving, causes the second arm (b) to swerve round and draw the trace (c) in the direction from the side towards the middle of

the organ. This latter having the lower end of the leaver (i) fastened to it, draws that with it inwards; the upper end (p) in consequence taking an outward motion, and moving the slider the same way. The passage-way is thus made clear for the wind from the grooves through the holes (w) in the upper-board into the pipes.

256. In the draw-stop action for small organs, wooden trundles are not usually employed, but iron squares are more frequently used.

The iron-trundle draw-stop action. (fig. 68), the trun

257. In the second or iron-trundle draw-stop action, (fig. 68), the trundle and the arms are formed of wrought



iron. The trundle itself (aa) stands at the edge of the sound-board (bb), instead of underneath it, as in the former case, with its upper end (c) rather above the level of the bottom of the sound-board. There is no trace used, the bottom arm (d) being made much longer, that it may extend from the trundle to the draw-stop rod (e), and the top arm (f) is placed quite at the upper end of the trundle, from whence it gradually inclines upwards, until it reaches the slider (b), where it is finished off with a small bolt (g), that passes through the slider (b), and acts upon it.

258. When a sound-board is remotely situated, its draw-stop action is modified, and the trundles are sometimes placed horizontally, instead of perpendicularly; all such matters of detail being of course regulated by the nature of the situation to which the organ is being adapted.

259. The draw-stop action of the organ at the *Panopticon* is constructed on a principle entirely new to this country; the sliders being put in motion by small bellows.

# CHAPTER XIV.

THE SHIFTING MOVEMENT, AND THE COMPOSITION PEDALS.

The shifting movement.

260. THERE are other means by which the sliders of the sound-board of an organ are brought under the control of the performer, besides those just described.

261. As early as Snetzler's time, if not before, means were devised for bringing some of the sliders of the great organ sound-board under the power of the feet of the performer; the object being to enable the organist to shut off the "chorus stops" without having to remove one or perhaps both of his hands from the manual. contrivance alluded to was called a "shifting movement," and was put into operation by means of a pedal. On the depression of the pedal, the sliders governing the particular stops (usually all the flue stops of smaller size than the principal, and also the reed stops) were drawn in; and there they remained so long as the pedal continued down, which was kept in that position either by the foot, or by being hitched into a cutting in the case on one side of the pedal. On raising the foot, or releasing the pedal, as the case might be, the sliders were, by means of strong springs, restored to their former position. A great defect in the shifting movement, however, was, that in addition to the power necessary to set the machinery in motion, the resistance of the springs had to be overcome before the pedal would act, and this rendered its frequent use a matter of toil and some difficulty. Besides this, only one change in the combination of stops could be effected.

The composition pedals.

262. These drawbacks led to the invention of the composition pedals; a system of mechanism in which springs acting in the way just described are entirely done away with; and wherein the sliders are left to remain as the pedal arranges them, until the hand, or another pedal, effects a readjustment. The merit of this invention appears to be due to Mr. Bishop; though a claim to something of the same kind was made also by the late Mr. Flight.

263. Of composition pedals there are two kinds, the "single action" and the "double action."

The single-action composition pedal.

264. A single-action composition pedal operates in *one* way only; that is, it either *draws out* or *thrusts in* a given number of sliders, but does not do *both*.

265. For example, one composition-pedal of this kind will simply draw out stops, say Nos. 1, 2, and 3\*; a second, stops Nos. 4, 5, and 6, and so on. But the first pedal will not draw in all the stops, except Nos. 1, 2, and 3: this, if done at all, must be accomplished by a third pedal. Some single-action composition pedals, therefore, only draw out stops; others merely draw some in.

The double-action composition pedal performs both offices. It will either draw out all the stops up to a certain one; or it will draw in all to the same certain one. Or, supposing a combination to have been previously prepared, composed partly of stops below and partly above the number acted upon by a certain pedal—as, for instance, Nos. 1, 2, 5, and 6—on pressing down the composition pedal that throws out stops Nos. 1 to 3, the stop No. 3 will be added to Nos. 1 and 2, and Nos. 5 and 6 will be drawn in.

267. The full operation of the "double action" can be interestingly brought under observation in the following manner. If the mixtures and reeds *only* be drawn, and the pedal that acts on the great organ stops "to fifteenth" be pressed down, the stop handles that were previously in will all be thrown out, and those that were out will be drawn in.

268. To modern organs of moderate size there are usually 3, 4, or 5 double-action composition pedals, controlling the great organ stops; and sometimes there are also others which affect the swell and pedal stops.


269. The second composition pedal is usually designed to prepare a *louder* combination than the first; and the third, if there are only three, generally brings into operation the remaining and most powerful stops.

270. The second one will therefore draw the sliders up to, say No. 6, if fewer are out; or it will draw in to that number, if more are out. The third will generally draw out all the remaining sliders, or such of them as may previously have been left undrawn; and so increase the tone of the great organ to its fullest power. Occasionally, indeed, the trumpet is not thus drawn, but is left to be added by the hand.

The composition pedal action there are many vapedal action.

271. Of the composition pedal action there are many varieties; almost every organ-builder having some plan which differs, either in principle altogether, or in some matter of detail, from that adopted

by all the others. The kind of action represented in the following engraving, however, has been very generally used. It consists of two iron rods, or "composition irons," disposed horizontally (a a b, fig. 69), furnished with vertical iron arms (c c e e e e); the whole of which are brought under control in the region of the manuals, through the aid of some simple mechanism, such as that indicated at d f.



<sup>\*</sup> Instead of making use of the names of stops in this explanation, figures are employed; as it is thought the description will be rendered more clear by being divested of all technicality.

The way in which the action operates. 272. On pressing down the composition pedal (f), the horizontal arm (d), projecting from the first composition-iron  $(a\ a)$  is drawn downwards, partly turning the composition-iron on its axis. The upright arms at the end  $(e\ e\ e)$  are by this motion turned inwards, towards the sound-board, thrusting back the sliders with which they are brought into contact. The composition-irons are supposed to be placed at the opposite end of the sound-board to the draw-stop action; consequently their motion produces an effect the reverse of what they would do, were they placed at the same end of the sound-board. Thus, thrusting in the sliders at the one end is of course equivalent to drawing them out at the other. The first three sliders being thrust back, the draw-stops acting thereupon start forward, and the three stops governed by those draw-stops and sliders respectively are now ready for use.

- 273. As the *first* composition-iron revolves, the *contact* (o) strikes against the contact (h) belonging to the second composition-iron (b), and causes the second composition-iron to revolve the *contrary* way to the first. The arms (c c), being made to move only with the body, take also the contrary course, moving the other sliders with them; and thus is it that the "double action" is established, and the power secured of restoring any combination of stops to one particular form, by simply the pressure of the foot upon a pedal.
- 274. Every "double-action composition pedal" made upon this principle is provided with two of these composition irons, one for drawing off such sliders as the other does not draw on.
- 275. The composition pedals are usually placed immediately over the German pedals, in a row, and nearly parallel with the swell pedal; but occasionally they project through the jambs, as that of the swell often does, some on each side of the pedal-board.
- 276. Mr. Willis now constructs his composition appliances so that they may be worked with the fingers by the aid of pneumatic levers; and for which method of putting them into operation he has secured a patent. No pedals are used, but simply studs or buttons, which project through the beading under the great organ keys.
- 277. Mr. Hill has introduced into the Panopticon organ a most ingenious piece of mechanism, worked by a pedal, which draws out all the great organ stops, singly and in succession, producing thereby a gradual and complete crescendo; after doing which, it draws them in again, one by one, producing as complete a diminuendo.
- 278. In the modern French organs by Cavaillé Coll, and others, the composition pedals do not act upon the draw-stops, but upon the wind. For instance, if you put down the pedal to take off the reeds, it does not shift the sliders, but cuts off the communication of the wind from the reed sound-board, which of course effectually silences the stops.
- 279. In Germany, composition pedals are scarcely known; consequently the organs of that country are mostly without one of the greatest modern advantages. Batz, of Utrecht, is however beginning to introduce them.
- 280. In arranging the composition pedals, some of the English organ-builders place the "loud pedal" to the left and the softest to the right, while others reverse this order. The adoption of one uniform plan is most desirable.

# CHAPTER XV.

### THE ECHO AND SWELL.

- 281. Most of the old English organs originally possessed, and a few of them still retain, a department called the "echo."
- The Echo organ consists of a duplication of the treble portion of some of the stops found on the other manual organs, closed in a wooden box, to render their tone soft and more distant-sounding than that of the stops of the same name in other parts of the instrument; planted on a small sound-board of their own, and provided with a separate half row of keys. The name of this now nearly obsolete department in English organs plainly indicates the purpose for which it was originally designed. In the year 1712, a most important improvement on the old echo was effected by Abraham Jordan, whereby the sound produced from its stops could be made to rise or fall on the ear with increasing or decreasing strength. This power was gained by making the front of the box that enclosed the pipes open instead of solid, as before, and furnishing it with a moveable shutter, fitting closely to and entirely covering the opening, and running up and down in a sash, like a window. A rope or lever attached to the shutter raised it, on the performer pressing down a pedal placed to his right and near to the ground, which action, gradually raising the sliding shutter, uncovered the opening in the box, and allowed the sound produced by the pipes within to emerge. The echo, in this greatly ameliorated form, was called the "swelling organ" or "swell," and rose so rapidly into repute, that the echo in its former primitive state fell into entire disuse in a very short space of time.
- 283. The "nag's-head swell," as the above early kind of swell was called, was not well designed, nor happily adapted to its purpose in a mechanical point of view. The weight or resistance to be overcome by the pressure of the foot was so great that the shutter could be set in motion only with difficulty; and when it was in motion, there was equal difficulty in regulating the rate or extent of its ascent; for it would then not unfrequently run up almost of itself. Its descent was similarly beyond control, and it would often fall with an audible noise. The nag's-head swell continued in use for upwards of half a century, till it was superseded by what has since been denominated the "Venetian swell." By whom this kind was invented is not positively known. It is not to be found among Green's latest work; but occurs constantly in the organs of England and Avery, one of whom no doubt was its originator.
- 284. The peculiarity of the *Venetian swell* consists in the front being composed of a series of "shades" or "shutters," measuring from six to ten inches in breadth,

and from one and a half to two and a half inches in thickness. Each shutter is hung on an axis placed one third from the top of its breadth. The edges of each shutter are bevelled away at an angle of about 45 degrees, so that the bevelled surfaces are parallel to each other, and each two contiguous boards are made to overlap each other, the bevelled surfaces meeting, so that the whole front may be quite flush or even when the shutters are closed. An arm projects a few inches from each shutter, in a line one above another, and these are all connected with a perpendicular rod, so that when the rod is raised, which is done by means of a pedal, all the shutters are opened. The bevelled surfaces of the shutters are covered with felt or some such substance, to make them fit closely and shut in the sound. Cloth and matting were for some time used as a lining to the box to deaden the sound when the swell was closed; but they exercised a similar influence also when it was open; besides which, the former material harboured moths, and the latter erumbled into dust, some of which found its way into the pipes. Brown paper, well coated with glue, covers the pores of the wood of the box, and so keeps in the sound when the shutters are closed, at the same time that it presents a hard surface to reflect the sound when they are open.

- 285. The resemblance which the shutters of a modern swell bear to Venetian window-blinds, readily suggested the designation by which they are now so generally known.
- 286. When the shutters of a swell are narrow, they are of course more numerous; and in such cases, when open, they present a greater number of thicknesses of wood to check the egress of the sound. On the other hand, when they are broader, and consequently fewer in number, they are more liable to "cast."
- 287. The swell-box and shutters are shown in profile in the general section. See fig. 4.
- 288. On a well-constructed Venetian swell, a practised performer can imitate, not only a gradual *crescendo* and *diminuendo*, but also a *sforzando*; a very small opening being sufficient to make an immediate burst on the ear, while, when the shutters are closed, a close imitation of an echo is produced. When the shutters are closed, they take that position either from their own weight, or from the influence of springs or weights.
- 289. In the lower part of the swell-box, in front, or at the back, or sometimes in both places, according to the plantation of the reed-stops, there is usually either a long moveable panel or a wooden flap, corresponding in length with the swell-shutters, behind which are ranged the pipes forming the reed stops, to the tuning of which access is thus easily gained.
- 290. Other facilities for tuning are usually provided, having special reference to the adjustment of the flue-stops. Those consist of large openings in each side of the swell-box, ordinarily closed by doors or panels. By removing these, the Tuner can reach the top of any flue-pipe that may require his attention.
- 291. Large swell sound-boards have frequently a centre passage-board, in which case there is an entrance door provided through the centre of the front of the swell, and the shutters are divided into two smaller sets.
- 292. A good Venetian swell, constructed on the ordinary principle, is capable of producing great effects of light and shade; yet attempts have been made from time to time to increase its contrasting powers.

- 293. One plan consisted in enclosing the original box in a second case, with a space of a few inches left between the two at the sides, back, and top, and filling the interstices with shavings, sawdust, or any other material that would prevent the escape of sound. In the front were placed two or even three sets of shutters, which did not all open simultaneously, although acted upon by one pedal, but, by a suitable arrangement of cranks and levers, on the gradual depression of the pedal, one set commenced its motion, then a second, and finally the third, each of the latter two with an accelerated pace, as compared with that of the one that preceded it; so that all three sets arrived at their extreme opening at the same moment, the shades falling into parallel lines, presenting scarcely any obstacle to the free escape of all the sound which the enclosed pipes were capable of producing. The box of the swell in the organ at St. James's Church, Bristol, built by Smith of that city in 1824, under the direction of Dr. Hodges, was constructed in the manner just detailed.
- 294. Another plan provided the back as well as the front of the swell-box with Venetian shutters, as was the case at the parish church, Doncaster; while the chief peculiarity in a third plan, devised for the same purpose, consisted in furnishing both the sides as well as the front of the box with shutters, as at York Cathedral. In this latter example the side shutters were made to work vertically. The shutters of the swell in the fine new organ recently erected in the church of St. Vincent de Paul in Paris, made by Cavaillé Coll, also work in the manner just mentioned. The swell-box in this instrument presents the peculiarity of having its sides and back provided with plate-glass panels, by which means, not only is a perfect view of what is within obtained from without, but the inside of the swell is nearly as free from darkness as the other interior parts of the organ.
- 295. A swell imparts to the sound of an organ an agreeable undulating effect, similar to that produced by the wind on the sound of a peal of bells when it bears their tones first towards, then from the listener. An organ with a swell is, in fact, as much in advance of an organ without one, so far as the power of giving expression to music is concerned, as a modern pianoforte is superior to the old harpsichord; on which account, it is rapidly finding admission into the organs of France and Germany.
- 296. The swell was held in special estimation by Samuel Green, who considerably increased its utility and efficiency, by extending its previously limited compass. Until his time, its range usually terminated at fiddle g or tenor f, sometimes even at middle c¹; but, in two of his organs, he extended the two former compasses by no less than a whole octave. The fine organs in which these evidences of Green's sound judgment are to be found, are those in St. Katherine's Church, Regent's Park, brought from the demolished structure of that name, near the Tower, and in the chapel of Greenwich Hospital; in the former of which the swell descends to gamut G, and in the latter, a tone lower, namely, to F F. Green originally enclosed even the great manual organ of his instrument in St. George's Chapel, Windsor, in a great swell.
- 297. Some of the old swell boxes were furnished with a wooden tube, not unlike a wind-trunk, projecting from the back of the box, and passing out into the tower of the church. This was the case with the organ at St. Martin's in the Fields, built by the elder Gray. The end of the tube attached to the swell-box was furnished


with a trap, which opened when the swell was closed, and closed as the swell was opened; by which means the subdued effect of the swell, when shut, was increased, on account of an outlet being thus afforded for the sound. This contrivance suggests a method of overcoming a difficulty with regard to the larger swells of modern organs. If the swell is much used without being opened, and the shutters fit accurately, the atmosphere within the swell-box becomes increased in density by the great quantity of wind that rapidly passes through the large pipes into the circumscribed area of the box, which has the effect of flattening the pitch of some of the pipes. If, on the other hand, a little leakage be allowed, the escaping air, by carrying some of the tone with it, renders the softened effect of the swell less perfect. By adapting a tube, as above, there would be free ventilation within the swell-box, when closed as well as when open, whereby the freedom of speech of the large as well as small pipes would be better secured; the pipes would not be thrown out of tune by being smothered; and the fullest contrasting powers of the swell would be preserved. If the swell were likely to be exposed to two temperatures—a second and lower one from the tower when the shutters were closed—this might be rectified by a small gas jet placed at a safe distance from the mouth of the tube. In his exhibition organ, Mr. Willis secured a free circulation of air by putting the swell bellows inside the swell-box.

### CHAPTER XVI.

#### THE TREMULANT.

298. The tremulant is a small apparatus that gives to the tone of any department of an organ to which it may be applied a waving or undulating effect, resembling the *vibrato* in singing, and the *tremulando* in violin-playing. It has long been known in England by tradition, an appliance of the kind having formed a portion of the original work of Snetzler's organ in the Lutheran Church, at the Savoy, Strand. The old tremulants, however, were very noisy contrivances; hence they were not favorably received in this country, and they were latterly also omitted from most of the new organs in Germany. In Paris, a better kind of tremulant action was devised, not many years ago; on which, nevertheless, the English builders have succeeded in making considerable improvements; the first church organ in this country to which a tremulant of the new kind was applied, being that at St. Luke's, Old Street, the addition being made by Mr. Davison.

299. The accompanying engraving (fig. 70) represents one of the most successful tremulant actions. It is supposed to be fixed to one of the broad sides of the wind-trunk. The wind passes through a hole in the wind-trunk (11), into the wind-box (a a a), and hence through an internal aperture in the slab (b b), into the tremulant (c c c), which also has an aperture through it, covered by the pallet (d d d), held firmly down by the screw (e). The tremulant is thus set in motion. The rod (k)turns the screw half round in the socket (f), the pallet (ddd) being thereby raised slightly; the tremulant (c c c) immediately follows the pallet (d), by reason of the internal pressure of air on its under surface; but it is immediately thrown back by the spring (y), which, in power, just counterpoises the upward pressure of the tremulant (c c c). These two opposing forces, viz. the wind inside and the spring outside, impart a trembling motion to the tremulant, which motion is communicated to the bar (h). The rapidity and regularity of the vibrations depend upon the length and thickness of the vibrating bar, influenced, in some examples, by a small sliding weight at the end, on shifting which nearer to or farther from the tremulant, the vibrations are accelerated or retarded.



- 300. The tremulant is here described in connection with the swell, because that is the department to which it is the most usually attached in England; besides which, its effect is considerably enhanced when brought into conjunction with the numerous other resources of the division of the organ just named. The effects of forte, piano, crescendo, diminuendo, sforzando, and tremulando, are then all attainable from that one department alone.
- 301. The tremulant effect in an organ is of older date than the tremulando and vibrato effects in instrumental and vocal performance. This fact may be gathered from the following passage taken from Grassineau's Musical Dictionary, ed. 1740, p. 289.
- 302. "TREMOLO, Tremolante, or Tremente, 'tis not often used, except thus abbreviated—Trem. or tr.; to intimate to the instrumental performers of a piece, that they make several notes on the same degree or pitch of tune, with one draw of the bow, to imitate the shaking on the organ. The' this is often placed in the vocal parts of a song. We have examples of both in Mr. Lully's opera of Isis."

# DIVISION V.

## THE SOUND-PRODUCING PORTIONS OF THE ORGAN.

## CHAPTER XVII.

THE MATERIALS USED FOR ORGAN-PIPES.

- 303. HAVING now described the wind-collecting and distributing portions, as also the mechanism of the organ, the next subject to be considered is the nature and construction of those parts from which the *tone* of the organ is more immediately produced.
- 304. The sound of an organ emanates from an assemblage of pipes, which are made either of tin, metal, or wood;—are round or square;—long or short;—broad or narrow;—according to circumstances. But first of the materials.
- 305. The various *substances* of which organ pipes are made, are tin; metal; lead; antimony metal; zinc; and wood of various kinds.
- Tin. 306. Of all the materials just specified as being used for organ pipes, tin ranks first in point of excellence; and of the many existing varieties of this substance, that found in England is held in the highest esteem, not only by some of the organ-builders of this country, past and present, but also by the continental artists, by the latter of whom it still continues to be used in liberal quantities. Thus we find English tin mentioned as being used for a greater or less number of stops in the specifications numbered 11, 44, 45, 46, 48, 54, 55, 84, &c. in the accounts of foreign organs contained in the appendix to this book; while in other cases—Nos. 25, 34, 41, 42, 53, 65, and 74, for example,—other kinds of tin are named, as Prussian tin, probe tin, or simply "tin."
- 307. Tin has occasionally been used by English organ-builders for organ stops for many years past. Greenwood, of Leeds, introduced a dulciana of this material into the organ in Brereton Hall upwards of twenty-five years since: Mr. Hamilton, of Edinburgh, has employed it exclusively for the last ten years: and more recently it has been used by Mr. Davison for the great Open Diapason, and an interior stop in the Eton College Chapel organ (built 1852); also for the choir Open Diapason in

the Glasgow Town Hall organ (erected in 1853); and by Mr. Walker, for the Open Diapason and Dulciana in the organ at Holy Trinity Church, Vauxhall Bridge, finished in the year 1852.

- 308. Tin recommends itself as a material for organ pipes by its great durability, its superior silver colour, and its lightness. It is very ductile, on which account pipe-work made of such material does not nearly so soon become cracked or broken round the top by the force necessarily exercised with the tuning-horn during the process of tuning. Neither are pipes of this metal so soon attacked by the strong acid in the wood-work that sustains and supports them (the upper-boards and rackboards),-but which will eat away the lower part of pipes made of many other materials that are more frequently used. It undergoes but little change, either from exposure to the atmosphere, or to the impure exhalation produced by the breathing of a closely packed audience; and it resists the influence of sulphurous vapours, such as the fumes from gas. Nor is it oxidised even by the combined action of air and moisture; on which last account, it has always been liberally used for the pipes of organs in those countries where there is a humid atmosphere, as in Holland; and the use of wood pipes at the same time avoided, as far as possible, on account of their tendency to swell from the damp. Of the sixty stops in the Haarlam organ (Foreign Specifications, No. 1), only one is of wood, namely, the pedal Sub-bass, and that is a subsequent insertion. The front pipes of that celebrated instrument, the largest of which is nearly forty feet in length, are of pure tin; while the inside pipes are made of metal compounded of half tin and half lead.
- 309. Tin, again, is less susceptible of change of temperature than are many of the compounds in common use, on account of its greater hardness; consequently pipes of this material stand much better in tune.
- 310. Tin does not soon become tarnished; hence its peculiar appropriateness for ungilded "front pipes," for which purpose it has indeed been used for centuries in even the humblest village church organs in Germany; and when it does at length become dulled, its splendour is easily recovered.
- 311. The lighter specific gravity of tin, again—fully one-third less than that of lead—is in its favor; a given quantity of the former going much farther than an equal weight of the latter. This is supposing the pipes to be made from sheets of the same thickness; but as this is but seldom the case—the 16-feet front pipes of the organ at St. Roque's Church, in Paris, however, forming an exception, they being of tin, and of remarkable substance,—the tin would probably go as far again as the lead. The great cost of tin-five or six times that of lead,-and more particularly the baneful "low-contract" spirit which unfortunately pervades most modern transactions in organ-building matters,—preclude its use to any great extent in this country; although it would, on account of the greater durability of the material, prove to be the cheapest in the end. The easy fusibility of tin renders the joining together of the edges of sheets of that metal a work demanding great care, as it is possible otherwise for the melted solder to fuse them instead of uniting them into a seam; hence a small portion of alloy (lead) is frequently added, which renders the substance less susceptible of heat. According to a late experiment, tin fuses at 442°, whereas lead requires 612° of Fahrenheit's thermometer. Cavaillé Coll, the eminent organ-builder of Paris, generally proportions 1-10th of lead to 9-10ths of tin; and Schulze, one of

the most excellent builders in Germany, uses 1-4th of lead to 3-4ths of tin; and for his ordinary metal, half tin and half lead. The two ingredients just named are said to form the hardest compound, when the proportions are 1-4th of lead to 3-4ths of tin.

- 312. Some German organ-builders draw a distinction, and a very good one, between "pure tin" and "tin." The term "pure tin" of course explains itself; but the material is still called "tin" so long as the proportion of alloy is so small as to improve the mass; and this is considered to be the case so long as the alloy forms no more than 1-4th of the total weight of the metal. Pipes composed of this material are said to produce the greatest amount of tone, combining brightness with fulness. When the pipes are of "pure tin," if they are also made of good substance and well blown, the tone has a tendency to become rather piercing; if, on the other hand, they are made thin and are less copiously winded, the sound will be very musical, though not so weighty as that from more solid pipes of the same scale made of the alloyed tin. Hence the latter material is preferred for the strongest-toned stops; and the former for others of a clear, cutting, crisp, or light intonation. Thus the Gambas, Salicets, &c. in Germany, and the choir Open Diapason and Dulciana of English organs, are not unfrequently made of "pure tin."
- 313. The original pipes of the Temple organ, made by Father Smith, are rather more than 3-4ths tin. The specific gravity of the metal of the last-mentioned organ is 7.9111 (that of water = 1); and its composition is as follows:

Tin ...... 76·9504 per cent. Lead .... 21·9017 ,, Copper.... '5183 ,, 99·3704

- 314. The presence of copper, which is only about a half per cent., is no doubt accidental, and was in combination with the tin; a small quantity of copper being commonly found in ordinary commercial tin. The above composition very nearly accords with what would be called by the German organ-builders " $12\frac{1}{2}$  löthig metal," that is, one pound ( $\equiv 16$  löth) of the metal contains  $12\frac{1}{2}$  löth of tin, or  $12\frac{1}{2}$  oz. of tin to  $3\frac{1}{2}$  oz. of lead. The proportions of tin and lead, therefore, lie between 4 of tin and 1 of lead, and 3 of tin and 1 of lead, as above intimated.
- 315. In "Die Orgel," by Töpfer (Erfurt, 1843), page 175, a table is given of the specific gravity of metal with different proportions of tin and lead, from which it appears that the specific gravity of that consisting of 4 of tin and 1 of lead is 7.8830, and that containing 3 of tin and 1 of lead is 8.0380; the specific gravity of the Temple metal being between the two, namely, 7.9111. The front pipes of the organs at St. Paul's Cathedral and Trinity College Chapel, Cambridge, are also of very fine metal, and of considerable thickness; hence the rich and resonant character of the Diapasons of all the instruments above named.

Metal. 316. Metal is a word used technically by organ-builders; and is understood to signify a mixture of tin and lead, which compound is valued according to the quantity of the former ingredient contained in its composition. The metal ordinarily used abroad consists of  $^1$  tin and  $\frac{1}{2}$  lead. The distinction between

tin and metal stops, as well as the proportion of tin and lead used in the composition of the metal, will be found interestingly illustrated in Specifications of Foreign Organs, Nos. 65, 74, 88, 89, 91, 92, &c.

Spotted Metal. 317. There is a compound now much used in England, and held in high repute, called "spotted metal," from its surface being mottled or covered with spots. The spots gradually appear on the surface as the metal cools after being cast into sheets, and "rise" when the ingredients contain about  $\frac{1}{3}$  of tin. They are, therefore, generally viewed as an evidence of the goodness of the material. Spotted metal was frequently made use of by the younger Harris and Green, also by Lincoln. In the present day, it is constantly used by Walker, &c.

Lead. 318. Lead, either alone or with but a slight admixture of tin, from its inability to sustain itself for any lengthened period, is, as a material for metal organ pipes, comparatively worthless. The greater thickness to which a sheet of this metal must necessarily be made, to compensate for its natural softness, added to its greater specific gravity, are circumstances that render the bodies of leaden flue pipes so heavy that their feet are very liable to become depressed at the apex from the weight, and the language to sink, whereby the intonation of the pipe is endangered, if not lost. The tubes of reed-pipes, especially, are very apt to bend at the narrow end or stork, from this weakness. Bad metal is discernable in a variety of ways; to the eye, by its dark blue tint\*; to the touch, by its producing a dull hollow sound on being rapped, whereas pipes of good thick metal produce a clear ringing sound; and to the nail, by its being easily scratched, whereas tin can scarcely be marked in that manner. Metal, composed chiefly of lead, also easily soils paper on which it is rubbed. The organ in the Minoreten Church at Bonn-the instrument on which Beethoven used to play—has its metal pipe-work composed entirely of lead, including the 16-feet front. It is not a good instrument.

Antimony Metal. 319. Antimony metal is compounded chiefly of lead and antimony, or lead and type. The antimony imparts considerable hardness to the mass; so that the possibility need scarcely exist of a pipe-foot or language of antimony metal sinking. The drawback is its brittleness; pipe-work of this compound being very liable to crack round the top after being subjected to the action of the tuning-horn for a few years. A proof of this lack of tenacity in the metal in question is obtained by bending a piece of it to and fro, when it will be found to break asunder on reversing the bend. In some instances the antimony has been known to separate itself from the lead, leaving the pipes covered with little indentations; and reed-pipes of antimony metal have been known to snap off suddenly at the stork, and fall from their situations.

<sup>\* &</sup>quot;In the continental organs, the pipes visible in front of the case are carefully finished and burnished, and show the bright natural lustre of the white metal; but, in England, where the ignoble alloy is incapable of retaining its polish, the pipes are obliged to be gilt or painted, to make them appear respectable."—Musical Instruments in the Great Exhibition, by Wm. Pole, page 49.

Zine. 320. Zinc has occasionally been used for the structure of large metal pipes; and it is a metal that undergoes but little alteration at common temperatures, under even the combined influences of air and moisture. The tone produced from pipes of this material is somewhat lighter than that of tin or metal pipes of the same nature. Its cost, however,—scarcely a tithe of that of good metal,—nuch favors its introduction. Thus the tubes of the 32 and 16 feet reed stops in many of the continental organs are made of this material. The 32-feet Posaun on the pedal at St. Roque's, at Paris, is of zinc; so also is the 16-feet Bombarde in the organ at St. Martin's, Liege. The front Double Open Diapason (32 feet) in the Birmingham Town-Hall organ is likewise of the same material; and there is a Double Open Diapason of the same size and metal also in the Cathedral organ at York.

The easting of the metal.

321. In order to prepare the metal for use, of which organ pipes are to be formed, the ingredients are melted together in a copper, and then cast into sheets; a process effected by pouring it, in a molten state, into a wooden trough, and running the trough rapidly along a bench faced with tick. The metal escapes from the trough through a narrow horizontal cutting at the back, leaving a layer of metal behind it as it proceeds; and the wider the cutting is, of course the thicker will be the sheet of metal produced. After being cast to an approximate thickness, the metal is planed down to the precise thickness required. It is then cut into portions of the shape necessary to give to the pipes the required size and form, and is thus finally worked up.

Wood. 322. A great number of the large pipes, as well as some of the smaller, are made of wood; and experience proves that pipes made of good wood do better service, and are of longer duration, than inferior metal ones.

323. Dr. Burney was assured by Snetzler, who had seen Father Smith work, that he was so particularly careful in the choice of his wood, as never to use any that had the least flaw or knot in it; and so tender was he of his reputation, that he would never waste time in trying to mend a bad pipe, but would immediately throw it away and make another, which accounts for the soundness of his wood pipes to this day. The woods chiefly made use of for modern pipes are cedar, deal, and pine. Oak was employed by Father Smith, but not frequently, in consequence of its cost, and the expense of working it. The Stopped Diapason in the choir organ, throughout, and the bass of that in the great organ at the Temple, are however of this material. So also is the Flute in the great organ. Mahogany is occasionally adopted for the pipes of organs destined for hot climates, as in the organ at Calcutta Cathedral, built by the late Mr. Gray. Other woods are sometimes made use of in Continental organs, as maple-wood, pear-tree-wood, cypress-wood, box-wood, &c.—See Foreign Specifications, Nos. 53, 57, 59, 74, 86, 89, &c.

The seasoning of the wood.

324. The wood of which organ-pipes are to be made is first well seasoned; that is to say, it is thoroughly exposed to the air for a few years,—and, to a certain extent, also to the rain water,—to destroy all its vital properties; after which it is kept in a dry place, where the air can get to it freely, to prevent its decaying. If any sap were to remain in the timber—i. e. if the

wood were not to be thoroughly seasoned—it would be very apt, after being worked up into pipes, to split on becoming dry, and so render the intonation faulty.

325. With the view to rendering the wood pipe-work thoroughly sound, such knots in the timber as cannot be avoided are covered will with glue and leather, or paper, to prevent their falling out; or they are extracted, and their places filled in with other wood. After this, the wood pipes are often covered on the outside with a coat of red size (which by no means improves the appearance of the interior of the organ), and inside with a layer of thin glue, to fill up the pores of the wood, which, by rendering the surface smooth, improves the tone of the pipes.

#### CHAPTER XVIII.

THE PLAN, OUTLINE, AND STRUCTURE OF ORGAN-PIPES.

The plan and outline of the pipes.

326. THE next particulars to be noticed are the plan, outline, and proportions of the pipes that are formed out of the several materials just enumerated.

327. In regard to *plan*, organ-pipes are divided into two classes—*round* and *four-sided*; the two kinds of plan necessarily arising from the employment of the flexible and the stiff substances.

328. In regard to *shape* and *outline*, organ-pipes are very diversified; and every variation in these respects causes some alteration in the *strength* or *character* of the tone of the pipe.

329. The chief varieties of round-bodied pipes are the

Cylindrical,
Conical,
Conical, surmounted by a bell,
Inverted cone, and
Inverted cone, surmounted by a bell.

330. Wood pipes are divided into
Four-sided,
Pyramidal, and

Inverted pyramidal pipes.

Cylindrical pipes. 331. Pipes classed under this head are such round ones as preserve the same diameter in body all the way up. There are three varieties of cylindrical pipes—the open; the stopped; and the half-stopped.

Open cylindrical pipes (fig. 71, page 79).

332. Open cylindrical pipes are the most numerous in all organs; the stops called Open Diapason, Principal, Fiftcenth, and Mixture, among others, being ordinarily composed of pipes of this shape. Open cylindrical pipes are therefore used for the strong-toned flue stops.

Stopped cylindrical pipes (fig. 72, page 79).


333. Stopped cylindrical pipes are such as have their top closed or covered in by a metal covering or cap (a, fig. 72). Stops composed of pipes so formed are rarely to be met with in

England, except in old organs; and there they are only occasionally to be seen. The pretty (so-labelled) Stopped Diapason in the swell of the small organ in All-Hallows,

Bread Street, is formed of pipes of this description. Stops of eovered pipes, however, are of common occurrence in the German organs, under the names of "Gedact" and "Quintaton."

334. The "Gedact 8 fusston," which is sometimes made also of wood, is a soft, mellow-toned Stopped Diapason. The "Quintaton 8 fusston" is a Stopped Diapason of small scale, which sounds an harmonic as well as the fundamental or ground-tone.

Half-stopped cylindrical pipes (fig. 73). Half-stopped cylindrical pipes are far more common drical pipes (fig. 73). English organs than are the last mentioned. They are formed much after the manner of the covered pipes just noticed, the chief difference consisting in the cap being perforated in the centre with a small tube or chimney rising therefrom, and hence called flute à cheminée by the French. (See e, fig. 73.) Stops of this kind are frequently to be seen in old organs, and occasionally also in modern ones, under the names Stopped Diapason (metal), Flute (metal), &e.; although the stop-labels seldom indicate their presence, so far as the material is concerned.



336. The great Stopped Diapason and choir Flute in the organ at the Temple Church are of metal; so were those in Harris's fine organ at Doncaster, destroyed in 1853. There is a fine metal Stopped Diapason in Bridge's great organ at Christ Church, Spitalfields.


Perforated cylindrical pipes are used in the formation of certain stops. Thus the small pipes of the Keraulophon are pierced through the body, near to the top; those of the English Hohlflute have two holes near to the top, and opposite to each other; while those of the Flute Harmonique have each a perforation about half way up the body.

338. Besides the foregoing varieties, eylindrical pipes are made of wood in Germany, and produce a most exquisite tone. They are chiefly used for the "Flauto

Traverso," which stop, like the French Flute Harmonique, blows its octave in the upper portion of the scale.

339. Besides the flue stops already enumerated, some soft-toned reed stops are composed of cylindrical pipes. These are the Clarionet (fig. 74) and Vox Humana (fig. 75) stops. The former is formed of moderately long and narrow pipes, which are quite open at the top; the last-mentioned are of shorter and broader pipes, and half-stopped at the top.

Conical pipes. 340. Conical pipes are such of which the bodies lessen from the mouth upwards more or less rapidly. Pipes of this conical shape are neither common nor particularly rare in English organs. They are, however, not very readily traced even when they do occur, as their presence is seldom notified in any way on the stop-handles. Two varieties of conical pipes are here engraved. Fig. 77 represents the German "Spitz-flöte," which is little more than half the width at the top; and fig. 78 the German "Gemshorn," which is scarcely more than  $\frac{1}{3}$  at the top that it is at the mouth. Father Smith occasionally made use of conical pipes. The Principal and Fifteenth (so called) in the choir organ of the instrument at the Temple Church, and the choir Twelfth at St. Paul's Cathedral, are composed of pipes of this shape; the former of the two at the Temple taking the outline of the form here numbered 77, and the latter that of 78.



341. Stops of similar shape, labelled "Gamba 8 feet," and "Gemshorn 4 feet," occur in the choir organ of the fine instrument erected in the Wesleyan Chapel, Poplar, in 1848, by Mr. Hill; and in the same division of the organ at the Panopticon, also by the same builder.

Conical pipes, surmounted by a bell, are used in the formation of the English Viol di Gamba; the pipes of which stop, however; differ from those of the German one of the same peculiar to the English organ, and was first introduced by Mr. Hill.


Inverted cone (199, 79).

343. Pipes of the inverted conical form, i. e. narrow at the lower extremity, and spreading out thence upwards (see fig. 79), are employed to a great extent in most organs; the greater portion of the reedstops, as Trumpet, Clarion, Horn, &c. being composed of pipes partaking of this outline; the chief difference perceivable to the eye being in the proportion. Flue pipes are made of this shape on the continent, and form the stop called the "Dolcan" (199, 80). A stop of this shape and name occurs in the organ at St. Stephen's Church, Westminster, built by Mr. Hill, producing a light, agreeable, and rather fluty tone.

Inverted cone, surmounted by a bell (fig. 81).

344. Pipes of the shape of an inverted cone, surmounted by a bell, increase in diameter more gradually and to a less extent than the preceding; the bell expanding more suddenly. Pipes of this construction (fig. 81) are only used in the formation of the Hautboy and its octave; the pipes of which stops more nearly resemble the shape of their orchestral prototype, than those of any other in the organ, excepting some of the continental Flutes.

Wooden pipes. 345. Four-sided pipes (fig. 82) are those of which the bodies are of the same width and depth throughout. They are freely employed in most organs, and are of two kinds; the first open, the second stopped, entirely or partially.



G

Open four-sided pipes are often introduced in lieu of the pipes.

346. Open four-sided pipes are often introduced in lieu of the large metal bass ones of the Dulciana and Open Diapason. Some stops are formed exclusively of pipes of this class; as the Claribella, Open wood Flute, &c. The Pedal Open Diapason is very commonly composed of pipes of the above kind.

Stopped four-sided pipes (fig. 83). 347. Stopped four-sided pipes are closed in at the upper end with a stopper. Like the preceding, they are used to a great extent in most organs; the Double and Unison Stopped Diapasons, and the Stopped Flute, being in modern instruments usually composed of pipes of this description.

Half-stopped four-sided pipes.


348. The difference between a stopped and a half-stopped pipe consists in the latter having a hole bored down through the handle and stopper. The treble portion of the stops mentioned under the last head is frequently perforated in this manner; so also is the Clarinet-flute. Large stopped pipes are seldom bored.

Pyramidal pipes (fig. 84). Pyramidal pipes, broadest at the mouth and lessening upwards, are sometimes introduced (fig. 84) to form the bass of the metal conical stops, in the same way that the open four-sided pipes are employed for the completion of some of the cylindrical stops. Occasionally entire stops are formed of pipes of this shape.

350. In the choir department of the large organ in the Wesleyan chapel at Boston, built by Messrs. Gray and Davison, are two stops made of this shape, and called "Gamba" and "Gemshorn."

Pyramidal and inverted (fig. 85).

351. Pipes of the inverted pyramidal shape, i. e. narrow at the bottom and broad at the top (fig. 85), are frequently used for large reed-stops, as the 16 and 32 feet Posauns. Smaller reed-stops are sometimes formed of pipes of this description; as, for instance, the Bassoon. The pipes constituting the lower portion of the "Dolcan" (fig. 86) are also sometimes made of the pyramidal and inverted shape.



352. The varied proportion in the dimensions of a pipe, and its influence on the second, are noticed in a subsequent page.

The classification of 353. The numerous kinds of pipes just noticed are divithe pipes into flue and reed pipes. ded, in regard to the distinct manner in which that part is made which in reality produces the tone, into two great classes, namely, flue-pipes and reed-pipes.

Flue pipes. 354. Lip, mouth, or flue pipes,—for they are called by all these names,—are such as have an oblong opening, called the mouth, at the junction of the body with the foot of the pipe; bounded above and below by two edges called the lips; which are made to sound by the wind first passing through a narrow fissure, flue, or wind-way; and which depend chiefly on the length or shortness of their bodies, for the gravity or acuteness of the sound they produce.

Reed pipes. 355. Reed or tongue pipes are, on the contrary, those which are made to sound through the medium of a mouth-piece (not unlike that of a Clarionet), furnished with an elastic plate of metal; and which do not depend on the length of the tube\* of the pipe, but on the size of the mouthpiece and the vibrations of the tongue, for the gravity or acuteness of the sound.

356. For the purpose of illustrating the difference between these two classes of pipes, it may be observed, that, while an open flue pipe must have a body of eight-feet standard length to produce the CC sound, a reed pipe may only require a tube of about eighteen inches, as in the case of a Vox Humana. Indeed, a tube of any sort is not indispensable, as is evidenced in Accordions, Seraphines, Harmoniums, Concertinas, and such like instruments; all of which produce their sounds from metal tongues of various sizes, closely resembling those belonging to the reedpipes of an organ; but the dimensions of which instruments must be sufficient to indicate that tubes cannot therein be contained. The tubes, however, exercise a great influence on the strength and fulness of the tone produced; both being much increased by their presence.

The separate parts of 357. An open metal flue pipe is composed of three distinct a metal flue pipe. parts, called the body, foot, and language or languid.

358. The body is that part of the pipe that, commencing at the mouth, extends thence upwards. (See fig. 71, g, h, page 79.) It is formed by rolling a sheet of metal, of the requisite dimensions, round a wooden cylinder or cone, called a "mandrill," and uniting the edges together with solder. The joint thus formed is called a "seam," and occurs in the back of the pipe. On the opposite side, forming the front of the body, and near to the lower end, an indentation is made, as shown in fig. 87, at a, called the "leaf," which is continued to nearly the bottom, where a small portion of the flattened part is cut away, leaving a broad opening, b. The edge that is left immediately over this opening (c) is called the "upper-lip."



87

<sup>\*</sup> Flue-pipes are said to have bodies, and reed-pipes tubes.

359. The foot is that part of the pipe, of an inverted conical shape, that extends from the mouth downwards (fig. 38). It is made in a similar manner 88 to the body; i. e. it has a seam running vertically up the centre of the back, and an indentation in the front; though, in this instance, in the upper part (a), corresponding with that in the body of the pipe, forming an "under-lip." The foot serves as a conductor of wind from the upper-board up to the mouth of the pipe; hence, in the apex (e) a hole is made for the entrance of the wind. It further answers as a support to the pipe; to which end it is made very thick and strong, that it may resist the weight and pressure of the body.



360. The language, or languid (fig. 89), is the flat plate of metal that lies horizontally over the top of the foot, just inside the mouth. It is made of much thicker material than any other part of the pipe, because it is entirely unsupported, except at the sides and



back. In front, it presents a straight edge, corresponding with the lips of the body and foot, but slightly behind that of the latter, leaving a narrow fissure or "windway" between. The front is also bevelled, inwards and upwards. The language is made very strong and thick, that it might not sink in front or in the middlecasualties that would cause the "sheet of wind" to miss the upper-lip, and so render the speech of the pipe defective.

361. The mouth, as already intimated, is the horizontal cutting or opening that occurs at the junction of the body and foot of the pipe. Its use and influence will be noticed hereafter.

The way in which Open metal pipes.—The separate parts of an open the several parts of flue pipe are joined together in the following manner. The metal pipes are straight edges of the language and foot are first arranged parallel, and then the back and sides of the two are soldered together; the narrow slit in front being left open so as to form a passage or "wind-way" for the current of air that enters at the foot of the pipe. In the next place, the lips of the body and foot are placed precisely opposite to each other, and the body and foot are thus strongly united together at the back and sides. The language is thus entirely enclosed within a finished pipe.

- 363. Stopped metal pipes are either furnished with a moveable cap, that fits tightly over the top of the pipe, completely enclosing it, or a metal cap is soldered on to the top of the body.
- 364. Half-stopped metal pipes have, in addition to the cap, or the fixed covering, a small cylindrical tube, or "chimney," soldered into a hole in its centre, which tube imparts a little more freedom and strength to the tone.
- 365. It may be as well to explain here the precise meaning of the German name given to a stop composed of pipes of the kind just noticed. The literal translation of the German name Rohr-flöte is reed-flute; which has sometimes been supposed to imply a reedy-toned flute stop; such interpretation, however, being accompanied by a difficulty arising from the fact, that half-stopped metal pipes, with chimneys, produce a peculiarly smooth and liquid tone. The name really refers to the formation of the pipe, not to the character of its tone; and signifies that the dis-

tinguishing feature of the pipe is a small tube resembling the hollow-stalk that grows in wet grounds, and which all English dictionaries describe as a reed (rohr). Rohr-flöte therefore simply means a stop belonging to the flute-work, the pipes of which are furnished with a tube or reed. Furthermore, reed-pipes are always so called in England, from the circumstance of their being provided with a small metal tube by way of mouthpiece.

366. The three kinds of metal flue-pipes are frequently furnished with ears, i. e. pieces of metal projecting from each side of the mouth. In stopped and half-stopped pipes the ears are large; but in open ones they are smaller and more neat, giving to the front-pipes, which are always furnished with them, a finished appearance.

Wood flue pipes; open, stopped, and half-stopped.

367. An open *wood* pipe is formed of four separate parts; namely, the body, block, cap, and foot.

368. The body (g, fig. 90) consists of a right-angled tube, formed of four planed boards; the cross section of which is not usually a square, but an oblong. At the lower end, the body is closed by the block  $(h \ h)$ , which is nearly divided in two by a deep cutting, called the throat (k). The block and throat are closed in front by the cap  $(b \ a)$ —a piece of hard wood, hollowed out (n)—leaving the two sides and the bottom edges to be glued or screwed to the sides and block of the pipe. The upper edge (b) of the cap recedes a little, to form the wind-way. The pipe-foot (m) is a cylindrical or four-sided tube, introduced at the bottom of the pipe, to serve as a conductor of the wind into the pipe, and also as a support thereto.

369. In wooden stopped and half-stopped pipes, the stopper is well covered with leather at the bottom and sides, to make the stopping quite sound. Were it not so, the tone would be false.

370. The proportion of the breadth, as compared with the depth, of wood stopped pipes is varied very much, according to the quality of tone that is desired to be produced. Father Smith and Bridge frequently made their stopped pipes nearly square; the former sometimes making the proportions of the block of his C C Stopped Diapason 5 inches by  $4\frac{3}{4}$ . The German builders make some of their wood pipes narrow and deep, as in the Lieblich Gedact, the C C C pipe of which measures 5 inches by  $3\frac{3}{8}$ ; while those for other stops are made wider than they are deep, as in the Hohl-flote, shown in fig. 91, the tenor c pipe of which is made  $1\frac{1}{1}\frac{3}{6}$  deep and  $2\frac{7}{16}$  wide. A pipe that is nearly square gives a full and weighty tone; one that is narrow and deep, a soft and sweet (Lieblich) tone; and one that is shallow and wide, a powerful and hollow (Hohl) tone. Father Smith made his Hohl-flute perfectly square, the block of the 2-feet pipe measuring exactly 1 inch in depth and width; and when placed on the same manual with a Stopped Diapason, he then made the latter narrow and deep, i. e. of the Lieblich Gedact shape, by which means he secured great indivi-





duality in the tone of the two stops. An interesting illustration of this arrangement of scales will be found in the charming choir organ in the Cathedral at Manchester.

How the several parts are worked together.

371. In working together the separate parts of an open wood flue pipe, the sides are first glued and nailed, or pinned, to the block; and when the glue has thoroughly "set," the back

and front are attached to the edges of the sides by similar means. The pipe-foot is then glued in; and when the pipe is voiced, the cap is fastened on.

372. The mouth of a wood flue pipe is formed by discontinuing the front of the body of the pipe just above the block, as shown at w, in fig. 90, and bevelling off the front of the surface just above, downwards and inwards (i), till an edge is produced, called the upper-lip. Just below this, leaving however an opening of sufficient depth to form the mouth, is the upper edge of the cap, which constitutes the under-lip of the mouth.

373. There are certain modifications sometimes effected in the manner of making the mouth of wood pipes that may here be noticed.

374. Block pipes occasionally have their mouths inverted (see fig. 92). In such cases, the front of the block (a) is made to project as far as the outer surface of the front of the pipe (b), instead of being only in a line with the inner one, as in the case of block pipes of the usual kind; and the bevelled part that forms the upper-lip (c) is cut on the inner surface of the front of the pipe, instead of outside the exterior, then presenting an unbroken appearance, as though there were no lip at all. The arrangement of the mouth, in fact, as compared with that of simply block pipes, is precisely reversed. The English Waldflute of 4 feet, and sometimes the Clarabella, and even larger stops, are composed of block pipes with inverted mouths.

375. Languid Wood Pipes are sometimes made, the peculiarity in which is sufficiently indicated by the term employed for distinguishing such from the other varieties of pipe; namely, that instead of a wooden block, it is simply furnished with a plate or languid of wood, as shown in the accompanying section. Large wood pipes are often made on this principle.

376. The double-mouthed pipe is but seldom seen in England. Its name is a key to the peculiarity observable in the nature of its formation, namely, that of having two mouths instead of one; and the mouths are placed opposite to each other. Greater strength of tone is said to be produced from pipes with two mouths. The German Doppel-flöte is composed of pipes so formed.

377. The G G G Open Pedal-pipe introduced into the Westminster Abbey organ by Elliott and Hill, in Dr. Cooke's time, had two mouths, and was also of the pyramidal form. Its situation in the organ case, however, was a confined one, consequently it was never heard to advantage; and when the pedal pipes were afterwards laid horizontally in a pile on the screen, as its outline was inconvenient for its new position, it was removed and another pipe substituted.





93

- 378. The only difference between an open and stopped wood pipe consists in the latter being closed at the top (b, fig. 83) by a plug or stopper, illustrated at a in the same figure. A half-stopped wood pipe has a hole drilled down the stopper.
- 379. Wooden flue pipes are sometimes furnished with ears on each side the mouth, and occasionally also with a cross piece fastened on immediately beneath the under-lip, called a beard. Ears and beards are chiefly supplied to such pipes as are too slow in their articulation. These additions, by keeping the wind together, accelerates the speech of the pipe.

Origin and continu-380. Something may now be said concerning the speech of ance of the tone in flue pipes. A metal flue pipe is made to sound by the admission flue pipes. of a jet of wind at the apex of the foot, which, rushing upwards, passes through the wind-way and strikes against the upper-lip, producing a concussion which prevents the air from issuing in a continuous manner from the mouth, and causes it to proceed intermittingly. The vibrations thus caused are communicated to the column of air within the body of the pipe; and the air being set in motion, a sound is produced; which sound, however, cannot strictly be said to be produced by the pipe itself, nor by the elastic motion of its body, but by the vibrations at its mouth, and the motion of the column of air contained within its body. The former circumstance is sufficiently evidenced by the fact that the pitch is nearly the same, whatever may be the thickness or the character of the material employed in the construction of the pipe. The stoutness, toughness, and elasticity of the material, have, nevertheless, something to do with the quality and strength of the tone, as will presently be explained. A slight motion of the body of the pipe may indeed be detected; which, however, is a consequence and not a cause; and arises from the friction of the column of air within, having nothing to do with the production of the sound, which is to be attributed solely to the circumstances already mentioned.

- 381. A *wood* flue pipe is made to sound in much the same manner as a metal pipe of the same kind. The wind, on being admitted, passes up the pipe-foot into the throat, and from thence into the hollowed part of the cap, up which it forces itself; then, after passing through the wind-way between the upper edge of the cap and block, it strikes against the upper-lip, and is thus made to vibrate, the vibrations, as already described, being communicated to the air in the body of the pipe.
- 382. It is worthy of remark, that, whereas the sides of a wood pipe beat violently while the pipe is speaking, the front and back remain perfectly quiescent.
- 383. The sound from a pipe continues so long as the organ-wind is allowed to enter that pipe, and at the same unabated strength.
- 384. In a Stopped pipe the current of air in the body of the pipe takes a somewhat altered course, and produces a remarkably different result from what it does in an Open one.
- 385. The consideration of this subject affords an opportunity for explaining what might otherwise appear to be an inaccuracy in regard to flue pipes depending on the dimensions of their bodies for the gravity or acuteness of their sound. A stopped flue pipe of a given length will produce a sound as low as that of an open pipe of twice the length. This fact, however, is soon accounted for. Instead of the

air escaping out at the top of the shorter pipe, as it does out of the longer, it is checked by the stopper that closes the upper end. In consequence of this interruption, the wind is reflected back again down the pipe before it can make its exit, which it does through the mouth. The wind in a stopped pipe, therefore, traverses the distance of the length of the body twice over—first up, then down—and consequently produces a sound of increased gravity in proportion. Thus, a stopped pipe of 2 feet gives the same sound as an open one of 4 feet; a stopped pipe of 8 feet the same sound as an open one of 16 feet; and so on.

The mouth of a flue pipe; and the influence of its proportions ou the tone of the pipe. 386. The size and proportions of the mouth of a *metal* flue pipe exercise great influence on the strength, character, and quality of the tone of the pipe. The usual proportions, which, however, are subject to considerable modification, are, for the width,

 $\frac{1}{4}$  the circumference of the body, and  $\frac{1}{16}$  of the same measure for the height. According to this rule, therefore, the mouth of a pipe that is 16 inches in circumference inside—or, what is the same thing,  $5\frac{1}{3}$  inches in diameter, the diameter being about  $\frac{1}{3}$  of the circumference—would be  $\frac{1}{4}$  inches in width and 1 inch in height. Some organ pipes have a wide mouth, others a narrow one; some have a high mouth, and some a low one. A wide and high mouth produces a round, powerful tone; a narrow one, a sharper tone; a narrow and low mouth, a delicate tone; and a wide and higher mouth, a less clear and hollow tone. But even these deviations have their assigned limits; for, if the upper-lip be cut up too high, the pipe will be slow to speak, or will not speak at all; and if the mouth be too narrow, the pipe will speak the octave above its real sound.

The voicing of metal and wood flue pipes. 387. The careful conformation of the mouth of the pipe; setting the lips; regulating the quantity of wind to be admitted; conducting it through the wind-way in a sheet of the precise thickness; and carrying out other such details necessary to secure the true tone—character and speech of the pipe, are matters of great delicacy; demanding the nicest skill as well as a just perception of tone on the part of the operator. These and other duties are included under the one general term *voicing*; and some idea will be formed of the importance and influence of this branch of organ-building, from the following observations in reference to the speech of an organ pipe.

388. The wind on entering a pipe is blown through the wind-way in a thin sheet against the upper-lip; the mouth or intermediate space being covered by this stream of air. This "sheet of wind," as it is called, is exposed externally to the outward air, while on the inside it is defended from it by the back and sides of the pipe. The wind that comes out at the mouth of the pipe passes violently upwards against and above the leaf; causing an inward draught underneath, towards and indeed through the mouth. The former fact may be ascertained by blowing smoke into a pipe and watching its progress; the latter, by holding a lighted candle just below or in a line with the mouth of a pipe while speaking, when the flame will be drawn towards or even through the mouth. The inward-bearing draught outside the mouth being stronger than the quiescent air within, the sheet of wind gives way for an instant, and the draught bears into the pipe, but is immediately overcome by

the sheet of wind, which in its turn prevails until the draught overcomes it again. Hence the periodical concussions of the sheet of wind against the upper lip of the pipe.

389. This alternate crossing of streams will, under ordinary circumstances, of course take place with greater or less rapidity, according to the dimensions of the mouth, and the strength of the wind exciting the column of air within the body of the pipe; and the elastic motion of the lower end of the column of air in the region of the mouth—by compression and expansion—assists in the alternate restitution of the sheet of wind and the inward-bearing draught by turns. The pitch of the sound of a Flue Pipe therefore is regulated as much by the number of pulsations which take place at the mouth of the pipe in a second of time, as by the number of vibrations that occur in the body of the pipe in the same time, with the latter of which the former doubtless correspond. This hypothesis is borne out by the fact, that if a pipe be shortened, as in transposing a GG metal Open Diapason into a CC, it does not then require less wind, but more; the additional quantity no doubt being required to accelerate the vibrations at the mouth, so that they may be in proportion to the quicker vibrations of the shortened column of air inside the body of the pipe.

390. It has already been explained, that some proportion is preserved between the dimensions of the mouth and the diameter of the pipe; but the length of the vibrating column of air may be somewhat increased or decreased without much affecting the speech, as may be ascertained by temporarily covering one or more of the lower holes in the back of a front pipe which has openings in it. If, however, the length of a pipe be very great in proportion to its diameter and the dimensions of its mouth, the pulses at the mouth will not be slow enough to correspond with the waves of the lengthened column of air; and the pipe will then either not speak at all, or it will break into some higher sound. This circumstance accounts for Dulciana pipes, the smallest in scale of any open pipes in an organ, and with even narrower mouths in proportion, having so decided a tendency to "speak their octaves" when in the slightest degree out of order. For some stops, it is required that the pipes shall speak their octave and not give their unison sound, as in the German "Flauto Traverso"; in which case, the voicer regulates the dimensions and proportions of the mouth accordingly. At the same time, a pipe in which the proper proportions are preserved in regard to length, diameter, and mouth, will break off into a higher sound, if it has more than a certain amount of wind, or a stronger wind; as in the "Flute Harmonique" of the French and English organ-builders.

391. In cutting the wind-way, if the opening be made too deep, the "sheet of wind" will be too thick, and the inward-bearing draught will be unable to break through; in which case, the pipe will not speak with the proper strength, but will simply produce a humming or whizzing sound. Or if the mouth of a pipe be "cut up too high," the sheet of wind will not entirely cover the space forming the mouth; in organ-builders' phraseology, "the wind will not reach;" and the speech of the pipe will be dull and unsteady.

392. In wood pipes of the four-sided shape, the width of mouth of course corresponds with the inside measure of the same side of the pipe in which it is cut. Its height is commonly one fourth of its width, or a little more; but, inasmuch as wood pipes are, as already explained, sometimes made narrow and deep, the mouth being on the narrow side, while at others the mouth is placed on the wide side, it is

evident that its measure in the direction just mentioned must be subject to much greater variation than in metal pipes.


393. In some German *wood* pipes, the blocks and other parts connected with the speech of the pipes are made on a plan so different from any of the English methods already noticed, and yet produce so firm and full a tone, even when the scale is small, that a few particulars concerning them are here introduced. Instead

of the block being formed with its face at a right-angle to the top, it is bevelled back and downwards, as shown at a, in fig. 94. The cap is made straight and smooth inside, instead of being hollowed as in figs. 90, 92, and 93; and in lieu of the wind-way being made by filing a portion from off the cap, it is formed by filing from off the block; and the upper-edge of the cap is set on a level with the top of the block, instead of a little below it.

394. A glance at the accompanying diagram (fig. 94) will be sufficient to show that in a pipe thus formed the wind must gradually undergo increased compression as it ascends through the wedge-shaped hollow between the block and cap, and that it must in consequence be thrown with much greater force against the lip; a stronger and clearer tone being thus secured. The mouth is cut up much higher than ordinary, it frequently being equivalent to three-fourths of its width, and sometimes even more; and the lip is

left thick, that the wind may take good hold. There are no nicks either in the block or the cap; the latter of which is made about half as thick again at the mouth end as at the foot end, to prevent the inward-bearing draught being too strong, and thus, in a neater manner, serve the purpose of a beard. The hole in the pipe-foot is made very large, and is perfectly round; there is no plugging, and the speech is plumper than when the wind is carried through four three-quarter apertures, as in most plugged pipes. The lower end of the foot is leathered, so as to prevent an escape of wind between it and the upper-board.

395. The modern German *metal* pipes are made and voiced more nearly as in England, except that in some cases the *bevel* on the language is made *more acute* than in English pipes. Fig. 95 shows the English language and bevel in profile; fig. 96 exhibits the German in a similar manner. The acute bevel has the effect of throwing the wind more *into the pipe*, which permits the mouth to be cut up higher; the tone produced being remarkably full and bright. The inside of the pipes is coated with a red lac, which is doubtless intended as an imitation of the peculiar dark varnish which time places on the surface of old pipes; and which, by closing the pores in the metal and rendering the inner surface perfectly smooth, has something to do with the mellowing of the tone.



396. The *mechanical* part of voicing, so far as the *eye* can detect, consists, in the instance of a metal pipe, chiefly in cutting with great nicety a series of notches or *nicks* in the front part of the language. The "nicking" is made on the lower edge of the bevelled surface of the language, and the notches run para!!el to

each other, and sometimes, though not always, at an angle to the axis of the pipe. There are different methods of voicing, which produce different results. A pipe that is not voiced at all, will frequently not sound at all, or will give a wrong note, or will not speak with adequate strength.

397. Large pipes, and sometimes comparatively small ones, will however occasionally present exceptions to the rule, if the mouth and parts adjacent are proportioned with mathematical accuracy. The front pipes of the organ at St. Giles's in the Fields, made by Harris, have no nicking, neither have several of the metal and wood Stopped Diapasons in the Temple organ. Pipes that have but few nicks will frequently produce a round sonorous tone, as is evidenced in many of Smith's Open Diapasons; while others, that are much and regularly nicked, will produce a softer and very musical tone, as in Green's Diapasons.

398. The voicing of a wood flue pipe consists of several small parallel lines, filed on the front or face of the upper part of the block. These little cuts do not run quite at right angles to the upper lip, neither are they made of the same width right down; but they are deepest and widest at the mouth, and gradually decrease as they recede from it, until at last they are lost in the plain surface of the block. In voicing the pipe, which of course is done before the cap is put on, the upper edge of the block is slightly pared away opposite the under-lip, so as to direct the wind against the upper-lip. If the angle be pared off too much or too little, the pipe will be slow to speak, or will speak ill, or perhaps not at all. Or if the sheet of wind be suffered to strike against the upper-lip with rather too much force, the tone produced will be imperfect, and perhaps accompanied with a chirping at the commencement of the pipe's speaking.

The influence of the material, form, and seale on the tone of a pipe.

other circumstances.

399. Besides the many modifications or *characters* of tone (so to speak) which are produced by the particular method of voicing adopted, the tone of a pipe is influenced by many

400. And First, of the *material*. Supposing all other circumstances to be the same, it may be said, in regard to metal flue pipes, that the thicker and more elastic the body of the pipe is, the more decided, clear, and distinct will be the sound. According to some of the first German works on the subject, the tone of a pipe is improved by the material being well hammered before being worked up.

401. In regard to wood pipes, the same phenomenon may be observed as to the influence of the material on the tone; a pipe made of some hard wood, as oak, giving the clearest and strongest tone, while one of the softer kind produces the most mellow tone. When the old builders used a soft wood, they sometimes cut the planks the cross-way of the grain, probably from the circumstance of the wood of the bellies of Violins being cut in that manner. The deal pipes in the Finedon organ, Northamptonshire, built by the younger Smith, are formed out of boards cut in the direction just mentioned. If a comparison be drawn between the quality and strength of the tone of metal and wood pipes generally, a long open metal pipe will be found to give the clearest and most sonorous sound, and an open wood one a thick and heavy sound. This is, of course, supposing their measurement and all other circumstances to be about the same.

- 402. Then of the *form*. Pipes having the open cylindrical outline, when made to the full proportionate diameter, give the strongest, clearest, and fullest tone of any metal flue pipes. Those of the conical shape produce a rather more subdued sound than the cylindrical; accompanied either by a tender, reedy, or a *crying* character of tone, according to the extent of their conicality and the manner in which they are voiced. Pipes of the covered species emit the weakest sound; the chinney or the perforation, as the case may be, giving rather more freedom to the character of the tone.
- 403. By an alteration of *scale*, that is to say, an increase or decrease of diameter, while the same length is preserved, a further modification in the strength and character of the tone is produced.
- 404. The width or narrowness of a pipe alters the strength of the sound produced, and to such an extent, that an open cylindrical pipe (already described as giving the more powerful sound) may, by the reduction of its scale, be made to sound as lightly as a covered one, as will be perceived on comparing the strength of the tone of a Dulciana pipe with that of a Stopped Diapason pipe. Moreover, by enlarging the scale sufficiently, a pipe of soft wood—Christiana deal, for instance—may be made to produce a stronger and heavier sound than a pipe of hard wood, as oak.

Influence of the 405. In addition to the influence which the material, form, strength and quantity and scale of a pipe exercise on the tone produced, the strength of the wind on the of the wind by which it is made to speak, or the quantity alcharacter and strength of the tone. lowed to enter the pipe, or both, effect a further alteration in the strength of the sound. A stronger and a greater "flush of wind," within certain bounds, causes a pipe to give a fuller and brighter tone. If the jet of wind, however, be too great or too strong, the pipe will "overblow," and give the octave of its true sound. A strong wind causes the sound produced to be also rather higher in pitch, as well as stronger and brighter. An illustration of the influence of a lessened strength of the wind on the quality, power, and pitch of the sound of a pipe, occurs when the wind is being "let out." The sound then gradually becomes duller, weaker, and *lower*, until it altogether ceases; or it will *rise* in pitch, and speak louder and clearer again, as more wind is supplied just before the sound dies away.

- 406. Experiments have proved that reed-stops acquire a considerable accession of power and splendour by being placed upon a heavier wind than the flue stops. The first organ in England that had a reed stop voiced to a heavy pressure of wind, is that in the Town Hall, at Birmingham; into which instrument the stop alluded to, called the " *Tuba Mirabilis*," was introduced in the year 1840.
- 407. In France, the influence of different strengths of wind has been turned to still greater account by the ingenious artists, Messrs. Cavaillé Coll, organ-builders to the late French government, in the fine instruments built by them for the Abbey Church of St. Denis, near Paris, and the Church of the Madeline in Paris. In these admirable organs, they have not only placed the reed stops on a heavier wind than the flue, but have increased the weight in the treble by an inch. This latter application was suggested by the fact of performers on wind instruments, in order to render the acute tones of equal strength with the grave, exercising a greater effort

of the muscles of the lungs, when sounding high notes than when producing low ones. By supplying the pipes of the upper keys with a stronger wind, the weakness at times observable in the treble of organs is entirely rectified.


408. The same intelligent builders have further succeeded in making reed and flue stops produce an harmonic instead of a ground tone, and hence called "Trompet Harmonique," and "Flute Harmonique." See Foreign Specifications, Nos. 12 and 13. The pipes are made of double or even four-fold length, and, by a strong and copious wind, made to "overblow," and so sound the octave or the super-octave.

409. In the magnificent new organ lately erected in London, by Mr. Hill, in the Panopticon, the builder has incorporated not only the several modern continental improvements above referred to, but also some new mechanical inventions of his own. The organ in the Glasgow Town Hall has also the great reeds and two harmonic flutes on a heavy wind, and the treble of the organ on a stronger wind than the bass.

Formation of a reed-pipe of an organ is formed of a mouthpiece, pipe.

composed of a block, reed, tongue, and wooden wedge, with a tuning-wire and boot; and a tube or body.

411. The block of a reed-pipe (fig. 97) is, in modern specimens, usually a circular and rather solid mass of metal, cast in a mould; though in old reed-pipes the blocks are frequently of boxwood, turned in a lathe. From the block, the reed and tongue hang suspended below, and the tube rises above. Through the block, two round holes (bc) are left in the casting; the largest of which (b) forms the passage-way for the wind from the reed into the tube; and



99

98

the smallest, which occurs a little in advance of the first, admits a wire that is required for regulating the precise length of the vibrating portion of the tongue, presently to be noticed. The upper part (a) of the block is made rather wider than the lower, forming a rim that rests on the upper edge of the boot.

- 412. The reed is a small cylindrical tube of brass (fig. 98), slightly conical in shape, being usually widest at the lower end, and having the lower end closed by a piece of brass, which slants a little upwards and backwards. In the front of the reed, an opening is left (d), running lengthways, presenting an appearance as though a portion of the reed had been cut away, at which the wind enters. The upper end of the reed is fitted tightly into the larger hole in the block already mentioned, with the opening towards the smallest hole.
- 413. The tongue (fig. 99) lies immediately over the opening just noticed in the reed, covering also the edges which border it. It consists usually of a thin, tough, and elastic plate or spring of brass, and is fixed in its position by the upper end being passed a

little way up into the block, and then a small wooden wedge being driven into the part of the circular hole in the block that was left vacant on the flattened side of the reed. The lower end of the tongue, therefore, is left entirely free, and is slightly curved.

414. The tuning-wire (fig. 100) is a moveable piece of bent steel-wire, that passes through the small hole in the block, in front of the reed and tongue. The lower part of it is bent up, as shown at (f) in the accompanying illustration, so as to press against and across the tongue. So much of the tongue as may be above the point where the tuning-wire crosses it, is pressed firmly against the reed and prevented vibrating: the wind, therefore, only agitates that part that is below the wire. As, however, the wire is moveable, the vibrating portion of the tongue can be lengthened or shortened at pleasure; and the upper end of the tuning-wire is hooked, so that the tuning-knife may move it upwards or downwards the better.



- 415. The boot of a reed-pipe is the short upright and strong tube of metal into which the greater portion of the block sinks (see fig. 79, page 81, and fig. 97, page 93). It therefore has to support the weight of the entire pipe; in addition to which, it receives the wind, through a hole in the lower end, from one of the borings in the upper-board, over which it rests and indeed sinks into a short distance, and directs it up to the reed.
- 416. The tube of a reed-pipe, as already explained, presents the outline of a cylinder, an inverted cone, an inverted cone with a bell, or an inverted pyramid (see figs. 74, 75, 79, 81, and 85; pages 80, 91, and 92), according to circumstances; and rises from the surface of the block, to which it is soldered, in the instance of small metal pipes. In larger pipes this is not so, but a short tube called a socket is introduced, which receives the narrow end or "neck" of the longer tube, and sustains it firmly and steadily. Sockets are of course necessary for reed-pipes of all sizes that have wooden tubes, as illustrated in fig. 85, page 82; and the lower end of each tube has then to be rounded off to make it correspond in form with the circular shape of the socket that is to receive it.
- 417. It might prove interesting to the reader now to refer to the various kinds of reed pipes represented on pages 65, 66, 70, 72, and 76; and trace out for himself their several peculiarities and points of difference, as well as their separate parts, so far as they are in sight.

The formation of the tubes.

418. Metal tubes, like the bodies of flue pipes of the same material, are formed of sheets of metal, cut to such a shape as will, when rolled and soldered up, give to the tube the required form and proportion. The bell, if the addition of one be required, is of course applied afterwards. That part of the metal plate which is to form the neck of the tube is left much thicker than the other end, in order that it shall neither sink nor snap off under the pressure of the upper and broader part. Wooden tubes are formed of four boards each, comparatively wide at the upper end and narrow at the lower, glued and nailed together.

The different kinds of mouth-pieces or reeds. The open, closed, and freereeds. 419. The opening, already noticed as occurring in the front of the reed, either extends all the way up, as shown in *fig.* 98, or only partially so, and gradually contracting to a point. The former is called the "open reed," and is the same in kind that

has been in use for centuries: the latter is termed the "closed reed," and is of modern invention.

- 420. The open reed admits by far the greater quantity of wind into a pipe, the influence of which increased volume excites the tongue to vibrate against the reed with more force, and so to produce a stronger and clearer tone. Hence it is generally considered to be the description of reed the best adapted for all powerful and prompt-speaking reed-pipes. It requires a rather longer tube than the closed reed.
- 421. The closed reed allows only of a lessened draught through it, and is on this account considered by some organ-builders to be well adapted for reed-pipes, the tone of which is required to be of a quieter character; though it is not indispensable to employ them to obtain a subdued tone, inasmuch as some organ-builders eschew the use of closed-reeds altogether. Moreover they present a much larger surface between the reed and tongue, whereon dirt may lodge.
- 422. The free reed. A third kind of reed is used on the continent, called the free-reed. In this variety the size of the tongue and the opening in the reed are so adjusted in regard to each other, that the former almost exactly fits the latter: the tongue, therefore, instead of striking on the edges of the reed, is impelled into the opening by the wind; when, from its own elasticity, it resumes its former position; and the sound is produced by its rapid vibratory motion to and fro through the air. The tone of a free reed is not usually so strong as that of a striking reed, but it is particularly smooth and free from rattling. Some fine 16 and 32 feet Posauns have been made in Germany of free reeds.

The influence of the tube, its shape, scale, and material, on the strength and character of the tone of a reed-pipe.

423. It will be remembered to have been stated (ante, p. 83, sec. 355) that a reed-pipe does not depend upon its tube for the gravity or acuteness of the sound produced, but chiefly on the dimensions and other circumstances connected with its tongue. The tube, however, makes a considerable difference in the strength and

character of the tone. Were it otherwise, there would exist no sufficient reason for its introduction. The dimensions of the tube are so adjusted to the size of the tongue, that the vibrations of the column of air contained in the former shall correspond with the vibrations of the latter. Where this accordance does not exist, the sound produced is inferior in quality. It is not absolutely necessary that the tongue and the column of air in the tube should be in unison, to produce a musical sound; but the tone of small scale reeds is always more pleasing, and that of larger reeds more full and rich, when the unison is perfect. Short-bodied pipes of the cylindrical shape give a comparatively light sound; as may be ascertained by trying any Clarionet or English Vox Humana Stop. Pipes with tubes of the inverted conical form give a more sonorous tone than the last-mentioned—the strength and character of the sound being governed to some extent by the scale and length of the tube. When it is of narrow measure, the tone is rather thin and somewhat nasal, as in most Bassoon stops. When the pipe is similarly shaped, but with a bell added, the tone becomes somewhat clearer, more wailing and attenuated, as in a Hautboy stop. The weight and power of the sound increases with the further increase in the seale; the Trumpet being louder and more smart than the Bassoon; and the Posaun more ponderous than the Trumpet.

The influence of the reed and tongue on the tone of the pipe.

424. The strength of tone, again, depends much on the shape of the opening in the reed; whether the tongue be made of common brass, or a composition containing a larger proportion of copper; the thickness of the tongue; its curvature; and the smoothness and flatness of the edges of the aperture against which the tongue vibrates. Reed-stops of delicate intonation, as the Hautboy, Clarionet, and Bassoon, have long, narrow, and thin tongues; others of strong and full tone, as the Trumpet, Horn, and Posaun, have shorter, broader, and thicker tongues. Many of the old Trumpet stops have reeds that are either larger or broader than those now used, and shorter tubes; which accounts for their tone being thin, and devoid of the power and impressiveness which characterise all good stops of the kind.

How a sound is produced from a reedpipe.

425. When the tongue of a reed-pipe is in a state of rest, it is curved, leaving the opening in the reed free to the admission of air. The peculiar tone of a reed-pipe is, in the instance of a striking reed, produced by the tongue beating against the reed, and rebounding again by the force of its own elasticity. The tongue is excited by a current of air being thrown on to it from below; which, as it rushes through the opening in the reed, draws or sucks the tongue with it towards the reed, against the edges of which it strikes, and then returns.

426. In a *free* reed, the sound is produced by the motion of the tongue to and fro; and, as that motion is never checked or interrupted by the tongue striking, the tone is as smooth and continuous as that of a flue-pipe.

How the pitch of the sound of an organ-pipe is determined.

determined by the number of beats or vibrations made by the tongue in a second of time; and the reeds are accordingly made small or large, depending on the acuteness or gravity of the sound each is required to emit. The higher the pitch of the sound, the smaller must be the reed, and the quicker the vibrations of its tongue; the deeper it is, the larger must be its reed, and the slower the beats of its tongue upon the reed, and perhaps even audible. In a flue-pipe the pitch is governed by the length of the body of the pipe, or, more strictly speaking, by the length of the column of air within that body; which follows the simple geometrical law, that by doubling the length, it sounds an octave higher.

428. The following table exhibits at one view the number of vibrations which take place in a flue-pipe, and the number of blows made by a striking reed in a second of time, in producing the several C sounds used for organ-stop measurement; while, to the right, the shortened length of the pipe is given.

0 -		0	-			
Name of C.	Vi	brations in		ws of tongu		Length of
	1	flue-pipe.	i	reed-pipe.	0	pen flue-pipe.
CCCC		32		16		32 feet.
CCC		64		32		16 ,,
CC		128		64		8 ,,
Tenor c		256	—	128	—	4 ,,
Middle c <sup>1</sup>		512	—	256	_	2 ,,
Treble c2		1024		512		1 ,,

429. It is necessary to mention that the above table of vibrations refers to single and not to complete or double ones. As the latter are used by some writers on harmonics, the difference might create confusion, if not explained. The tongue of a reed-pipe strikes when vibrating towards the reed, but of course not when vibrating from it; hence the beats made by the tongue in a reed-pipe only amount to half the number of vibrations taking place in a flue-pipe in the same time, as shown in the above table, which accounts for those beats often being discernable to the ear in the speech of even 16-feet reed-stops. When, therefore, the rustling of the tongue of large reed-pipes cannot otherwise be silenced, the front of the reed is lined with a thin coat of leather—simply the dressed part, the fleshy part being cut or scraped away—so as to form a soft surface for the tongue to strike against.

430. The wind having passed through the mouth-piece of a reed-pipe, the size of which has defined the *pitch* of the sound, it passes into the tube; the shape, material, or scale, or all combined, imparting to such sound the *character* and *strength* required.

# CHAPTER XIX.

#### THE STANDARD LENGTH OF ORGAN-PIPES.

- 431. Organ-pipes, and particularly those of the flue species, are made to a great variety of sizes. The greatest standard length of a speaking-pipe is 32 feet; the shortest,  $\frac{\pi}{4}$  of an inch. The foot is not of course taken into calculation, as that is nothing more than a supporter and wind-channel to the pipe. The sound of the two pipes of the extreme measurement just mentioned would be 9 octaves apart; consequently, a complete range of organ-pipes, including all the semitones, would present a series of 109 different sizes.
- 432. Organ-pipes do not always measure the exact length quoted; but they will fall a little short of, or, in some cases, rather exceed, that measurement, as the case may be. Hence a distinction is drawn between the literal length, and the standard or quoted length of a pipe; the latter generally presenting an approximation only to the former. Many circumstances tend to render an adherence to the literal length almost impossible; as, for instance, a stronger or lighter wind, which would demand a longer or shorter pipe to produce a sound of the same pitch; the more copious winding of a pipe, which would cause it to "blow sharp," and would therefore require a longer body to produce a sound of the original pitch; the difference in the foot measurement in various countries; the variation of pitch; or an alteration in the scale, or in the outline of the pipe.

The names of the sounds produced from organ-pipes.

433. From the circumstance of every septave of pipes and sounds included in the extensive range just mentioned being called by the same seven letters, it becomes a matter of necessity that, in order to obtain a clear view of the whole, some means should be adopted for distinguishing each septave from the others. This advantageous classification is established either by the aid and use of some special kind of letter—capital or small; by some particular kind of letter, with a sign added thereto; or by two, three, or four capital letters grouped closely together. In some few cases, a particular name is also given to a particular pipe or sound; though it considerably simplifies the nomenclature by confining the application of such names solely to the keys.

434. For most musical purposes, the *notation* indicates with sufficient precision the gravity or acuteness of the sound that may be expected to be heard; because many instruments, and all voices, produce but a sound of one unvarying pitch for each note, and that one agreeing with the music written. With the organ, however, the case is different; for, in some instances, eight or ten different sounds are concentrated on one key; which are produced from as many separate pipes, of nearly as

many varying lengths; therefore, a definite *pitch* cannot invariably be associated with the *note* written, nor with the *key* struck, in the case of an organ, or of organ-music; since the sound produced may be in accordance therewith, or it may be one or two octaves lower, or one or two octaves higher, or a combination of all, according to the nature of the Stop or Stops drawn.

435. Nevertheless, the several octaves and keys on a manual, and also some of the intermediate keys in those octaves, have distinctive names, by which they are conveniently referred to in the course of writing, or in conversation. These names have originated from various sources.

The classification of those sounds into octaves; and the different methods by which the several octaves are distinguished from one another. 436. In olden times, the 21 degrees, commencing on the first line in the bass, and ascending to and ending on the fifth line in the treble, were termed the *gamut*, or musical scale; which gamut comprised a range of two octaves and a minor seventh. The several sounds therein contained were represented by letters, which at the same time corresponded with the

name of those sounds; but to distinguish such sounds as were represented by the same letter, but which differed in pitch, a different kind of letter was used, sometimes accompanied by another attendant characteristic. Thus, the first septave was represented by capital letters; the second, or that next above, by small letters; and the third and upper one by two small letters; thus—



437. On this gamut\* being in the course of time extended, the next seven keys and diatonic sounds represented by notes immediately below the bass stave were termed double, and were marked with two capital letters, as CC, DD, &c.; while those forming the first septave above the treble stave were said to be in alt. The second series of seven diatonic sounds below the original "gamut," commencing with F, the fourth line below the bass stave, were distinguished by three capital letters, as CCC, DDD, and so on; and the remaining four diatonic sounds from GGG to the C below were marked with four capital letters, as CCCC, DDDD. Then upwards, the sounds in and higher than the second octave above the treble stave, i. e. from g, the fourth line above the treble stave, were said to be in altissimo. This completed the English tablature.

<sup>\*</sup> Guido Aretinus, a Benedictine monk of Arezzo, in Tuseany, in the tenth century, was the inventor of the gamut above referred to; though it is not perhaps so strictly an invention as an improvement on the diagramma, or scale of the Grecians. Previous to the time of Guido, the septaves were reckoned from A; but that ancient theorist added the G below, and denoted it by the Greck gamma, r. Hence arises the word gamut, or gamma ut, it being the ut or first sound of the G hexachord.

- 438. But it will be perceived that it presents neither the names nor signs by which the highest two and a half octaves of pipes and sounds can be distinguished from each other; and is therefore so far defective. Moreover, the terms "in alt" and "in altissimo" are inconveniently long for the practical purpose for which the distinguishing terms are so useful in organ-building, namely, for marking the composition of the Mixture Stops in various parts of the scale.
- 439. From the above nomenclature, however, two of the most useful names, as well as one of the terms used at the present day by organ-builders, as part of the tablature applied to the keys of the manual, have been borrowed; while as many of the remaining terms are preserved to distinguish the deeper sounds that are below the unison range of the modern manual. The former are (1) gamut G, or the lowest G of Guido's gamut; (2) middle c¹—the "mean" or middle cleff c¹ of the same gamut, represented by the note on the ledger line between the bass and treble staves; and (3) the term "in alt" for the keys above the treble stave.



440. Some of the other keys are named after certain string instruments, from the circumstance of their unison sound corresponding with the lowest sound produceable on such instruments; as Tenor (or viola) c, and Fiddle (or violin) g. These several names and terms, with the additional three, viz. "double C," " $g^1$  above middle  $c^1$ ," and "treble  $c^2$ "—the latter applied to the c represented by the note of that name in the treble stave—form a complete tablature for the several C and G keys of the organ manual, as shown in the following table.



441. The several septaves—or octaves, as they are more frequently, though less strictly, called—which occur on a manual comprising the above gamut, are sometimes distinguished by the name given to the C with which each commences; as, the Bass octave; Tenor octave; Middle octave; Treble octave; and Top octave, or half octave, as the case may be. In addition to this, they are sometimes referred to by the standard length of the C that commences each octave; as the 8-feet octave, the 4-feet octave, &c.

- 442. But, as before observed, the number of different sounds in an organ far exceeds that of the keys on the clavier; hence arises the necessity for some method of grouping the additional sounds, and indeed all sounds, into octaves, and of calculating and measuring them. And first, of the classification of the sounds within the usual manual compass. According to the old English system, G was made the starting sound for this purpose, as shown in the first "gamut;" while, in Germany, C has for a long period been recognised as the standard sound. In the latter country, the lowest octave on the manual, corresponding with the "Bass octave" of the table above given, is called the "great octave," and is represented by single capital letters, as C, D, E, &c. The next octave, identical with the English "Tenor octave," is termed the "small octave," and is distinguished by small letters, as c, d, e. The third octave, or "Middle octave" of the English, is called the "once-marked octave," represented by small letters with a small figure 1 to the right and a little above the letter, thus—c1, d1, e1; while the "Treble octave" is called the "twice-marked octave," c2, d2, e2; the remaining half octave, from "c3 in alt to f3 in alt," forming a portion of the "thrice-marked octave," c3, d3, e3. Sometimes so many little horizontal lines are used instead of figures, thus—c; which system, however, has an air of complication about it.
- 443. Then, of the sounds *above* the compass of the ordinary organ manual, the octave commencing with c in altissimo is termed the "four-times marked octave," as c<sup>4</sup>, d<sup>4</sup>, e<sup>4</sup>; and the octave higher again, the "five-times marked octave," as c<sup>5</sup>, d<sup>5</sup>, e<sup>5</sup>. Of the sounds *below*, the 16-feet octave is called the "first sub-octave," distinguished by capital letters with a line underneath, C, D, E, and the 32-feet octave, counting downwards from the "contra C," as the Germans call the 16-feet C, is termed the "second sub-octave," distinguished by capital letters twice underlined, thus—C, D, E.
- 444. The English tablature for distinguishing the several octaves of manual keys, including some of the intermediate keys, is so complete, distinct, and satisfactory, that nothing advantageous would be gained by relinquishing it in favour of the German; but as the English tablature presents no means for classifying the higher sounds, the German nomenclature above given might, under such circumstances, be beneficially received. It will therefore be adopted in the chapter which treats of the composition of Mixtures; and, in order to give an easy clue thereto, the English names which refer to the several C and G sounds comprehended in the compass of the manual will also be introduced, that the *names* in the one case may explain the *tablature* in the other.
- 445. For the 16 and 32 feet octaves of pipes and sounds, we have in England a tablature of our own, and one that is so thoroughly understood and generally received that there exists no necessity for adopting any other.

The size of the pipes mostly used for stopmeasurement.

446. Many of the pipes, especially those sounding C, E, or or organ-stop, and therefore fix the standard length of that stop. It is necessary, therefore, to refer to these.

447. The C of 32-feet length. The sound of this pipe is below that of any other musical instrument. It is called either the "32-feet C pipe," from its standard

length; the "4 C pipe," from its English designation; or the "twice under-marked C," according to the German tablature. Its sound is an octave below the lowest C of the grand Pianoforte.

- 448. The C of 16-feet length. The sound of this C is in unison with the lowest C of the grand Pianoforte; and is represented by a note in the sixth space below the bass staff. It is the "CCC" (pronounced 3 C) of the English tablature; the "Contra C," or "once under-marked C," of the German, and the "16-feet C" pipe.
- 449. The C of 8-feet length. The pitch of this pipe is in unison with the lowest sound (produced from the open fourth string) of the Violoncello; and is represented by a note on the second ledger line below the bass staff. It is the English "CC" (double C); the German "great C;" or the "8-feet C pipe."
- 450. The C of 4-feet length. The sound of this pipe is in unison with the lowest note of the Tenor Violin or Viola, and also of the old Tenor Hautboy, or Tenoroon\*; on which accounts it is frequently called "Tenor C." It is represented in the English tablature by a capital C; but in the German by a small c. Its sound is indicated by a note in the second space of the bass staff.
- 451. The C of 2 feet. This pipe sounds in unison with the lowest C of the Hautboy. Its pitch is represented by a note placed on the ledger line between the two staffs. According to the English tablature, this sound would be denoted by a small c; according to the German, by the once-marked c¹. This is called most frequently "middle c," from its being the middle one of the three cs included within the ancient gamut; but more particularly from the note that represents it being placed on the same line as the cleff of the middle, mean, or intermediate parts—the counter tenor and tenor—in vocal compositions.
- 452. The C of 1 foot. The sound of this pipe (in unison with the lowest note of the Flauto Piccolo) is represented by a note placed in the third space in the treble staff. It is distinguished in the English tablature by two small letters, c c; and in the German by the twice marked  $c^2$ . It is also known as treble  $c^2$ .
- 453. The C of 6 inches. This is the English "c in alt," and the German "thrice-marked c," c³. Its sound is represented by a note on the second line above the treble staff.
- 454. The C of 3 inches. The English "c in altissimo," and the German "four-times marked c,"  $c^4$ . A note in the sixth space above the treble staff denotes its sound.
- 455. The C of  $1\frac{1}{2}$  inch. The five-times marked c of the German tablature, c<sup>5</sup>. The 7-octave grand Pianofortes are sometimes made up to this note.
- 456. The C of  $\frac{3}{4}$  inch. The six-times marked c,  $c^6$ . This is the smallest pipe made. Its sound is 2 octaves above c in "altissimo."
- 457. The Cs are the most important class of organ-pipes, not only because they are the most convenient and proper ones that can be adopted as a foundation for the purpose of stop measurement, of which more in another chapter; but also because pipes of that sound commence and conclude the great series. The class next in im-

<sup>\*</sup> The name Tenoroon has sometimes been given to an organ-stop, which, however, does not resemble the instrument named in the text, either in regard to pitch or quality.

portance are the G pipes, which denote the foundation measurement of G G organstops, and also the size of the fifth-sounding stops of C organs.

- 458. The following are the lengths of the chief G pipes.
- 459. The G of  $21\frac{1}{3}$  feet (24 feet) standard length. The sound of this pipe is a fifth above that of the 32-feet C. It is the "GGG" (three G) of the English tablature, and the "twice under-marked G" of the German.
- 460. Two different lengths are here given for the G pipes. The first is in every case the correct one, and therefore the best one to be written down or engraved; the other, in brackets, is necessarily made use of in conversation for convenience and for brevity sake. The latter is not so well adapted for the Stop-labelling, because it would lead to some confusion in regard to the lengths. For instance—the standard length of a Twelfth is one-third the length of the Diapason; therefore, if the former were to be marked 3 feet, the latter would appear to be wrong at 3 feet, and might be supposed to be a misprint of 9 feet, which would be a second error.
- 461. The G of 10\geq feet (12 feet). The sound of this open pipe is represented by a note placed in the fourth space below the bass staff. It is the "GG" (double G) of the English tablature, and the "once under-marked G" of the German.
- 462. The G of  $5\frac{1}{3}$  feet (6 feet). The sound of this pipe is represented by a note placed on the first line of the bass staff. It is the "great octave G" of the Germans, and the English "gamut G."
- 463. The G of  $2\frac{2}{3}$  feet (3 feet). The sound of a pipe of this length is represented by a note in the third space below the treble staff. In both the English and German tablature it is denoted by a small g. It is the English "Fiddle g."
- 464. The G of  $1\frac{1}{3}$  foot  $(1\frac{1}{2}$  foot). A note placed on the second line of the treble staff represents the sound of this pipe. It is marked in the English tablature by two gs, gg; and in the German by a g once-marked,  $g^1$ . It is called " $g^1$  above middle."
- 465. A third class of pipes may be noticed, as being used for the purpose of stop-measurement; viz. some of the E, or third-sounding pipes.
- 466. The E of  $6\frac{2}{5}$  feet. The sound of this pipe is a major third above that of the C C or 8-feet pipe. The gravity of its sound is represented by a note on the first ledger line below the bass staff. It is the English E E (double E); the German "Great E."
- 467. The E of  $3\frac{1}{3}$  feet. The sound of this pipe is a third above that of the tenor C, or the 4-feet pipe. Its sound is represented by a note in the third space of the bass staff; and is denoted by a small e in the German tablature, and by the term "Tenor e," mostly, in England.
- 468. The E of  $1\frac{5}{5}$  foot. The sound of this pipe is a third above that of the middle  $c^1$ , or 2-feet pipe. A note placed on the first line of the treble staff represents its sound. It is the small e of the English tablature; the "once-marked  $e^1$ " of the German; and is the "middle  $e^1$ " of ordinary phraseology.

### CHAPTER XX.

### THE SIZE OF TONE OF ORGAN-PIPES.

- 469. BESIDES the description of pipe, i.e. the open, noticed in the preceding section—wherein the standard length of the body accords with the pitch of its sound —there are other kinds, the sound produced from which is much lower or "larger" than what the length of the body would indicate. The chief of these are the stopped pipes, which produce a sound as deep as that of an open pipe of twice the length, or nearly so, for the reason explained when speaking of the form of pipes.
- 470. As the *length* of such pipes would be no criterion of their sound, and yet it is most necessary to know what pipes of different conformation will speak in unison with each other, the *length* of the several kinds of short-bodied but low-sounding pipes is dispensed with, and in lieu of this they are measured according to the gravity of the sound they produce, or, in other words, according to their size of tone.
- 471. In speaking therefore of pipes, the bodies of which measure much less than the "standard length," they are said to give the 8, 16, or 32 feet tone, according to whether the sound they produce be in unison with an open pipe of 8, 16, or 32 feet measurement. To prevent, however, their being confounded with the open pipes of superior length, the word "tone," "sound," or "pitch," is added, which, of itself, implies that the bodies are not of that standard size.
- 472. The very important difference between "standard length" and "size of tone" may be familiarly illustrated in the following manner.
- 473. If an open pipe, say a Clarabella, be blown with the mouth, and the top be covered with the flat palm of the hand, its pitch will be lowered to the extent of a major seventh. And a similar lowering of the sound would take place in a larger pipe, say the 8-feet C. The latter would not, however, on that account be transformed from an 8 into a 16 feet pipe; its sound or "size of tone" only would be altered, its length would remain the same. A smaller pipe would simply be made to produce the sound of a larger.
- 474. The full range to which stopped pipes have been made is 7 octaves, namely, from the 32-feet C tone to c<sup>4</sup> in altissimo, or perhaps a note higher. Reed pipes have been made to the same range; downwards in numerous German, Belgian, and Dutch organs; upwards occasionally in some of Harris's organs, who, at times, carried his Clarions right through in octave reeds, as in the late parish church organ at Doncaster, the manuals of which were up to d<sup>3</sup> in alt.

The seale of organpipes; and the influence which an alteration in the proportion exercises on the length.

475. The question here presents itself why the pipe in the above experiment did not speak the *full* octave below, instead of a major seventh only, if the column of air travelled the double distance. It was because the *bulk* or scale of the body remained of the same size. A stopped pipe is required to be of a somewhat

larger diameter than an open one of the same length to produce the true octave below,

as will be at once ascertained by comparing a middle  $c^1$  Clarabella with a tenor c Stopped Diapason pipe. A middle  $c^1$  Clarabella will measure  $2\frac{1}{16}$  inches in depth, by  $1\frac{5}{8}$  inch in width; whereas the latter will be about  $2\frac{7}{16}$  inches, by  $1\frac{13}{16}$  inch in depth.

- 476. The width or narrowness of any pipe, in proportion to its length, is termed its "scale;" and a pipe is spoken of as being of a "large scale" or a "small scale," according to the ratio which its diameter bears to its length. A pipe in which this width is carried to the full legitimate extent, is said to be of "full scale;" and when the diameter is narrow as compared with the length, it is said to be of "small scale."
- 477. An alteration of scale causes a slight difference in the length of a pipe producing a given sound; the length being reduced by an increase in the scale, and *vice versâ*. Thus, a large scale Open Diapason pipe sounding, say, middle c¹, is rather shorter than the corresponding pipe of a similar stop of smaller scale; while that of a Dulciana producing the same sound will be longer than either, on account of its measure being narrower than either. These variations are, however, subject to modification, from the influences mentioned in sec. 432, p. 93.
- 478. If the three pipes of different scales were to be made to the same length, all their sounds would differ in pitch from each other.
- 479. The length of a pipe producing a given sound is also slightly affected by an alteration in the outline of its body. Thus, a conical pipe will be rather longer than a cylindrical pipe of full scale, and its length will increase with the extent of its conicality. The following short table will suffice to illustrate the above several particulars.

## 2-feet (middle c<sup>1</sup>) Flue-pipes.

Name.	Circum, at mout	th.	Circum. at top.	Length.
Open Diapason.	$6\frac{7}{8}$ in.		$6\frac{7}{8}$ in.	 1 ft. $10\frac{3}{4}$ in.
Dulciana	$4\frac{1}{8}$ in.		$4\frac{1}{8}$ in.	 1 ft. 115 in.
Gamba	$4\frac{1}{2}$ in.		$4\frac{1}{2}$ in.	 2 ft. $0\frac{3}{8}$ in.
Spitzflote	$6\frac{1}{4}$ in.		$4\frac{5}{8}$ in.	 1 ft. 11 in.
Gemshorn	$6\frac{5}{8}$ in.		$2\frac{1}{8}$ in.	 1 ft. 11½ in.

430. The foregoing observations refer to Flue-pipes; but the length of Reed-pipes is also modified by the outline and scale of the tube; the length increasing as the scale is enlarged or made to deviate from the cylindrical outline. A cylindrical reed, or Clarinet pipe, is very short, being little more than half the speaking length; a Bassoon pipe, slightly outspreading, rather longer; a Hautboy pipe, with a wider bell, longer again; a Trumpet, longer still; and a Trombone, or Posaun pipe, the largest in scale of any, also the longest of any.

# 2-feet (middle c $^{\mathbf{1}})$ Reed-pipes.

		_
Name.	Circum. at top.	Length.
Clarionet	$3\frac{1}{8}$ in	. 1 ft. 1½ in.
Bassoon	$3\frac{5}{4}$ in	. 1 ft. 8 in.
Hautboy	$6\frac{1}{2}$ in	. 1 ft. 8 <sup>1</sup> / <sub>1</sub> in.
Trumpet	$8\frac{1}{2}$ in	• 1 ft. $8\frac{3}{4}$ in.
Horn	10 in	. 1 ft. 9 in.

### CHAPTER XXI.

### ORGAN STOPS.

Definition of a stop; and an explanation of the various kinds. 481. The gross number of pipes contained in an organ consists of so many distinct longitudinal series or sets; some of which are for the separate use of the manuals, and others for the

pedal. A series of pipes, the range of which extends from the lowest to the highest key of a Clavier; gradually diminishing in length and size; having the same quality and strength of tone throughout; and the mechanism of which will allow of their being sounded independently of those of the other series, is called a Stop. Or, viewed in another way, a Stop may be described as consisting of a certain number of octaves of pipes, extracted from the greater series—such as that of 9 octaves mentioned in the preceding chapter—commencing with some pre-arranged pipe. octaves and a half of pipes from the open series, commencing with 8-feet C, would form a Manual Open Diapason; two octaves and a half, beginning with gamut G, would form a pedal Twelfth; four octaves and a half, commencing with 2-feet c1, would be a manual Fifteenth; four octaves and a half from the stopped scries, commencing with the CCC pipe, 16-feet tone, would form a Manual Bordun: the same compass from the reed series, commencing with the 8-feet C pipe, would form a Manual Trumpet; or two octaves and a half, from CCC, 16-feet pipe, a Pedal Posaun. Allowing a little for variation of scale, this will convey a very good idea of what an organ stop is.

482. Organ stops may, in regard to their compass—the way in which they are made to "draw"—and other circumstances—be divided into five classes, namely:

Whole stops; Half stops; Incomplete stops; Short stops; and Repetition stops.

483. Whole stops are such as have their compass extending through the entire range of the manual or pedal. To this class rightly belong the Open and Stopped Diapasons; the Dulciana, Double Diapasons, Principal, Fifteenth, Mixture, Trumpet, &c.

484. Half stops are those which are complete so far that they comprise an unbroken series of pipes inside the organ, throughout the Manual range—like the whole stops—but with this difference, that the draw-stop action and sliders are so contrived that the bass portion of such stops can be drawn independently of the treble, by

means af a second handle. Half stops occur the most frequently on those manuals which have some incomplete stops, and where the bass of one stop is therefore used as a substitute for the omitted part of other stops. The Stopped Diapason is very frequently "cut" for this purpose; the 8-feet octave being employed to complete the range of the Dulciana, when the latter stops at tenor c.

485. Incomplete stops are those which ought, from their nature, to extend through the entire compass of the manual, which should, in fact, be whole stops; but which, for some reason, are made in an incomplete form. A Dulciana without pipes to the bass, or 8-feet octave of the Manual, or a Bordun (Double Stopped Diapason), not having its full complement of pipes upwards, are incomplete stops. The difference between an incomplete and a half stop is, that the former is altogether without pipes in some portion of its compass, either in the treble or in the bass, as the case may be; whereas a half stop has its remaining pipes really in the organ, commencing where the first half or portion of the stop leaves off, but which can only be drawn on by means of a second draw stop.

486. Short stops are such as do not extend completely through the compass of the manual, and are not therefore whole stops; and which yet cannot strictly be classed either as half or as incomplete stops, since they are of limited range by nature. To this class belong many of the imitative stops. These, in many instances, take the extent of their compass from that of the instrument which they each individually represent, without reference to the compass of the manual on which they may happen to be placed. Thus, a Clarionet Stop that descends to tenor c sharp has the full range downwards of the instrument the name of which it bears, and therefore cannot fairly be ranked as an incomplete stop; neither can a Bassoon stop that ascends to b¹ flat above middle c¹ be correctly so classed, since it then has the full upward range of the ordinary orchestral Bassoon. When their compass is less than that just given, then they of course become incomplete stops.

487. Some imitative stops are classed as incomplete stops, even when their compass equals that of their prototypes, unless their range corresponds with that of the manual on which they are placed. This is the case with the Trumpet, Hautboy, Cornopean, and Flute, among others. The reason of this is, that such stops are used as frequently, if not more so, as combination stops than as solo, for the purposes of accompaniment; and are hence required to be of the same compass as the other stops of the organ employed for the same end.

488. Repetition stops are only met with in pedal organs, and only in such specimens of those as are of too short a range. A repetition stop is that whereof one octave of pipes is made to repeat on a second octave of pedals, or on a portion of them,

when there is not quite a complete second octave of pedals for them to act upon. They are found most frequently in G G organs. They are incomplete stops with a

return to hide the deficiency.

489. Subsidiary stops. Organ stops are further divided into sounding stops and subsidiary stops; the former being all such as produce tones like those already described, while under the latter head are classed the numerous devices, operated upon by handles, which aid in bringing the organ and its several resources more completely under control. The several manual and pedal couplers, therefore, are subsidiary stops; so also are the wind-trunk valves, or ventils, found more frequently

in Continental than in English organs. The distinction is a necessary one, for otherwise it would be possible in many organs to draw out 6 or 8 so-called "stops" without any sound whatever being producible from the instrument; whereas, by their being recognised as "subsidiary stops," no sound would be expected from them.

490. The numerous effects of which all well-planned organs The size of the stops; how ascertained. are susceptible, result partly from the presence and use of stops of diverse form, nature, and character of tone; and partly from stops varying as well in pitch as in quality of tone, and other distinctive conditions. The most important and useful stops for the manuals are those of 3-feet, because they are in unison with the human voice, and are therefore particularly required for the accompaniment of singing. For the pedal, the 16-feet is the most useful (which, being twice the size of the most important manual stops, will of course sound an octave below them), as they form the true bass to the manual 8-feet stops. The size of a stop is ascertained and fixed by the length of the pipe that speaks on the lowest key of the clavier on which it appears. If it be a C C manual, and the 8-feet or C C pipe be placed on the lowest key, as in the Open Diapason, the series of pipes are said to form an "8-feet stop." If it be the tenor c or 4-feet pipe that is so placed, as in the Principal, the series of pipes compose a "4-feet stop." If it be a 16-feet pipe that is so situated, as in the Double Open Diapason, then the pipes are said to form a 16-feet stop, and so on. These quoted measurements refer more particularly to stops composed of open pipes, and the low C pipe of each of which is of the standard dimension given. Covered and other stops composed of short-bodied pipes are, as already explained, measured according to their "size of tone," irrespective of their length of pipe. A Stop so composed and having attached to the CC key a pipe that gives the CC or 8-feet sound, as in the Stopped Diapason, is a Stop of 8-feet tone; one giving the 16-feet sound, as in the Bordun, is a Stop of 16-feet tone.

- 491. Some incomplete and short Stops are, as already explained, without pipes to the 8-feet octave of keys; the size of which, therefore, is calculated in another way, viz. by their pitch, so far as their compass does extend. An Open Diapason or Dulciana, for instance, that stops at tenor or 4-feet c, is nevertheless an 8-feet stop as far as it goes. The circumstance of its longest pipe measuring but 4-feet arises from the omission of the entire 8-feet octave; the introduction of which would make the true standard length of the stop quite apparent. Even a Clarabella to middle c¹ (2-feet length) is an 8-feet stop so far as it extends; but is without both the 4 and 8 feet octaves of pipes.
- 492. To be a 4 or 2 feet stop, the 4 or 2 feet pipe must be on the CC or 8-feet key. The 4-feet pipe on the 4-feet key, as in the case of a tenor c Dulciana, or the 2-feet pipe on the 2-feet key, as in a middle c¹ Clarabella, still leaves the sound in unison with the Diapasons, so far as any sound at all can be obtained, and is therefore of unison or 8-feet pitch.

The classification of the stops, in regard to their tone-producing part, into reed stops and flue stops.

493. The peculiarity by which the two great classes of organ pipes are distinguished has been already so fully explained, that it is only necessary to add, in this place, that the same classification is observed with the Stops, and that a Reed-stop is a series

of pipes which speak through the medium of a reed and tongue; and a Flue-stop, a similar series of lip pipes.

494. Among those of the former class of Stops are included the Trumpet, Clarion, Double Trumpet, Horn, Cornopean, Trombone, Hautboy, Bassoon, Clarionet, and Vox Humana stops; among the latter, the Diapasons, Principal, Fifteenth, the Mixtures; and, in short, all the stops that are not included in the forementioned class.

Classification of the flue-stops, in regard Flute-work.

The several kinds of Flue-stops are so numerous, and to certain peculiarities some kinds are so much more important than others, and require in their structure, in- to be introduced in so much greater abundance, that, for the to Diapason - work, Covered - work, and sake of recognition, they are conveniently distributed and arranged under three separate heads. Flue-stops are therefore grouped into

> Diapason-work (Principal-werk), Covered-work, and (Gedact-werk), Flute-work (Flöte-werk).

- 496. Diapason-work. Under the head of Diapason or Principal-work are placed all the open cylindrical stops of Open Diapason measure, or which have their scale deduced from that of the Open Diapason; such stops are the chief, most important, or "principal," as they are also the most numerous, in an organ; and hence the origin and appropriateness of the term under which stops of this shape and proportion are classed\*. The Unison, and Double Open Diapasons, Principal, Fifteenth, and Octave Fifteenth; the Fifth, Twelfth, and Larigot; the Tenth and Tierce; and the Mixture Stops, when of full or proportionate scale; belong to the Diapason-work.
- 497. Covered-work. This class comprises all stops composed of pipes that have their bodies stopped, closed, or covered at the upper end. The Unison and Double Stopped Diapasons (Bordun), the Stopped Flute, and the Stopped Piccolo, therefore, are members of the Covered-work.
- 498. Flute-work. This division includes all Flue-stops of whatsoever kind or shape, that do not come under either of the preceding divisions.
- 499. All four-sided pipes, therefore, that are open at the top, and so distinguished from the Covered-work, belong to the "Flute-work;" a term adopted for convenience of classification, and not intended to imply that all the Stops arranged under that head produce a flute quality of tone. The "Diapason" and "Covered" Stops have occasionally been included with the above, under the one general term "Flutework;" but "Flute" stops are never placed under the head of "Diapason," or " Covered"-work.

500. The Clarabella, Wald-Flute, Hohl-Flute, Oboe-Flute, Suabe-Flute, the English and German Gambas, the Flageolet, Keraulophon and Piccolo stops, therefore, belong to the "Flute-work." Also the Conical stops, as Spitz-Flote and Gemshorn; and all Stops of cylindrical shape, the scale of which is either below or beyond that of the Diapason-work, as the Dulciana of 16, 8, and 4 feet, the Blockflute, &c.

<sup>\*</sup> Concerning the merit of the term "Diapason," see sections 523, 524, and 525, page 114.

Classification of Organ Stops, in regard to the soundthey produce, into Foundation, Mutation, and Compound Stops.

501. A third classification of organ Stops is made, in regard to the *sound* they produce; i. e. whether that accords with the key struck or not. The three divisions into which the Stops are thrown for this purpose are,

Foundation Stops, Mutation Stops, and Compound Stops.

- 502. Foundation Stops are such as produce a sound corresponding with the key pressed down; that is to say, that give the C sound when the C key is touched. They are so designated, because their sound is the very "foundation" of the organ tone; so much so, that such Stops cannot be dispensed with, and therefore receive priority of selection: without them, and that in good proportion, the tone of an organ would be confused and undefined; although they again are, to a certain extent, dependent on members of the other classes of stops for a complete and satisfactory result. The Foundation-stops are of various lengths, consequently their sound may be high or low; but this does not affect their classification, so long as the key and the name of the sound agree. They are of 32, 16, 8, 4, 2 feet, and 1 foot in length or sound; and include members of all classes of Stops; Reed and Flue; Open and Stopped; Diapason, Covered, and Flute-work; the chief conditions being that they are of the lengths the size of the tone indicated above.
- 503. The 8-feet Stops on the manual and the 16 on the pedal are called the Chief Foundation Stops, as being the unisons of their respective departments, and giving the "ground-tone." All the 4-feet on the manual and 8-feet on the pedal are classed as Octave Stops; and those of 16-feet on the manual and 32 on the pedal, as Double Stops.
- 504. Mutation, or Filling-up Stops do not give a sound corresponding with the key pressed down; but some sound g on the C key, others e. Those giving the forementioned sound are called "fifth-sounding" or Quint Stops; those giving the latter, "third-sounding" or Tierce stops. They are of various lengths, like the Foundation-stops; the size, or size of tone, of the Fifth-sounding Stops being as follows:  $10\frac{2}{3}$  (12),  $5\frac{1}{3}$  (6),  $2\frac{2}{3}$  (3) feet, and  $1\frac{1}{3}$  ( $1\frac{1}{2}$ ) foot.
- 505. An open Stop of  $5\frac{1}{3}$  feet on the manual, or  $10\frac{2}{3}$  on the pedal, sounds the fifth above the Unison Stops of those departments respectively, and is called the Fifth. One of the  $2\frac{2}{3}$  feet on the manual, or  $5\frac{1}{3}$  on the pedal, gives the octave of the fifth, or the Twelfth, by which name it is hence called. A Stop, sounding the second octave above the fifth, that is, a nineteenth above the unison, measuring  $1\frac{1}{3}$  on the manual and  $2\frac{2}{3}$  feet on the pedal, is called the Larigot. A still smaller rank of fifth-sounding pipes, speaking a twenty-sixth above the unison tone, is often included among the ranks of the manual Compound-stops; where, indeed, the last-mentioned series is more frequently met with than as a separate Stop.
- 506. In German organs, the fifth-sounding Stops are called "Quints," in reference to the *sound* they produce. The *pitch* of that sound is not usually indicated by any peculiarity in the name on the draw-stop, but by the length being marked in figures. See Foreign Specifications, 2, 60, 78, 89.
- 507. The lengths of the Third-sounding Stops or Tierces are  $6\frac{2}{5}$ ,  $3\frac{1}{5}$  feet, and  $1\frac{5}{5}$  foot.

508. An Open-stop, measuring  $3\frac{1}{5}$  on the manual, or  $6\frac{2}{5}$  on the pedal, gives the unior-third above the Octave-stops, or the *tenth* above the unison, and is called the Tenth. One measuring  $1\frac{3}{5}$  foot on the manual, or  $3\frac{1}{5}$  on the pedal, sounds a major-third above the Super-octave Stops, or a *seventeenth* above the Unison Stops, and is called the Tierce.

509. The Mutation-stops impart a certain roundness and fulness to the general organ-tone, by "filling up" some of the bare octave sounds of the Foundation-stops, by the mixture therewith of certain intermediate, harmonical sounds, of fixed and determinate pitches. They also have the further effect of binding together the extreme sounds of the Compound-stops, and the Unison and Double Stops; and of blending the whole into one great mass of musical sound. The laws which regulate the admission of Mutation-stops, and decide which are required and which are not, are fully explained in a subsequent chapter.

510. Compound or Mixture Stops. The stops which have 1 pipe to each key, have been termed "simple" stops. The kind now under consideration are called "Compound" Stops, because they have more than 1 pipe to each key, often 5; and "Mixture" Stops, because those several pipes consist of certain members of the two preceding descriptions of Stops, "mixed" or "compounded" together. These little pipes are so uniformly required to be used in conjunction, that they are generally made to draw in groups; hence the formation of Compound-stops. The Compound-stops give to the Foundation-stops a distinctness and clearness of effect in the bass, especially necessary to the quick enunciation of the larger pipes; and great vivacity as well as a kind of ringing character to the general organ-tone.

### CHAPTER XXII.

#### THE NAMES OF ORGAN STOPS.

The name and description of stops found in English organs; together with their length or size of tone on the manual and pedal.

511. A COMPLETE list of stops usually found in English organs will now be given. Among the names inserted therein, will occasionally be found one of continental origin, and for which no English equivalent is known to exist. Where this is the case, of course the original name has been allowed to stand; but where a translation of the foreign name could be given, this has been

added within brackets. It has happened that, in a few instances, continental names have been applied by English organ-builders to Stops of somewhat different construction or character of tone, which will be duly pointed out.

- 512. With regard to the arrangement of the stops mentioned in the list, the flue and reed species have been treated separately, priority being given to the former; and the members of each have been taken in the order of their length or their size of tone, commencing with the largest, and ending with the smallest.
- 513. Sub-Bordun, Manual-Untersaz. This Manual stop is composed of stopped pipes, and is, in pitch, two octaves below the unison or 8-feet stops: it is therefore of 32-feet tone. The Sub-Bordun is best suited for organs of the first magnitude, in which it has a grand effect. Its compass is usually to middle c¹, fiddle g, or, at most, to tenor c. Examples will be found in Foreign Specifications, Nos. 23, 40, 64, 70, &c.; also in the organ at St. Olive's, Southwark, built by Lincoln, which however has open pipes in the treble.
- 514. Double Open Diapason. This Stop belongs to the "Diapason-work," and is of 16 feet length on the manual, and 32 on the pedal. It is made either of tin, metal, zinc, or wood. The manual Double Open Diapason is most frequently made of metal. in this country, and is sometimes continued right down in metal, as is the case in the organ at Brunswick Chapel, Leeds, built by Booth of Wakefield; one of G G compass, where the largest metal-pipe is consequently 211 feet in length. stances, the lower half-octave, or octave of pipes, are of wood, -as in that of the late St. George's Church, Doncaster,—from FFF to CCC. In other specimens, the pipes, to the lowest octave or so, are omitted and stopped pipes, substituted to save room or expense; or the Stop is altogether discontinued below the tenor c key. In the latter case, the stop is on that account called *Tenoroon\**. The oldest authentic specimen of the Double Open Diapason known to exist in England, is the one in the very interesting organ in Exeter Cathedral, made by Loosemore, in 1664. The instrument just named, together with that in St. Saviour's, Southwark, made by Schwarbrook, were the only two organs in this country that possessed a Double Open Diapason until of late years.

- 515. The Pedal Double Open Diapason is made of either of the four materials mentioned above. Specimens of wood Stops of this kind occur at Westminster Abbey; at the Parish Church and at Brunswick Chapel, Leeds; at York Minster; and at the Birmingham Town Hall. The instruments in the two last-mentioned edifices have also each a 32-feet Stop of this description made of zinc; while 32-feet Stops of tin occur at Haarlem, Hamburgh, &c. The pitch of the Double Open Diapason, whether of the Manual or Pedal, is an octave below the Unison Stop.
- 516. Double Dulciana. An open metal cylindrical Stop, belonging to the Flutework; of small scale and delicate tone, and somewhat slow of speech. It is a Manual Stop of 16-feet, of which but a few specimens have been made in a complete form. There is one, however, in metal throughout, to the 16-feet pipe, in the Choir organ of the large instrument at Brunswick Chapel, Leeds. Occasionally the pipes, to the lowest octave or octave and a half of keys, are of stopped wood, as in the Swell at Christ Church, Newgate Street; though more frequently there are no pipes at all provided for the lowest octave keys; in which case, the Stop is usually called Tenoroon Dulciana.
- 517. Double Stopped Diapason, or Bordun; on the Pedal, Sub-Bordun, or Untersatz. This is a Covered-stop, of 16-feet tone on the Manual and 32 on the Pedal. It is, rightly, a whole stop, like the two preceding; complete specimens occurring on the Great Manual organs at St. Luke's, Old Street; the Exchange, Northampton; All Saints', Northampton; and at St. Michael's, Chester Square; &c. In many organs which have a Tenoroon Open Diapason or Dulciana, the Double Stopped Diapason consists of one octave only of pipes, producing the 16-feet octave of sounds, acting on the 8-feet octave of the Manual, commencing where the Tenoroon leaves off. The English Double Stopped Diapason is generally made of wood throughout. This is the case also with many continental specimens (see Foreign Specifications, Nos. 41, 48, &c.); while others again are either wholly or in part of metal (see Nos. 55, 62, &c.). Of the Manual Double Stopped Diapason, numerous specimens were in existence in this country about the middle of the last century. The organ built by Jordon, Bridge, and Byfield, in the year 1740, for the church at Great Yarmouth, had a Stop of this kind. So also had the organ in the Foundling Hospital (constructed by Parker, and erected in 1759), which however extended no farther than through the lowest octave and a half of the Great Manual. The instrument at St. Margaret's, Lynn, made by Snetzler, in 1754, originally contained one throughout the Great Organ; and another, by Schwarbrook, formed part of his masterpiece at St. Michael's, Coventry. Dr. Hawkins, in his History of Music, mentions another specimen as occurring in an organ at Manchester (at the Cathedral) in his time.
- 518. The Pedal Double Stopped Diapason (32-feet tone) appears to have been introduced, for the first time in this country, by Smith of Bristol, in the organ he built for the church of St. James in that city, in 1824. Its usefulness is gradually being recognized, and its calm, deep, and religious effect justly appreciated. Other examples of the Stop occur in organs at the Temple, and St. Olave's, Southwark, in the latter of which it is called Sub-Bourdun, 32-feet tone; and at Trinity College, Cambridge.
- 519. Pyramidon. This is a Pedal stop of 16 or 32 feet tone, invented by the Rev. Sir Frederic Ouseley, and made by Mr. Flight; the peculiarities in which con-

sist, first, in the shape of the pipes, which are more than four times the size at the top than they are at the mouth; and, secondly, in their producing sounds of remarkable gravity for their size. From a pipe, measuring only 2 feet 9 inches in length, 2 feet 3 inches square at the top, and 8 inches at the block, the C C C or 16-feet sound is obtained. The quality of the tone resembles that of a stopped pipe.

- 520. Open Diapason. The Open Diapason is the chief member of the "Principal"-work. It is a whole stop, of 8 feet on the Manual, and 16 feet on the Pedal; and is called Open in contradistinction to the Stopped Diapason, the pipes of which are closed or covered in at the top. From its being the chief Foundation-stop on the Manual and Pedal, its goodness or badness exercises an important influence over the effect of the organ generally. The Manual Open Diapason is generally formed of tin or metal pipes, many of which are those usually seen in front of the case. Sometimes the lowest half-octave or octave of pipes are made of wood.
- 521. Large organs frequently have two Open Diapasons on the Great Manual; of tin or metal throughout, usually, in old instruments, but with the bass of the second one of wood, in many later organs. When the organ is placed on the choir screen, as is often the case in cathedrals and other cruciform structures, the majority of the pipes of one *Open* appear in the east, and those of the other in the west front of the case. The second Open Diapason is made to a different scale from the first, usually one pipe smaller, to destroy the sympathy.
- 522. The Pedal Open Diapason is almost invariably made of wood. Metal ones, however, are sometimes met with; as in the Pedal organs at St. Sepulchre's, Snow Hill; Christ Church, Newgate Street; Exeter Hall; St. John's, Chester; &c.
- 523. It may be worth while to mention here, that the use of the word "Diapason" has in some instances been objected to, as having no definite signification; and its retention as a name for an organ stop proposed to be discontinued in consequence. There seems, however, to be no sufficient reason for discarding it.
- 524. That it is no longer applicable in its *original* signification, is indeed true. The word, which is of Greek origin, means an "octave;" and, applied to the first pneumatic organ, which is recorded to have had but *one octave* of pipes, and those only of the diatonic scale, offered the most fit name that could have been given. But, in proportion as the subsequent increase in the compass of the organ and the number of its Stops took place, the appropriateness of the term in its *original* sense decreased.
- 525. These developments, however, prepared the way for the application of the word in a more extended meaning. The term "Diapason," coming as it does from two Greek words, signifying "through all," is applied by makers of musical instruments to the rule, standard, or scale by which they make their Flutes, Hautboys, &c. In a similar manner, the set of Unison Open pipes under consideration forms the rule, standard, or scale by which the organ-builder regulates the size of the harmonic series of stops; not only in the first instance, in regard to their length and breadth of body, but afterwards, in regard to their strength and quality of tone. Its influence extends "through all" the Stops in question; hence, the name "Diapason" appears to be just the most appropriate one that could be given to a set of pipes exercising so much power.
- 526. Dulciana. This is an 8-feet Manual Stop, belonging to the flutework. It is sometimes of metal throughout, as at St. Giles's, Camberwell; or the

lowest octave is made of wood and the remainder of metal, as at St. Dunstan's, Fleet Street. The Dulciana, in most organs, stops at tenor c; the Stop then frequently being grooved into the Stopped Diapason in the 8-feet octave; or the bass of the Stopped Diapason is made to draw separately to meet it. The pipes of the Dulciana are much smaller in scale than those of the Open Diapason, the fiddle g, or tenor f sharp pipe of the former, being of the same diameter as the middle c<sup>1</sup> pipe of the latter; and its tone is peculiarly soft and gentle.

- 527. The Dulciana stop was either invented or introduced into this country by Snetzler, who acquired great reputation from the entire success that attended his first public specimen, which forms a portion of the organ crected by him, in the year 1754, in St. Margaret's Church, at Lynn, in Norfolk.
- 528. Harmonic Flute. (See Foreign Specifications, Nos. 12 and 13.) This is a Manual open metal Flue-stop, extending to fiddle g, or tenor c, at the farthest, of cylin-lindrical form, of 8 or 4 feet pitch, and blown by a heavy wind; it is sometimes simply copiously winded. The pipes are of double length; i. c. 16 or 8 feet; and the bodies have a hole bored in them, midway between the foot and the top. The tone of the Harmonic Flute is exceedingly full, fluty, and powerful, and imparts great breadth and thickness to the general organ-tone. It was invented by Cavaillé Coll of Paris, and has lately been introduced by Hill, and also by Davison, into their organs at the Panopticon, Leicester Square, and at the Town Hall, Glasgow. The upper pipes of the Harmonic Flute sometimes blow the second octave above, and are accordingly four times their speaking length.
- 529. Voix Celestes. (See Specifications, No. 13.) The Voix Celestes is another stop of French invention, formed of two Dulcianas; which are first tuned in unison, and then the pipes of the second one are lightly touched again with the tuning-horn, and their pitch slightly raised. This gives to the tone of the Stop a waving, undulating character; which, in this respect, resembles the German Stop called Unda Maris (wave of the sea), which will be found mentioned in Specifications, Nos. 79, 80, &c.
- 530. The Voix Celeste was first employed in England in the Panopticon and Glasgow organs.
- 531. Stopped Diapason. The Stopped Diapason is an 8-feet sounding Stop on the Manual, and 16 on the Pedal. It is the most important member of the Coveredwork,—its sound being in unison with that of the Open Diapason. The Manual Stopped Diapason is sometimes composed of metal pipes as far as tenor e, and of oak thence downwards, as on the Great Manual at the Temple Church; or of metal to middle e<sup>1</sup>, and of deal below, as at Christ Church, Spitalfields. More frequently, however, it is of wood throughout. The different materials slightly modify the tone; which may, in general terms, be described as being fluty and mellow.
- 532. On the Pedal, the Stopped Diapason is generally made of wood. Its tone adds a quiet solidity to that of the Pedal Open Diapason.
- 533. Clarionet Flute. This Stop is formed much after the manner of a Stopped Diapason, except that the perforations in the stoppers are much larger, and its tone is of a very agreeable, reedy quality. It is of 8 or 4 feet tone on the Manual. A Stop of this kind, labelled Flute, occurs on the Great Manual of an organ at Cheetham Hill, built by Elliott, in 1811.

- 534. Clarabella. The modern Stop thus called, which was invented by Bishop, is of 8 feet on the Manual. It is formed of open wood pipes of a large scale, producing a thick and powerful fluty tone; and is sometimes introduced instead of the treble portion of the Stopped Diapason. The Clarabella is seldom disposed otherwise than as an Incomplete stop; its compass generally only extending to middle  $c^1$ , or, at most, to tenor c. A complete one, however, occurs in the Swell of the Brunswick Chapel organ, Leeds, by Booth of Wakefield.
- 535. The English Clarabella much resembles the German "Hohl-flöte" in character of tone, except that its sound is scarcely so strong or so full.
- 536. Dolcan. This is an Open Manual Stop, of 8 feet, the pipes of which are of larger diameter at the top than at the bottom, producing a very agreeable tone. It is not much known in England; a specimen, however, exists in the organ at St. Stephen's Church, Westminster, made by Hill.
- 537. Viol di Gamba, or Gamba. This is one of the most highly esteemed and most frequently disposed Stops in continental organs; as may be gathered from reference to the Foreign Specifications in the Appendix. The German Gamba is usually composed of cylindrical pipes, of small scale, well cut up; though, occasionally, it is formed of conical pipes. In England, the Viol di Gamba was, until very recently, made exclusively of the conical shape, surmounted by a bell, as represented in fig. 76, page 79; and which kind of pipe was first introduced by Mr. Hill.
- 538. In compass, the Viol di Gamba usually descends no lower than tenor c; that at Christ Church, Spitalfields, however,—which is a Bell Gamba,—descends to C C. Examples of the German Gamba occur in the Exchange organ, at Northampton, and in the organ at the Temple Church, the latter specimen descending to C C.
- 539. The tone of the Bell Gamba is very agreeable and reedy, and quick in its articulation; while that of the (German) Gamba is much stronger, pungent, and cutting, but of slower intonation (imitating the bite of the bow on the string), hence the latter has the Stopped Diapason always drawn with it, which performs the same office, in regard to this and all other slow-speaking Stops, that the "percussion" does to the tongues of Harmoniums.
- 540. Keraulophon. This also is a manual stop of 8 feet, of metal, and, like the one last noticed, of a reedy and pleasing quality of tone. It seldom extends lower than tenor c. It is formed of cylindrical pipes, like the Open Diapason and Dulciana, the peculiarity in the character of the tone being produced by the boring of a small round hole in the body of the pipe near to the top, or through a sliding cap. The Keraulophon was invented by Messrs. Gray and Davison, and used by them for the first time in the organ at St. Paul's Church, Knightsbridge, built in 1843.
- 541. *Hohl-flute* (Hollow-toned Flute). A German name, applied of late years to an English open metal Stop of 8 feet, that is nearly identical with the Stop last described.
- 542. The Hohl-flute was occasionally introduced by Father Smith into his organs. There were originally two in his instrument at Durham Cathedral, one on the Great and the other on the Choir manual, each of wood; both of which, however, have long since disappeared. That introduced by the same builder into the Choir Organ at the Cathedral, Manchester, still remains, under the name "Dulciana." The German Hohl-flute, when of metal, is made to a very large scale; i.e. larger than

the Open Diapason, producing a powerful and thick, or, as the name distinctly intimates, a hollow tone. There is a Hohl-flute in the organ erected by Schulze, in 1851, in the Exchange at Northampton, of wood, and having the mouth on the broad side of the pipe.

- 543. Geigen Principal (Violin Diapason) is a manual stop of 8 feet, producing a pungent tone, very like that of the Gamba, except that the pipes, being of larger scale, speak quicker and produce a fuller tone. The Stop is not much known in England—two specimens, of 8 and 4 feet, however, occurring on the Choir manual in the Exchange organ at Northampton.
- 544. Salicional, or Salicet. Another reedy-toned 8-feet Manual Stop, of small scale, of which an example occurs in the Swell of the Panopticon organ. It may not be uninteresting to many to have the peculiarities of the several string-toned Stops briefly pointed out:

- 545. All the above-named Stops differ in respect to the "height of mouth;" the smallest in scale (the Salicional) being cut up most, and the Open (the largest), the least. Moreover, they differ very much in their speech; the Salicet being the slowest, but the most penetrating; the Open, the quickest and fullest.
- 546. Fifth—Quint. Double Twelfth—Diapente. The Fifth is the longest mutation stop commonly introduced into an organ. On the Manual, it is sometimes composed of open pipes of proportionate scale to the Double Open Diapason, in which case it of course forms a portion of the "Diapason-work;" at others, it consists of stopped pipes, as in the Chester Cathedral Organ, built by Gray and Davison, and in St. Margaret's Church, Gotha, built by Schulze—when it belongs to the Coveredwork (Gedact-Quint: see Foreign Specifications, Nos. 6, 43, &c.). In a few English examples, the Manual Quint has been formed of Dulciana pipes, which, however, are of weak intonation, and less prompt in speech. The Quint on the Pedal is almost invariably composed of stopped pipes, and are most effective. (See Specifications, Nos. 1, 52, 63, 65, 71, 83, &c.). The greatest size of the Quint is usually  $5\frac{1}{3}$ -feet on the Manual, and  $10\frac{2}{3}$ -feet tone on the Pedal. In the Cathedral organ, however, at Bremen, built by Schulze, is a "Quinten-Bass" of  $21\frac{1}{3}$ -feet tone, of stopped wood pipes. (See Appendix, No. 64.)
- 547. A Manual Open Quint was made in England so long back as the year 1730, by Bridge, the organ-builder, who introduced it into the instrument erected by him in Christ Church, Spitalfields, in that year. The Pedal Stopped Quint, 10\frac{2}{5}-feet tone, was first introduced into this country by Robson, in the organ at Huddersfield, built in 1850. A second specimen was introduced by Kirtland and Jardine, with excellent effect, into their organ in Holy Trinity Church, Manchester, made in 1852.
- 548. Principal Octave. A 4-feet Stop on the Manual, and 8 feet on the Pedal. Its usual material is either tin or metal, though, in some organs, where there are two Principals on the Great Manual, the second one is sometimes of wood, as at Christ's Hospital, the Chapel Royal, St. James's, &c.; the second one is then more correctly

an open wood Flute of 4-feet. At St. Sepulchre's; St. Giles's, Camberwell; Christ Church, Spitalfields; &c. both Principals are of metal. The English Principal is the octave stop to the Open Diapason; and where there are two metal Principals, the scale of the second one 'is generally regulated by the measure of the second Open Diapason, to which Stop it is usually designed to form an appropriate octave.

- 549. Dulciana Principal—Dulcet. A delicate and sweet-toned Manual Stop of 4 feet, formed of metal pipes, of small scale. It was first introduced by Green, who, in several of his later instruments, placed this, as well as a unison Dulciana, in the Swell. Examples occur, thus disposed, in the organs erected by him at Rochester and Salisbury Cathedrals, Greenwich Hospital, &c.
- 550. Flute. A stop of either 4-feet standard length or 4-feet tone on the Manual (for both species of Stop are met with indifferently and indiscriminately under the same name), and 8-feet tone on the Pedal. The old Flute Stops are sometimes composed of metal pipes throughout, as in the Choir organ at the Temple Church; St. Andrew's, Undershaft; and, until lately, at St. Paul's; sometimes partly so, as at St. Michael's, Cornhill; while in many instances they are of wood throughout, as at Finedon. The old organs often have a Flute Stop of octave pitch on both the Great and Choir Manuals. Where this is the case, one is often of metal, either wholly or partially, and the other of wood, the different materials being used as an auxiliary to secure an individuality in the character of the tone of each. The majority of the modern Flute Stops are of wood, and open; and hence are 4-feet Stops, as those already noticed are of 4-feet tone.
- 551. The quality of the tone of a Flute Stop usually bears a close resemblance to that of the wind instrument after which it is named.
- 552. As a Pcdal stop, the Flute has not as yet been much used in this country, although it is of the greatest utility. A Bass Flute Stop occurs in the organ at St. Mark's, Hamilton Terrace, Regent's Park, built by Gray, in 1847.
- 553. Spitz-flute (literally, pointed or spire-flute). This Stop is found of 8, 4, and 2 feet length in German organs. (See Foreign Specifications, Nos. 49, 75, &c.) In England, it has hitherto been made chiefly as a 4-feet Stop; i. e. of principal pitch, as in the Choir Organ at the Temple Church. The pipes of the Spitz-flute are slightly conical, being about \( \frac{1}{4} \) narrower at top than at the mouth, and the tone is therefore rather softer than that of the cylindrical stop, but of very pleasing quality.
- 554. Gemshorn. The Gemshorn is a member of the Flute-work, and is met with of 8, 4, or 2 feet length in continental organs. (See Appendix, Nos. 3, 5, &c.). A Stop of this kind, of 4 feet, occurs on the Choir Manuals of the organs at the Panopticon, and at the Wesleyan Chapel, Poplar, built by Mr. Hill; and of 2 feet in the Choir organ at the Temple Church. The pipes of this Stop are only  $\frac{1}{3}$  the diameter at the top that they are at the mouth; and the tone is consequently light, but very clear and travelling.
- 555. Nason. This name is sometimes found applied in old organs to a wood-stopped Flute of 4-feet pitch on the Great Manual, as at the Temple Church; and, until a few years since, at St. Paul's Cathedral. It is generally a very quiet and sweet-toned Stop, producing a most lovely effect when combined with the Diapasons.
- 556. Wald-flute (Wood or Forest-flute). The name given in England to a Manual Stop of 4 feet, formed of open wood pipes of a large scale, with inverted

mouths. It is a full-toned and powerful speaking Stop, and, in all essential particulars, may be considered as an octave Clarabella. It seldom ranges lower than tenor c. Mr. Hill first used it in the Cheetham Hill organ, Manchester, built by him in 1841. The English Wald-flute is a distinct Stop to the German one of the same name. The German Stop is made either of tin, metal, or wood; the English one always of the last-mentioned material. The former is also made to a scale larger than that of the Open Diapason, and produces a thick and full tone.

- 557. Clear-flute. An open wood flute of 4 feet, invented by the firm of Kirtland and Jardine, of Manchester. It resembles the Wald-flute so far, that the pipes have the inward-bevelled mouth; but, in addition to this, they have also the bevelled block, shown in fig. 94, page 90; are copiously winded, have no nicking, and are more nearly square in shape. The tone is exceedingly firm, clear, and full.
- 558. Oboc-flute. Another 4-feet Manual Stop, composed of wood pipes of small scale. Its usual range is to tenor c. The tone of the Oboe-flute is very delicate and reedy, and not so strong as that of the Viol di Gamba.
- 559. Suabe-flute. Also a tenor c Manual Stop of 4 feet, formed of wood pipes, with inverted mouths. Its tone is liquid and clear, and not so loud as the Waldflute. The Suabe-flute was invented by Mr. Hill.
- 560. Celestina. A 4-feet Manual Stop, formed of open wood pipes, of small scale, producing a very delicate and subdued tone. It is not often met with. Its usual place is in the Swell organ; as at Christ's Hospital, and the Chapel Royal, St. James's.
- 561. Tenth—Double Tierce—Decima. This is an open metal cylindrical Stop, of  $3\frac{1}{3}$ -feet length on the Manual, and  $6\frac{2}{5}$ -feet on the Pedal. It is the second Double Mutation Stop, taking them in the order of their size or gravity of tone; but the largest of the third-sounding species. The first English organ in which the Tenth was legitimately introduced, is the one in the Mechanics' Institution, Liverpool. The pitch of the Tenth is a major third above the Principal, or a tenth above the Diapasons; all numerical names giving the altitude of the sound above that of the unison Stops.
- 562. Twelfth—Duodecima. An open metal stop, of  $2\frac{\circ}{3}$  feet on the Manual, and  $5\frac{1}{3}$  feet on the Pedal, belonging to the Diapason-work. Its pitch is a perfect fifth above the Principal, or a twelfth above the Diapasons.
- 563. Fifteenth—Super-octave. Also an open metal Stop belonging to the Diapason-work, of 2-feet length on the Manual, and 4-feet on the Pedal. The Fifteenth sounds the octave above the Principal, and consequently a fifteenth, or super-octave, above the unison Stops. In some organs, where there are two Fifteenths on one Manual, the second is made of wood, as at the Chapel Royal, St. James's, forming, in fact, a Piccolo; at Christ Church, Spitalfields, both the Fifteenths on the Great Manual are of metal.
- 564. Block-flute (common or ordinary flute). This is an open metal Stop, tuned in unison with the Fifteenth. It is composed of pipes of a very large scale, the 4-feet c pipe measuring very nearly  $4\frac{1}{2}$  inches in diameter, the measure of the 4-feet pipe of the Open Diapason being about  $3\frac{1}{2}$  inches. The tone of the Block-flute is very full and broad.
  - 565. The Block-flute was a favorite Stop with Father Smith, who introduced it

into the Durham and St. Paul's Cathedral organs. The former specimen has disappeared; the latter still remains, under the name "Large Fifteenth."

- 566. Piccolo. A 2-feet Manual Stop, formed of wood pipes, producing a bright, clear, and travelling tone. Its pitch, as its accordance of length thereto would imply, is in unison with the Fifteenth; i. e. two octaves above the Diapasons. The Piccolo is sometimes a Whole-stop, as at St. Michael's, Chester Square; but more often it only extends to tenor c.
- 567. Flageolet. Another small member of the Flute-work, usually of 2 feet on the Manual. It is formed of open wood pipes, and the tone is smaller and sharper than that of the Piccolo.
- 568. Tierce—Seventeenth. A Stop formed of open metal cylindrical pipes, the pitch of which is a major third above the Fifteenth, or a seventeenth above the Diapasons. The Tierce frequently constitutes one of the ranks of the Sesquialtera, though, in old organs, it is occasionally made to draw separately, as at St. Sepulchre's. It is, however, found in both ways, in ancient as well as modern instruments.
- 569. Larigot—Nineteenth—Octave-Twelfth. This also is a small metal Mutation-stop, of  $1\frac{1}{6}$  foot on the Manual, and  $2\frac{1}{3}$  on the Pedal. It is occasionally met with as a separate Stop, as at Christ Church, Spitalfields, and St. Sepulchre's; but generally it is embodied in the Sesquialtera, of which it forms, strictly speaking, an integral part. The Larigot sounds a perfect fifth above the Fifteenth, and therefore a nineteenth above the Unison Stops.
- 570. Octave-fifteenth—Twenty-second. A small open metal Stop, of 1 foot on the Manual and 2 feet on the Pedal, of bright and sharp tone. It sounds the octave above the Fifteenth, and the third octave above the Diapasons. This rank of pipes, like the Tierce and Larigot, is but seldom disposed as a separate stop. It occurs in this manner in the organs at St. Philip's, Sheffield, and Stratford on Avon. A "Two-and-twentieth" also appears as one of the Stops in the original specification for the old organ at York Minster, built by Dallam, in 1633.
- 571. Doublette. The French name for the Fifteenth; but in England applied, of late years, to a two-rank Foundation-stop, sounding a fifteenth and twenty-second above the unison, the two sounds being an octave apart.

Compound Stops. 572. Sesquialtera. This Compound-stop is composed of either 5, 4, 3, or 2 ranks of open metal pipes, tuned in thirds, fifths, and octaves to the Diapasons. The altitude of the several sounds of a 5-rank Sesquialtera above the unison pitch, would, under ordinary circumstances, be, in the bass, a 17th (3), 19th (5), 22nd (8), 26th (5), and 29th (8), from the ground tone. Where, however, there is a separate Tierce, it is not usual to include a duplicate of that rank in the Sesquialtera, unless, indeed, the ranks of mixture are sufficiently numerous to demand this arrangement. At Doncaster, where there was a Tierce and a 5-rank Sesquialtera, the latter was compounded of a 19th (5), 22nd (8), 24th (3), 26th (5), and 29th (8): that is, with an octave Tierce in lieu of the unison (separate) one. Another composition for a 5-rank Sesquialtera with separate Tierce, is—15th (8), 19th (5), 22nd (8), 26th (5), and 29th (8). A 4-rank Sesquialtera is generally, though not always, composed of a 15th (8), 17th (3), 19th (5), and 22nd (8), as at St. Mary's, Nottingham (Snetzler), and at St. Botolph's, Aldgate. Sometimes it con-

sists of a 17th (3), 19th (5), 22nd (8), and 24th (3) (Tierce and octave Tierce), as at St. Magnus, London Bridge. This again, and indeed all Sesquialteras, however numerous or few may be the number of ranks of its pipes, are, in regard to their composition, influenced very much by the presence, or otherwise, of the Tierce, the Larigot, the temperament to which the organ is tuned, and even also by the occurrence, or not, of other Compound-stops on the same Manual.

- 573. As the pipes of the Sesquialtera would become exceedingly small, keen, and prominent in the treble, and, moreover, their presence is not demanded by the acoustical phenomenon on which the introduction of the Compound-stops is founded, as is fully explained in a succeeding chapter—the smaller ranks are usually discontinued from middle  $c^1$ , or  $c^1$  sharp, at their original altitude of pitch above the Diapason, and larger pipes, sounding an octave lower, are substituted. In this manner the Twenty-second or Octave-fifteenth, the smallest rank in a Sesquialtera of 3 ranks, is turned into a Fifteenth, and the Nineteenth, or Larigot, into a Twelfth. The Tierce is usually allowed to remain unbroken throughout the Manual.
- 574. In consequence of these "breaks," as they are termed, there are then of course two Twelfths and two Fifteenths in the treble. All such duplicate ranks are, in England, usually made to a different scale.
- 575. The German Sesquialtera, when of 2 ranks, is composed of a Twelfth and Tierce, sounding a major sixth.
- 576. Mixture. This Stop consists of from 5 to 2 ranks of open metal pipes, which are, in England, generally of smaller dimensions than those of the Sesquialtera, particularly where the last-mentioned Stop is not very numerously ranked, and has nothing higher than a 22nd.
- 577. The Mixture, then, if of two ranks only, usually consists of a 26th (5) and 29th (8) in the bass and tenor octaves; changing to a 19th (5) and 22nd (8) at middle c<sup>1</sup>, or middle c<sup>1</sup> sharp; i.e. on the same key where the Sesquialtera breaks into a 12th, 15th, and 17th. In some Mixtures the breaks occur sooner; for instance, in Smith's, at the Temple Church, the Mixture breaks into a 19th (5) and 22nd (8) at tenor c sharp, and continues of that composition throughout the tenor octave. In some modern examples, on the contrary, both the Sesquialtera and Mixture are carried up to the smallest pipe commonly made, namely, f<sup>5</sup>, occurring on the treble f<sup>2</sup> key in the Sesquialtera, and on the f<sup>1</sup> above middle c<sup>1</sup> key in the Mixture, before any break is made.
- 578. The Mixture of 5 ranks occurs the most frequently on such Manuals as have no other Compound-stop, as in the Swell at Christ Church, Newgate-street. In such cases its composition is nearly identical with that of a numerously ranked Sesquialtera, and closely resembles the Continental Mixture.
- 579. In Germany, the Mixture is usually the first Compound-stop, as the Sesquialtera is in England; and not the second, as we generally make it. Their second Compound-stop is generally either a Scharf (sharp) or Cymbel.
- 580. On the Great Manual of the organ in the Town Hall at Birmingham, is a 5-rank Mixture, besides a Sesquialtera and Furniture of the same number of ranks.
- 581. Furniture. This Compound-stop consists of from 5 to 2 sets of small open metal pipes, the number of ranks, as well as the intervals they sound above the unison Stops, varying with circumstances. Where there is a Sesquialtera and Mixture on

the same Manual, the Furniture is sometimes above both; as at St. Giles's, Camberwell. For instance, if it be of 2 ranks, they will probably be a 33rd (5) and a 36th (8) above the unison; i.e. a 5th and 8th above the (usual) upper rank of the Mixture; but the ranks will break in every octave, on account of even its longest pipes being but very small. In other examples, the Furniture is nearly identical in composition with the usual 3-rank Sesquialtera; as at St. Sepulchre's, and at the Panopticon. In many organs the Furniture appears as the second Compound-stop; as at St. Leonard's, Shoreditch, &c.; in which case it is nearly, if not quite, identical with the usual Mixture.

- 582. The Furniture, farther, appears occasionally on the Choir organ; as at St. Margaret's, Westminster; Croydon Church, &c. where it is capable of great effect.
  - 583. Cornet. This name is applied to several distinct kinds of Stops.
- 584. The Mounted Cornet is a Compound-stop, consisting usually of 5 ranks of pipes, made to a very large scale, and voiced very loudly. It is only a treble stop in English organs, ranging from middle c¹ upwards; but in German examples, its usual compass is to tenor c. The Mounted Cornet is composed of a Stopped (or sometimes an Open) Diapason, a Principal, Twelfth, Fifteenth, and a Tierce. The pipes are planted on a small sound-board of their own, raised some 3 or 4 feet above that of the Great Organ—hence its name,—and the wind is conducted from the Great Organ sound-board up to that of the Mounted Cornet through metal tubes. The Mounted Cornet is almost entirely confined to old organs; and from many of these it has been removed. It was chiefly used for playing out the melody of the Corales upon, and for the performance of a now obsolete kind of voluntary, and is but seldom introduced into modern English organs, as its place, for all useful purposes, is well supplied by other Stops.
- 585. Echo-Cornet. This variety is also a Compound-stop, and is sometimes mounted. It is composed of the same number of ranks of pipes as the Mounted Cornet, and usually, though not always, of pipes of the same pitch, but of Dulciana scale. This Stop frequently extends to tenor c. Its usual situation is in the Swell, as at St. Peter's, Cornhill; its tone, besides being in itself light and delicate, being farther subdued by being enclosed within a box.
- 586. The name of Cornet is often found applied to the Compound-stop so frequently met with in the short Swells of the last century. It is generally of 3 ranks, 12th, 15th, and 17th; though, where there is no separate Principal, as at St. George's, Ratcliff Highway, that Stop is usually incorporated with it, which then of course contains 4 ranks.
- 587. In small organs, the Sesquialtera is not uncommonly made to "draw in halves;" the treble of which is then often labelled "Cornet."
- 588. The name is, in German organs, further applied to a small Pedal Reedstop, of 4 and 2 feet. (See Foreign Specifications, Nos. 4, 6, 7, 10, 50, &c.)

Reed-stops. 589. Double Trumpet. This is a Manual Stop of 16 feet, with pipes either of metal throughout, as at the late St. George's, Doncaster, and at All Saints, Northampton; or having the tubes to the lowest octave of wood, as at Ashton-under-line. Sometimes the pipes of the lowest octave are omitted; in which case the Stop is frequently called "Tenoroon Trumpet." Its tone is weaker—

though only slightly so—than the Unison Trumpet, to which it of course sounds the octave below.


- 590. Double Bassoon. Contra Fayotto. Also a Manual 16-feet Recd-stop, but of smaller scale and softer tone than the Double Trumpet. A fine specimen occurs in the Swell at All Saints, Northampton.
- 591. Double Hautboy. Another 16-feet Manual Recd-stop, of small scale. An example occurs in the Swell of the organ in Cranbrook Church, Kent, built by Willis.
- 592. Trumpet. An 8-feet Reed-stop, both on the Manual and the Pedal. Its tone is clear and penetrating, somewhat resembling that of the well-known wind instrument after which it is named. The tubes of the Trumpet-pipes are usually made either of tin or metal, though occasionally they are of zine or wood.
- 593. Horn. An 8-feet Manual Reed-stop, formed of tin or metal pipes of much larger scale than those of the Trumpet. The tonc of the Horn-stop is fuller and smoother than that of the Trumpet, and without the clang peculiar and necessary to that Stop. The Horn-stop was invented by Byfield, who was by far the best Reed-voicer of his time.
- 594. Cornopean. Also a Manual Reed-stop of 8 feet, consisting of a set of tin or metal pipes of nearly the same scale as the Horn, but of a different style of voicing. Its tone is more sonorous than the Trumpet; and smoother, though scarcely so powerful, as that of the Horn.
- 595. Trombone. Posaun. A very powerful and full-toned Reed-stop, of 8 fect on the Manual, and 16 or 32 feet on the Pedal. Its pipes are made to a very large scale, and of tin, metal, or wood;—of tin or metal for the Manual; and of metal, zinc, or wood, mostly, for the Pedal.
- 596. There are 32-feet Contra Posauns in churches at Hamburgh and Copenhagen, and of tin. Those at Birmingham and York are of wood. A 16-feet Pedal Posaun of metal occurs in the organ at Exeter Hall, built by Mr. Walker; and one of zinc at the New Church, Chectham Hill, near Manchester, built by Mr. Hill. Wooden ones are of common occurrence throughout the country.
- 597. Ophicleide. Tuba Mirabilis. The most powerful 8-feet Manual Reedstop known. The majestic effect produced by this Stop arises partly from its scale, but more particularly from the great strength of the wind that gives it utterance—three or four times that of the ordinary organ-wind. The Stop is usually placed on a sound-board of its own, with a separate bellows, &c. &c.
- 598. The Ophicleide was first introduced by Mr. Hill into the large organ in the Birmingham Town Hall.
- 599. Hautboy. An 8-feet Manual-stop, formed of metal pipes. The tone of this Stop is thin, penetrating, and of wailing character, like that of the instrument of the same name, the sound of which it of course is intended to imitate.
- 600. Bassoon. Fagotto. This is a soft and slightly nasal-toned Reed-stop, of 8 feet on the Manual, and 16 on the Pedal. Its tubes are made either of metal or of wood. In old organs, the Bassoon is generally a Whole-stop, as at Christ Church, Spitalfields; St. Michael's, Cornhill; &c. In modern instruments, it is more frequently an Incomplete one, sometimes consisting of a single octave of pipes only, acting on the Great octave of Manual Keys, and therefore, as an imitative stop, comparatively useless.

- 601. Clarionet, Cormorne, Cromorne, or Krumm-horn, Cremona, Corno di Bassetto. This is another agreeable Reed-stop, of soft intonation, of 8-feet size of tone. It possesses great sweetness and beauty of tone; and, when finished by the hand of a master, is a close imitation of the orchestral Clarionet, invented at the commencement of the last century, by Denner, of Nuremburg, This Stop is met with under a great variety of names. The word Cormorne, from which Cromorne is derived, signifies a soft-toned Horn. The name Krumm-horn is compounded of the adjective krumm, i.e. crooked, and Horn; and signifies a Cornet or small Shawm of irregular form. These names have, in England, been corrupted into "Cremona;" and as the Stop has, in the majority of modern examples, also been reduced from its former full manual compass to one of fiddle g range, the idea is thus in two ways conveyed, that it is a Violin stop; whereas the last-mentioned (Geigen Principal) is a Flue and not a Reed-stop, as already explained\*. As the Stop in question is estimated in proportion as its tone approximates that of a Clarionet, and as all organbuilders alike strive to make it imitate that instrument, "Clarionet" is obviously a better name to apply to it than "Cremona;" that is, when it is of Clarionet compass, namely, to tenor c sharp, or to c natural.
- 602. A Clarionet of deeper pitch, i. e. descending to F F, composed of a longer tube, bent towards the middle, and forming an obtuse angle, is known in England as the *Corno di Bassetto*, and in Germany as the *Krumm-horn* (crooked horn). The appropriateness of this name for a Clarionet-stop of similarly extended compass is therefore obvious. A *Bass* Clarionet, having a compass down to C C, or even B B flat, has recently been introduced.
- 603. Corno-flute. The name given to a Manual Reed-stop of 8 feet, having wooden tubes, and producing a soft and agreeable quality of tone. As it is a Reed-stop, it is not easy to say why it is named as belonging to the Flute-work.
- 604. Vox Humana. This Stop is intended to represent the human voice, which it often does, but very faintly. It is of 8-feet tone, and generally extends throughout the entire compass of the Choir or Swell Organ. Its tubes are very short, like those of the Clarionet, but broader.
- 605. Clarion. A 4-feet Reed-stop, both on the Manual and Pedal, formed of pipes of tin or metal. The tone of this Stop is sharp and clear, giving great brilliance to the Full Organ. The upper octave of this Stop is, on the Manual, generally composed of Open Flue-pipes, because Reed-pipes above f<sup>3</sup> in alt seldom remain long in tune. The Clarion at Doncaster, however, by Byfield, was carried up to the top in Reed-pipes.
- 606. Octave Hautboy. Hautboy Clarion. This is a 4-feet Reed-stop, composed of pipes of the Hautboy species. It is not a common Stop; but one of the kind occurs in the Swell of the Organ at St. George's Church, Hanover Square.
- 607. Octave Clarion. This is the smallest Reed-stop used in an organ. It is a 2-feet Stop, both on the Manual and Pedal. When it occurs as a Manual-stop, it

<sup>\*</sup> The "names and descriptions of several instruments instruct us as to the nature and design of many Stops in the organ, and what they are intended to imitate. To instance, in the Krumm-horn; the tone of it originally resembled that of a small Cornet, though many organ-makers have corrupted the word into Cremona, supposing it to be an imitation of the Cremona Violin."—Hawkins's History of Music, vol. ii, page 245, note.

usually extends through  $2\frac{1}{2}$  octaves in Reed-pipes, C C to  $f^1$  above middle  $c^1$  (sounding from middle  $c^1$  to  $f^3$  in alt), and then carried hence to the top in Flue-pipes. Sometimes, however, it consists of Reed-pipes throughout; breaking first into a Clarion, then into a Trumpet.

Table of the Sounds produced by the several leading Manual and Pedal Stops, from the low C key.

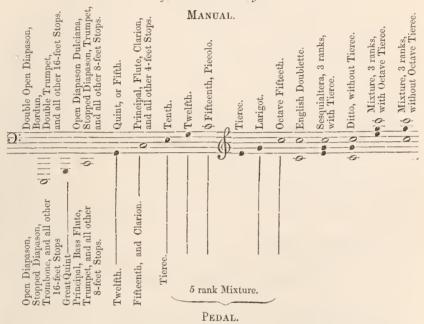

The sound of the 32-feet C is an octave below the first note above written.

### CHAPTER XXIII.

THE ORIGIN AND NECESSITY OF FOUNDATION, MUTATION, AND COMPOUND STOPS.

The introduction of 608. The preceding Chapter presents a list of all the dif-Stops of various sizes, founded on a pheno- ferent organ Stops ordinarily found in English organs, with their menon in nature. sizes and other particulars annexed. The lengths of these are not only very diversified, as will already have been perceived; but the sound of some might, at first, be imagined to be so opposed to that of others, as to be quite irreconcilable with them for any musical purpose. For example, if the 3-part chord of c Diapason drawn, the true sounds will be heard; but if the Twelfth be substituted, the chord of g1 major will be

sounded; or, if the Tierce be drawn, then the chord of e<sup>2</sup> major

So that, in fact, we find the following apparently opposed sounds; namely, c, e, gg<sup>1</sup>, b<sup>1</sup>, d<sup>2</sup>—e<sup>2</sup>, g<sup>2</sup> sharp, b<sup>2</sup>—concentrated on the same three keys.

- 609. Some organs have no separate Tierce wherewith the last example can be illustrated; in which case, some Compound-stop, containing a Tierce, may be drawn for the purpose, by which substitution the dissonance will appear to be still more egregious.
- 610. Now, it would seem that no agreeable effect could possibly be obtained from the union of sounds so hostile; but so far from this being the case, not only are most of these sounds capable of the most satisfactory reconciliation, but their presence is positively indispensable to the production of true organ-tone. The fact of their sounding so disagreeably, when tried as above suggested, arises from the peculiar manner of using them, which is not in accordance with the generally received method. The object, however, was simply to show that such combinations of sounds exist in organs: it has now to be explained how it is they are found there, and why it is they sound so well there, when well balanced and properly tuned.
- 611. If, when all is perfectly still, one of the bass strings of a pianoforte, or the fourth string of a violoncello, be set in vibration, other and higher sounds will be heard to accompany the fundamental sound or ground-tone.
- 612. A deep-toned string is best to select, in order to obtain a favorable illustration of this experiment; because the higher the fundamental sound is, the quicker

will the harmonics follow each other, and consequently the less audible will they be —particularly the higher ones.

613. These concomitant sounds are what are called the harmonic sounds; and they stand, in relation to the principal or ground-tone, in the following ratios:



Some of the smaller harmonics, as being of no importance here, are not noted down.

- 614. On examining the above notation, representing the series of harmonic sounds, it will be discovered that the sounds which at first appeared to be so much out of place (distinguished above by asterisks) correspond exactly with two of those suggested by nature. In fact, they, and indeed the sounds of all the smaller Foundation, Mutation, and Compound Stops, are introduced to corroborate Nature's dictates, and to reduce into the form of primary sounds what she indicates in the shape of harmonic sounds.
- 615. Nor are these Harmonic-corroborating Stops voiced so as to sound as weakly as the harmonic sounds themselves; yet they blend so well with the other Stops in all good organs, that together they produce the effect but of one full, brilliant, and magnificent whole.
- 616. This unity of effect, and due subordination of the Mutation-stops, are secured partly by the greater number and power of the Foundation-stops; partly by the weaker intonation of the Mutation ranks; partly by the restricted and correct method of using them; and partly by their being of the proper relative lengths.

How the sizes of the Harmonie-corroborating are deduced and fixed.

617. We have now to ascertain what those rightly decreasing lengths are, and to what Stops those lengths direct us, as being necessary to represent the harmonic series of sounds. The former point may be the most easily illustrated by a reference to the measurement of a string, and the extent to which its vibrating portion must be successively lessened, to reduce those harmonic sounds into a series of natural sounds.

- 618. A string of a certain length, thickness, and tension, will produce a given sound. To make that string produce the *octave* of its full-length sound (corroborating the first acoustic sound), the vibrating portion must be shortened to *one-half*. To produce the fifth of that octave, or the *twelfth* of the original sound (the second acoustic sound), it must be reduced to one-third; to one-fourth, to obtain the second octave of the full-length sound; to one-fifth, to produce the seventeenth; to one-sixth, for the nineteenth; and to one-eighth of the original length to produce the twenty-second, or third octave of the original sound.
- 619. According to this scale, the fixed length of the harmonic series of Stops should be  $\frac{1}{2}$ ,  $\frac{1}{3}$ ,  $\frac{1}{4}$ ,  $\frac{1}{5}$ ,  $\frac{1}{6}$ , and  $\frac{1}{8}$  the length of the Chief Foundation or Ground-stop, whatever that may be. That is to say, if an 8-feet manual Open Diapason be taken as the basis of the organ-tone, the smaller stops should measure in length 4 feet  $(\frac{1}{2})$ ,  $2\frac{\pi}{3}$  feet  $(\frac{1}{3})$ , 2 feet  $(\frac{1}{4})$ ,  $1\frac{\pi}{3}$  foot  $(\frac{\pi}{5})$ ,  $1\frac{\pi}{5}$  foot  $(\frac{\pi}{6})$ , and 1 foot  $(\frac{\pi}{8})$ .
  - 620. Or if a 16-feet Stop be taken for the foundation, as would be the case for

the Pedal, the length of the harmonic series would be 8 feet  $(\frac{1}{2})$ ,  $5\frac{1}{3}$  feet  $(\frac{1}{5})$ , 4 feet  $(\frac{1}{4})$ ,  $3\frac{1}{5}$  feet  $(\frac{1}{5})$ ,  $2\frac{2}{3}$  feet  $(\frac{1}{6})$ , and 2 feet  $(\frac{1}{8})$ .

621. And such we find to be the case; for, on comparing the first of the above codes of "lengths" with those given in the list of Stops in the last chapter, they are found to single out the identical Stops from the great number which are so constantly found in all organs. This fact is still more clearly illustrated in the following example:



622. In the above table, the notes represent the harmonic series of sounds, the figures beneath show the extent to which a string must be shortened to produce those sounds, the figures above show the precisely corresponding reduction that is made to transfer the series from a string to columns of air within pipes; and the names over all are those of the organ Stops to which the lengths have directed us.

Reasons for marking the length of the Stops on the knobs.

623. We are thus made sensible of the advantage and importance of having the length of the Stops placed on all the drawstop knobs, in addition to the names of the Stops. Their names are variable, and may be familiar, or not; but their lengths, or size of tone, are fixed, and therefore give an unerring clue to their pitch, when the names may perhaps be wholly unintelligible. It is now also obvious why the Fifth-sounding Stops should not be marked as being of "6 feet" and "3 feet," those figures placing the length of those Stops beyond their deducible admeasurement.

Theoretical exceptions sometimes taken to certain organ-stops.

624. It should not be omitted to be noticed, that some theorists take exception to some of the Harmonic-corroborating Stops—some objecting to the Tierce, because of its sounding the major third to the key struck, which it is thought must be offensive in a minor key; others, to the Twelfth, on the ground that it causes all musical progressional passages to be played in consecutive fifths; and others, again, to the Double Diapason downwards, and the Principal and smaller Foundation-ranks upwards, as they play in consecutive octaves to the Diapasons. According to the laws of musical composition, all such progressions, in strict writing, are forbidden, and all the above objections are equally strong and entitled to attention.

625. The rules of musical composition, however, are scarcely the tests by which the admissibility of organ Stops can be truly judged. An organ never sounds so well as when it contains most of these "theoretically" objectionable Stops. This fact may be

soon evidenced on an organ that contains them; though it will be necessary to proceed inversely. It may be ascertained thus: first draw all the open Flue-work; if the Twelfth, the "consecutive fifth" Stop, be shut in, there is then nothing to break the bare octave-work from the Diapason, till you come to the Mutation-ranks of the Compound-stops, and the tone consequently loses some of its roundness—becomes top and bottom. Close the Mutation-ranks of the Compound-stops, and the tone becomes more thin and cutting, because the sounds designed to fill up some of the intervals between the Foundation-ranks, to bind the whole together, are silenced. Next shut in all the "consecutive octave" Stops upwards, and the tone will be deprived of all brightness; and lastly, put in the Double Diapason—the Stop which sounds in unison with the adult male voices in the melody of a Corale,—and the Manual will lose its greatest gravity. Nothing but the Open Diapason will be left; the organ will be theorised down from a magnificent instrument to certainly a solemn, but, at the same time, dull and monotonous single set of pipes.

626. The laws of musical progression, and the phenomenon of harmonic attendant sounds, are, in reality, two very distinct subjects. As an illustration of this, it is only necessary to play on a full organ, with the Mutation and Compound-stops drawn, first a series of single notes, and then the same succession in fifths, when the difference between harmonic attendant sounds, and harmonic progressional sounds, must at once become apparent.

### CHAPTER XXIV.

PARTICULARS CONCERNING THE SCALE AND THE BALANCING OF ORGAN STOPS.

The comparative scale of the foundation and mutation stops, and ranks of pipes.

627. It was stated in the preceding chapter that the sounds of all the Mutation-stops and ranks of pipes are kept in a certain degree of subordination; and various means were mentioned by which this end is attained. In German organs, where the 8 and 4 feet Flue-Stops are generally more numerous than in English instruments, to their great improvement, and where Double Stops are such common as well as excellent features, the Mutation-stops are made to as large a scale as the Foundation; the predominance of the latter being secured by their greater number. Great breadth, as well as fulness of tone, is obtained by these means.

628. The old English builders made very little variation in the scale of the different Stops, but kept to nearly the same measure through them all. This accounts for the remarkably full as well as brilliant tone of the *chorus-work* of the best of their organs. This ringing, cheerful quality, however, is by no means a general, or even eommon, characteristic of old organs. In some cases, the scale of the small pipes was either too large—according to modern views,—or the pipes were not sufficiently blown; eonsequently, the tone of the small Stops and Mixtures became thick, or, as it is technically called, "horny." On the other hand, when the scales run too small, the tone indeed becomes bright, but without sufficient fulness; "sharp," as the Germans have it.

629. Father Smith made his Principal, Twelfth, and Fifteenth one pipe smaller than his Open Diapason; and the several ranks of his Mixtures two pipes smaller; so that the Twelfth was of the same scale as the Fifteenth, and the Tierce as large as the octave Fifteenth. By the requisite voicing, the tone of the Mutation-stops and ranks was rendered smooth and mellow, and that of the Foundation-ranks full and bold; the effect of the whole being exceedingly firm and clear, although occasionally lacking sufficient body, firmness and depth of tone, consequent on the smallness of the number of Unison and Octave Stops, and the entire absence of Double Manual Stops. As this circumstance involves a matter of some moment, where the renovation and enlargement of an old organ is concerned, it may be briefly discussed here.

630. Much pains was taken by the writer, while abroad, to test several Continental organs, with precisely the same Stops drawn that are usually found in old English organs, and the experiments were invariably attended with the same effect as that witnessed from some of the best old instruments of this country, namely, the production of a clear and ringing character of sound, but accompanied by an overamount of Mixture-tone. It was also observed that, on adding the *remaining* Stops,

the accurate balance of tone was immediately restored. An indisputable proof was in this manner obtained of the cause of the misproportion originally existing in so many English organs; as well as a clear illustration of the most correct way of remedying that defect. The "fathers of modern organ-building in England," Harris and Smith, studied their art abroad, where it was the custom to produce a fine and well-balanced organ by disposing a certain proportion of Mixture-work to secure clearness, boldness, and vivacity; one or more Double Stops to impart gravity and dignity; and a good number of 8 and 4 feet Stops to give firmness and definitiveness to the whole by blending the various elements in harmonious amalgamation. On arriving in this country, they encountered a serious difficulty in being compelled to keep their organs within restricted dimensions. Perhaps they were also sometimes straitened in the matter of terms; and they might even have had to contend with a want of appreciation and co-operation on the part of contemporary organists.

- 631. Being denied the necessary room wherein to complete their Manual organs—even independently of a separate Pedal organ, which was invariably omitted—they had to relinquish some of those Stops which would require the *most space* for their accommodation; hence, the Double Stops were generally expunged, and, in some cases, even some of the Unison and Octave Stops also.
- The due proportion of the three great elements being thus disturbed, by the entire omission of one, and the weakening of a second, the third then naturally stood out with undue prominence. To give an instance: Dr. Burney, in his History of Music, vol. iii, page 440, note, speaking of the St. Paul's Cathedral organ, says, "notwithstanding the power of the chorus of this admirable instrument, several more exeellent Stops were made for it, which lay many years useless in the vestry, but for which Sir Christopher Wren, tender of his architectural proportions, would never eonsent to let the ease be sufficiently eapacious to receive." In the English Musical Gazette, for January, 1819, page 6, it is stated what some of those Stops were. After mentioning that Sir Christopher Wren "would not consent to let the ease be enlarged to receive them," the narrator proceeds to say, "three of the Stops were in eonsequence obliged to be kept out; viz. a Bassoon, a Clarion, and another Stop of minor consequence, which were kept in the Cathedral for several years after-Schmidt hoping he might get them in at some future period; but he died a few years before Sir Christopher Wren." The Stop of "minor eonsequence," as it seems then to have been considered, Mr. Bishop imagines to have been a Double Diapason; and Mr. Sutton, in his "Short Aecount of Organs," page 34, adds, "this conjecture seems highly probable, as there is no doubt that, to contain a Double Diapason in addition, the organ-ease would necessarily have to be much enlarged."
- 633. Again, in the building of the Temple organ, Smith had to confine his work within certain limited dimensions, in order that, if his instrument should be accepted, it might go within the western arch of the choir; hence it was not only made without Doubles, but with one Open Diapason only to support 6 ranks of Mixture in the Bass, and 9 in the Treble; and the Great and Choir organs had to be crowded on to one Sound-board.
- 634. At St. Paul's, in consequence of the omission of all Double Stops, one Unison, and one Octave Stop, what then remained as "the organ" was of course thrown out of proportion; and "the power of the chorus," noticed by Dr. Burney,

becoming thus excessive, the Mixtures were ultimately taken out, and new ones of softer tone introduced. The influence of "large" and "small" Stops on the general effect of an organ, is a subject concerning which nearly as much nuisapprehension prevails in England now as in the days of Smith and Harris. Many imagine that, because the introduction of a few Double, 8 and 4 feet Stops will increase the "bulk" of an organ by perhaps one-half, therefore their striking and arresting effect must be in proportion; and that, as the addition of more Mixture would not call for the addition of six inches to the depth of the organ, its introduction would exercise as little appreciable difference to the ear as it would to the eye. These are the popular ideas on the subject; whereas, the facts are exactly the contrary. The large Stops increase the fulness, roundness, depth, and sonority of the organ, imparting great richness to the general effect; whereas, more Mixture may increase the "din" of the organ to such an extent as to be almost intolcrable. Dr. Burney appears to have been, to some extent, under the influence of the general misapprehension; for, in the extract already given—"notwithstanding the power of the chorus, more excellent Stops were made," &c .-- he writes as though the effect of the omitted Stops would have been to increase that "power;" whereas they would certainly have tended to subdue it. Sir Henry Dryden, in his pamphlet on "Church Music," when writing concerning modern Church organs (pages 28 and 29), says, "Generally the Pedal organs are too weak, the Great organs too noisy, the Choir organs too small, and the Swell organs too short in compass. We have a great deal too many Mixtures and such-like cheap Stops, and too few of large and expensive open metal Pipes. It is difficult to have too much Bass to an organ. No sound below a voice will drown it. The Pedal pipes at Westminster Abbey will not drown the weakest boy's voice. Mixtures and Scsquialteras drown voices." It is manifest from this, how permanently injurious it must be to limit the space for an organ to such an extent that the organ-builder cannot introduce all the Stops necessary to produce a well-balanced instrument.

635. The Stops that have a tendency, from their brightness, to interfere with the just predominance of the voices, always find ready admission; while those that are necessary for sustaining and supporting the voices are almost as invariably limited in number and efficiency.

explained, so uniformly made to appear "too shrill," or "too screaming," that, in the great majority of instances, they have since been melted down and replaced by others of weaker intonation. Many of Harris's organs, also, have been brought into proportion by a like process. Another way of obtaining this end would have been to add Stops similar in pitch to those which the original builders had, from the good influence of early education, learnt to consider as necessary, and which the experience of more recent times has proved to be indispensable, but which they were, from the first, compelled to relinquish, and to the omission of which the original misproportion was to be ascribed. This would not only have restored the balance of tone, but would have raised those instruments towards the state of completeness and efficiency contemplated by their respective makers, and upon an acoustic principle with which they were perfectly familiar; for it is important to bear in mind that most of the large organs constructed in England during the last ten years, with Double Manual

Stops and an independent Pedal organ, are, in reality, only on an equality in these respects with many of the instruments which Smith and Harris left behind them in their native countries upwards of a century and a half ago, and with some of which they could not fail to have been well acquainted.

637. Organs having Double Stops on the Manual, and a 16-feet Pedal, were of most common occurrence in France, Holland, and Germany, not only in the seventeenth century, but even in the sixteenth. For instance, those at Freiburg in Breisgau, built in 1520, containing 24 Stops (see Foreign Specifications, No. 37); at Amsterdam, enlarged in 1673, 44 Stops (Specifications, No. 5); at Rouen, 1630, 49 Stops (Specifications, No. 17); at Amiens Cathedral, built as long ago as 1429, and yet with a 16-feet front (Specifications, No. 14); and at Antwerp, 1645 and 1670 (Specifications, Nos. 21 and 22); all those just mentioned, among a number of others, included the above-mentioned features among their original constituent parts; the Pedal organs comprising from 4 to 10 Stops—a proportion that is considered liberal even in the nineteenth century in England.

633. There were even some 32-feet organs also existing in Germany as far back as the sixteenth century. At St. Mary's Church, Lübeck, an organ was erected previous to the year 1561, with a 32-feet front of polished tin; and at St. Peter's Church, Hamburgh (since destroyed), was a 32-feet organ of still earlier date, it having been erected before the year 1548. The several foregoing facts and dates are important, and necessary to be introduced here, as being calculated to allay the groundless fear occasionally expressed, that the present race of English organ-builders are getting their instruments "too large;" whereas in reality they are only introducing certain Stops requiring much space, that are necessary to produce a full and well-balanced tone. The organs of Harris and Smith were originally little more than "8-feet organs," destitute of Pedal; the "Great organ" departments being, in most cases, scarcely so complete as the "Echo" or "Choir" of many old Continental organs, as may be ascertained by comparing the original Specifications of their instruments with those of the last-named parts of foreign organs, described at the end of this work. Modern builders, in striving to raise the standard of English organs above that to which the excellent makers just named were permitted by circumstances to work, are really doing no more than placing their instruments, in regard to number and distribution of Stops, on a par with those made nearly two centuries since abroad,—of course introducing such beneficial alterations into the list of Stops as modern science has placed at command, and also incorporating numerous improvements in the mechanism that were not even so much as dreamt of at the former period; -and it seems needless to treat this attempt to place the nineteenth century English organ at least on an equality with the seventeenth century foreign organ, as an alarming advance, or as a hazardous enlargement.

639. As bearing upon the subject of the great improvement to be effected by the judicious development of a really good old organ, an extract may be made from Mr. Edward Holmes's entertaining volume, entitled, "A Ramble among the Musicians of Germany," in which the author, after mentioning Silbermann, "one of the most renowned builders of Germany, and whose name (Silvermann) very well describes the quality of his tone," proceeds to say, in a foot note, page 193: "As a matter of science, it is worthy consideration how far the structure of our organs might be improved by

uniting the sweet cathedral quality of tone, for which those of the Temple, Westminster Abbey, &c. are noted, with the magnificence of Silbermann." Had Harris and Smith worked unfettered, there is little doubt but the two attributes above specified would always have been found combined in as eminent a degree in their organs as in those of the great Strasburg builder. In the absence, however, of this, and in proceeding to renovate organs of their make, the choice lies between "wedging up," "papering up," or "melting down" the original Mixtures, supplying their place by others of softer tone, and of reducing their comparative strength of tone by increasing that of the 3 and 4 feet tone, by adding to the number of Stops producing those pitches, and by also engrafting one or more Double Stops. The former course has the charm of economy to recommend it, although it involves a greater departure than ever from the calculation of the original builder; while the latter and more expensive process effects a nearer approach to it.

- 640. In some of the organs built soon after Smith and Harris's time, a better balance of Manual-tone was attempted, by giving the small Stops less wind at the foot; but the former large scale being at the same time also retained, the result was the production of an indistinct, dull, horny quality of tone, as already mentioned.
- 641. The organs of John Schreider, Smith's son-in-law, are distinguished from those of Smith, by having the Diapasons voiced stronger in the treble. The extent to which his organs were susceptible of improvement by the introduction of Double Stops, &c. has been satisfactorily evidenced in the enlargement of his fine instrument in Westminster Abbey, the additions to which were made by Hill.
- 642. Renatus Harris's organ at St. Sepulchre's, Snow Hill, has also been considerably improved, by additions made by Gray and Davison, and would, by the introduction of Double Manual Stops to the Great organ, be rendered quite magnificent.
- 643. The younger Harris (John) made the Tierce in his organs of the same scale as the Principal, Twelfth, and Fifteenth; i.e. one pipe smaller than the Diapason; and the Mixtures two pipes smaller.
- 644. In conjunction with his partner Byfield, he increased the strength of the 8 and 4 feet sound, by the more frequent introduction of a second Open Diapason, St. George's, Doncaster, erected in 1738, those builders introduced two Trumpets. The Mixtures of Harris and Byfield were usually carried up higher in the musical scale without a break, than were those of Smith; hence a greater amount of brilliance, though with scarcely so much boldness, from the omission of the duplicate ranks for which the higher ones were substituted. It may be mentioned, that the firmness is imparted by the number or strength of tone of the 8 and 4 feet Stops; while the boldness, brilliance, or keenness, depends a great deal on the composition, scale, and winding of the Mixtures. The younger Harris's Compound-stops were wonderfully animated and ringing, which properties seemed to indicate that their maker included Double Manual Stops in his conception of what a complete organ should be; and this opinion was afterwards confirmed at Doncaster, when such Stops were added, by the increased beauty which they imparted to the tone of that originally fine organ. The organ built, in 1740, by the same Byfield, in conjunction with his other partners, Jordan and Bridge, for the church at Great Yarmouth, actually had, according to Dr. Burney's account, printed in Rees's Cyclopædia, under the article "Organ," a

Double Diapason; also two Open Diapasons, two Trumpets and Clarion, and 9 ranks of Mixture.

645. Both Schwarbrook and Snetzler (Germans) also succeeded in incorporating a Bordun as a part of their organs at St. Michael's, Coventry, 1733; and Lynn Regis, 1754. In reference to that in the last-named organ, Dr. Burney (History, vol. iii, page 438, note) says, "One of the metal Stops of this instrument, called the Bordun, is an octave below the Open Diapason, and has the effect of a double bass in the chorus." The Double Stops have since disappeared from the Yarmouth and Lynn organs; and as Stops of that nature were but very rarely introduced into other instruments, these circumstances clearly indicate that even at so recent a period as a century since, the prevailing taste, or prejudice, or both, of English organists continued to run counter to the attempted advances of the most eminent builders towards the production of a complete and well-balanced organ. It would be interesting to ascertain, if it were possible to do so, whether the trifling and irreverant notions concerning organ-playing in church, so much in vogue throughout the last century, were so at the time of Smith and Harris's arrival in this country; and, consequently, whether the incapacity to appreciate, and therefore to advocate, the broad and dignified instruments which those builders were prepared to construct, was to be attributed to the then prevailing musical taste; or, whether the frivolous and tasteless manner in question of using the organ was the consequence of their usually being composed chiefly of "little" Stops, as some of the Germans have expressed themselves, somewhat contemptuously, when speaking of our old organs. One thing is at any rate certain, that the organs were not calculated to encourage the conception of elevated musical ideas; nor, if they arose, independently of external assistance, were they capable of realising them\*; hence the production of so much music, specially written for such instruments, that now reflects nought but discredit upon the contemporary musical taste of this country. Dr. Crotch, in his "Elements," page 89, felt it necessary, in addition to directing the taste of students, also to state what they should avoid. "Organ voluntaries," he says, "should consist of fugues, with introductions for the full organ, upon the model of Sebastian Bach and Handel. Soft movements for the Diapason and Swell should be slow and sweet, or mournful and pathetic, and may be in the Italian style of the seventeenth century. English voluntaries for the Trumpet, Echo, Vox Humana, Cornet, Oboe, and other solo Stops, are too often vulgar, trifling, and ridiculous; being equally void of science, taste, and that decorous gravity of style which should ever characterize church music." It is an important fact that, in Germany, where Double Manual Stops have been common for centuries, the vicious style of organ music above referred to never existed, so far as we are aware; whereas, in England, it never ceased to exist, until an appreciation for that class of Stops, and for firmer "medium-work," began to spread itself,—that is, within the present century.

646. George England made his Principal one pipe smaller than his Open Diapason, his Fifteenth two pipes narrower, and every rank of his Mixtures to a varied scale.

<sup>\*</sup> Those who, like the writer, heard Mendelssohn extemporise, in 4 or 5 pure parts, on an essentially *English* organ, will remember how destitute of breadth and dignity was the effect which emanated from what present organ-builders call the "thin-toned old organ."

- 647. In a Compound-stop of 4 ranks, comprising 17th, 19th, 22nd, and 26th, he would make the 17th a small scale, the 19th rather larger, the 22nd large scale and powerfully voiced, and the 26th small again, and voiced almost as a Dulciana. This last rank, nevertheless, made itself heard, and gave to the Mixture a sound as of bells. England's Mixtures were of a very silvery and sparkling quality; though not so bold as Smith's, nor so full as Harris's, on account of their different composition and smaller scale. His larger organs commonly had the advantage of four 8-feet Stops and three 4-feet Stops, which, in conjunction with the lighter Mixtures, presented a two-fold modification greatly in favor of a well-balanced tone; though, from the greater comparative firmness thus imparted to the medium-work, they are generally quite capable of "carrying" a 16-feet Stop of light intonation.
- 648. Green's scales were, in some respects, larger than those of any of the preceding; that is to say, he made his 17th and 19th one scale smaller only than the Diapason, and the 22nd alone two scales less. The Open Diapason itself was made one pipe smaller, in the treble, than Father Smith's scale, but several pipes larger in the bass; and was generally of remarkable excellence, the treble part being very pure in quality, though not very loud, and the bass full and ponderous. His Mixtures varied but slightly in their composition from those of Smith; while in the voicing, Green's pipes were closely and finely nicked, and not cut up much, and with comparatively but little wind passing in at the foot; hence his soft, rich, and pleasant tone, which, however, generally lacked the boldness and energy of the organs of Harris and Smith.
- 649. The system of scaling frequently followed in modern times is as follows. To speak first of the Foundation-stops: the Open Diapason is made to the largest scale, because, being the *chief* Foundation-stop, it is essential that its sound should predominate. The Principal is made one scale smaller than the Open Diapason; the Fifteenth one scale less than the Principal—and so on, each successive Foundation-rank rather smaller than its predecessor. Thus the 2-feet pipe of the Principal, speaking on the Tenor c key, is made of the same diameter as Middle c¹ sharp pipe of the Open Diapason; and the 2-feet pipe of the Fifteenth speaking on the CC key, the same width as the Middle d¹ pipe of the Open Diapason.
- 650. Each Foundation-stop, however, commencing from the Open Diapason upwards, is voiced rather brighter, as may be ascertained by first drawing the Open Diapason and striking the Middle c¹ key, when a full and sonorous sound will be heard. Change the Open Diapason for the Principal, and press down the Tenor c key; the sound, identical with the first one in pitch, will be rather louder, but less full. Substitute the Fifteenth for the Principal, and strike the CC key, which will reiterate the same pitch, and the sound will be yet brighter, though there will be less again of it.
- 651. The Twelfth is much varied in scale, according to circumstances. If there be but few ranks of Mixture, the Twelfth is made only of the same diameter as the Fifteenth, although its pitch is a fourth lower, and its pipes consequently more than one-fourth longer. At other times, it is made of the same scale as the Fifteenth.
- 652. The Third-sounding Stops are made to a still smaller scale, as their sound has to be more subdued even than that of the Fifth-sounding Stops.
  - 653. The Foundation-stops, then, are the largest scaled and the loudest; the

Fifth-sounding Stops the next; and the Third-sounding the smallest of all in much modern work.

- 654. Towards the commencement of the present century, the usual method of balancing the Stops was much disturbed by the influence of certain theoretical organists of the time, who would have the Compound-stops voiced so as to sound nearly as weakly as the acoustic sounds they were introduced to corroborate. At the present time, those organ-builders enjoy the highest reputation in England whose instruments are voiced the most directly at variance with these theoretical notions.
- 655. Organ builders are frequently heard to speak of an Open Diapason being made to a 12, 13, 14, or 15 inch scale, as the ease may be. These figures refer to the width of the sheet of metal out of which the gamut G pipe is made, and which pipe therefore, when finished, ordinarily measures from nearly 4 to about 5 inches in diameter.
- 656. According to the scale of the Open Diapason, those of the Harmonic series of Stops are of course regulated.

The increase of scale 657. It was shown in Chap. XIX, ante, pp. 101, 102, & 103, in a stop as the pipes become shorter; and that a pipe which sounds the octave above another of the same kind is only half the length of the first one. Thus, in a Manual why necessary. Open Diapason, the C C pipe of which is 8-feet in length, the Tenor e is but 4-feet; the Middle e<sup>1</sup>, 2-feet; the Treble c<sup>2</sup>, 1-foot; and the c<sup>3</sup> in alt, 6-inches. The diameter of these several pipes might, at first thought, be imagined to decrease in proportion to the reduction in their length. This, however, is not really the ease. As the pipes gradually become shorter, they are made rather wider in proportion. As an illustration of this, suppose the 8-feet pipe of an Open Diapason to be 6 inches in diameter; the 4-feet pipe will not be simply 3 inches, but about  $3\frac{1}{a}$  inches in width; the 2-feet, not  $1\frac{1}{6}$ , but  $1\frac{15}{6}$  inch in diameter; the 1-foot, not  $\frac{5}{4}$  of an inch, but  $1\frac{1}{4}$ ; and the 6-inch pipe, not  $\frac{3}{8}$ , but  $\frac{6}{8}$  of an inch in diameter. Thus we find that the diameter of a metal open pipe, as compared with its length, is, in the course of four octaves, sometimes just doubled.

- 658. A still greater increase is made upwards in the scale of a Reed-stop. Take, for instance, an 8-feet Posaun. In some examples, the C C pipe, 8-feet, measures 5 inches in diameter; the Tenor c, 4-feet  $4\frac{1}{2}$  inches; the Middle  $c^1$ , 2-feet  $3\frac{1}{2}$  inches; Treble  $c^2$ , 1-foot  $2\frac{3}{4}$  inches; and the  $c^3$  in alt pipe, 6-inches in length, 2 inches in diameter at the bell.
- 659. The object for which an increase is made in the scale of organ-pipes, whether of the Flue or the Reed species, is to secure as far as possible an equality and uniformity in the strength and tone-character of the Stop throughout its range, and which could not be otherwise obtained; for the pipes of an Open Diapason would ultimately become smaller than those of a Dulciana, the  $c^3$  in alt pipe of which Stop measures  $\frac{7}{16}$  of an inch, good, in diameter; and those of a Posaun, less than those of a Bassoon.
- 660. It has already been explained, that a performer on a wind instrument has to exercise a *greater* effort of the muscles of the lungs, in order to secure the high sounds being of *the same* strength as the low ones. In like manner an organ-builder first *increases* the scale of his Stop gradually from the longest pipe up to the shortest,

as a preliminary to his obtaining even the same amount and kind of tone. He then admits an increased quantity of wind in at the foot, for the purpose of blowing from each successive pipe of the series an undiminished strength of tone—an additional amount of wind of the same density producing nearly an equal effect to that which the same amount of wind of greater density would do. In some of the modern French organs, and also in the organ at the Panopticon, built by Mr. Hill, and that in the Town Hall, Glasgow, built by Mr. Davison, the treble portion of the Stops is supplied with a wind half an inch or an inch heavier than the bass part, which brings the method of producing high sounds from organ-stops and from wind instruments into closer analogy.

661. Many of the German builders have for a long series of years obtained a similar result, either by introducing two pipes to each key in the treble, as in Müller's celebrated organ at Haarlem, finished in 1738—see Foreign Specifications, No. 1; and in Batz's organ at Utrecht, erected in 1826—see Specification, No. 10; or by putting larger pipes in the treble of their Compound-stops than is usual in England. The latter plan, which is one of great utility, will be more fully explained in a following chapter.

A variation is made in the seale of the stops of the same Claviers, and also in the duplicates on the same Clavier. The reason and necessity thereof.

The Stops belonging to each separate division of an organ are made to a different scale to what the corresponding name on the different stops are on the other departments: that is to say, the Open Diapason in the Swell is made to a somewhat less diameter than the like stop in the Great organ, and that of the Choir organ smaller again, which variation of scale in the fundamental Stop, or "Diapason" of each Clavier, leads, as a matter of course, to a

corresponding variation in that of the Harmonic series of Stops of each department.

663. One of the main objects in this variation of scale is, to secure to each department the requisite distinctness of character and proportionate strength of tone. Thus a large scale is adopted for the Great organ, the tone of which is required to be full, broad, and strong: a somewhat smaller scale for the Swell, which combines in its sound much of the dignified character of the Great organ tone, united with the sprightly tone of the Choir: the smallest for the choir organ, the sound of which is lighter than that of the other Manual organs, yet full of life and vivacity: and the largest for the Pedal, which should possess weight, depth, and fulness.

664. The way in which a variation of scale is effected, is, by taking the diameter of, say, the C C sharp pipe of the first stop as the scale for the C C pipe of the second stop, and by following out the same relative and reduced measure throughout the series of pipes.

665. For another scale, the width of the original D D pipe would be taken for the C C pipe.

666. Where two Stops of one kind are placed on the same Manual, as, for instance, two Open Diapasons, or two Principals, the second is usually made to a different scale from the first; and not only so, but to a scale varying, however slightly, from that of the similar Stop on all the other Manuals. One reason for this is, if two Stops are made to the same scale, and voiced alike, they are very likely to "sympathise."

- 667. When two pipes sympathise, a beating or waving is heard when they are sounded together, although they are perfectly in tune when tried separately, and do not "rob." Sometimes the two pipes together will even sound weaker than either when used separately.
- 668. Varying the scale is one of the means taken for preventing sympathy; not indeed that this step is *indispensable* to that end, since some organs exist having two Open Diapasons in the treble, of the same scale, which do not sympathise; while, in other examples, having two Open Diapasons of different scale, a tremulousness does appear. It is, nevertheless, one of the most advisable as well as most usual methods adopted to prevent it. A "beating" between two pipes made to different scales will arise from their being placed too near to each other on the sound-board.
- 669. In that case, the defect does not arise from "sympathy," but *proximity*. To prevent any waving occurring from this second cause, it is essential that the two Stops should be placed at some distance apart, and, if possible, be separated by other Stops.
- 670. An additional reason to that given above for making the corresponding Stops of the several Claviers to different scales, is to avoid, as far as possible, any beating occurring when any of, or all, the departments of the organ are coupled together.
- 671. Again, the repetition ranks in the Compound-stops of a department—i. e. the duplicate ranks which are introduced where the "breaks" occur, and which appear in greater or less abundance in all Mixture-stops, as already explained at page 121, sec. 57, 92, and 573—are generally made to diversified scales in England, with the view to preventing any tremulousness appearing among them.
- 672. For this reason, also, the duplicates in the Compound stops—that is, the repetition of certain ranks of pipes which always occur in greater or less abundance where there are many ranks of mixture, particularly in the treble part of the stops—are generally made to diversified scales, otherwise a beating or waving is likely to arise from the phenomenon just noticed.
- 673. Father Smith not only used to vary the scale slightly, but also to make the feet of the duplicate ranks to a different length; so that the pipes might speak on a different level to the others. Green and England also varied the length of their pipe-feet for a similar purpose.

### CHAPTER XXV.

#### THE TEMPERAMENT OF THE ORGAN.


The temperament; 674. The interval of a perfect octave comprises somewhat the phenomenon in less than 6 major tones; more than 3 major thirds; and less nature that occasions its necessity; and the than 4 minor thirds. For example - supposing the perfect different systems. octave to be divided into 3010 equal parts, the interval of a major tone would contain 511 of those parts, which number being multiplied by 6 would make 3066 instead of 3010, i. e. plus 56 parts. A minor third would be equal to 791 of such parts, which being multiplied by 4 would make 3164 instead of 3010, plus 54 parts. A major third would contain 969 of those parts, which number being multiplied by 3 would only make 2907 instead of 3010, i.e. minus 103 parts. (See Charles Child Spencer's "Treatise on Music." See also Dr. Crotch's Elements of Musical Composition, second edition, page 99, where the author shows, by means of diagrams, illustrating experiments made on the monochord, the extent to which the octave falls short of the true octave when measured by perfect thirds, and how much it exceeds it when measured by major tones.) This excess or short-coming, as the case would be, according to the manner of dividing the octave, is called the wolf—a term said to have been originally suggested by the howling effect of a badly tuned consonance.

- 675. In all instruments of which the scale consists of 12 fixed sounds in the octave, and in the organ among that number, this imperfection has to be softened down and hidden, as far as possible, by distribution; and any interval that is slightly augmented or reduced in receiving its allotted share of the dissonance, is said to be "tempered," while the principle on which the dissonance is distributed—whether equally among all the scales, or so as to appear less obviously in some of them and more so in others—constitutes the system of temperament adopted.
- 676. Two distinct systems of temperament suggest themselves—the *equal* and the *unequal*; of which the latter is by far the oldest.
- 677. Most of the Church music composed previous to the middle of the 17th century was written either in one of the five major scales of C, G, D, F, or B flat; in one of the three minor scales, A, D, or G; or in some one of the ancient scales, commencing on one of the notes just named.


Unequal temperament. 678. The fixed sounds of organs were therefore tempered with the special object of favoring the tonic, dominant, and subdominant harmonies of those scales as much as possible, as shown in the following example:



679. The five short keys were tempered so as to form nearly perfect thirds to the small black notes that are here added above or below them; and so long as composers and organists confined themselves chiefly to the use of the scales already named, the existence of the wolf to an aggravated extent in all the other scales remained a matter of no great practical importance; but as by degrees they also came to be employed, the defects of the unequal system of tuning became so much more apparent, that various methods were proposed, from time to time, with a view to their amelioration. Even at the period already named, several pieces of Church music had been written in the scales of E flat major, A major, E minor, &c.; in the former of which keys the sub-dominant triad could only be sounded thus by the then existing temperament,



and in the latter, the dominant major triad thus,



Quarter tones. 630. The earliest steps towards getting rid of the wolf, were, in England, made by introducing extra keys into each octave, furnished with separate sets of pipes, and which were intended to be used and others omitted when playing in certain scales. The first experiment of this nature was made in 1687, by Father Smith, who was most probably assisted in his design with the advice and cooperation of the great Henry Purcell: and it was in the fine organ in the Temple Church, which Purcell afterwards exhibited during the memorable trial, that these quarter tones were first made available. Two such additional keys were introduced into each octave—A flat and D sharp—by which means the chords of A flat major and B major, the two quoted above, were rendered among the best, instead of being two of the very worst on the organ. The scale of the Temple organ, with these additions, stood thus:




681. The result of these added sounds was received with so much favour, that, in the organ presented by Handel to the Foundling Hospital, in 1759, and doubtless constructed under his own direction, the additional tones in each octave were further increased, in number from two to four, the two new ones being D flat and A sharp, which extended the amelioration to the triads of D flat major and F


sharp major: so that, instead of the sub-dominant harmony of A flat being sounded thus,



and the dominant harmony of B major or minor, instead of being given thus,



The scale of the Foundling Hospital organ was therefore as follows:



682. After this, that is, about the year 1808, Hawkes took out a patent for an organ, in which two distinct sounds were obtained from the only remaining black key, namely, F sharp and G flat, making the scale as follows:



683. Nearly a quarter of a century before this time, however, the elder Russel had made an organ with 20 sounds in the octave. At subsequent periods, others were built with a still greater number of keys in the octave; until those erected for the late Rev. Mr. Liston and Colonel Thompson had 43 and 40 keys in the octave respectively.

684. The additional sounds in the several instruments just enumerated not only answered their purpose well, but they served also to illustrate theoretically the difference between sounds which, from the force of habit, some might be apt to consider as identical. Their general adoption, however, did not follow, on account of the great cost of the extra pipes, &c.; the additional room necessary to accommodate them; and the complex machinery or key-boards required to bring them into active use.

Perfect temperament. 685. Moreover, in proportion as theoretical perfection in the tuning was approached, by the introduction of additional sounds, the practical disadvantages were increased; for they destroyed that ambiguity in certain harmonic combinations which is one of the greatest and richest resources of the musician's art. The beauty of an enharmonic transition consists, as all musicians know, in the "change without the difference:"



whereas, by a system of perfect tuning, all such changes as the above were made obvious; that is to say, the altered notation called forth other sounds, which announced and foretold the coming transition,—and, by the doubt being thus removed, the unexpected charm was entirely destroyed.

686. It will, of course, be perceived that the great practical question relative to the best method of tempering the original twelve sounds, so as to render all the scales playable, was left wholly untouched upon by these ingeniously conceived and constructed instruments; which were organs illustrating the theory of perfect temperament, and not equal temperament.

Equal temperament. 687. It was in Germany that the last-mentioned and important theme was first started and discussed; and the merit of its invention was chiefly due to the great Sebastian Bach, who demonstrated the superiority of that system over all others in the contents of the invaluable volume known to musical students under the title of "the well-tempered Clavichord;" or 48 Preludes and Fugues in all the major and minor keys. At first, this system of tuning was applied only to the progenitor of the modern pianoforte, as will have been gathered from the title of the publication just referred to; but in a short time it was extended to the organ. One of the strongest opponents to its being adapted to that instrument is said to have been Silbermann, the celebrated organ-builder; and the tradition runs, that whenever Sebastian Bach observed Silbermann among his select circle of auditors, he used to say to him, in perfect good humour, you tune the organ in the manner you please, and I play the organ in the key I please, and thereupon used to strike off a Fantasia in A flat major; the contest invariably ending in Silbermann's retiring to avoid his own "wolf."

688. The Continental organs have universally been tuned on the *equal* temperament system for nearly a century past, as the Pianofortes and Harmoniums are in this country; while those in England have for the most part been as uniformly tuned according to the old or *unequal* method, even up to the present time.


A reason in favor of unequal temperament. 689. Each system has its advocates. In favor of the unequal, the same reason which no doubt led to its adoption originally is still urged; namely, that it renders the common major scales nearly perfect.

That reason considered.


690. This is undoubtedly the case; but it is at the same time an insufficient reason. There is now a second circumstance to be considered, which could scarcely have been taken into account in the seventeenth century; which is, that the unequal temperament causes no less than 15 out of the 24 scales to be more or less wolf-ish, commencing with the dominant or the sub-

dominant harmonies of those keys the nearest related to the common scales; as, for instance, E major or E flat major, B minor, C minor, &c.; and ultimately extending itself also to the tonic triads, as D flat major, G sharp minor, &c. It, in fact, perpetuates the very defects which the quarter-tones in the one case, and the equal temperament in the other, were introduced to remove.

- 691. What the defects may be, to which the unequal temperament leads, will be best indicated by a few musical examples. Before, however, giving them, one or two simple practical methods may be pointed out for ascertaining whether an organ really be tuned in the manner referred to.
- 692. The scale of an unequally tempered organ has already been given, it forming the first illustration to the present chapter, to which reference might here be made (see page 140). If, on an organ so tuned, the sound of the black keys be tested in the *opposite* direction to that indicated in the illustration just named, it will become obvious to the *ear*, as it may be rendered also to the *eye*, that they form no *thirds* at all to the new notes with which they are now combined.



693. If a test by *beats* be desired, proceed as follows. Draw the ordinary 3-rank Sesquialtera in the Great Organ, and the Principal in the Swell—the Swell being fixed open—then play the following series of notes on the two manuals, vcryslowly:



694. It will be found that the thirds played on the keys, and the perfect thirds sounded by the Tierce in the Sesquialtera so nearly accord, that few, if any, beats will be heard. This proves that the thirds to the bass notes given in the last example are much favored; i.e. are scarcely, if at all, tempered. Reverse the test, thus, playing slowly, as before,



and the most horrible dissonances will ensue, because no accordance with those notes is even aimed at.

Illustrations of sacred music as sounded on an unequally tempered organ.

695. A few musical extracts will now be given, to show the musical extracts will now the

such a system of tuning in a still stronger light; but the object has, in this place, been simply to show the great desirability of adopting the equal temperament, even for the humblest church organs; its great superiority for concert-room organs being all but universally admitted.









Ex. 7. Behold now praise the Lord. Rogers.









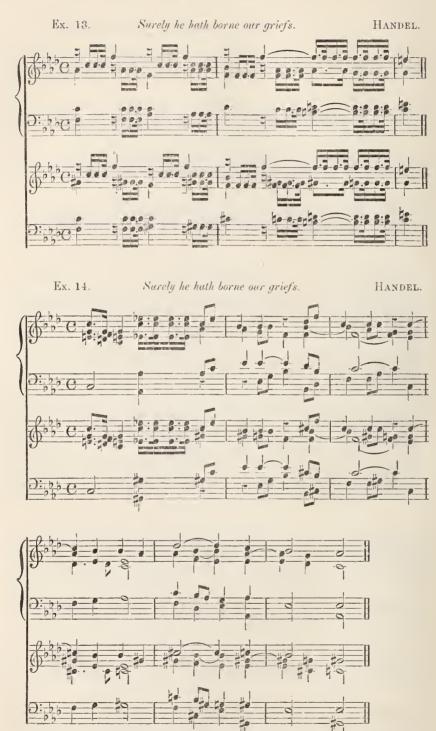



696. No one who is aware of what intervals a common chord is formed would desire to designate the strange accumulations of notes occupying the lower lines in the foregoing examples as specimens of "musical composition;" and it is not easy, therefore, to conceive why the crude *sounds* which those *notes* represent should be received as "harmonious combinations," save on the weak ground that the ear has, by long custom, been rendered partially insensible to their harshness. It is certain that nothing half so egregiously bad can be made to emanate from an equally tempered organ.

697. Concerning the composition from which the last example given above is taken, Dr. Burney says, in his Musical History, vol. iii, page 608—"The anthom for three voices, from the eighty-eighth Psalm, is truly pathetic and expressive from the beginning to the end; but, unluckily, the key in which it is composed (F minor) is so much out of tune on the organ, as it is usually tempered, that the effect must be doubly offensive to those who, though possessed of good ears, are unable to account for it." It would seem from this that the learned Doctor was no admirer of what German organ-builders term the barbarous system of tuning.

Unequal temperament advocated on the score that it preserves a distinct character of key.

698. The retention of unequal temperament for the tuning of organs continues to be occasionally urged in England; and the second and distinct plea sometimes set up for it is, that it preserves the distinctive character of the different scales or keys. The

unequal temperament unquestionably renders all the scales either better or worse than the equal, at the same time making some of them so bad as to be unfit for use. None are the same in both temperaments. It, therefore, undoubtedly divides the scales into good and bad, smooth and harsh, bearable and unbearable; but, beyond this, it does surprisingly little that is advantageous. A few of the commonest scales are by it rendered nearly perfect, consequently but little distinction of character can exist between them. If there did, then a Service or Anthem, a Psalm Tune or Chant, could not be transposed from one of those good scales into another good scale for the accommodation of voices, as is at present frequently done, without violating the character of the keys. Any alteration of character that may be observable, consequent on transposition, is chiefly due to the change of pitch—a separate cause of variety in scales that has not always been sufficiently recognised in discussions on this subject. Then with regard to all the other scales, their "distinctive character" arises from their being more or less out of tune. For instance, some of those with flats have, on account of the lessened intervals-extreme thirds instead of perfect fourths, and extreme seconds in place of minor thirds (see examples 6, 10, 13, 14, and 16)—a melancholy, tame, and limping character: others with sharps for the signature have, on account of the augmented intervals—diminished fourths for major thirds, &c. (see examples 5 and 12)—an excited, restless, and stilted character: while the extreme keys, which comprise both diminished and augmented intervals, are so crude as to be altogether intolerable. See example 12. The "character of the key," therefore, does not appear nearly so distinctly among the good scales as among the bad; and as those having the most character are the very ones that are recommended to be avoided—even by those who advocate the system of tuning that produces them,—it is obvious that the preservation of the "character

of key" can form no well-grounded argument in favour of the retention of the unequal system of temperament. Scheibler\*, speaking historically of the arguments that had been used by the old German theorists, a century ago, in defence of this primitive method of tuning, and which were identical with those put forth for a similar purpose in England at the present time, says, "Such a modification, or rather corruption of the scales, was called temperament; and, strange to say, the old theorists advocated the adoption of such unequally tempered scales, on the plea that the different degrees of deviation from the mathematical purity tended to give them a greater characteristic difference of effect, and thereby give a greater power of colouring to the musical art: a plea that represented a necessary evil in the colour of a real advantage and benefit."

699. When even the most sincere supporters of the theory of securing "distinct character of key," by means of the unequal tuning, discovered good reason for dreading its effect when it was secured, the inference was but a natural one that there must have been something inherently defective in that principle of tuning. Indeed, had it been otherwise, the most eminent organ-builders, organists, and mathematicians, German as well as English, would not for so long a period have directed their attention to devising means for *superseding* it; and which some proposed to effect by means of extra keys; others by a system of equal temperament.

Equal temperament recommended on the same grounds.

700. As much stress, however, is still at times laid on the little that the unequal temperament effects for *agreeable* distinction of key, it may not be out of place here to quote what has

been advanced on the other side, i. e. in favour of the equal system of temperament. Bombet, in his life of Haydn, pages 98, 99, and 100, has given a list of keys, with observations in reference to this subject, which are here extracted.

"F major..... This key is rich, mild, sober, and contemplative.

D minor..... Possesses the same qualities, but of a heavier and darker cast: more doleful, solemn, and grand.

G major..... Gay and sprightly, Being the medium key, it is adapted to the greatest range of subjects.

E minor..... Persuasive, soft, and tender.

A flat major...

The most lovely of the tribe. Unassuming, gentle, soft, delicate, and tender, having none of the pertness of A in sharps. Every author has been sensible of the charm of this key, and has reserved it for the expression of his most refined sentiments.

F minor..... Religious, penitential, and gloomy.

A major..... Golden, warm, and sunny.

F sharp minor . Mournfully grand.

B flat major... The least interesting of any. It has not sufficient fire to render it majestic, or grand, and is too dull for song.

G minor..... Meek and pensive. Replete with melancholy.

 $<sup>^{\</sup>ast}$  An Essay on the Theory and Practice of Tuning, by Scheibler, published by Robert Cocks and Co. page 26.

B in sharps. . . Keen and piercing. Seldom used.

C major..... Bold, vigorous, and commanding; suited to the expression of war and enterprise.

A minor..... J Plaintive, but not feeble.

D flat major... Awfully dark. In this remote key, Haydn and Beethoven have written their sublimest thoughts. They never enter it but for tragic purposes.

Ample, grand, and noble. Having more fire than C, it is suited to the loftiest purposes. In choral music, it is the highest key, the treble having its cadence note on the 4th line.

B minor..... j Bewailing, but in too high a tone to excite commiseration.

E flat major... Full, and mellow: sombre, soft, and beautiful. It is a key in which all musicians delight. Though less decided in its character than some of the others, the regularity of its beauty renders it a universal favourite.

C minor...... Complaining: having something of the whining cast of Bminor.

E major..... Bright and pellucid: adapted to brilliant subjects. In this key Haydn has written his most elegant thoughts. Handel mistook its properties when he used it in the chorus, "The many rend the skies with loud applause." Though higher than D, it is less loud, as it stretches the voice beyond its natural powers.

It is sufficient to have hinted at these effects. To account for them, is difficult; but every musician is sensible of their existence."

701. Enough is set forth in the above quotation—even allowing something for over-colouring—to argue a great superiority on the part of the equal temperament over the unequal on the question under consideration; not the least of its greater excellencies consisting in its transforming the otherwise "wolfish" key of A flat major into "the most lovely of the tribe."

Temperament, as the only source of distinction of key, questioned.

702. But, in truth, it appears doubtful whether the question of "character of key" should ever have been *so much* mixed up with that of "temperament" as it has been, since writers are

by no means unanimous as to the *source* of that distinction; some even going so far as to doubt whether it exists at all, save in education and imagination.

Pitch supposed to exercise an influence in establishing the character of key.

703.

racter of nature, the nature, the nature, the nature, the nature of the nature.

703. In unequally tempered instruments, a distinct character of key undoubtedly exists; but it is of so untuneful a nature, that, instead of proving an *advantage*, it is a source of

racter of key.

nature, that, instead of proving an advantage, it is a source of pain to sensitive ears, as Dr. Burney has testified in the passage quoted in paragraph 697, page 152. The equal temperament removes the cause of the crude distinction; but, in doing so, it, in the opinion of some, must also destroy all difference between one key and another. This appears to be only a natural inference; yet experience shows that on an equally tempered instrument, such as the pianoforte, for instance, a very visible distinction of key does exist. Some would account for this by supposing that

a sort of unintentional temperament must find admittance; that the tuner, unconsciously, has perhaps a bias in favor of certain keys. Others would attribute the distinction to the influence of a second and independent agency, namely, pitch, or the grave and acute qualities of sound. As to the manner in which that influence is exercised, they propose to account for it by supposing that, when an author composes a piece of music, he first determines his key, and then confines his ideas to the proper compass of the voices or instruments for which he is writing. Thus, in penning a vocal piece for a treble voice of average compass, if c2 be taken as the key-note, the available range would be half an octave upwards, and a whole octave downwards; if f1, it would be a whole octave upwards, and half an octave downwards; if a1 flat, it would be a sixth upwards, and a sixth downwards; and so on; and that each separate melodial range has perforce its own distinct series of attendant harmonies. students and auditors, by performing and hearing music so written, are thus gradually led to ascribe to each of the keys a specific character. In this case, however, the primary influences would appear to be the limits of the voice, and other circumstances under which the music was written, rather than any inherent and peculiar property in the pitch. If any specific quality ever belonged to certain sounds-of which sounds the musical scales are formed,-that quality would continue to exist; therefore, on an alteration of pitch taking place, such as has actually occurred, by ascent, to the extent of a semitone, since the time of Haydn, the scales that formerly had sharps for the signature, though now having flats, would still be brilliant: and those which had flats, though now having sharps, would be the reverse. Music written, in the last century, in the "golden, warm, and sunny" scale of A major, would now be heard in "the least interesting key" of B flat major; and so on: whereas no such perversion of sentiment has ever been declared to have taken place.

The internal resources of the musical art capable of giving any character to any key.

704. The probability is, that neither temperament nor pitch, although both capable of exercising great influence, have so much to do with giving "greater power of colouring to the musical art" by means of the establishment of the so-called

"character of scale," as the internal resources of the art itself. For since music has become a language, as well as a science and an art, composers have been enabled to express vehatever they please, in any scale they please. They have drawn music of a given "character," and its opposite, from one and the same scale. Thus, if Handel selected the "bold, vigorous, and commanding" scale of C major for the "Horse and his Rider" chorus, he employed it with equal success also for his "Dead March in Saul." If Mendelssohn adopted the same scale, "expressive of war and enterprise," for his "Military Duet," he used it no less felicitously for his sweet and peaceful aria, "O rest in the Lord." If he fixed upon the scale of G minor, "replete with melancholy," for his most pathetic second movement in the instrumental introduction to the "Lobgesang," he adopted the same "meek and pensive scale" with equally perfect success also for two of his most vivacious "Scherzos," those in the "Ottetto" and the "Midsummer Night's Dream" music. Weber selected the "awfully dark and tragic" scale of D flat major for his inspiriting "Invitation to the Dance." But to whatever circumstance, or combination of eircumstances, the distinction of scale observable on an

equally tempered pianoforte or organ is to be ascribed, one thing is evident;—if the unequal temperament was felt to be *insufficient* for the purposes of church-organ accompaniment in the *seventeenth* century, as is evidenced by the unwearied attempts that were made to *get rid* of it, it cannot be sufficient in the nineteenth, now that the use of a far greater number of scales has become unavoidable, from a variety of causes.

Characteristics of equal temperament. 705. We have heard how "out of tune" the unequal tuning makes some of the scales that are even in constant use; and we have seen the cause. The equal temperament removes that cause, by, among other things, tempering the sound of all the short keys, so that they will serve either as the flat to the white key to the right, or as the sharp to the white key to the left. Its influence in the enharmonic scales, which is considerable, is not here dwelt upon. The equal temperament, by rendering each of the twelve fixed sounds susceptible of answering two or three distinct purposes, possesses advantages, as well as a degree of practical simplicity and efficiency, quite peculiar to itself.

706. In distributing the wolf equally among all the scales, the major thirds in a few common keys are made rather sharper than in the unequal temperament. This—the most grave objection taken to the equal system of tuning—never amounts to a striking defect, while in many instances it necessarily becomes a positive beauty. It is well known that the most perfect organ and instruments in existence, the human voice and the violin, can produce all the gradations of the enharmonic scale; yet both singers and performers on string instruments prefer making the leading note not a perfect third to its root, but sharp. And as every major triad, at the same time that it forms the tonic triad of one scale, c for instance, also forms the dominant of the fifth below, f;





it follows that its third, e in the above examples, as the leading note of that dominant harmony, accords more closely with the custom observed by the best practical musicians, from the very circumstance of its being sharper than perfect. Besides this, the sharp thirds infuse a freshness and spirit into the common keys, which according to the old temperament they do not possess; added to which, they relieve the extreme keys from that undue proportion of the dissonance which renders them scarcely bearable on an unequally tempered organ. Besides this, the equal temperament much improves the effect of the whole series of minor scales; in which, it will be recollected, a very considerable proportion of the English church music is written. Again, as nearly all well-cultivated voices have been tutored at an equally tempered pianoforte, a similarly tempered organ must prove the best accompaniment to them. No singer would think of sounding for semitones such intervals as those which occur on an unequally tempered organ between D and E flat, or between G sharp and A; or such as those between A flat and B flat, or between C sharp and

D sharp for whole tones; or such as those between A flat and C, or between B and D sharp for major thirds. In this respect, singers have frequently been censured for "singing out of time," when the fault has rested solely with the unequal temperament of the organ on which they have been accompanied.

707. Then, in practice, the equal temperament is the only system that affords unfettered facility for the transposition of a piece of music (when that may be required), without distorting the intervals of its melody, or rendering the progress of its harmony crude and exaggerated. In this variable climate, it frequently happens that, by transposing a psalm tune or a chant a semitone or a whole tonc lower, the voices of a choir or congregation may be spared much exertion and unnecessary fatigue. Besides this, organs vary more or less in pitch; and if an instrument be tuned very high, the music can then be transposed without harshness being imparted to it. In the Harmonicon for 1824, a correspondent states that "till of late years the organ in St. Paul's Cathedral was half a note above the usual standard, and the organ-part of the music performed at the Feast of the Sons of the Clergy was therefore obliged to be transposed half a note lower than the other parts, for the accommodation of the organist." It is easy to conceive how horrible several movements in Handel's Dettingen Te Deum must have sounded when thus transposed into D flat, A flat, B flat minor, &c. in consequence of the unequal temperament of the organ. A recurrence of such untuneful missoundings in St. Paul's is now permanently averted, the instrument in that cathedral having been recently re-tuned on the equal temperament principle, owing to the enlightened views entertained by the present organist, Mr. Goss. And it is worthy of observation, that, at the Bicentenary Festival Meeting of the Sons of the Clergy held in that edifice this year (1854), it was universally remarked "how well in tune the voices were with the organ," the fact being that the organ had never before been in tune with the voices.

708. One of the earliest and most earnest advocates, in England, for the application of equal temperament to the organ was the late Dr. Crotch—himself a very great authority,-who directed attention to the subject, on the last page of the second edition of his "Elements of Musical Composition," in the following words:-" The author cannot but regret that the preference of English organists for the old method of tuning has been (as he is informed) hitherto so strong and determined, as to have resisted and repelled the attempts made to introduce the equal temperament into our cathedrals and churches. He has for many years uniformly recommended that this system should have a fair trial, upon the principle that as all tempered fifths and thirds offend the ear, those systems which contain such as are most tempered and most discordant cannot be preferable; especially in an age when the keys which have four sharps and three flats can no longer be excluded from general use. It has at length been fairly tried, and, having carefully examined it, he feels convinced that its practicability and superiority are as unequivocal on the organ as they are allowed to be on the pianoforte, and on all other instruments which contain only twelve different notes in each octave. He continues to press these opinions, not merely because they are his own, but because, in so doing, he is contending for the far higher authority of the judgment and practice of one whom, he trusts, his opponents must venerate and admire—the greatest of all composers for his sacred instrument—

# CHAPTER XXVI.

#### THE TUNING OF THE ORGAN.

Laying the bearings; and extending their influence to the Stops generally.

709. The first step taken, when tuning an organ, is what is technically termed "laying the bearings." This process, after adjusting the starting sound to the pitch of the tuning-fork, con-

sists in tuning the remaining eleven sounds of the octave by intervals of third, fourth, fifth, sixth, or octave, up or down as the case may be, and at the same time of making those intervals "bear" nearer towards or farther from the sounds from which they are being calculated than if they were being tuned absolutely perfect.

710. The following scheme exhibits one of the most approved methods of laying the bearings on the unequal temperament principle:



The bound note is in each case supposed to be tuned; the other is the one to be adjusted. In laying the bearings, all the thirds, fourths, and sixths, that are tuned upwards, are made a little sharp, and those that are tuned downwards, rather flat. The fifths, on the contrary, are tuned a slight degree flat upwards, and sharp downwards. As the tuner proceeds with his work, he occasionally tries the temperament of a note just tuned with some other note previously adjusted, to ascertain whether the bearings are being laid correctly. These references are called *trials* or *proofs*, and are made by adding the major third, fourth, or sixth, above or below, to the note just tuned. If the intervals upwards prove to be rather greater than perfect in all cases, except between c sharp and f sharp, which should be rather flat, all is right; but if otherwise, then some of the previous bearings are not quite correct. The proofs are, in the above scheme, indicated by the initial letter p.

711. In laying the bearings according to the equal temperament system, the tuning is frequently proceeded with by fifths and octaves only, as shown in the following example:




712. The bearings are laid in and about the middle octave and a half of the Stop, as will be perceived on referring to the notation of the two last examples; and the Stop usually selected for the purpose is the Principal, the pitch of that Stop being the medium one between the Unison and small Stops. The bearings having been laid, the remainder of the Stop is tuned in octaves to the pipes already adjusted. After this, the Unison Flue-stops are tuned, and then the smaller Stops; the Reeds being left till last. The fifth and third-sounding Stops, as also the fifth and third-sounding ranks of the Compound-stops, are tuned in absolutely perfect thirds and fifths to the Foundation-stops.

How the pitch of the several kinds of organ-pipe is altered.

713. A Large Open Metal Flue-pipe has its pitch raised by cutting away a ring of the metal from off the top of the pipe, and is lowered by soldering a ring on. Or the pipe is furnished

with a sliding-cap or cylinder, which is slipped up or down, according to whether the pitch of the pipe is to be lowered or raised. Sometimes a large pipe is tuned by a slit made in its back at the upper end. This is particularly the case with Front Pipes. By bending the two edges apart, so as to leave an aperture, the pitch of the pipe is sharpened, and by closing them, it is flattened.

714. A Small Open Metal Flue-pipe is tuned by an instrument constructed for the purpose, that is conical in shape, and called a Tuning-horn. Tuning-horns are of many different sizes, all of which come into requisition in the course of "tuning an organ through." The larger ones consist simply of a hollow Cone (fig. 101), made of brass; the smaller, of a handle (fig. 102) with



a solid metal Cone at one end (a), and a hollow Cone at the other (b). Through the instrumentality of a Tuning-horn, the top of a pipe may be contracted or expanded; i. e. its edge may be drawn in or turned out as occasion may require.

as possible in tune. If any pipe is still a slight degree too flat, the pointed end of the cone is pressed into the aperture at the top of that pipe, which turns the edge a little outwards, and so slightly raises its pitch. If, on the contrary, a pipe is a little too sharp, the hollow part of the cone is forced over the top of that pipe, which presses its edge inwards, and thus has the same effect that very slightly lengthening the pipe would. The pipes are therefore first cut down as nearly in tune as may be, and the tuning-horns are then used for their nicest adjustment.

716. A Large Open Wood Flue-pipe is sharpened by cutting the body of the pipe shorter, and flattened by nailing a piece of board as far over the open end of the pipe as is necessary to make it give its true note.

717. A Small Open Wood Flue-pipe has a metal shade fixed into the upper end of the back of the pipe. To flatten the pitch, this shade is bent down over the orifice of the pipe; to sharpen it, the shade is raised.

718. As the Compound-stops have several pipes to a note, and all these would of course sound at the same time, and be apt to confuse the tuner, a small mop (fig. 103) is thrust into each pipe of the given note, excepting the one about to be tuned, to silence them. Sometimes the various ranks of pipes that form a Compound-stop are governed by as many small sliders, capable of being drawn separately. Where this is the case, mops are not used, as the small special slider to a single rank of pipes can then be drawn without disturbing any of the others.

719. Stopped Metal Pipes, whether entirely or partially closed, are furnished with a cap, and by this they are occasionally tuned. By pressing this cap down, the vibrating column of air within the pipe is shortened, and the sound of the pipe is therefore raised, and vice versa. This mode of tuning Metal Stopped Pipes is, however, more prevalent in Germany than in England, in consequence of the Quintaton and some other Stops having fixed ears and beards. In England, Stopped Metal Pipes, which

have generally very large ears, are more frequently tuned by those ears. By bending them nearer towards the mouth of the pipe, they lower the pitch; and by bending them outwards, they, on the contrary, raise it.

710. Stopped Wood Pipes are closed with a stopper, that is forced into the upper end of the pipe; and in this respect differs from the cap of the Stopped Metal Pipe, which encloses the top of the body. Its influence, however, is the same; namely, that of sharpening the pitch of the pipe the further it is pressed down, and of flattening it, the more it is drawn upwards.

721. Reed Pipes are tuned by means of the tuning-wire, on raising which, the vibrating portion of the tongue is lengthened, causing it to give a deeper tone; and on depressing which, the vibrating portion of the tongue is shortened, and the pitch consequently raised.

The pitch of the organ altered by the heat and cold in different seasons. The extent of this alteration.

722. The pitch of the organ is affected to a considerable extent by the altered temperature of the atmosphere at different seasons of the year. This fact was satisfactorily elucidated by the late Dr. Smith, Master of Trinity College, Cambridge, who

has given the results of his experiments, in his work on Harmonics, page 192, 2nd edition:—"I found," he says, "that the particles of air in the cylindrical pipe, called d¹, in the middle of the Open Diapason, made 262 complete vibrations, or returns to the places they went from, in one second of time. This experiment was made in the month of September, at the time when the thermometer stood at temperate, or thereabouts. But, upon a cold day in November, I found, by a like experiment, that the same pipe gave but 254 complete vibrations in one second; so that the pitch of its sound was lower than in September by something more than ¼ of a mean tone."

723. "And, upon a pretty hot day in August, I collected, from another experiment, that the same pipe gave 268 complete vibrations in a second of time; which shews that its pitch was higher than in November by almost half a mean tone."

724. "By some observations made upon the contraction and expansion of air, from its greatest degree of cold in our climate to its greatest degree of heat, com-

103.

pared with Sir Isaac Newton's theory of the velocity of sounds, I find also that the air in an organ-pipe may vary the number of its vibrations made in a given time in the ratio of 15 to 16, which answers to the major hemitone, or about  $_{1}^{7}$ <sub>2</sub> of the mean tone, and agrees very well with the foregoing experiments."

725. The influence of a change or rise in the temperature on the pitch of an organ, is sometimes rather strikingly illustrated during the evening meeting of large congregations, and also in concert-rooms; and it is not unfrequently also attended with some temporary inconvenience. On account of the church or room being filled with people, the temperature soon rises; the atmosphere in and around the pipes of those parts of the organ that are exposed to it undergoing a similar change. The metal pipes themselves also become warm from the heated air coming in contact with them; some metals and compounds, however, being sooner influenced than others. When the parts of the organ in question are played, supplied as they now are by a warm air, and with their pipes also warm, they are found to sound much sharper than before. The Swell pipes, however, supposing the shutters of the box to have been kept closed, are surrounded by an atmosphere of the original temperature, the heat not having been able to penetrate through the box; they, therefore, remain cool; and the warm air from the bellows as it passes into them becomes chilled and is reduced to its original density; the consequence being that the Swell, at its unaltered pitch, sounds, perhaps, a quarter of a tone flatter than the Great organ. This nonaccordance of pitch is often very detrimental in its effect; but it can generally be obviated by fixing the Swell open, whenever the organ is not being used during the evening, so as to allow the warm air to reach its pipes, and raise their pitch with the rest of the organ. Care should afterwards be taken to leave the Swell open all night, that its pipes may cool with the other parts of the organ; or it may be too sharp when next used. The writer has known a concert-room organ to rise as much as a semitone in pitch in the course of an evening's performance, when the temperature has very much increased.

726. When an organ has been thrown much out of tune by a great change of temperature, it will be found that the Flue-stops are not so much at variance among themselves, nor the Reeds, as that one class of Stops has bodily separated from the other. This change is commonly attributed to the Reeds, which are said to have "gone flat,"—Reed-pipes being rather proverbial for their instability of pitch;—but in this instance the alteration appears to rest rather with the Flue-stops.

727. A simple and ready illustration of the influence of heat in raising the pitch of a Flue-pipe may be obtained in the following way. Take out the top pipe of the Dulciana, if it be in tune, and hold its body in the hands until it becomes perfectly warm, and then return it into its place, and sound it with the Stopped Diapason. It will then be found to sound very sharp. This is because the warm pipe raises the temperature of the air as it passes through it. If the two pipes are allowed to continue to sound together, a rapid beat will at first be heard; but as the current of air gradually cools the pipe, the beats will become slower, until they at last entirely disappear; as the pipe, on attaining its first temperature, returns to its original pitch.

728. As to the cause of the change of pitch, from alteration of temperature, some have been inclined to attribute it partly to the expansion of the metal in warm weather, and its contraction in cold; and partly to the lighter density of the atmosphere in summer than in winter. Dr. Brewer, in his recently published work on "Sound and its Phenomena," page 255, says, "the reason is, an increase of temperature increases the *elasticity* of the pipes; in consequence of which, they vibrate somewhat more quickly, and render a higher note." This refers to Flue-pipes. With regard to the tongues of Reed-pipes, which are of brass, as the heat expands them, it would be supposed that they would vibrate slower, and produce a lower sound; but if their elasticity also is increased, the one influence may to some extent balance the effect of the other.

729. As being connected in some degree with this subject, reference may be made to the cause of the draught that is so generally felt to issue from the region of the keys of an organ. The warmer atmosphere, as it comes in contact with the numerous metal pipes, becomes chilled; and its density being increased, it descends. In this manner a constant eddy is produced, resulting in the disagreeable effect referred to, and which has been attributed to almost every cause but the right one.

## CHAPTER XXVII.

# THE PITCH TO WHICH AN ORGAN SHOULD BE TUNED.

The question a most be tuned, introduces to consideration several very interesting particulars. A concert-room organ would, as a matter of course, be tuned up to the present concert-pitch, in order that it may accord with the orchestral instruments. With regard to church organs, however, this same question cannot be satisfactorily answered in so brief a manner. There are several circumstances which first demand attention, particularly if the establishment of a Choral Service is contemplated.

The presumed lower pitch of two centuries since.

731. Much has been written, at various times, to show that the musical pitch has been gradually rising for the last two centuries; and the opinion has even been expressed, that in

Tallis's time it was some two tones lower than it is now.

The difficulties inseparable from that theory. 732. The difficulty, or rather impossibility, has been to reconcile this theory with the *notation* of the venerable pieces of church harmony of the sixteenth and early part of the

seventeenth centuries. All who have been accustomed to assist in the Choral performance of the Services and Anthems of the early English Church composers, must have observed that the parts, generally speaking, lie so low for the voices that they can be sung only with some difficulty, even at the present supposed elevation of a major third above the original pitch; and this circumstance has naturally led to much speculation as to whether they ever *could* have been sung at a pitch much, if at all, below that in present use.

733. Several different theories have been propounded, with the hope of settling this by no means unimportant question.

734. Some have supposed that the range of the human voice must have been lower at that period than it is now; others, that the composers could not have studied the compass and convenience of the voices for which they wrote; while others maintain that the compositions in question were not contemplated by their authors to be sung to any definite pitch, but were intended to be transposed, to suit the voices, as occasion might require. All these explanations, however, are accompanied by some circumstance that proves fatal to its unqualified reception. Let us examine them in the order they are above given.

The compass of the human voice supposed to have changed.

735. It must be needless to insist on the extreme improbability of the supposition that nature has found it necessary to revise that which has always been ranked among her most

perfect works; namely, the vocal organ of the human species; particularly as there exists no real difficulty to render the retention of so unseemly an hypothesis necessary. But were it otherwise, the questionableness of such a theory is soon rendered evident by making an analysis of the music of the period already alluded to. In the Services of Tye, Tallis, Bird, Gibbons, Bevin, Farrant, Hilton, and others, the notation of the treble part in no case ascends higher than d2, the fourth line in the treble; while in a few instances it descends as low as tenor a, the second line below. The bass constantly ranges down to FF, and sometimes even to EE; and the inner parts lie proportionably low. The Anthems of the same composers slightly exceed the above upward range in the treble part; but that only rarely. Now, if the pitch, at the time alluded to, were some two tones lower than at present, the above writers must have considered the sound corresponding with the modern b 1 flat, or b 1 natural, the third line in the treble, as marking the full average upward range of treble voices, and an occasional tenor f, the fourth line in the bass, as not too low for them; and further, they must have viewed D D flat, and even CC, the second line below the bass, as sounds quite within the range of the ordinary bass voices; -ideas certainly most opposed to our knowledge and experience of the compass and capabilities of the several voices in existence in the present day. But, inasmuch as the theory of the former existence of a complete series of different, that is, deeper voices, rests solely on the presumed lower pitch of the seventeenth century—and this latter point is not yet proved,—acquiescence in it may for the present be fairly withheld.

The old composers supposed not to have consulted the convenience of the voices they wrote for.

736. With regard to the second suggestion, "that the composers could not have studied the compass and convenience of the voices for which they wrote;" the answer to this must depend entirely on the decision arrived at in reference to the

former question, and, therefore, may also stand over for a time.

The early English composers supposed to have written without regard to any definite pitch, 737. The third supposition is, "that the compositions in question were not contemplated by their authors to be sung to any definite pitch." This, however, does not meet the difficulty. Unless the old English treble voices were as deep as the

modern counter-tenors, and all the other voices proportionably lower, Tallis, Gibbons, and the other church composers of the period, must invariably and intentionally have written their music in a pitch in which it could never have been sung, and have thus rendered recourse to transposition not simply a matter of occasional expediency, but one of constant necessity. Nay, more, as their Services, &c. were from the first intended to be accompanied by the organ (the composers themselves, in many cases, taking their seat at the instrument), and as the organs of that day were tuned according to the unequal temperament;—as, moreover, the music was always written in the scales that were specially fuvoured by that temperament, but out of which, according to the above theory, they must uniformly have been transposed;—it follows,

if the above hypothesis be correct, that the learned composers referred to must have avoided using the *good* keys in performance, if not in writing, and preferred the *bad*. Now, it is not possible that proceedings so needlessly complex and objectionable as those just detailed could have been recognised, still less have received *preference*, at the hands of those who were, in all other respects relating to their art, such methodical and deep-thinking men.

Everything questioned except the presumed lowness of the old pitch.

738. In the attempted solutions hitherto advanced, the judgment of the great English composers of the time referred to, and even the original perfectness of some of nature's own work, the compass of the human voice, have been questioned,

while one thing, the mutability of which is so well known, namely, the *pitch*, has been treated as though it was indisputably a very low one in the sixteenth century.

Strong grounds for believing in the former existence of a high ecclesiastical pitch. 739. Now, although the opinion is directly at variance with all the hitherto received notions on the subject, there are the strongest reasons for believing that the ecclesiastical pitch of the sixteenth and early part of the seventeenth centuries, so

far from being some two tones lower than that now in use, was a whole tone higher than the present concert-pitch.

The sixteenth and seventeenth century organs in Germany a whole tone sharp.

740. During recent visits to several of the organs of Germany, the writer was frequently struck with the extreme *sharp-ness* of the pitch of the *old* organs. Of the three great instru-

ments at Hamburgh, two, namely, those in St. Catharine's Church, which is the oldest, and that in the church of St. Jacobi, built in the seventeenth century (see Foreign Organs in Appendix, Nos. 66 and 67), proved to be a whole tone above the writer's tuning-fork, marked "Philharmonic" pitch. The transept organ in St. Mary's Church, at Lübeck (No 71), another old instrument, on being tested, was also found to be a whole tone above the same pitch; while that in one of the other churches in the same old town (No. 72) was a full semitone above the same pitch. On the enquiry being made of the organists of the three fore-mentioned churches, how they accounted for this circumstance, they explained that their organs were tuned to the church pitch; and it subsequently transpired that in Germany three distinct standards of pitch had at different periods been used to which to tune organs; namely, orchestra pitch, which was the lowest; chamber pitch, a semitone above the former; and church pitch, which was the highest. On extending these enquiries to an organ-builder of that country, that person stated that he had almost invariably found the old organs, which he had been called upon to tune, repair, or replace by new ones, a semitone or a whole tone sharper than the present concert pitch. Not the least interesting proof of the former existence of a high church pitch is to be found in the fact that Sebastian Bach, in his Church Cantatas, in most cases, wrote the organ part a note lower than the other parts; -which circumstance is alluded to by Mr. Macfarren, in his analysis of the contents of the first volume of Cantatas, published by the Leipzig Bach Society, printed in the Musical World for 1853.

A high ceelesiastical pitch believed to have existed formerly in England as well as in Germany.

741. The above facts, in conjunction with others, tended to confirm an opinion the writer had long previously entertained; namely, that in England, as in Germany, there must have existed, at the period of the Reformation, and from that time

to that of the Rebellion, a church pitch quite separate from the orchestral or instrumental pitch; and not only so, but even higher than the modern concert pitch. Every circumstance directly supports this hypothesis, which at the same time removes and reconciles all the difficulties and improbabilities which have encumbered every other view of the same subject.

The very low notation of ancient church music favourable to this view.

742. To begin with a reference to the English Church Music. If we read the notation of the old Services a tone higher, the average compass of the treble parts will then be made to the extent from middle b or  $c^1$ , up to  $e^2$  or  $f^2$ ; and

the bass parts, as a rule, not lower than gamut G or FF; precisely the ranges which are known to be the best for the corresponding voices in church music. By this very simple means the necessity is obviated; for, supposing that the range of the human voice has undergone any modification, it removes all occasion for suggesting that the whole race of church composers of the sixteenth and early part of the seventeenth centuries understood or studied the convenience of the voices so little as invariably to have written too low for them; and it renders it quite superfluous to suppose that that industrious class of writers made a practice of setting their services and anthems in wrong keys, leaving singers and organists to transpose them into the correct ones. William Turner, writing in 1724, says, "when Guido Aretinus reduced the Greek scale into the form now used, there was no sound practised E la, which gave birth to the common proverb, viz. he strains a note above E la," Without going back so far as this quotation would take us, if the pitch in Tallis's time had been some two tones lower than at present, it is difficult to comprehend a cause for treble voices having to "strain" at c2; but if it were a tone higher, it is easy to understand that then, as now, the sound of f<sup>2</sup> sharp could only be produced by the exercise of some exertion.

The frequent transposition of early church music into higher keys, in performance, also in support of this view.

743. In addition to the theoretical evidences already advanced, there are many practical reasons for believing in the former existence of a church pitch in England higher than the present one. For some time past, it has been the custom with Mr. Turle, the organist of Westminster Abbey, to play Gibbons'

Anthem, "Hosanna to the Son of David," which is printed in C, in D major; by which transposition the music is rendered more effective in performance, and far less laborious to the choir to sing. The writer also has for years made a practice of playing Gibbons' Service in G instead of F, and many other pieces a tone higher than they are printed, which experiments have uniformly been attended with so good an effect on the general character of the music, besides affording so much relief to the voices, as to strengthen the supposition that such transpositions were not departures from, but restorations of, the original pitch\*. Again, the writer observed, at the

<sup>\*</sup> All this goes to show the influence of "pitch," and the "compass of voices," on the effect of music, irrespective of temperament.

Bicentenary Festival of the Sons of the Clergy this year (1854), that Mr. Goss played Gibbons' Anthem, "God is gone up," in G, instead of F, as written, in consequence of the parts otherwise lying so low for the voices. The tenors descend to B, and in one case to gamut  $\Lambda$ . By the transposition they had not to go below tenor e or B; but if taken "some two tones lower," they ought to have descended to FF—a sufficiently low note even for bass voices now-a-days.

- 744. Another practical illustration that a high vocal pitch was most probably recognised by the early English church and choral writers, may be gathered from the custom observed at both the metropolitan Madrigal Societies, of almost uniformly taking the pitch of the old English madrigals a semitone or more higher than the notation represents, that is, in about the German chamber pitch of former times, to the great improvement of the general effect.
- 745. Since the above observations were first written, two interesting facts have come to the writer's knowledge, which strongly support the opinion as to a former high church pitch. In the library, at the Exeter Cathedral, is preserved a MS. copy, written about the beginning of the last century, of Tallis's Service in D, transposed into E; and in Dr. Rimbault's library is a copy of Gibbons' Service in F, transposed into G; in both cases the notation, no doubt, being raised, to compensate for the lowering of the pitch, in order that the originally intended sounds might be preserved.
- 746. In 1644, church organs were ordered to be demolished by act of Parliament; and so implicitly was the nonsensical decree obeyed, that very few organs escaped the general destruction; and even the two or three that were spared have subsequently undergone so much alteration in the course of improvement that they could afford little or no assistance in solving the question which has just been considered.

Father Smith's pitch flatter than the presumed ecclesiastical pitch of preceding times.

747. The organs built by Smith and Harris after the Restoration were not tuned to so high a pitch as the presumed choir pitch of the time of Tallis and Gibbons. Smith's pitch, however, was much higher than is commonly supposed, as

may be gathered from the following passage, extracted from "The English Musical Gazette" for January 1819. "It is a remarkable circumstance that all Schmidt's organs were a quarter, and some even half å tone above pitch: this was so severely felt by the wind instruments, at the performances of the Sons of the Clergy, that they could not get near the pitch of the organ. In consequence of this, it was agreed upon, that the organ should be altered to concert pitch, by transposing the pipes, so that the present DDD was formerly CCC, and so on through the organ." To this it may be added, that the pipes to the CCC key are new ones; the two Open Diapason pipes, of wood, standing in the angles of the case to the left of the manuals. The pitch of the Temple organ was also originally very sharp; but was lowered in 1843. Yet neither the St. Paul's nor the Temple organ is even now more than a quarter of a tone below pitch; consequently they must both originally have been quite up to the present concert pitch, and therefore almost mathematically correct, if not quite so. Harris's organs were generally lower in pitch than Smith's. That at Wolverhampton,—part of the one that was originally creeted at the Temple,

—was so until a few years since, when its pitch was raised. It is not certain what was the cause of this difference. Probably it arose from the fact of the French foot measure being greater than the German; which measure, applied to the organ pipes, would necessarily lead to such a result as that just mentioned. It would be an interesting fact to discover positively whether the pitch of the organ stops was formerly regulated by the foot measurement of their longest pipes, or by the number of the vibrations of the column of air within them.

The flattened pitch accompanied by a raised notation.

748. But to turn from such speculations to the written music of the latter part of the seventeenth century. On referring to the sacred compositions by the contemporaries of

Smith and Harris, we perceive this coincidence in support of the opinion that the pitch of that period was flatter than the earlier choir pitch; namely, that certain notes, such as e<sup>2</sup> and f<sup>2</sup>, which scarcely ever appeared in the treble part of the earlier church music, were now of quite common occurrence.

The pitch lower again, at the commencement of the eighteenth century, in England.

749. Soon after the commencement of the eighteenth century, the pitch had again fallen. Possibly Harris's flatter pitch was preferred and accepted as the standard. It is known that the organ in the Chapel of Trinity College, Cambridge,

commenced by Father Smith, and "cut down" and finished by his son-in-law, Schrider, in 1708, was originally adjusted to the pitch which has been shown mathematically to have been a minor tone below the present pitch. The writer of the "Reformation of Cathedral Music," page 25, says, "Dr. Smith (Harmonics, 1749) gives 393 as the number of vibrations of A in a second. Fisher, in 1823, gives 430. Woolhouse ascertained the Philharmonic pitch, in 1835, to have 424. The same note referred to the scale of vibrations C = 512, and derived as a prime harmonic from the subdominant F, will have 426.6. Now the ratio of any of these to 393 is almost exactly as 10:9, which is the ratio of a minor tone, showing the rise of pitch within a single century."

A similar alteration of pitch, at the same period, in France and Germany.

750. What is very remarkable is, the pitch had, soon after the commencement of the last century, fallen as much in France and Germany as in England. Of the three fine organs at Strasburg, built by Silbermann, those in the cathedral, finished in 1716, and that in the Protestant church, proved, on trial in 1853, to be a whole tone below the pitch of the same fork by which the Hamburg organs were tested the preceding year, and found to be a whole tone sharp. The third organ, in St. Thomas's Church, is nearly as flat. The organ in the church of St. Maria di Capitol, at Cologne, built in 1767 by Konig, was also originally flat; and, like the Trinity organ, has since been sharpened.

The lower pitch in the last century accompanied by a further ascent in the notation.

751. In this case, again, the greater depression of the pitch is manifested by the increased upward range of the notation, as is clearly demonstrated by the music of Handel and other composers of the last century, even without the authority

of Handel's tuning-fork, the existence of which further authenticates the supposition. William Turner likewise speaks of the treble voices in his time going some three or four degrees higher than Guido's gamut, which, however, would then have consisted of the same range of *sounds* as in Tallis's time, or within a semitone of it\*.

752. It is evident, then, (1) that the organ pitch has within three centuries varied to the extent of two whole tones; (2) that there have at different times existed three distinct pitches, the highest being the oldest; that in use soon after the commencement of the last century being the lowest; and (3) that the present pitch is about midway between the extreme high and low pitches of former times, and is as nearly as possible identical with Father Smith's.

To which of the three church pitches formerly in use should a church organ be tuned?

753. The question now is, to which of these three different pitches a *church* organ had better be tuned, seeing that music has been written to *all* of them, yet but *one* can be adopted? As the *medium* pitch is at the same time also the true

mathematical one, there can be no doubt but that, theoretically speaking, it would be better that all organs be adjusted to a fork that gives that true mathematical pitch, such as that published by Mr. Hullah, and issued by Mr. Parker, of No. 445, West Strand; but complaints are so frequently made by members of congregations on the one hand, and by singers who have to perform the solo and verse music of the last century on the other, of the inconvenience of singing to the present high pitch, that it is worthy consideration whether it would not be as well to have organs tuned exactly a semitone flat, for the general convenience of the voices, and then for such music to be transposed as may require it, and into such keys as would best suit the particular congregations or choirs. At any rate, it is clear that, to be adequate to the purposes of transposition, all organs should be tuned on the equal temperament system. In that case, music could be transposed by easy semitonal gradations, either upwards or downwards, or by whole tones, without involving crude results, which could not be accomplished on an organ tuned in any other way.

<sup>\*</sup> It is, perhaps, worth mentioning, that several pieces by Handel have lately been transposed into lower keys, and printed with the view of restoring their original pitch.

# DIVISION VII.

## CHAPTER XXVIII.

# ON THE CORRECT USE OF THE STOPS.

- 754. HAVING, in a preceding chapter (see ante, page 112), given an account of the several organ Stops commonly found in English organs, a few words may now be added as to their object and use, as well as their effect when sounded singly or in combination.
- 755. On a correct knowledge of the nature, quality, and pitch,—whether indicated by name or by figures, -of the different organ Stops, depends the good or bad effect of even the best organs. Without a clear perception of what is right in these matters, it is impossible that a performer can be sure, how, under what circumstances, and for what ends, this or that combination of Stops may be the most seasonably employed. However scientifically the organ-builder may have fixed and deduced his scales, voiced his pipes, and truly balanced their tone; however strictly every rule necessary to the production of a "good organ" may have been observed in constructing the instrument; all these important preliminaries necessary towards a becoming and decent accompaniment to the music of the church will be of little avail, if the mind that is to direct their use is but imperfectly stored with the knowledge necessary to secure their proper application. Nor can this knowledge be obtained from books, beyond a certain extent; for a combination of Stops that will answer a particular purpose in one organ, often will not do so, at any rate to the same extent, in another, on account of the different size or proportions of the building in which the organ stands; the varied strength of tone of the similar Stops of different instruments; the situation of the organ in the church; or even the locality of the Stops in the organ itself, for the exigencies arising from which circumstances, or a combination of them, no book could provide. It is, therefore, incumbent on every organist rather to endeavour to ascertain for himself the peculiar excellencies, and perhaps defects, of the individual instrument at which he is chosen to preside, and so discover the method of applying the former to special purposes with the best effect, and of hiding the latter as far as may be.
- 756. There are certain general and fundamental rules, however, concerning the appropriate method of combining the Stops, which may be pointed out. Besides the

combinations about to be specified, others of a less common kind will be found to follow the suggestions for the introduction of certain Stops in the specifications given in a subsequent chapter; beyond which, as has been already said, all must be left to the organist's good judgment, and the capacity of his instrument.

General rules for the stops. 757. The first step essential towards a correct knowledge of the Stops. the right use of the Stops, is an acquaintance with the general method of combining the members of the three great classes of Foundation, Mutation, and Compound-stops, so as to secure, in all cases, the predominance of the foundation tone.

758. The Foundation-stops, as explained in a preceding chapter (see ante, page 110), produce a sound agreeing in name with the key pressed down; and are of 16, 8, 4, and 2 feet on the Manual, and of double size on the Pedal.

759. The larger Foundation-stops will, for certain purposes, produce an appropriate effect alone; as, for instance, the 8 and 4 feet Flue-stops, or the 16, 8, and 4; or in some cases the 16, 8, 4, and 2 feet, though the latter combination will necessarily be somewhat thin and transparent.

760. The Mutation-stops, i. e. the Fifth, Tenth, Twelfth, Tierce, Larigot, &c. are not intended to be used alone; the class to which they belong being designed expressly for the filling up of some of the intervals between the Foundation-stops; and for so doing away with the leanness of bare octave-work. They depend on the first class of Stops for their good effect, and must not therefore be employed without them. In using the Mutation-stops, care should be taken that the Foundation rank, the next smallest in size, is also drawn with it to cover it; otherwise, its sound will appear too remarkable, and perhaps even offensive. Thus the Twelfth should always have the Fifteenth drawn with it; and the Tierce or Larigot, the octave Fifteenth, at any rate in the bass.

761. The Fifth and Tenth, being *Double* Mutation-stops, forming the Twelfth and Tierce to the Double Open Diapason, constitute no part of the *Unison* harmonic series; for which reason they should never be drawn without their Fundamental-stop of 16 feet. An exception to this rule is sometimes made abroad, with good effect, on the pedal; concerning which, more farther on.

762. The Compound-stops can only be successfully used when blended with some Foundation and Mutation-stops.

763. The Foundation-stops give distinctness, the Mutation-stops fulness, and the Compound-stops brightness and point to the general organ tone.

The character of tone of some of the leading Stops; and the purposes to which they may be applied.

764. The Unison-stops are, of course, the most important in an organ, as they are also generally the most numerous. In drawing any of these separately, or blending them together, attention should be directed to their various qualities of tone.

Some Stops possess a character that renders them more applicable to one kind of music than to another; and, again, some mix better than others together.

765. Open Diapason. The tone of this Stop is full, sonorous, and solemn. It is the one the best adapted for the performance of slow music in dispersed harmony, particularly when there are many suspensions occurring in the progress of the piece.

The Stopped Diapason is advantageously added to the Open Diapason, when used as above, to give body to the pure sounds of the open pipes; and the Dulciana, if there be one on the same Clavier, is also drawn, as adding slightly to the general effect. All reedy-toned Flue-stops, as the Gamba, &c. are foreign to the purpose, as interfering with the smooth and *velvety* tone of the best English Diapasons.

- 766. The Stopped Diapason is delicate and flutey in its character of tone. Generally speaking, it tells better, when used singly, for solo purposes than for full harmony; its tone being too weak and not sufficiently sonorous for the latter purpose. In short passages of tranquil character, however, it can be used with good effect. As a Combination-stop, it is one of the most useful in an organ. It is the best one to use with the Clarionet, with the tone of which it blends admirably; or with the Swell Hautboy, when the latter is to be employed as a Solo-stop. In certain cases it forms an excellent accompaniment to a single voice, being very prompt in its speech, as well as light and travelling in its tone.
- 767. The Dulciana is usually a Stop of great delicacy, smoothness, and gentleness of tone. Its sound is lighter than that of the Stopped Diapason, but clearer and of a more singing character. It is the most used singly as an accompanimental Stop to some of the Solo-stops on the other Manuals, as the Stopped Diapason in the Great Organ, or the Hautboy in the Swell; its own situation being usually on the Choir Manual. The Dulciana may, however, be effectively employed as a Solostop, in the treble part, in cantabile passages, with the Diapasons in the Swell (closed) by way of accompaniment, and also much in the same way as the Open Diapason, i. e. in full harmony, to which Stop it may be considered as a diminutive or echo.
- 768. The Gamba, from the resemblance of its tone to that of stringed instruments, is peculiarly well adapted for four-part playing, particularly for music that has many chromatic progressions in the harmony. When of weak intonation, it tells best by itself; but when of strong tone, it sounds better when blended with the Stopped Diapason, Clarabella, or German Hohl-flöte. For accompanimental purposes it requires to be used with some caution. A Gamba of strong intonation, used alternately with the Stopped Diapason and Stopped Flute (one of them of metal) on another Manual, produces a most charming effect. The pungent tone of the former, followed by the liquid tones of the latter combination, present a most exquisite contrast. What has been said of the Gamba, applies mostly also to the Keraulophon and other reedy-toned Unison Flue-stops.
- 769. The Clarabella, from its powerful flutey quality, forms an excellent Unison Solo Stop by itself, at times when a strong and decided flute tone is required. As a Combination Stop, for use with the Clarinet or Hautboy, it sometimes imparts too much body to render the imitation close.
- 770. The Trumpet in the Great Organ is seldom used as a Solo-stop. When it is so, it should always be accompanied by the Diapasons. When thus blended, it sounds well, if played in harmony; in major keys, its effect being grand and dignified; and in minor, solemn and impressive. Diatonic progressions of harmony are better suited to the tone-character of this Stop than chromatic. The Swell Trumpet is much used for choral accompaniment, as well as for solo-playing; and the same may be said of all the other full Scale Unison Reed-stops of that de-

partment. When employed for the former purpose, it has the Diapasons drawn with it; and often, also, the Principal and smaller Stops, according to circumstances. As a rule, all Reed-stops should have some Unison Flue-stop, or Stops, combined with them, to add body to the penetrative and powerful character of that produced by the Reeds.

- 771. Clarionet. The best Flue-stop to draw with the Clarionet is the Stopped Diapason; as this not only mixes well with the former, but does not give more body and thickness to the tone of the Stop than it should have in its imitative capacity, and it is not generally used in any other. This Stop is often used, among other purposes, for playing out the whole or a portion of the melody of a Psalm Tune upon. For an accompaniment thereto the Swell Diapasons and Hautboy answers well, with a couple of soft Stops (16 and 8 feet pitch) for a Pedal Bass.
- 772. The Hautboy, as already intimated, when about to be used as a Solostop, will tell best with the Stopped Diapason only added. The instrument itself (Hautboy) is by nature but of thin tone; hence, to preserve the resemblance between the tone of the original and the prototype, a Flue-stop of light but firm tone is the most appropriate to be employed. When used for the purpose of accompaniment to voices, the Hautboy Stop tells best combined with both the Diapasons, and perhaps also, though not always, with the Principal; which latter Stop will sometimes blend and sometimes not, according to the exact character of the Reed-stop.
- .773 In blending together some of the smaller Foundation Stops with the Unison, for the purpose of accompaniment, they are generally taken in their regular octave progression. Thus, after the 8-feet Stops are drawn, some of those of 4-feet are next brought on; and then, if necessary, those of 2-feet; but not those of 2-feet first, and then others of 4-feet. The Flute or Principal, or both, according to the strength of the unison tone, therefore follow the Unison Stops; and then the Piccolo or the Fifteenth, if necessary; and not vice versā. For particular effects, unusual combinations are made; as, for instance, 16 and 4 feet Stops without any of 8; or 8 and 2 feet Stops, omitting those of 4 feet. Such combinations produce the best effect when compounded of members of the covered or light-toned Flute-work. The tone of Stops of the Open Diapason species is generally too strong and sonorous for such purposes.

On the combination of the Stops for the production of any required strength of tone.

774. By means of an appropriate combination of the Stops which all well-arranged or complete organs contain, any strength of organ-tone may be obtained, from the softest to the loudest. The kinds of Stop arrangement that will produce these several

desirable and necessary gradations of sound, may be distinguished by a particular letter or letters, thus: PP, P, MP, MF, F, and FF; under which heads may be conveniently given such combinations as will produce the strength of tone that the musical meaning of those letters are understood to indicate.

775. PP. For the production of a *Pianissimo*, a single soft-toned 8-feet Flue-stop\* on the Manual will be sufficient as a Stopped Diapason, Dulciana, or Gamba,

<sup>\*</sup> The size of Stop here spoken of may or may not be its standard size. "When, in organ music, "8-feet Flue Stops" are directed to be used, the expression is understood to mean the combination of all Stops, except the Reeds, that give the 8-feet sound. This interpretation is always accepted when speaking of the use of the Stop.

- &c. On the Pcdal, its own Bass (16 feet) may be drawn, or, if that is not present, some other Stop of an equally subdued tone. It is generally of advantage to add a "helper" (that is, a Stop giving the octave above), to the Pedal: this can either be a soft Pedal Stop of 8 feet, or the Manual Stop coupled to the original Pcdal Stop.
- 776. P. for Piano, all the smooth-toned Manual 8-feet Flue-stops. On the Pedal, the corresponding 16-fect Stops should be drawn. The addition of an 8-feet Open Stop will in many cases improve the effect of the Pedal; but, if a Stop of this kind should not exist in that department, one of a similar nature can be borrowed from the second Manual; or the first Manual may be coupled to the Pedal.
- 777. M.P. a *Mezzo Piano* is gained by adding the 4-feet Flue-stops of the Manual (Principal, Flute, &c.) to those already named; and those of 8 feet to the Pedal.
- 778. For the production of a medium strength of tone between the two last-given gradations, combine all the soft 8 and 4 feet Manual Stops, as the Stopped Diapason, Dulciana, and Flute. These, together, possess more brightness, but less fulness than the former, and less roundness than the latter.
- 779. M.F. A *Mezzo Forte* is produced by adding the  $2\frac{e}{5}$ -feet and 2-feet Stops (Twelfth, Fifteenth, &c.) on the Manual, to those of 8 and 4 feet, and those of  $5\frac{1}{5}$  and 4 feet to the Pedal.
- 780. F. For a *Forte*, the collected Compound-stops may be brought into play. When a medium between the two last-mentioned gradations is required, only one Compound-stop need be drawn.
- 781. FF. A full climax is secured by adding the Reed-stops (Trumpet, Clarion, &c.) to the foregoing.
- 782. A medium may here again be obtained by adding the 8-feet Reed-stop only to the Flue-stop, previously drawn out.
- 783. The Manual 16-fect Flue-stops (Doubles) have not been specified in any of the above gradations, because it is not so much the nature of such Stops to add power as weight, gravity, and solemnity, to the tone of the other Stops. Their use with or rejection from any particular combination, therefore, does not so properly come under consideration, when the question of strength of tone is being discussed, as when that of character of tone is being treated of. Almost any combination, whether loud or soft, may receive the accession of a 16-feet Stop with advantage, under particular circumstances. Thus, some soft or moderately strong combinations that would perhaps give a tone approaching towards joyfulness, becomes imbued with a more serious character, when a Stop of 16-feet pitch is added thereto, and is therefore rendered a more fit accompaniment to music of a sad character. A strong combination which possesses the brilliance and point of the Mixture-work, and perhaps also the impressiveness of the Reed-stops, acquires weight and magnificence from 16-feet Manual Stops, particularly if they are accompanied by Double Mutation Stops and a 16-feet Reed-stop.
- 784. Moreover, the organ should be used in a somewhat different manner when any 16-feet Manual-stops are drawn, otherwise the excellent effects which that class of Stops are especially calculated to produce, will be to some extent obscured. The omission of all "Doubles," as a rule, from the Manuals of English

organs, until of late years, rendered it compulsory on organists to invent a sort of substitute for them in effect; for it was found that the organ-tone lacked the requisite gravity and dignity, however numerous the Unison Stops might be. Performers on that instrument, therefore, had to lay aside the purer and more strict style of playing, as being "ineffective," and to fall back upon the system of keeping some eight or nine notes down at a time, to draw from their instruments anything approaching a broad and massive character of tone. Latterly, the serious omission above adverted to has been supplied, by addition to old organs, and by incorporation with new ones; and the care already hinted at, as being required in playing on an instrument possessing so valuable an acquisition, consists in not adopting so full a style of playing, when the 16-feet Stops are drawn, as when they are not. The former is viewed as rather a complicated *substitute* for the latter; and if *both* are had recourse to simultaneously, the one is most likely to destroy the effect of the other. A very charming contrast may, however, frequently be produced by accompanying a Chant or Corale, sometimes in four parts with the Doubles drawn, sometimes in about six without them.

785. It may be mentioned here, that many object to the Doubles being used in accompanying Fugal compositions, particularly at those points where the subject is led off by one of the higher parts. There is much reason in this objection, although it only applies to the precise times specified. The Doubles may, between whiles, be introduced with even greater effect, when the voices are moving in harmonic masses. For the best illustrations of the occasions when the 16-feet Stops may or may not be used in choral accompaniment, the organ part to Israel in Egypt, written by Mendelssohn for the Handel Society, may be consulted with the greatest advantage.

786. When the organ is being used as a solo instrument, i.e. in voluntaries, the above objection does not hold good. The Doubles cannot then interfere with or mislead any voices. Moreover, the tradition general throughout Germany, is, that Sebastian Bach played his Fugues with the Doubles drawn; therefore, those who would aspire to perform his works after his own manner, can only do so by availing themselves of that dignified class of Stops. As to "the octave below" being discernible at the starting of a Fugue, there is no doubt that any moderately educated musical ear can detect any interval or Stop in an organ that it cares to listen for, whether it be the Double Diapason, the Tierce, the Twelfth, or what not; but that affords no conclusive ground for the exclusion of any of those Stops. Besides, even supposing the Doubles to have an undesirable effect for some half dozen bars in the course of a musical composition, if it has a most advantageous influence in the remaining hundred or so, which fact is beyond question, the far greater evil would arise from their exclusion.

787. Neither has the influence of the *Swell* been included in the foregoing scheme for producing various degrees of strong or weak tone. The Swell is of inestimable advantage for all classes of accompaniment, as it enables the performer to increase the tone when the voices may be getting flat, and to decrease it when all is going well. This power is independent of and supplementary to that of imparting expression to the music, which latter attribute is of such peculiar value, as well as being highly acceptable to those who have true appreciation and sound musical feeling.

On the adaptation of the organ-tone to the true purposes of choral accompaniment

788. In applying the various combinations and resources already specified to the purposes of choral or congregational accompaniment, there are many circumstances to be taken into consideration, and which ought always to influence the selection. The first and greatest of these is of course the prevailing character of the words about to be sung, whether they are jubilant or supplicatory, and with which the accompaniment should always accord, so that it may produce a suitable impression. A musical composer, when scoring a secular work for an orchestra, employs those instruments, the quality and character of tone of which are the most applicable to the subject of the words and the spirit of the music. An organ being the more seemly substitute for an orchestra in a Church, and containing, as it does, imitations of most of the orchestral instruments, an organist should, by a skilful combination of its different Stops, adapt the tone of the instrument to the sense of the words and the character of the music that are being sung, in order that the result of his rightly-directed efforts may be as appropriate and acceptable as possible. When it is recollected how much pains is taken with the accompaniment to heighten the effect of music, some of which is avowedly written chiefly for man's amusement and pastime, it is obvious that at least the same amount of care should be exercised to secure an equally appropriate accompaniment to those vocal strains which occur in the edifying Services of the Church. An organist cannot be too mindful of this, nor can he exercise too much forethought and discretion in making this most important condition of the utility of his office legitimately perceptible. It is in this particular, of all others, that he has the opportunity of showing his superiority over the mechanical work of a self-acting instrument. A barrel-organ can be made to execute music with the utmost precision and finish; it may even be made to shift its own Stops; but it cannot be endowed with the reason necessary wherewith to direct the application of these combinations. to their special purposes. A mind must be in active operation to do this worthily; and herein lies the secret of an organist's great advantage in performance, over an instrument from which the Choral accompaniment is "ground" out. Nothing can be less acceptable than to hear bright Stops used, and an animated style of playing adopted, when the words are prayerful or supplicatory; or, on the other hand, to hear only heavy Stops brought into requisition when the subject is a jubilant one. Every large and well-designed organ necessarily contains many Stops that are appropriate and inappropriate for all occasions; and it is, therefore, capable of considerably heightening or of injuring the effect, according to whether its powers be rightly directed or not: and an organist who misses their judicious application, whether from causes resting with himself, or from the influence of others, is open to the supposition of being disregardful of the trust reposed in him, and may, therefore, hazard the respect due to his office-consequences against which every organist

789. After ascertaining the prevailing character of the words, the next point to be considered is the exact quantity, as well as description, of loud or soft tone that the circumstances of time and place would seem to suggest as the most appropriate to the occasion. As the number of the congregation will vary very considerably on different occasions, so also will the strength of the united voices of its members. The amount of organ-tone, therefore, necessary for directing and giving support

should guard himself by the exercise of his best powers of discrimination.

to the voices of a full congregation, will consequently be too much when there is but a "thin attendance." Particular care, therefore, should be taken to modify the tone in some way, so that it may not be too strong for a reduced number of voices, and yet strong enough to prevent the congregation singing out of tune or time. The simplest way of lessening the strength of the accompaniment without destroying its spirit and character, is to draw, on the Second or Third Manual, Stops of the same size, and perhaps name, that one would use on the First, if the concourse of persons were larger. Any modification in this combination that the peculiarities of the particular organ might render necessary, would of course be taken into account. With the resources at his command, which every Parish Church organ ought to possess, and which many do, an organist ought to find no difficulty in accommodating its tone to any exigency that may arise.

790. At the same time that every organist should view his calling as a high one, demanding the exercise of great intelligence as well as technical knowledge in the fulfilment of its duties, it should also be borne in mind that the introduction of organs into churches, and their judicious employment there, are but means to the attainment of certain ends. What those ends and objects may be, will be best gathered from the following quotation from the introduction to Schneider's School for the Organ, which well describes what is looked for from the Church organs and organists of Germany. "An organ consecrated to the sanctuary and to sacred music, is intended to be subservient to the edification of a congregation assembled together for divine worship; to support and to accompany, in a proper manner, the singing; and to be instrumental in promoting a devotional frame of mind and the edification of the soul, and its elevation above every thing earthly, to the contemplation of things invisible and divinea noble object, which can only be obtained by a style of performance suited to the holiness of the place and the sacredness of the subjects. The proper management of this sublime instrument can induce a devotional spirit and an elevation of mind in the scientific hearer, as well as in any individual of feeling. The sound of the organ is able to insinuate itself by mild and tender tones, and then the mind is filled with the pious tranquillity of filial devotion; but it can also elevate itself to majesty and pomp, and peal and roll like storm and thunder, and then it elevates our hearts with sublime emotions. Whilst most other instruments can only express individual feelings, this kingly instrument can produce a variety of emotions The organ alone can best fill with its tones the lofty vaults of the vast Cathedral, support the singing of large congregations, and, by its power, operate upon the religious feelings."

## DIVISION VIII.

THE CAUSE OF MANY OF THE FAULTS WHICH ARISE IN AN ORGAN, TOGETHER WITH THEIR REMEDIES.

## CHAPTER XXIX.

791. It is important that an organist should be in a position to ascertain the cause of the faults existing, or occasionally appearing, in his organ; and also what are the steps necessary to be taken to remedy them. Some derangements arise from such simple causes, and can be so easily set right, that an organist might remove them himself, if quite certain of the seat of the disorder; and, by so doing, save the organtuner perhaps a long journey to rectify what may not occupy him ten minutes when he is there. Schneider, in his "Organ School" (page 60, first English edition), expresses himself on the above subject in the following words: "It is, generally speaking, necessary for the organ-player that he should make himself as intimately acquainted as possible with the internal construction of the organ, with the nature of every single part, the combination of which constitutes its whole; as well of the particular parts of the mechanism which cause the pipes to sound, as also of the nature, peculiarities, and properties of the pipes themselves, in the manifold variety of their make, and the various kinds of sounds which are constantly produced; by which means alone, a right and appropriate style of managing the instrument, and one in all respects suitable to its nature, can be attained. But, as regards a regularly appointed organist, the knowledge is absolutely indispensable; for it is his first duty to take care of his instrument, to preserve it and carefully to look after it-a duty which can only be fulfilled when he is able to discover immediately the cause of those derangements in the mechanism, &c. which are unavoidable in an instrument composed of so many diversified parts; and even to remedy, himself, the defects in many cases, when an organ-builder may not be immediately at hand. If the organist, thus acquainted with the construction of the organ, fulfils that duty to the fullest extent, and, in those cases for which he does not find himself competent, procures promptly the assistance of some qualified person, an organ may continue for a long time in a sound condition, and a more extensive repair be rendered unnecessary for a considerable period. On the contrary, an ignorance of the construction of the organ, and negligence in the care of the instrument, and also with respect to getting small defects

remedied, always leads to inevitable and more considerable damage; and not only do expensive repairs become requisite, but also an instrument thus neglected can often only be restored in a very imperfect manner."

THE UNBIDDEN SOUNDING OF A PIPE FROM CAUSES IN THE REGION OF THE PALLETS.

Ciphering caused by dirt on the pallet.

792. Among the numerous faults and derangements to which all organs are at times liable, one of the most frequently recurring is that known as a "ciphering;" in other words, the sounding of a pipe, on the drawing of a Stop, without any key being pressed down. A ciphering may arise from various causes. Some grit or chips may have worked down from the pipes, through the table and the channels of the sound-board, to the surface of the pallet; and, by resting on its edge, and holding it a little way open, thereby admit sufficient wind into the groove to make the first Stop sound that is afterwards drawn. A derangement from this cause is frequently indicated by the controlling key being a little below the level of the others. To remedy it, the front-board of the wind-chest must be taken off, the pallet drawn open, and its surface carefully wiped, as well as that part of the groove against which it "beds," with some dry, rough substance, to remove the impediment.

793. To facilitate the rectification of such casualties, some German organ-builders fasten on the front-board with large wooden screws, having sexagon heads, so large that they can be turned by the fingers alone; so that, in the event of a pallet becoming deranged during the service, the organist can get at it, with little loss of time, without the aid of noisy tools, and perhaps put it to rights before the organ is again required.

Ciphering from a pallet spring being too weak.

794. Or the ciphering may be caused by the pallet-spring being too weak to cause the key-movement to return quickly, and the pallet to thoroughly close over the pallet-hole. If this

is the cause, the key will rise sluggishly, and only partially; and the ciphering will continue till the key has been raised to its proper level by the hand. In this case, a piece of coiled wire, similar to that on the fourth string of a violin, and called by organ-builders "check-spring," may be fastened to the tracker, outside the windchest, and to some neighbouring wood-work, which will assist the return of the movement, and accelerate the closing of the pallet. Or, still better, the weak spring can be removed and replaced by a stronger one.

Ciphering caused by the pallet catching on a direction-pin. 795. Sometimes a ciphering will be caused by the pallet descending too low, and catching on one of the side directionpins; an accident that is likely to occur, if a key be struck too

violently and suddenly. To cure this, the front-board must be taken off, and the pallet released. In some German organs, the two side direction-pins are omitted, and one pin introduced instead, of extra stoutness, placed in the centre of the front of the pallet, where a small vertical groove is cut in the pallet, to allow the pallet to descend and ascend without leaving the pin.

Ciphering from damp loosening the leather; or heat warping the pallet. 796. A ciphering will frequently arise—particularly in instruments that are so situated as to be exposed to the changes of atmosphere in an aggravated form—from the damp in winter loosening the leather from the surface of the pallet, allowing

it to swerve from its place over the pallet-hole, and admitting wind into the groove; or from the heat in summer warping the pallet as it dries it, and, by destroying its evenness of surface, preventing its bedding properly over the pallet-hole. To remedy either of these derangements, the pallet has to be taken out; and, in the one case, the leather has to be fresh glued on to the pallet; while, in the other, the pallet has to be planed down afresh, newly faced with leather, and then re-fastened to the sound-board.

797. The pallets in some French sound-boards are made without leather pallethinges, but with simply a pin passing through a puncture in the tail end of the pallet, for the pallet to work upon. This arrangement presents the advantage of allowing an almost instantaneous substitution of a sound pallet for a defective one; and it also admits of the immediate resumption of the use of that pallet, instead of its remaining idle for many hours while the glue is drying. It also admits of the easy cleaning of the joint-end of the pallet, which is always a tiresome operation with pallets fastened on in the usual way.

Ciphering caused by a pull-down being rusty. 798. A ciphering is sometimes caused by a pull-down having become rusty, which causes it to become fixed in the hole in the brass plate through which it ought to pass, and

holding the pallet a little way open. This fault can generally be remedied by drawing the pallet open, and cleaning the pull-down with scouring paper; care at the same time being taken not to bend the wire, which would establish another source of eiphering.

# THE UNBIDDEN SOUNDING OF A PIPE FROM FAULTS IN THE KEY-MOVEMENT.

Ciphering from some adhesive substance falling between the keys.

799. A ciphering will sometimes be caused by some derangement of the key movement. Commencing at the keys, one of the commonest causes of ciphering is the falling of melted wax or tallow on and between the keys, which will

attach two together. This is soon remedied by carefully scraping the sides as well as the surface of the keys with a penknife, to remove the cause of adhesion. Or it may be caused by dirt, or a pin having fallen between two keys. The best way to proceed to remove the impediment, in that case, is to "work it out," which may be effected by taking hold of the two keys, in front, with the thumb and forefinger of each hand, and raising the one key at the same time that the other is lowered; drawing them apart with a certain amount of firmness, without violence, to encourage the impediment to fall.

Ciphering caused by a key warping.

800. Another cause of a sticking at the key, is its warping from excessive heat, which causes it to rub against its

neighbour, and become fixed. The eye will easily discover whereabouts the key is out of the parallel, if it is in the fore part of the key; as well as the probable point of contact. To remedy this, the key has to be removed from its place, and either scraped, or a few very fine chips pared off from the part where it touches the next key; which may be done sufficiently to ease the key, without disfiguring it. To remove the key, the book-desk has first to be taken out; and if the disarranged key is in one of the lower sets, the upper must be lifted out, to lay the right Manual bare. Modern organs are usually so constructed that the Manuals can be moved in or out with little more difficulty than the drawers of a chest of drawers, which is a most convenient arrangement.

Ciphering from a sticker binding.

801. Sometimes a sticker will "bind" in the hole in the register through which it should move, from damp swelling both portions of the wood-work, whereby the hole in the register becomes smaller, and the sticker larger. This can be cured by taking out the sticker, and either filing the hole in the register a little larger, or by scraping the sticker. Or the sticker may bind, from the black-lead having worn away from its surface; in which case, more might be added with a black-lead pencil, without, however, damping it.

Ciphering eaused by a backfall getting off the sticker.

802. In a backfall movement, a ciphering will sometimes be caused by the backfall shooting off the sticker, under the influence of a violent blow on the key, and catching on the top of

the sticker-pin. To set this right, it is simply necessary to press the sticker-pin carefully, but firmly—without, however, bending it—into its place under the drill-hole in the backfall, and lowering the backfall into its right place. On doing this, the key will resume its proper level.

Ciphering from grit in the eentre-holes; or by a swelling of the movement. 803. A ciphering will sometimes be caused by grit, dirt, or small wood or metal chips working into the pin-holes of some part of the movement, or between a square or backfall and the frame; which, by preventing the complete action

of the movement, will hold the pallet a little way open, and also cause the key to remain a little way down. By tapping the key rapidly, the fault will frequently correct itself, and save further trouble: if not, it must be sought for through the movement, and removed. Or some part of the movement may have swollen, and be thus made to bind too tightly on the pin. This might be rectified by cutting the centre-hole the least degree larger; but if the fault only appears in damp weather, and then only slightly, it is usually better to leave it to be corrected by a drier and warmer atmosphere; particularly as the wood, by contraction at such a time, might otherwise leave the pin-hole sufficiently large to cause a looseness of action, and a rattling.

## THE UNBIDDEN SOUNDING OF A PIPE FROM DEFECTS IN THE SOUND-BOARD.

804. A running. One of the most tiresome and vexatious defects which can occur in an organ is a *running*; because the region of the disarrangement is fre-

quently one of the most hidden parts of the organ. Its seat is always the soundboard, or immediately adjacent parts, and it consists of an unbidden sounding of a second pipe on the sounding of a first, which may arise from a variety of causes. The pitch of the second sound, however, will sometimes assist one in discovering the seat of the disorder, if some allowance be made for its pitch being flat, and its sound not well defined, on account of the defect frequently being produced by a very small quantity of wind, which breathes rather than blows into the pipe. For this reason, the evil is not apparent when all the Stops on the sound-board are drawn; for then there are so many outlets for the fugitive wind, that it disperses and escapes without producing any audible effect: but when one or two soft Stops only are drawn, then it frequently becomes painfully so.

A running caused by an upper-board being too loose.

originally sounded.

805. A running may arise from an upper-board not being screwed down sufficiently; which is soon remedied by tightening the screws in the immediate vicinity of the pipe Or it may be caused by a leakage from one groove to the next. Whether it arises in this manner, will be indicated by the pitch of the unbidden sound, when compared with the plantation of the pipes. If the pipes are

planted semitonally, as in plan 2, ante, page 42, and the secondary sound is the half tone above or below the tone sounded; or if the pipes are disposed tonally, as in plans 1 and 3, ante, pages 41 and 42, and the unbidden sound is a tone above or below that produced in the usual way; the defect will, in either case, be traceable to the above-mentioned cause.

A running caused by a sound-board bar separating from the table; or by an unsound bar.

806. Or a sound-board bar has "sprung," i.e. has become partially separated from the table; or a small crack has "started" in the sound-board bar itself, allowing a little wind to pass through from one groove into the next. To stop

this, the crevice is well covered with paper, coated and saturated with glue. Sometimes, to cure this fault, recourse is had to "bleeding" (see ante, page 34, sec. 145); which, however, is only an objectionable method of hiding the fault.

A humming caused by one slider touching and partly drawing a second.

807. A disagreeable humming, not unlike a running in effect, although it is not in reality one, will sometimes be caused by one slider rubbing against the next as it is being drawn, and partially drawing that also, causing a little wind to

pass into the pipes of a second Stop. In this case, the effect will be like a running of an aggravated kind, inasmuch as the defect will appear to exist on nearly every key of the manual. The unbidden sounds will be rather lower in pitch than the correct sounds, though scarcely amounting to a semitone. To remedy this evil, a peg might be driven in between the two sliders; or one of them might be planed at the edge to prevent its touching the other. As the objectionable custom of placing two, or even as many as three sliders together, without intermediate bearers, is entirely discarded by all modern organ-builders, the liability of a humming from the disarrangement last named is confined to old organs. When it occurs, all the Stops that are not actually in use should be pressed in.

A humming caused by pipes standing in too close proximity. 808. Sometimes the unbidden sounding of a second pipe will arise from the pipes being packed too closely together, so that the wind that passes out at the mouth of one pipe enters

that of another, causing it to produce a moaning sound. This evil frequently is not an easy one to remove. The primary cause of this is the sound-board being too small, which leads to the pipes being placed in too close proximity. In some cases, this defect can in a manner be cured by turning the mouth of one of the pipes in another direction; or by mounting the pipe on a longer foot; or by conveyancing it off to another situation. The most thorough cure for such an evil, however, is the introduction of a new and larger sound-board.

#### DEFECTS IN THE KEY-MOVEMENT.

A springing in the key-movement.

809. A Manual key will sometimes go down about half-way, under the pressure of the finger, without causing any sound; after which, something will appear suddenly to snap, and the key will descend the remainder of the distance with a run, the organ at the same moment sounding. This disagreeable effect is caused by the roller being too weak. Instead of its setting the second arm in motion the instant the first one is operated upon by the key, the roller "springs" or twists for a time, until it has in this manner derived a sufficient accession of power to give a tug at the pallet; the resistance at which being thus overcome, the pallet starts down, giving to the touch the tiresome breaking sensation already noticed. This can only be cured by introducing stronger or thicker rollers.

A dead resistance opposed to the finger by the key-movement.

810. In some cases, a key will at first altogether resist the touch of the finger, and will not move until the pressure has been much increased, when it will suddenly give way, and descend, accompanied by a sharp clacking noise. This defect, quite as annoying as the last, is found more frequently in old organs than in new, where the roller-arms are of iron, instead of wood, with metal tracker-hooks attached in both cases. The iron, after a few years, rusts, causing a grating and biting, instead of a free and immediate action, which leads to the dogged resistance experienced at the keys. New wooden roller-arms are the only cure for this fault.

A thumping at the keys laws.

811. A thumping will sometimes be heard as the keys go down. This will be the case, if the layers of cloth or baize under the front of the keys have become hard, or are too thin. The fault is easily remedied by the substitution of soft and thick baize, or by the addition of an extra layer.

A rattling in the key-movement, from the noisy nature of the materials.

812. The original key-movements of old organs were frequently so noisy, rattling, and squeaking, and their every motion so audible, that whatever the organist played seemed to have the questionable addition of a "castanet" accompaniment. This offensive

interruption arose from metal having been used where wood has subsequently been found to be so much superior. The cause of the rattling was this. On touching a key, the first tracker-hook produced a "click" as it struck against the first *iron* arm; the second iron arm produced a similar noise on coming in contact with the second tracker-hook; the "metal against metal" not only produced a squeaking or a grating as the parts moved, on the finger descending; but, when the finger left the key, and the movement returned, the tracker-hooks vibrated and chattered in the holes of the iron arms. Thus a rustling and sometimes also a chirping noise accompanied the action of the movement when it ascended, as well as when it descended. The removal of the cause of the defects noticed in the two preceding sections, will lead to the disappearance of those just noticed.

813. In modern organs, iron roller-arms are almost always avoided—unless, indeed, the rollers themselves are of the same material, in which case they are of course unavoidable—and wooden ones introduced, as being far more quiet in their action. Even in the few instances where the contact of metal with metal cannot be avoided, as at the junction of the tracker-hook with the pull-down, some organ-builders do not allow the two pieces of metal to touch, but "bush," i.e. line the loop of the pull-down with cloth, to silence the action. For the like purpose of lessening the friction and quieting the motion, other organ-builders introduce into each of the studs which support the rollers a kind of leather button, in the centre of which the roller-pin noiselessly works.

A rattling sometimes caused by trackers flapping together.

814. Sometimes, in "extended" key-movements, a noise will be caused by the long trackers flapping together. This is soon remedied by introducing an additional register. As, how-

ever, every additional register, or comb, adds to the friction,—to avoid this latter, some continental builders carry the trackers over little box-wood or ivory reels, by which means they are supported and steadied, without the touch being made heavier or more sluggish.

A key down without 815. Occasionally a key will be found to have sunk, i.e. producing any sound. it will be down, without, however, causing any ciphering. This will arise from some connecting portion of the key movement having slipped or given way. For instance, it will occur if either of the tracker-hooks is broken; and it can, in that case, soon be remedied with a fresh piece of wire. Or, if the rollers are provided with wooden roller-arms, and the union of the roller-arms with the trackers is effected by means of tapped-wires and buttons, it will sometimes arise from the button slipping down the tapped-wire. In this case, all that is necessary to correct the disarrangement, is to screw the button up again, which is done by turning it to the right. The tracker, however, should be held firmly, immediately above the tapped-wire, to prevent its twisting, or a cause of second derangement may arise while the first is being removed. A dumb key will sometimes be caused by the breaking of a square, a casualty to which squares are very liable, if they are formed of one piece of wood only, so that the grain of the wood necessarily crosses one of the arms. To cure this fault thoroughly, and prevent its recurrence, a new and stronger square must be provided.

The touch of the manuals too shallow at certain seasons, and too deep at others.

816. In warm, dry weather, the touch sometimes becomes "shallow," and the pallets do not open sufficiently; consequently the pipes sound out of tune, from the inadequate supply of wind, particularly in the bass. In cold, wet

weather, the touch, on the contrary, becomes "too deep;" which change renders the playing more difficult, and also causes a tendency to ciphering, from the keys then pressing against the thumping-board. The variations in the depth of the touch are caused solely by atmospheric change; the heat, by drying and contracting the building frame and key movements, slackening it; and the damp, by swelling and expanding them, tightening the touch. There are several ways of remedying these faults.

817. Most modern organs are provided either with small wedges, placed under each end of the square or backfall frame, immediately over each Manual, or with screws; the former of which are pressed in or drawn out, and the latter turned down or up, according as the touch requires deepening or being made shallow. The touch of the entire row of keys can thus be altered in a very few minutes. In older organs which have not these facilities, the depth of touch can only be regulated by screwing or unscrewing the button of every key separately, which process consumes a great deal of time. To make a key "higher," the button must be turned to the right; to make it "lower," it must be screwed to the left. While this is being done, some one should be at the keys, who, by passing the fingers lightly over the key being regulated, and its neighbours, will ascertain whether the key is on an exact level with the others; and if it is not, he will call out whether it is required to be "higher" or "lower," to make it so.

An unevenness in the level of the keys of the manual.

818. A single key will sometimes be out of the level with the other keys. If it is below, without causing a ciphering, the irregularity is most probably caused by the button having

slipped, which, in that case, must be screwed up again; and a second one might be added, and screwed up close to the first one, to assist it. If a key is above the proper level, without causing a ciphering, it has probably risen from the rapid return of the movement, on the quick or sudden removal of the finger from the key. A slight tapping on the key will generally be sufficient to cause it, or the movement, to adjust itself.

A key screwed up too high, sometimes causes the speech of the pipes to tremble. 819. A key that is screwed up rather too high, will frequently cause the pallet to open and close slightly and rapidly, admitting a small quantity of wind into the groove by fits and starts, and imparting to the speech of the pipes an effect not

unlike that produced by a tremulant when in motion. To stop this, it is simply necessary to unscrew the button a little. A key that has slightly deepened from change of weather, will sometimes produce this effect.

A ciphering caused by the breaking of a pedal-spring. 820. A ciphering is sometimes caused by the spring that should raise a pedal having broken, whereby the weight of the pedal-key drags on the movement, and has the same effect

as the weight of the hand on a Manual key. If a Manual remains coupled to the Pedal while this fault exists, it will cause an apparent ciphering there also, but which will be found to have no real existence on disconnecting the Manual, as the supposed derangement will then immediately disappear. If the Pedals are only furnished with bell-springs, they will be very noisy, as well as more liable to the above accident, and should be removed, and better springs provided.

### DISARRANGEMENTS CONNECTED WITH THE DRAW-STOP ACTION AND SLIDERS.

A draw-stop rod will sometimes come out too fir, or go too far in. 821. A draw-stop rod will occasionally come out far beyond its proper distance, and will also return too far, and that without affecting the Stop, which will be either always in or always out. This fault arises from the connecting-pin at one

of the centres having worked out; and it may therefore occur either at the junction of the draw-stop rod with the trundle-arm,—of the second trundle-arm with the trace,—the trace with the lever, &c. All that is in general required, is, the restoration of the pin to its original position, or its place supplied by a new one.

A draw-stop some-Sometimes, on the contrary, a draw-stop is very times very stiff. difficult to draw; -in the language of organ-builders, it is This derangement is generally caused by atmospheric change. In damp weather, the upper-board and slider become swollen, and, by pressing against each other, increase the amount of friction. The consequent stiffness is usually removed by slightly loosening the screws which fasten down the upper-board, which allows the slider more liberty. On the re-appearance of warm weather, and the subsequent drying, shrinking, and return of the wood-work to its original and precise dimensions, the screws should of course be tightened again. In hot weather, however, as well as in cold and damp, a stiffness will sometimes appear in the action of the draw-stops; but in this case the cause would be the warping of the upper-board or slider, which would lead to a "binding" of those parts. An abatement of the heat would be accompanied by an abatement of the fault. In the course of time, however, it may happen that if the screws of the upper-board are loosened sufficiently to remove all stiffness from the draw-stop, a running will be heard; and, on tightening them, the stiffness will return. This is an evidence that the repeated changes of temperature and condition of the atmosphere have had the effect of disturbing the accurate adjustment of the several parts to one another. When this is the case, the upper-board requires to be removed, the slider taken out, and the several parts "eased" at those points where the binding occurs.

### DEFECTS IN THE BELLOWS AND THE WINDING OF THE ORGAN.

A creaking, from friction at the centres.

823. One of the most frequently recurring faults in a bellows, fortunately, is generally one of the most easy to cure; namely, a squeaking or creaking. This commonly arises either from the friction of

the bellows-handle on its centre, or from a similar rubbing at the junction of the pump-rods with the lever or feeders; and is removed by simply applying a little grease.

A clacking, caused by hard valves.

824. A clacking will sometimes be heard at the moment that the feeders are drawn up. This is only perceived in old bellows, and is caused by the valves being made of wood, covered with leather that has become hard, descending on the bottom-board with an audible blow. To remedy this, new leather valves must be substituted for the noisy old ones.

A gasping, from the valves being too few and small.

825. A rushing, gasping sound may occasionally be discerned, as a feeder descends and inhales a fresh supply of wind. This occurs when the valves are too few in number, or are too

small, or do not open sufficiently. The wind then forces its way through the gratings or orifices under the valves with so much additional force as to cause a whistling as it goes. To cure this, additional valves must be made.

Bellows work quicker in hot weather.

826. In very dry seasons, the contents of the bellows will sometimes be exhausted much sooner than at other times. This is partly owing to the contraction of the wood of the ribs, which opens the pores; and partly to the shrinking or curling of the leather valves, which together cause more or less wind to escape. Generally, this is only a temporary derangement, which a change of weather will rectify; but should it prove otherwise, the assistance of the organ-builder should be at once secured, as the restoration of a firm and steady wind is of vital importance to the intonation of the organ.

Bellows produce a cracking sound after damp weather.

827. After damp weather, the bellows will frequently produce a sharp, tearing sound when they are first blown, particularly if they have not been used for some days. This,

however, does not announce any real accident, though its cause might lead to one. In damp weather, the coat of glue with which the inside of the ribs is covered, to close the pores, becomes softened; which causes the ribs, as they lie together, to adhere slightly. When the bellows are subsequently blown, the ribs are separated, producing at the same time the sound above noticed.

Tremulousness, from the length and elasticity of the column of wind.

828. Sometimes the working of the bellows affects the speech of the pipes; i. e. a slight waving or forcing of the tone will be heard at the moment the feeders commence and complete their operation. This arises from the additional compres-

sion which takes place at the moment that the feeder and the surface-weights alternately exercise their influence. The feeder, before it can introduce fresh wind, has to overcome the pressure of the surface-weights by the exercise of *more* than an equivalent force; and when this under and upward pressure ceases, the surface-weights and top-board return and descend upon the wind with all their original pressure. In this manner a series of little jerks are given to the wind at the commencement and completion of each stroke, which are sometimes communicated to the

speech of the pipes, particularly if the wind-trunks are small or long. To remove this defect, a concussion bellows is usually applied; but a more effectual remedy would be the introduction of wider, shorter, and more direct wind-trunks. When the wind-trunks are small or long, and the supply of wind to the sound-board barely adequate, the column of wind becomes more elastic; in consequence of which, not only is every little and perhaps unavoidable defect at the bellows conveyed to the pipes, but it is also exaggerated. When, on the contrary, the wind-trunks are broad and short, the column of air has greater firmness, from its greater bulk; and is less elastic from the same cause, aided by its lesser length; consequently it is not nearly so liable to communicate every little disturbance at the bellows to the speech of the pipes.

Tremulousness, from shortness of supply.

829. Sometimes if a chord be held down with the right hand in the tenor, the treble, on adding a three-part chord with the left hand in the tenor, the treble pipes will be weakened in their speech for a moment, and then will recover themselves; and on withdrawing the left hand from the keys, the treble pipes will "raise their voices" for an instant, and then reduce their tone to the usual strength. These defects are sure indications of the wind-trunk, or the wind-chest, or both, being too small. In other cases, an organ will stand the above test successfully; but if chords be held down in the treble and tenor with the two hands, and a disjunct passage be played upon the Pedals in the bass of the Manual, a tremulousness in the tone will appear in the upper parts. This will show that the wind-supply at the grooves is still inadequate, from one or other of the causes already mentioned.

Unequal intonation, caused by small grooves and palletholes. A robbing.

830. In some organs it is found that certain Stops sound sharper and brighter, or stronger, when tried by themselves; and flatter and duller, or weaker, when used with the others. This serious fault rests either with the grooves, which do not

hold sufficient wind to supply all the pipes effectually; or with the pallet-holes, which do not admit the necessary quantity. The "robbing" usually manifests itself the most strongly in the lowest octave or octave and a half of the sound-board. It invariably appears in old sound-boards, and is not always absent from new ones. There are many simple ways of ascertaining whether a Manual organ is properly supplied, or not, with wind in the bass. If, on drawing the Mixtures by themselves, and holding down one of the lowest keys, the pipes sound firmly in a certain pitch, and with a certain amount of strength, and if, on adding the other Stops, the Mixtures fall in pitch and become more quiet in their tone, it is clear that the grooves either do not hold, or do not receive sufficient wind. Or if the Reeds be drawn alone, and they speak with a certain amount of crispness, promptness, and strength, but, on adding the other Stops, the Reeds sound tamely, sluggishly, and more quietly, it is evident that the demand on the wind in the grooves is greater than the supply. The only effectual remedy for this defect is the introduction of a new and larger sound-board, with more capacious grooves in the bass-or with double grooves,and with larger pallet-holes and pallets. In the absence of this, the small Stops have to be tuned in the bass, with all the Stops on the sound-board drawn, that allowance may be made for the flattening effect caused by the robbing; and this is why the

small Stops sound sharper, and perhaps tremulously, when tried by themselves, at which time they receive their full supply of wind.

A hissing, arising from an escape of wind. 831. Sometimes a hissing or whizzing sound is heard to emanate from some part of the organ. The sound itself is, perhaps, scarcely perceptible, but it arrests the attention by its

continuance. The exact place where it occurs is frequently difficult to discover. An engineer has an advantage over an organ-builder, under parallel circumstances; for, in a steam engine, the locality of a slight leakage is immediately made evident by the escaping steam turning to vapour and attracting attention; whereas no such assistance appears in an organ to guide the builder to the seat of an analogous fault. This is frequently ascertained by means of a lighted candle, the flame of which will flicker as it draws near to the place where the escape is taking place, and as it gets into the unusual draught caused by it.

832. The hissing frequently arises from an escape of wind at the joint of one of the wind-trunks; which will be caused by the leather covering having become loosened, from damp, age, or decay. This is remedied either by glueing the leather down again; by applying a fresh strip of leather, if the other is unsound; or even by fastening a piece of thick paper over the little hole, saturating the stopping with glue. An escape of wind will sometimes take place at the side of a pull-down, through the hole in the brass plate; particularly if the action of the pull-down has not been perfectly horizontal, and has worn the hole into an oval shape.

#### FAULTS CONNECTED WITH THE SPEECH OF THE PIPES.

Small pipes are frequently dumb, tremulous, or weak in their speech.

833. It frequently happens, particularly with regard to small open Flue-pipes, that a pipe will be "off its speech," i. e. will not sound, or it will sound tremulously, or with less than its proper strength. A most frequent cause of this fault is

dust; a very small portion of which—so small that it would not affect the speech of a large pipe at all—being sufficient to render a small one dumb. If the fault is a general one throughout the organ, it can only be remedied by a thorough cleaning. If there are only isolated instances here and there, they can be rectified by taking the few pipes out, one by one; wiping the surface of the languid, and carefully dusting the nicking, and clearing the wind-way with a fine brush.

Flue-pipes become unequal in their strength and quality of tone from various causes. 834. Sometimes, however, an irregularity will be caused in large or small pipes by some disarrangement of the pipe itself. The upper-lip may be pressed in too far, or not far enough; the under-lip may have met with a similar temporary

derangement; or the languid may be too high or too low. The foot-hole may have become slightly contracted, from the pressure of the body of the pipe upon the foot; or it may have become too large from the partial decay of the apex of the foot. Any one of these accidents would affect the intonation of the pipe, causing it to sound too loud or too soft, tremulously, or in the octave above; and it is often more difficult to

discover which may be the true cause of the fault in any individual instance, than to correct it when it is found out. A pipe that sounds too loud, sometimes has its tone softened by pressing the under-lip a little nearer to the languid, which reduces the width of the wind-way, and therefore allows less wind to enter the pipe; and by altering the position of the upper-lip in the same direction. A pipe that sounds too weakly, frequently has its power increased by the opposite process.

A pipe sometimes sounds its octave, from the effects of dirt, or over-blowing. 835. A pipe will sometimes "sound its octave;" and Stops of small scale, as the Dulciana, are particularly liable to such derangement. This may be caused by a little dust having fallen into the wind-way; or by the pipe having rather

too much wind; or even by simply a change of temperature. All Stops of slow speech—"heavy intonation," as the Germans have it,—as, for instance, the German Gamba,—also are liable to casualties from similar causes; and, like the Dulciana, may be thrown off their speech, if the bellows do not give a perfectly equal blast. A pipe that has too broad a wind-way, or an insufficiently high mouth, will also speak its octave.

The tone of woodpipes influenced by change of temperature. 836. Wood-pipes are much influenced by change of temperature. In rainy weather, the damp, by swelling the fibres of the wood, presses and closes the pores; and, by thus rendering the wood more compact, firm, and sound, improves and

strengthens the tone. In very wet seasons, however, it is possible that the change may so far affect a pipe as to lessen the height of its mouth; and, by swelling the block, lessen the breadth of the wind-way, which would have the effect of slightly flattening its pitch, as well as perhaps affecting its speech. In an organ that is placed in a damp situation, these vexatious changes and derangements are both frequent and unavoidable. In dry weather, the wood may shrink and become more porous, the tone then being weaker. The height of the mouth, from the excessive dryness and contraction of the wood, may be increased, as well as the breadth of the wind-way, which would raise the pitch of the pipe, and perhaps also alter its speech. The influence of these changes is the most discernible in the large open wood Pedalpipes, which frequently will sound fuller in wet than in dry weather.

Stopped wood-pipes sometimes deranged by heat and drought.

837. Stopped wood-pipes are in summer, occasionally, put out of order by the stopper shrinking and falling into the pipe; raising the pitch and destroying its quality. The stop-

per must, in that case, be taken out and restored to its proper place; some means being at the same time taken to make it fit tightly. This can frequently be done by putting a layer of paper between the stopper and the leather cover, on all four sides. Or an additional covering of thin leather might be put over the stopper, if this will not make it fit too tightly. If a stopper that fits too tightly be driven into a pipe, it may cause the front or back to separate slightly from the sides, at the joints; and, by so causing the pipe to become unsound, render the tone false and weak. A defective intonation will also arise, if the stopper is not driven in perfectly level, but sideways.

Reed-pipes very susceptible of change of temperature. 838. Reed-pipes are very delicate in their nature; and are frequently disarranged by the merest trifles. When it is borne in mind that, even in a large Reed-pipe, it is not the

long tube, but the small tongue that originates the tone,—that the smallest particle of adhesive substance on the tongue will sometimes retard the rate of its vibration,—and that a very small piece of grit on the edge of the mouthpiece is frequently sufficient to prevent the tongue striking equally and truly,—it ceases to be a matter of wonder that a Reed-pipe should here and there so frequently get a little out of tune, or irregular in its tone. Moreover, the slightest shifting of the tongue will prevent its sounding properly. Or, if it should be rather too thick and stiff, or too much curved, it either will not sound at all, or only weakly, as the draught cannot then make it reach, or at any rate strike the mouthpiece with the requisite firmness. On the other hand, if it be too thin, weak, or insufficiently curved, it will strike the mouthpiece too violently and cause a "cackling." A tongue that is too stiff, or stands too far from the mouthpiece at the lower end, is set right by being reduced in thickness, or by having its curvature lessened. A thin or weak tongue cannot be altered for the better, and therefore should be removed and replaced by a stronger one.

839. The above are some of the most usual faults or defects occurring or met with in organs. Their ordinary causes have been specified, to show that the most careful vigilance of the organ-tuner is frequently insufficient to prevent their occasional or periodical occurrence. The nature of the several faults or defects have been explained, that the organist may be enabled to discover for himself whether they are of a superficial or of a vital character. Their usual remedies have also been given, in order that the organist might, if the derangements are of a superficial and trivial nature, proceed to rectify them himself, if he is quite sure that he is capable of doing so; or, if they are of a more vital and important nature, that he may at once call the attention of those in authority to them, and obtain from them the necessary permission to procure the assistance of the organ-builder to effect the necessary repairs or improvements;—for although, as Schneider observes, "the organist is not to be the organ-builder," yet it is peculiarly his duty to act as the protector and conservator of the instrument.

840. On the same page from which the extract at the commencement of this chapter is taken, and in continuation of it, Schneider proceeds to say—" If the organist conscientiously fulfils his obligation in this respect, as above described, those who have to provide for the keeping in repair of the Church and organ must also do their part; must take notice immediately of the report of the experienced organist; and not regard the expense, to have any defect which may be discovered, and which the organist himself cannot rectify, immediately remedied by a competent organ-builder. Unfortunately, this is frequently not the case; for, as experience everywhere shows, there are few organs in *good* condition; and the fault is not always to be attributed to the ignorance or the carelessness of the organist, but to the want of attention being paid to his complaints, and the dread of expense on the part of the authorities;—the organ is rather left to become completely spoiled, than an endeavour made to remedy, in good time, whatever is capable of being remedied."

### DIVISION IX.

SUGGESTIONS FOR THE CONSIDERATION OF THOSE WHO HAVE TO SUPERINTEND THE CONSTRUCTION AND ERECTION OF AN ORGAN.

# CHAPTER XXX.

841. The preceding chapters of this work having been devoted to a descriptive analysis of the structural details, &c. of an Organ, it now remains to treat of other essentials which call for the attention more particularly of those to whom the duties of preparing the specification and superintending the construction of an organ are entrusted.

THE COMPASS OF THE CLAVIERS, AND OF THEIR SEPARATE DIVISIONS OF THE ORGAN.

842. The first subject to be considered, is the compass necessary for the Manuals and Pedals, together with their respective departments of the organ.

343. It is most desirable that patient attention should be devoted to this question, since every separate compass yet devised has its advocates, even among those whose opinions are entitled to great consideration; but yet, which same opinions, when compared, are found to be conflicting. As, moreover, what is advanced in favor of one compass, is not unfrequently accompanied by something else by way of objection against all or most others, it behoves all who would desire to arrive at a just conclusion on this very important subject, to weigh all the arguments for and against each plan, before making a decision; otherwise, with the purest intentions, his efforts may only end in a perpetuation of the existing confusion.

Precedents for nearly every variety of Clavier range.

There are precedents for almost every imaginable variety of range, both of Manual as well as Pedal; and if the selection of the one from among the number were a question of no greater moment than the gratification of individual taste, or did not involve some violation of artistic arrangement that would not militate against the proportionate development of the separate departments of which an organ should consist, nor entail the sacrifice of funds and room in its consequences, there could be no difficulty in the way of any compass whatever being adopted that fancy might dictate. But the case is far otherwise. On a just view of this matter depends the successful issue of the work; its influence pervading the arrangements of the entire instrument. It is very important, then, that the most careful consideration should be given to this sub-

ject, before proceeding any further in the work, particularly as a false step in this direction, once taken, cannot afterwards be retraced.

The compass of the manuals; the con-fused state in which the question is involved in England; and the importance of a correct view of the subject.

845. Those who have been much in the custom of visiting English Church Organs, and observing their general arrangements, must have been struck with the remarkable variation that exists in the compass of the Manuals and Pedal of different instruments. A dozen Organs might be visited promiscuously, without any two being found to agree precisely in the

above respects. Some have short-octave GG Manuals; others, GG Manuals with long octaves. Some have Manuals descending a note lower, to FFF; others, Manuals to CCC; while a fifth class will have Manual organs of the orthodox CC range. Then of the Pedal: some Organs have an octave of Pedals commencing at GG; others, an octave and a half beginning on the same note, or perhaps on FFF. Some have two octaves of GG Pedals, while others have from two octaves to two octaves and a half of CCC Pedals. Such is the undecided state into which these divisions of Organ arrangement had fallen in this country, previous to the commencement of the now widely-spread desire for its amelioration.

How the true manual compass is to be ascertained.

which are not?

846. That all the compasses for Manual and Pedal just cited can be equally correct, is impossible; either some are too long, or others must be too short; or, supposing a medium range to be the true one, then some must be as much too short as others are too long. The question, then, is, out of the number, which are of the correct compasses and

847. The presence of a certain number of keys on the Manual and Pedal claviers, and an equal number of semitones in their respective Organs, must be necessary to render an instrument adequate to all the purposes and uses of a Church Organ. Do those Manuals,—the question of the compass of the Pedal is deferred for the present,—then, that extend only to CC, fall short of this needful range; or do the various kinds of long octave ones exceed it by just so much as their Manuals descend below that key? Or, is the medium compass, the GG, the correct one, and consequently the CC range as much too short as the CCC is too long for the required purposes? The sources to which alone reference can be made, with the certain result of finding a correct solution to the above problems, are the Choral and Instrumental compositions that are most frequently heard in, and which are held in the highest esteem as accessories to the Church Service; and for the accompaniment of the one, and the performance of the other, the Organ itself is employed in our Ecclesiastical edifices. If reference then be made to the works of the long list of English Choral writers, and to the scores of Handel, Beethoven, Bach, Mendelssohn, &c. this examination will be attended with the following results.

848. In the selected movements from the works originally written with orchestral accompaniments, such as the solos and choruses in Oratorios, Masses, &c. it will be observed that the violoncello part, which comprehends within its downward range also that of all vocal basses, never descends below the CC note, which note (as all musicians know) is the lowest one on that instrument. The double bass indeed is

a deeper-toned instrument; yet, as it does not give a sound in accordance with the notes written, but the octave below, as far as its compass permits, its representative is correctly to be found among the unison (16-feet) Flue-work of the Pedal Organ. Again, if the masterly compositions written expressly for the Organ, by Bach, Mendelssohn, Hesse, and others, be consulted, it will be seen that the greatest extent to which the Manual part of those classical works descends, is also CC. The finest and most elaborate sacred musical productions, then, whether they be essentially Choral, originally written with Instrumental accompaniments, or composed exclusively for the Organ, neither require nor recognize a greater extent of compass downwards than that possessed by the shortest of the various kinds of Manual above mentioned. A few exceptions to this otherwise universally supported fact, may indeed be found in the admirable Organ compositions of the late Samuel Wesley, Thomas Adams, and Dr. Wesley of Winchester; yet these examples would scarcely be deemed sufficient to outweigh the united authority established by the voluminous works bequeathed us by the writers previously named. That the CC Manual does afford ample scope for the perfect execution of the hand parts of all descriptions of music used in the church, excepting the few excellent works already specified, has never been clearly disputed. And that the CC Manual range is the best one for concert-room Organs, is equally beyond a doubt. So much, therefore, is greatly in favour of the CC Manual Organ.

Arguments against the CC Manual compass and in favour of a longer compass, it is sometimes urged—(1) that in accompanying the Choral Service, and more particularly the quieter parts, a soft bass is frequently required (though not written) below CC; (2) that if the Manual keys are made to end on that note, then the deeper sounds have to be obtained from the Pedal; and (3) if that department be furnished with a fair proportion of Stops, a shifting of these with every change from "Full" to "Verse," &c. becomes necessary; or (4) if there be but one Stop on the Pedal, as is too frequently the case, the choice then lies between a ponderous and heavy bass, and none at all.

850. These objections are founded on the manner in which CC Organs are sometimes made in England, rather than on the continental system, according to which they should be, and occasionally are, built. It is not a correct conclusion, that if the Manual keys stop at CC, the Manual sounds must also cease there; any more than it would be that the upward range of an Organ must cease at f3 in alt, if the keys do so. When there are two Manuals, the Great Organ should invariably have a Double Stopped Diapason (Bordun) throughout. This is one of the fundamental laws of the German system of Organ-building, and is constantly adhered to in the construction of even the smallest Church Organs of that country (see foreign specifications, Nos. 54, 55, 61, 62, 87, 102, 104, &c.); and it does not follow that, because the Great Manual of an English CC Organ is sometimes made without a Stop of 16-feet size of tone, the inconveniences that must arise from such omission are to be attributed to a principle of Organ-building, from which it is actually a departure. Where a Stop of the kind in question is disposed—and it should never be absent,—instead of the downward range of the deep Manual sounds being limited by the termination of the keys at CC, it is increased to the extent of

seven semitones beyond what an old-fashioned GG Manual could produce: so that, even on the question of "depth of tone," a CC Manual Organ on the Continental principle has the decided advantage over a GG Manual Organ on the English principle. Furthermore, the concentration of so many deep sounds on the Manual obviates the "necessity" for employing the Pedals so constantly, if the performer cares to dispense with the use of the latter; and thus the second objection to the CC Manual is, to a great extent, done away with. But even supposing the continued use of the Pedals to be desired, so far from the shifting of the Pedal Stops to obtain a soft bass being a matter of "necessity," some German Pedal Organs are made with a windtrunk valve (Sperventil) to cut off the wind from the Pedal Reeds and Chorus Stops, and worked by a Stop-handle that is shifted as quickly as a Pedal Coupler; by means of which a soft or loud Pedal may be obtained with the greatest facility.

- 351. One fact relating to the subject of the deep Manual tones should not here be omitted. While the extra keys below CC are said to be so necessary for soft accompaniments, the Second Manual (Swell), on which the quieter parts would frequently be played, is always made not only without those very keys, but, in the great majority of cases, also without the next whole octave above. This important circumstance much weakens the position, as to the "necessity" for the Manual keys descending below CC, to meet the requirements of soft playing.
- 852. Nay, more; when the Second Manual Organ (Swell) in GG Instruments is made to the short Tenor c compass, it is usual to arrange the kevs beyond to act either on the Great Organ, or on the "Pedal Pipes." Now, in the former case, a shifting of the Great Organ Stops must be made with every change from forte to piano, and back again; in the latter, there will be the strong and unseasonable bass; so that the second and third objections, if they are such, exist, to at least an equal extent, in Organs of long compass, and are not by any means peculiar to those of shorter range.
- 853. The CC is the only Manual range now accepted on the Continent. In Germany, Holland, Belgium, the Netherlands, Switzerland, France, &c. no Organ is ever made to any other compass. The celebrated Organs at Haerlam, Freiburg, Frankfort, Hamburgh, Rotterdam, Dresden, St. Denis, &c. are all CC Manual Organs\*.
- 854. Among the 300 or 400 English Organs that have been either built or remodelled conformably with this range, may be mentioned those at Christ Church, Newgate Street; St. Paul's, Knightsbridge; St. Peter's, and St. Michael's, Cornhill; St. Michael's, Chester Square; and St. Giles's, Camberwell. Also those in the Birmingham Town Hall; All Saints' Church, Northampton; the Collegiate Institution, Liverpool; the Parish Church, Ashton-under-line; &c.

<sup>\*</sup> It is worth the mentioning, that the Manuals of Spanish and Italian Organs sometimes descend below CC. Those of the new Organ in the Cathedral at Seville go down to  $\Lambda\Lambda$ ; those of the two Organs in Milan Cathedral descend to FFF; those of the chief Organ at St. Peter's at Rome range to CCC, short octaves; while those of the Organ at St. Alessandro at Milan are of CCC range, and of complete compass. (See accounts of these Organs in the Appendix.)

Much room, and a great expenditure of funds required to extend the compass of a Manual Organ below CC. 855. The CC compass for a Manual Organ, at the same time that it is quite satisfactory as to completeness and convenience, is far *less costly* than one of longer range; not that *cheapness* ought to be made a consideration in any case, where the object is to be devoted to the service of the Church, and

where the question should not be "what will do," but what is best. Still it does so chance to happen that a given number of Stops to CC will cost very considerably less than when extended down to GG, or lower; and the money and space saved by observing the distinction between what is essential and what is not, are of vital importance where funds and room are objects (and where are they not?), since they can then be devoted to the proper proportionate development of other departments which are too often straitened, or even altogether excluded, in order to allow of the lengthening out of a Manual Organ.

856. Some idea may be formed of the extra cost of a long octave Manual Organ, from the increase that is made in the price of one Stop alone by this downward elongation. The charge for an Open Diapason to CC is about eighteen pounds. The cost of the same Stop, if extended to GG, will be increased to nearly thirty pounds; if the FFF and FFF sharp be added, its price will be about forty pounds; and if its compass be further extended down to the CCC or 16-feet Pipe, and a good quality of metal be preserved throughout, its cost will not fall far short of seventy pounds. From these few facts, it will easily be seen that a hundred pounds may be soon expended in extending the Stops of even a single Manual, and this too, without extending its resources as a Manual Organ in any shape or way.

The true method of increasing the resources of a Manual Orgau.

857. For an illustration of this fact, try two Manual Organs by the same builder, furnished with Stops similar in every respect, only that the compass of those of the one shall

stop at CC, while those of the other shall extend to GG, or anywhere else. If this



or any other chord be struck in pure four-part harmony, first on one

of those Manuals and then on the other, the sound will be found to be precisely the same in each case, both as regards quantity as well as quality; in other words, the tone of the GG Manual Organ will possess no advantage over that of the CC one. The reason of this is obvious. Increasing the *compass* of a Manual, and increasing its *resources* as to tone and variety, are two widely different things, and they are worked out by totally opposite processes. The former end is attained by keeping to the same Stops, and augmenting their range; which is like adding a fifth or sixth string to the stringed instruments in a band, with the view to increasing their efficiency. The latter is effected by preserving the original compass (that compass being a full and complete one), and engrafting thereon other Stops that emit sounds differing in pitch, or quality, or both, from those produced by the original ones; a course which is equivalent to increasing the number and variety of instruments as

the means of extending the resources of an orchestra. As the capabilities of a band would be extended,—both in regard to its power of varied combination in the detail, and its grandeur of tone in the aggregate—by increasing the number of distinct instruments, so are the analogous powers of the Organ correspondingly augmented by increasing the number of distinct Stops; and they are increased only by this principle of development. A Manual can but be complete, let its compass be extended below CC as far as it may; even as a violin could be no more, were the number of its strings to be doubled, or even trebled Supposing such an experiment were really to be tried with a violin, music for that instrument would have to be altered, before any use could be made of the additions as violin features. In like manner all Church music has to be altered, before any use can be made of the keys below CC as Manual features.

How it may be ascertained whether certain keys are essential or not as manual 858. The best proofs of there being no legitimate use for the long octaves with the *hand*, are to be gathered from the deviations which it is necessary to make from the musical text, in order so to employ them. The keys acting upon these additional

tones and semitones are placed, as a matter of course, beyond the CC key; and, as the Manual part of all descriptions of Church Music alike only extends to that note (as has been already shown), they are not available as above, so long as a composer's notation is adhered to. To make use of the extra notes with the hand, the hand must be transferred an octave lower than the music directs; and single notes, octaves, or even full chords played down there: the Tenor part of the composition, meanwhile, being either entirely abandoned, or thrown an octave higher; the consequence being in either case a material departure from the musical text, and a most undesirable transposition of the parts.

859. Speaking of the superior effect that divided harmony produces upon the Organ, over close harmony, Forkel says, "by this means, a chorus, as it were, of four or five vocal parts, in their whole natural compass, is transferred to the Organ.

Let the following chords, in divided harmony, be tried,



and then compare how the following,



of rendering the same, sounds in comparison; and it will be evident what injury must accrue to the effect, from playing a whole piece in such a manner. In the former manner Bach always played the Organ." (Life of Bach, Boosey's edition, p. 33.)

860. Taking all the foregoing circumstances into consideration, it seems clear that the "long octaves" do not possess any real advantages as Manual keys, to compensate

for their enormous cost. And it is as indisputable that their application to certain departments—say the Chief Manual, or Great Organ—is often the means of excluding many of those which would be so from others; of reducing the number and amount of their contents; or even of necessitating their entire omission; by absorbing for their construction a sum from the gross amount which would be sufficient to secure the amelioration of one, if not more, of the above material blemishes. A few general illustrations may be given of these last-mentioned facts. To advance more specific ones would be inconsistent with the object of the present work.

The ameliorations that might be effected on a given specification, by regulating the outlay otherwise than in the construction of unessential Manual notes.

861. If the general arrangements of some modern £400 or £500 GG Organs be examined, they will in the majority of cases be found to be as follows—

Compass of Great Organ, GG to f 5 in alt, with

The Swell Manual continued down to GG, and made to act either on the Bass of the Great Organ, or on the Pedal Pipes, at pleasure.

862. From these particulars we perceive that, while the Chief Manual or Great Organ is carried half an octave lower than CC at a considerable cost, the second Manual Organ (Swell) is discontinued a whole octave above that note; the funds then not admitting of the latter department being made complete; and the Pedal Organ consists of "half" a Stop. Now it need scarcely be urged that the only correct points in which the two Manual Organs ought to differ from each other, are the number of Stops, or their strength of tone, and not in the compass, which should be the same in either case: for what is required for "soft accompaniments," is a Manual with Stops of a subdued tone, and not one without any bass to it.

863. The old Organ-builders, although compelled to make instruments to all kinds of compass, and thus to give an air of vacillation to some of their arrangements, but for which they must not be held responsible, and, for reasons already shown at page 131, were yet fully sensible of the propriety of making both Manual Organs to consist of the same number of keys; unless indeed, as was sometimes the case, particularly in their very small instruments, one was only designed as a Solo or Echo Organ, and not calculated for use in Choral accompaniments. A few remarkable exceptions only to this rule are known to exist. In the generality of instruments built during the latter part of the seventeenth century, throughout the eighteenth, and even at the commencement of the present, we constantly find the Second Manual (Choir) of equal range with the First or Great.

864. No doubt the Second Manual Organ is, in the present day, sometimes made shorter than the requisite compass, through lack of funds; and when such imperfectness is really the work of necessity, nothing can be said against it. That, however, is a separate question. When there are funds sufficient to pay for a GG Great Organ and a Tenor c Swell, there must be sufficient also to procure a Second Manual Organ of nearly, if not quite, perfect compass, if the expenditure be so directed; so that the above plea is hardly admissible under such circumstances, since

the lessened range of that department can then no longer be attributed to the smallness of the grant, but to the mode of its outlay.

865. The Swell being thus limited in its compass, some substitute is usually devised to supply the place of the omitted octave. The most usual expedients are to extend the second Manual downwards to the same range as the first or Great Organ, and make the continuation keys communicate either with the Pedal Pipes or with the Bass keys of the Great Organ. It is only necessary, however, to advert to the derivation of the terms Manual and Pedal ("manus," a hand, and "pes," the foot); when the inaccuracy of bringing on to a Manual certain Pipes designed exclusively for the use of the feet, and distinctly designated "Pedal" Pipes, will become apparent. Besides, the Pedal Pipes are the most ponderous-toned pipes in an Organ; and therefore, as a Bass to the Manual designed for soft accompaniments, are singularly inappropriate. Again, in many examples where there are "Double" Pedal Pipes, instead of there being an interval of a semitone only between the unison sound of the last key acting on the Swell and the first one on the Pedal Pipes, the two sounds are separated by an interval of a minor ninth; so that not only is the sound of the borrowed Bass opposed to its newly applied purpose, in the several respects of character, strength, and quality of tone, but in pitch it is of "16 feet:" whereas, for the Manual, the 8-feet pitch is most required.

866. Neither does the Bass octave of the loud or Great Organ form a satisfactory continuation to the soft or Swell Organ; for the reason that, if the same combination be drawn on both Manuals, the strength of the Bass (Great Organ) will be too strong to match well with the remainder (Swell); or if, to obviate this, fewer Stops be drawn on the Great Organ, there will exist but slight affinity between the tone-character of the Bass and the other parts. As before observed, if such arrangements as these arise from unavoidable causes, it is one matter; but if they are purely voluntary, as they must be admitted to be when they appear in conjunction with a GG Great Organ, it is quite another.

867. The next point to be illustrated is the extent to which "long octaves" limit the Specification of the different departments of an Organ.

868. A good average specimen of a GG Great Organ contains the following 10 Stops; viz. 1—Open Diapason. 6—Fifteenth.

2—Open Diapason.

7—Sesqui-altera—3 ranks.

3—Stopped Diapason.

8—Flute . . . . . . . 4 feet.

8—Mixture— 2 ranks.

4—Principal.5—Twelfth.

9—Trumpet. 10—Clarion.

869. By confining the above 10-Stop Great Organ to the CC compass, instead of extending it down to GG, the sum so saved would nearly, if not quite, defray the cost of the following Stops; viz.

1—Double Stopped Diapason16 feet tone.	9—Twelfth $\dots 2\frac{2}{5}$ feet.
2—Open Diapason 8 feet.	10—Fifteenth2 feet.
3—Open Diapason 8 feet.	11—Piccolo
4—Stopped Diapason 8 feet tone.	12—Sesqui-alteraIV ranks
5—Dulciana to Tenor c 8 feet.	13—Mixture III ranks
6—Stopped Fifth $5\frac{1}{3}$ feet tone.	14—Trumpet8 feet.
7—Principal 4 feet.	15—Clarion4 feet.

That is to say, the number of pipes to most of the keys could be increased from 13 to 20; the range of deep sounds extended downwards to the extent of seven semitones; and the capabilities of the department for varied combination nearly doubled.

870. Or, supposing the sum saved were expended on the improvement of an originally contemplated Tenor c Swell, containing the following six Stops; viz.

1—Double Stopped Diapason.	4—Principal.
2—Open Diapason.	5—Trumpet.
3—Stopped Diapason.	6—Hautboy.

871. Not only could its Specification be made to take the following improved form—

1—Double Stopped Diapason16 feet tone,	5—Fifteenth 2 feet,
2—Open Diapason 8 feet,	6—Mixture V ranks,
3—Stopped Diapason 8 feet tone,	7—Trumpet 8 feet,
4—Principal 4 feet,	8—Hautboy 8 feet,

but its compass could be extended downwards to at least Gamut G. That is to say, besides increasing the number of pipes to each key from 6 to 12, about half of the 8-feet octave could be added to the Swell Manual Organ, which would be far more useful than half of the 16-feet octave to the Great Manual Organ.

872. Or again, if the amount saved as above were to be laid out in getting rid of the ordinary "Pedal Pipes" of a single octave only in compass—in which the Unison and Double pitches are so strangely mixed together,—and providing something more intelligible in their stead, the following Stops could be secured:

Pedal Organ, compass C C C to tenor d.

1—Open Diapason.....wood....16 feet.

2—Stopped Diapason....wood....16 ft. tone.

3—Trombone.....wood....16 feet.

- 873. The questions that here suggest themselves are, first, whether the principle of Organ-construction that *necessitates* the confusing of the Manual Organ with the Pedal Organ, and the Pedal Organ with the Manual—making the one too long and the other too short—each rendered dependent on the other, while neither of them are in themselves complete, nor even capable of forming a satisfactory whole when united,—whether such a system should be perpetuated, in preference to the other principle which has for its foundation the requirements expected of each department, and which, from its well-tested merits, has become the standard principle in nearly all other countries but England?
- 874. Or, secondly, if either of the three modifications just suggested on the original Specification were to be followed, whether there would not result a much more satisfactory instrument?
- 875. It should be remarked that the *shortest* and *least expensive* of the various long octave Manual Organs was selected wherewith to draw the foregoing parallel Specifications. Had a longer compass been chosen, a still more surprising difference would have resulted; which would also have been the case even with the same compass, had two Manual Organs been taken into account instead of one; or even one Manual Organ, but having more Stops.

Other views in favor of GG Manuals, and against CC, consi-

876. There are other grounds yet to be noticed, on which the desire for the perpetuation of elongated Manuals is founded.

- 877. It is urged—(1) that the introduction of the extra keys offers scope for the production of many fine effects; (2) that their presence is absolutely essential, to serve as Pedal tones; and (3) that shortening the compass is going backwards instead of forwards.
- 878. That sounds below CC on the Manual are of the greatest use, and capable of most impressive results, has already been admitted, and is indeed self-evident. What is maintained is, that the desirability of their introduction does not call for a lengthening of the key-board.
- 879. When, for example, such sounds are required, it is very easy to draw the 16-feet Stop alone, when they will be obtained not only to GG, but seven semitones lower. For this method of using the Organ we have the authority of the greatest Organist and Organ-composer that ever lived. Sebastian Bach not only played, but actually wrote some of his music to be executed with the left hand on a 16-feet Stop only; by which means he drew from his instrument the practical effect of a CCC Manual, without overturning the theory of Organ-building to obtain it. See the translation of Forkel's "Life of Bach," p. 86.
- 880. No rules or specific directions, setting forth the manner of using the extra keys of a GG Organ with the hand, with fine effect, have ever appeared in print: and music for the Organ, of what kind soever, offers little or no assistance on the subiect; but, on the contrary, generally discountenances them. So that all is left to chance; - one has to invent a mode of using them, if they are to be touched at all; and it is but a natural consequence that the attempts should in different cases be attended with various degrees of success. That the Manual keys below CC are seldom made use of with the hands, when they are introduced, is clearly evinced by the comparatively perfect state in which those keys are invariably found, when most of the others are so much worn as to require renewal.
- 881. But whatever may be the effects attendant on the lengthening of the Manuals, if they be placed in juxtaposition with the decrease sustained in the number of the Stops; the loss of the numerous soft combinations that could have been made with the aid of those Stops for accompanimental purposes; and the impossibility of playing the best music even correctly, still less with adequate effect; it will then be seen what sacrifices must be made to secure the presence of five semitones—the advantages of which, when they are obtained, is very generally questioned.
- 882. The next position, "that the presence of the extra notes on the Manual is essential, that they may serve as Pedal tones," offers anything rather than assistance to the principle of Organ-construction it is intended to support. The anomaly of attaching to the Manual keys, Pipes that are expressly adapted for the feet, has already been pointed out. The above plea is in favor of placing certain keys and tones on the Manual which are conceded to be chiefly for the use of the Pedals. This creates a fresh discrepancy, and one that assumes a more prominent form, when it is considered for what purpose the extra tones are said to be introduced, and how far it is possible they can effect the end desired. If the Manual Unison Stops are required to serve as substitutes for the Pedal Diapasons, they should descend as far as those Diapasons,

namely, to CCC; if as Octave Stops, only to CC. The GG range is 7 semitones too short for the one purpose, and 5 too long for the other; therefore the peculiar unfitness of the notes in question, from BB to GG, for rendering the assistance sought, in a correct and intelligible manner, becomes obvious.

883. In suggesting the adoption of the CC compass for the Manual, it must not be concluded that the notes below CC are not required anywhere, but simply that they are not required on that Clavier as Manual notes. This leads to the third objection, that "shortening the compass is going backwards instead of forwards." This appears, at first, to be a well-grounded objection; yet, in reality, it admits of a ready reply. The great question is not which is the longest, but which is the most correct, complete, convenient, compact, and economical compass. These questions have already been once considered, but they may be further illustrated by a return to our former parallel. Supposing a fifth and sixth strings to have been added to a violin, and, no legitimate use being found for them, they were taken off again; the violin would not, on that account, become a less perfect instrument;—there would be no "going backwards." Or, to draw the parallel more closely, if, to supply the two extra strings for the violin, two had been abstracted from the violoncello; and it was afterwards desired that both should be rendered efficient; there could be no question as to the propriety of reducing the former and increasing the latter to the proper and precise dimensions. This latter comparison is the more exact one to draw; for the essential lowest octave of the Swell, or the equally essential upper octave of the Pedal Organ have been but too often omitted, where the one or the other might have been introduced but for the unessential notes from BB to GG on the Great Organ. It is believed there could be but one opinion as to the most correct course to pursue in regard to the stringed instruments; and it would seem surprising there should be a second one against an equally consistent proportioning of the different departments of an Organ.

884. It may be mentioned, by the way, that although the "Viols" of former times had six strings, and the modern violins have but four, yet the latter have always ranked as the more perfect instruments; while the advancement in the composition of music for string instruments; as well as of the playing on them, date from the time of the general adoption of the instrument having fewer strings. The parallel holds good, in every respect, in regard to Organs and Organ-playing in England.

885. The advocates for the long and for the short Manuals appear to be agreed on one very important point, namely, that the 16-feet range is the most correct one for as many of the Organ *Stops* as possible; the point of difference between them being as to where the large Pipes should be planted, whether on the Manuals or on the Pedal.

836. In Germany, also, the CCC or 16-feet range is viewed as the most correct one for the Organ Stops, even more generally so than in England, but not for the Organ Manuals. The Pedal is justly considered as the only proper place for their Bass. This is conclusively shown in German Specifications, where may frequently be seen disposed to a "Principal 8 feet" on the Manual, a "Principal-bass 16 feet" on the Pedal;—to the "Octave 4 feet" on the Manual, an "Octave-bass 8 feet" on the Pedal;—to the "Flote 4 feet" on the Manual, a "Flote-bass 8 feet" on the Pedal;—to a "Quint 5½ feet" on the Manual, a "Quinten-bass of 10½ feet" on the Pedal;—and so on. A reference to the German Specifications in the Appendix—taken either

from German Organ-books, or copied from the Stop-labels themselves—will fully illustrate this fact.

How the CC Manual compass was first exceeded.

887. The question here suggests itself how the CC compass ever came to be exceeded. The Manual range of the Organs built immediately after the Restoration, generally con-

sisted of four octaves, from CC to c3 in alt. (See Dr. Burney's article on the Organ before referred to.) The Double Diapason at that time was scarcely known in this country, and was certainly not appreciated; the Pedal Organ was entirely unknown; so that the English instruments of the date in question lacked those deep and sonorous tones which render an Organ so peculiarly well adapted to its place in the Church, and so superior to all other instruments for religious purposes. In proceeding to supply the existing deficiencies, without regarding either of the two systematic causes that were open for adoption, the third and only remaining mode of doing so was by extending the Manual downwards. Two notes were therefore added; one, sounding AA, placed on the CC sharp key; and the other, giving GG, on an additional key placed next beyond the CC one. A Manual of this kind is now called a "short octave" Manual; to distinguish it from the still longer ones that are to be met with. The result of this experiment being favorable as to the effect, the intermediate semitones from CC to GG were applied (excepting perhaps the GG sharp); and thus the GG long octave Manual Organ was formed. Further extensions were subsequently made; first to FFF, then to CCC. It is now, however, admitted by the great majority of English organists, that these added keys do not so properly belong to the Manual as to the Pedal; and that no sufficient grounds exist for introducing them as adjuncts to the former-mentioned departments in new work. It is not considered a sufficient reason for so doing, that the Manuals were made to GG in our fathers' time. Besides, if the key at which the Manual ought to stop is still to be passed—if the rules which should keep its compass within proper bounds are to be disregarded,—there then exists nothing to prevent the introduction of a GGG or even a CCCC Manual, if individual taste should desire it. Such an extension would be but carrying out, to the extent of a second octave, the elongating principle, which many would advocate to the extent of one octave, and which, moreover, would be equally justifiable on the same ground of individual fancy.

888. That the CC is the only true Manual compass, would not then seem to be so much a matter of individual opinion (as must be the supposition on behalf of any other), as a self-manifesting fact—all Church Music clearly showing it to be so. That it is also the only one that facilitates the perfecting of the range and proportionate development of the other departments, by avoiding an undue outlay on the Chief Manual Organ, is also beyond a doubt. Under all these circumstances, independently of others about to be mentioned, the CC compass is the only one that can be suggested with confidence for adoption as the best for the Manuals of new Organs.

The confusion in the size of the Stops caused by their clongation.

889. But there is a disadvantage in lengthening out the Manual Stops that has not as yet been hinted at; and one, moreover, that seems to be always overlooked by the promoters

of long Manuals; namely, the confusion into which such elongation throws the question of the standard length and the literal pitch of the Stops. It must have been observed, that in much Organ music, to save specifying any particular Stop that the instrument might or might not contain, the direction given is often simply an open one; as, for instance, "one 8-feet Stop;" meaning, of course, thereby, a Unison Stop. Now, by extending the compass of the Stops downwards, their size is altered; and so great is the confusion caused in consequence, that many of the lengthened Stops on a GG, FFF, or CCC Organ are made to assume a size identical with that of certain other Stops, correctly ranged, to which they are quite opposed, either in nature and method of usage, or both; and which ambiguity is eminently calculated to throw those who are desirous of identifying the size and pitch with the use of the Stops, into the greatest doubt and perplexity. For example—an Open Diapason would be of 8-feet length on a CC Manual. On a FFF Manual, the Quint would be the Stop of that size; and on one of the CCC compass, the Principal. If, therefore, an 8-feet Stop were really to be drawn as directed, it would in the first case produce the right effect, but in the second would sound the music a fifth higher than written; and in the third, the octave above. Again, in the instance of a GG Organ, the Diapason and Principal (102 and 51 feet), which should be freely available for the majority of combinations, and understood to be so, are, from their altered size, made to be identical in measurement with the Quints of better-arranged Organs; while the Twelfth and Larigot of a FFF Organ (4 and 2 feet), which require to be used with much care, are by the same process made to correspond in size with the Principal and Fifteenth of a CC Organ, which are scarcely at all restricted in their use. In fact, the size of the Unison, Octave, and Mutation Stops are mixed, crossed, and inextricably confused together.

890. But it might be suggested, if the confusion of lengths could somehow be got over (which of course it cannot), and the Manuals were to be extended down to CCC, whether then there would not result a satisfactory substitute for a proper Pedal Organ; and one moreover that would offer great conveniences for the purpose of Duetplaying. In one sense it would; but at the same time new difficulties would be created. What is required of an efficient Pedal Organ, is not simply a Bass to the Great Manual Stops, neither more nor less; but a Pedal Bass to as many of the leading Stops of all the Manuals as circumstances will permit; with the addition of such others as will stamp that department with a character of individuality. All these ends can never be attained by extending the compass of the Great Organ even to CCC.

891. And with respect to the conveniences for Duet-playing, a principle of Organ-building that takes two performers to produce the effect that one could manage under proper circumstances, can scarcely be said to be an advantageous one.

892. Again, if the Manual Unison Stops be increased to the 16-feet size, the Doubles will become 32; and 32 being then the Unison size for the Pedal, the Doubles will be 64 feet in length. The full development of a long Manual Organ would demand the introduction of Pipes nearly the height and bulk of factory chimneys, which would be destitute of definite tone when made.

893. In suggesting the adoption of the CC compass for the Manual, it will not of course be supposed that discontinuing the Manuals at that key will, alone and of

itself, render an Organ a better and a more perfect instrument. It is nothing more than one necessary step towards a successful issue. Two of the most prominent faults of the long Manual systems are—they allot too much to certain Manuals, and too little to the Pedal; both of which faults require correcting. But if the 16-feet octave, or even a portion of it, be omitted from the Manual, and nothing be added to the Pedal by way of compensation, then the Organ is left practically less efficient than it was before, in spite of the theoretical corrections. This is because the "Bass" of the Stops, instead of being simply transferred from the Manual to the Pedal, is omitted altogether; giving strong ground to justify the opinion of the promoters of the long Manual systems, that "shortening the Manual compass is going backwards." The minimum number of "Pedal Basses" which a CC Organ should have, is one third as many as there are Stops in the Great Organ. The maximum number is one third as many Pedal Basses as there are Stops in the entire Manual Organs. Below the former proportion the Pedal Stops are never reduced in Continental Organs of pretension. (See Foreign Specifications, in the Appendix; also the works of Töpfer, Kützing, Seidel, Schlimbach, &c.) These observations, however, are not intended to qualify in the slightest manner the ample proofs already adduced of the great superiority of the CC Organ, when consistently carried out. As compared with it, the inferior and patchy Pedal effect of the GG Organ is only equalled by a second unsuccessful imitation, also peculiar to long Manual Organs, namely, that of mimicking the effect of a 16-feet Stop, by coupling the Choir Organ to the Great in the octave below. Such expedients in co-existing Organs that have only been partially remodelled, offer no satisfactory precedents for their adoption in new work.

The upward range of 894. With regard to the upward range of the Manuals, the Manuals. Organ Music very seldom ascends beyond c<sup>5</sup> in alt; while the Psalm Tunes and Chants, of course, do not reach any thing like so high: but, as the Pipes to the keys above that c3 are small, do not occupy much room, and cost but little, and moreover are very useful in a variety of ways, particularly where there are octave couplers, the Manuals are generally continued up to f3 in alt, a3 in altissimo, or even to c4 in altissimo. This latter range is in some respects desirable for Concert-room Organs.

### CHAPTER XXXI

OF THE PEDALS AND PEDAL ORGAN; THEIR GRADUAL INTRODUCTION INTO ENGLAND; AND THEIR CORRECT COMPASS.

- 395. Among the most important additions and improvements that have been made to the Organ in modern times in England, are to be classed the introduction of Pedals, and the establishment and subsequent development of the Pedal Organ. These features, the importance and utility of which have for centuries been appreciated so justly on the Continent that a place has been assigned to them in every instrument of even moderate pretensions, are even now only just beginning to be adequately valued in this country. Yet, as Forkel observes, in his life of Bach, page 99, "the Pedal is an essential part of the Organ: by this alone it is exalted above all other instruments; for its magnificence, grandeur, and majesty depend upon it. Without the Pedal, this great instrument is no longer great: it approaches those little Organs called in Germany Positivs, which are of no value in the eyes of competent judges."
- 896. A few particulars concerning the date, compass, and number of Stops found in some early Continental Pedals, may be of use, as showing at how early a date an independent Pedal was appreciated abroad.

NAME OF PLACE,	DATE.	NUMBER	OF STOPS.	COMPASS.		FOREIGN CATIONS.
Amiens Cathedral	1429	. 7				14
Constance Cathedral	1518	8	CCC	to Gamut G		115
Freiburg in Breisgau	1520	4	CCC	to CC $\dots\dots$		37
St. Peter's, Hamburgh, earlier						
than	1548	13, inelu	iding 2 of			
		32 fe	et			69
Rouen	1630	8	CCC	to tenor c		17
Lucerne Cathedral	1651	13, inch	iding 1 of			
		32 fc	cet, and 5			
		of 10	G feet CCC	to tenor e, sho	rt	114
St. Nicholas, Hamburgh	1686	. 16, inch	uding 2 of			
		32 fe	cet			68

397. As to the precise period when Pedals were introduced into this country, great uncertainty prevails. According to an autograph letter, written by the late Charles Wesley, and now in the possession of Dr. Rimbault, the Savoy Organ, by Snetzler, was the first that had the important adjuncts in question, and which

formed part of Snetzler's original work. Another account states the Organ in St. Matthew's Church, Friday Street, to have been the first to have Pedals; and, further, that they were of two octaves in compass; were of CCC range; had a complete set of Stopped Diapason Pipes of 16-feet tone attached; and were made in 1790, under the direction of the late Rev. Mr. Latrobe. A third account is, that the first Pedals made in England were those applied to the Organ in Westminster Abbey, by Avery; that they were a ninth in compass, GG to Gamut A, with an octave of unison Open Pedal-pipes attached; that they were such a novelty and curiosity that people used to go from far and near to hear and see them; and that Dr. Benjamin Cooke, who died in 1793, composed his fine Service in G for the opening of the instrument, after receiving those additions.

898. Let which of the above accounts be right that may, one fact is certain, namely, that the range of the Pedal-board and Pedal-organ—like that of the Manual and its Organ—have in England been subject to great diversification. In seeking to form a governing opinion on this subject, i. e. of the correct Pedal compass, the surest course will be to enquire for what end the Pedal is introduced into the Organ; and take, as a guide, the answer this question will elicit. The primary object, then, is to enable the Organist to play the Bass part of any Church Composition with his feet\*, so that the necessity may be obviated of his deserting the Tenor and perhaps other inner parts; to which, it is scarcely necessary to say, his left hand should be chiefly devoted†.

899. In Germany, Holland, &c. where the true principles of Organ-construction and Organ-playing are more generally understood and appreciated than was the case till lately in England, the question concerning the compass necessary for the Pedal-clavier and Organ has long been set at rest; whereas in this country no attention at all commensurate with the importance of the subject was bestowed upon it, either by Organists or Organ-builders, until within the last few years; but the Pedals were made to accord with the incorrect GG Manuals.

900. But as music had to be more or less altered and injured to suit such Pedals, a proper spirit of enquiry was awakened; the contents of the English and German Sacred musical storehouses were diligently consulted; and from those unimpeachable sources a solution was obtained to the problem, "What is the proper compass for the Pedal?" The result of these examinations was the decision, that, to be competent to their purposes, a Pedal-clavier and Organ should possess a range of from 27 to 30 keys and tones, commencing at CCC, and ascending to Tenor d, e, or f.

901. This CCC scale has accordingly been almost uniformly adopted in England during the last few years. Occasionally only has the old GG range been adhered to. As, however, the latter still finds favor at times, it is necessary to set forth on what

<sup>\*</sup> Bach "produced with the Pedal, not only the lower notes, or those for which common Organists use the little finger of the left hand; but he played a real Bass melody with his feet." —Forkel's life of Bach, p. 33.

<sup>†</sup> The Tenor was formerly the Canto Fermo, Plain-Song, or principal part in a composition, and derived the name of Tenor from the Latin word tenuo, I hold; because it held or sustained the air, point, substance, or meaning of the whole Cantus; and every part superadded to it was considered but as its auxiliary. In Tallis's Responses, the Plain-Song is preserved in the Tenor.

substantial grounds it is considered wholly unsuitable to the present advanced state of Organ-playing in this country.

The insufficiency and incorrectness of GG Pedals for practical purposes.

902. The first disadvantage attendant on a GG Pedalboard, is, that a very large proportion of the Music written expressly for the Church cannot be correctly played thereon. Even many of the little pieces in the instruction books of *Rink*,

Hesse, &c. are beyond their capabilities. In fact, Pedals which descend no lower than GG are precisely in the same imperfect state that a violoncello would be without its fourth string, that is, also descending only to G; and the straits to which a violoncellist would be reduced by such a curtailment of the proper compass of his instrument, may well be adduced to faithfully illustrate the difficulties which an organist, who desires to play correctly, has to contend with when performing on Pedals so incomplete in their downward range.

The wrong pitch in which GG Pedals execute on the Manual Stops such pasages as do come within their range.

903. In such case, even passages which actually lie within their compass are not sounded in the right pitch on the Manual Stops. It is the true nature of a Manual Unison Stop to produce sounds in *exact accordance* with the notes written; whether the keys be pressed down with the fingers, or drawn down by

the Pedals: but this, usually, is what is not the case on GG Organs. For instance,

if some simple progression, such as the following, D:

D: 9 9 0

be played first on the Manual Unison Stops, and then repeated on the Pedals coupled thereto; instead of the same sounds being produced, we have the following—

J: \_\_\_\_\_\_

In fact, we find this singular confusion of "size"

and "sound" presented by a GG Open Diapason:—while the Stop itself is of  $10\frac{2}{3}$  feet standard length, its pitch will be of 8 feet, if played with the hands, and of 16 if played with the feet.

The impossibility of satisfactorily writing CCC Pipes to GG Pedals; and the false pitch in which the Pipes sound when they are so united.

904. The second disadvantage attendant on a GG Pedalboard consists in the impossibility of satisfactorily attaching thereunto an octave of Pipes having CCC for their lowest sound. The Pedals do not extend low enough to admit of the Pipes being applied to the right keys; hence they are made to act on the only perfect C octave which the Pedals do present, namely,

the octave above. But, in applying them in this manner, the Pipes undergo transposition, which materially alters their nature. Instead of forming the *lowest* octave of a 16-feet Stop, they then constitute the *upper* octave of a 32-feet Stop, and produce a sound *two* octaves lower than the notation, thus—



905. The incorrect Manuals suggest wrong Pedals; and the wrong Pedals necessitate a defective application of the "CCC Pedal Pipes." The Pipes being attached to the Pedals in the manner just noticed, the remaining half-octave of Pedals (i. e. the five treadles from BB down to GG) are either made to communicate with the same Pipes as their octave above, or they are furnished with Pipes in unison therewith; the result in either case being virtually the same. A "return" or "repeat" is caused in the series of Pedal sounds, which leads to this singular anomaly,—that the Pipe which produces the *lowest* sound is attached to one of the *middle* Pedals, while another that gives one of the *medium* sounds is made to act on the *lowest* Pedal.

The false readings which the CCC Pedal Pipes create.

906. The third disadvantage attendant on a GG Pedalboard arises from the compulsory attachment of the CCC Pipes to the wrong octave of Pedal keys, and the consequent "return"


that takes place on the half-octave of keys below. By this "return Pedal Pipe system" the two G, G sharp, A, A sharp, and B Pedals are made to produce precisely the same sounds; so that whether the upper half-octave of Pedals be used

D: or the lower, D: or both together,


no contrast or relief of any kind can be gained. The consequence of this identity in the sound produced from both ends of the GG Pedalboard, is, that such musical progressions as can be played on the treadles are altered, transposed, and reversed in their sounds, in the most remarkable manner;

often producing effects of the most startling and painful description. A few illustrations of this fact will now be given.

907. The first is taken from the well-known Chorus in *Handel's* Messiah, "And with his stripes." The subject, on its first entry in the Bass, stands thus in the score:



908. On "Return Pedal Pipes" it is given in the following form:-



the subject being, in a musical sense, destroyed by the "return," marked by an asterisk, and a grammatical error of the worst description introduced.

909. The next illustration is the subject of the concluding Chorus in Mozart's Litany:



910. The above—one of the most dignified and pompous subjects ever written—is thus altered by the "Return Pedal Pipes:"



- 911. The reading conveyed of the first five bars of this subject, then consists of a tame and monotonous reiteration of a single note.
- 912. The following few chords exhibit the progress of the harmony in the opening phrase of the introductory symphony to *Handel's* Coronation Anthem, "Zadok the Priest:"



and the following notes show the very objectional form the resolution of the seventh in the Bass is made to take by the Return Pedal Pipes:




- 913. The foregoing selections are from works written for Voices and Instruments. The two following are subjects from strict Organ compositions.
- 914. No. 1 is taken from *Bach's* well-known Fugue on the German Chorale, "Wir glauben all" au einen Gott," and which stands thus in the composition itself:



915. This is given out in the following form on the Return Pedal Pipes:



916. The next is from Mendelssohn's Fugue in C Minor:




917. The Pedal Pipes give the following version of the above:




- 918. It would scarcely be possible to recognize either of the foregoing subjects when played on the Pedal Pipes alone; for the original order and nature of the intervals from note to note are so frequently altered, that but few vestiges of the original progression remain.
- 919. Here are two of the simplest subjects that are to be found in the whole range of our standard Choral works for the Church:


Opening subject of the Anthem, "I will exalt thee," by Dr. Tye.




As given on a Return Pedal Organ:



Opening subject of the Anthem, "Almighty and everlasting God," by Orlando Gibbons:



Subject as given by a Return Pedal Organ:



920. The list of examples of false reading rendered unavoidable by the principle of Organ-construction already adverted to, might be increased ad infinitum; but this must be needless. The above specimens will be sufficient to show how defective is the GG Pedal and "Double Pedal Pipe" system. For Concert-room Organs it is absolutely worthless.

The introduction of "Double Pedal Pipes" as the first Pedal Stop, not in accordance with the laws of Organbuilding.

921. But, independently of violating the rules of the Grammar of Music when they are being used, the "Double Pedal Pipes," by their introduction as the first Stop on the Pedal, involve a departure from the very rudiments of Organbuilding; one of which is, that the Unison Stops of each Clavier, as being the most important, should be *first* introduced.

Others are, (1) that the sound of the Unison Stops should predominate; and (2) that the first Stops proposed for the Pedal, should be the Bass to some of the Manual Stops. That it must be impossible for the Organ-builder to balance the tone of his instrument properly, if the most important Pedal Stops—the 16-feet—are designed to be omitted, and another—the *Double*—which should be subservient, is to be introduced, is self-evident. Moreover, the Specification itself presents great want of unity and clearness of design, when the "Double" is the only Stop proposed for the Pedal, and yet is the Stop that is excluded from perhaps all the Manuals, as is generally the case with GG Organs.

922. It might be urged that the above important omission from the Pedal is very well supplied by coupling the Manuals thereto in such a manner as to obtain a 16-feet pitch from the clongated Stops of those departments, so far as their compass will permit. This, however, is not really the case; for, instead of the scale of the single Pedal Stop being so deduced from that of the borrowed Unison as to secure the predominance of the tone of the latter, it is generally so much larger, and the power and density of its sound so much greater, that it cannot be reduced into proper proportion, even if the Diapasons of all three Manuals are coupled together and brought to bear against it.

923. In fact, after carefully considering what are the characteristics of a GG Organ, with Pedals of the same compass and Return Pedal Pipes, and ascertaining its theoretical and practical defects, it scarcely becomes a subject of wonder that such a system (or rather no system) should be considered unworthy of perpetuation in the present day.

924. For, in the first place, it is as necessary to have the Bass part of a Composition played in an intelligible and correct manner as any other—more particularly as Part-singing, and consequently Part-playing, is now more often encouraged and appreciated in the English Church than it used to be; and in the next, on an instrument so defective in the main points we have described, the greater part of the Music of the Church can either not be played at all, or without due effect; as is well known to many Organists whose misfortune it is to have so unequally arranged an Organ whereon to play. Even the very name "Pedal Pipes," as applied to the single Half-Stop on the Pedal of a GG Organ, is devoid of definiteness and intelligibility. From such a name it cannot be gathered whether a Stop, so called, sounds in unison with the Manual Diapasons, or whether it gives the octave below; or if it does neither the one nor the other in particular, but partly both. Neither can it be discovered whether its Pipes are made of wood, or of metal, or whether they are Open or Stopped. Then of the Scale; the CCC Pipe will in some instances be scarcely 10 inches deep; while in others it will be 20 inches—that is to say, there will be a greater difference than between the Dulciana and Open Diapason on the Manualsyet there will be nothing whatever in the name or labelling to announce this difference. All these varieties of pitch, material, scale, and structure, are alike to be met with under the one indefinite term "Pedal Pipes."

The premature introduction of Double Pedal Pipes often a hindrance to the introduction of more important Pedal Stops. 925. Besides the defects above enumerated which they bring with them, the premature introduction of Double Pedal Pipes is an injudicious step on other grounds. They are often the means of preventing the subsequent introduction of the more important Unison Pedal Stops, on account of the false

impression which they convey of the "size" of the instrument of which they form a part. Instances might be cited, where an Organist has represented to the authorities the imperfect state of his instrument; and has been told, in reply, that the Organ is "too large" or "too loud" already; and this too when there has been but half a Swell, no Choir Organ, and no Open Diapason, Stopped Diapason, &c. on the Pedal. Nor is such an answer made without some justification, although founded on a serious misconception. Those who have had neither the requisite leisure nor opportunity to make themselves acquainted with the technical details and practical working of an Organ, can only speak of the instrument from the effect which it produces on them in the Church; and an octave of Pedal Pipes (in a small Organ), sounding two octaves below the corresponding octave of the Bass voice, of a larger scale than those forming any other Stop in the Organ, and often supplied with a wind of extra strength, are just the very things to betray one who so forms his judgment into a wrong conclusion. Their tone, standing apart (as it must do under such circumstances) from the remainder of the instrument, arrests the attention of the auditor; who, erroneously taking that as a sample of the sound of all Pedal Stops, feels opposed to the introduction of the latter. It may seem paradoxical to those who are not sufficiently masters of the subject to be aware of its perfect truth, that an Organ will possess more adequate means for being played soft, if the one octave of Pedal Pipes be omitted, and some three or four complete Pedal Stops be introduced; but such is nevertheless the fact. It is constantly the case in accompanying Church

Music, that a soft Pedal Unison Bass (that is, one of 16-fect pitch) is the only appropriate Bass, while one of a heavier and deeper tone is quite opposed to the purpose; yet when, instead of some of these most important Pedal Stops, there are only the "Double Pedal Pipes" at command, the Organist has no alternative but either to use those, in spite of their manifest inappropriateness, or none at all; and with the certain prospect of missing the true effect, do which he may, and perhaps of being held responsible afterwards for the result. What has been here advanced in relation to Church Organs, applies with even greater force to Concert Hall Organs.

The arrangements of a CC Organ contrast favorably with those of GG compass.

926. How strongly do the simple, systematic, and most excellent arrangements of the Pedal of a genuine CC Organ contrast with the complicated, faulty, and incomplete attributes of the GG plan—many of the particulars of which have just

been detailed! For instance, on a correctly planned CC Organ, the Bass part of any piece of Church Music can be executed on the Pedals in all its integrity, let the instrument be ever so small. In the next place, music that is played thereon, with the Manuals coupled thereto, is not only sounded in the correct pitch, but is also given in octaves, consisting of the actual sounds represented by the notation, with the addition of the octave below, as would be the case in Duet-playing on a CCC Manual Organ. The most skilful left-hand would fail to play passages in octaves on a long-Manual key-board, which can be executed with ease on a properly arranged CC Organ. The Manual Unison Stops (8 feet) give the various progressions as they stand (just as Bass voices or violoncellos would), while the Pedal Unison Stops (16 feet) give it as faithfully in the octave below; that is, in the pitch corresponding with that of the Double Basses;—so happily does an artistically planned Organ facilitate, and render comparatively easy, the perfect execution of music of the highest and most difficult class.

927. It should be the aim, then, of those to whom is entrusted the task of designing an Organ (if it really be desired that the instrument shall be as applicable and adequate to all its purposes as circumstances will permit, and be worthy of recognition as a work of art when completed), to eschew all plans that involve the violation of those rules and principles of which every Organ-builder and Organist is naturally supposed to be an upholder. All attempts to produce an artistic instrument will prove futile, unless the stunted GG Pedal-board and the imperfect and defective 32-feet Stop be given up; and in their lieu, a CCC set of Pedals, and at least one intelligible Stop of 16-feet pitch, be substituted. In Organs even of the most diminutive kind, this is quite attainable. A Covered Stop of that size of tone might, in extreme cases, be disposed on the Pedals; in moderate-sized Organs, two or three 16-feet Stops should be introduced. In instruments of larger dimensions, a 32-feet sounding Stop may be added; and in those of the first magnitude (and in those ONLY), should a 32-feet Open Stop appear. The 32-feet Stop, therefore, is one of the last, instead of the very first, to be proposed. The rules which regulate the admission of these and smaller Pedal Stops is a subject for separate consideration.

928. It need only be added here, that the CC Manual key should be capable of being united to the CCC Pedal; the Tenor e to the CC Pedal; and the middle c¹ key to the Tenor c Pedal. The intermediate Manual notes would of course be at-

tached to the respectively positioned Pedals\*. Thus would be secured the presence and union of the 8 and 16 feet scales, even in an instrument of the most prescribed limits.

<sup>\*</sup> In adding C Pedals to a long octave Manual Organ, it would be necessary—to prevent the notes below CC from becoming useless—to have two Pedal Couplers; one of the kind above recommended, and another to unite the GG Manual note to the GG Pedal, and so on. In many existing cases, where there are CCC Pedals and GG Manuals, the Pedals from CCC to FFF take down the Manual keys from CC to FFF, and then the GG Pedal draws down GG on the Manual. This creates a second return.

## CHAPTER XXXII.

## THE SITUATION FOR THE ORGAN.

929. The next subject for consideration—the situation for the Organ—is of no less importance than those already discussed; since on it depends, in a great measure, the best effect of the instrument when it is finished. So great an influence, indeed, does this question of position exercise, that an inferior Organ favorably situated will sound better than a superior one that is unfortunately placed; and a weak-toned instrument in a good position will sound louder than a fuller-toned one in an unfavorable situation.

Acoustical facts to be consulted.

930. Before, however, entering upon the enquiry as to which are good situations and which are not, it may not be unimportant to mention certain facts connected with the production and propagation, the absorption and weakening of sound; as a recollection of these will materially assist in illustrating the relative excellence or otherwise of the several sites that will have to be brought under notice.

How sound is pro-931. "When bodies are brought into sudden contact," duced and propasays the author of the volume entitled 'The art of improving gated. the Voice and Ear," "or a single body is made to vibrate or expand suddenly, it must displace a quantity of the surrounding air. The air which is thus displaced, in its turn displaces that portion of air which is next to it or beyond it on every side, above and below, before and behind, on the right and on the left. This displaced portion of air displaces again what is beyond it, and so on, in a manner similar to the circles of water which arise from throwing a stone into a pond. In the case of sound, however, the waves are not in superficial circles, but in spheres, like the coats of an onion." Sound, then, travelling, as it does, in all directions, it is easy to discover the cause of the excellent musical effect produced by Organs occupying a central position in a building; as, for instance, the Choir screen of a Cathedral or other large cruciform Church.

How brief sounds disperse.

932. A sound that is only an instant in duration, does not spread like a flood of water, pervading every part over which it passes; but, like a ripple made in a lake, which leaves in repose the part that it has quitted. This may be ascertained by striking a full staccato chord on a Cathedral

Organ that occupies a central position, when the sound will be distinctly perceived retiring from the instrument to the remotest parts of the building, gradually lessening in power, and ultimately dying away.

How sustained sounds more completely occupy space.

933. A continuous sound, on the contrary, pervades the entire space through which it has travelled; because fresh sound-waves are constantly being engendered, which successively occupy the space the preceding ones have left. This is the reason that the first sound of a sustained chord on a Cathedral Organ is not heard receding. The greater strength of the sound-waves nearer the instrument, from being less spent by divergence, prevents the original sound being heard. On raising the hands, however, from the keys, the sound will again be heard fading away.

The distribution of a sound that cannot travel backwards.

934. A sound that is produced in such a situation that it cannot travel backwards, on account of there being a large reflecting surface to check its progress in that direction, as in the

example of an Organ placed at the west end of a church, spreads somewhat after the manner of the rays of light through the bull's eye of a lantern. It travels forwards and sideways, upwards and downwards, and spreads as it proceeds. It is also reflected forwards by the surface behind; and derives some accession of strength from being so reflected. Sound, however, being greatly more reflexible than light, it spreads more rapidly, makes its way into recesses, round columns, and passes great walls or corners of buildings, where the solid interpositions would, in the example of light, only cast shadows.

935. An illustration of the fact of sound spreading as it proceeds may easily be found in a galleried Church having the Organ at the west end. The tone of the instrument is the most completely "caught," not by stationing oneself immediately inside the door, at the side of the Organ, leading into one of those appendages; but by traversing the gallery some little distance. In a similar manner an illustration of the fact of sound descending as it progresses, is given in the circumstance of an auditor in the nave having to place himself at some little distance from the instrument to hear it to the greatest advantage; and in his having to increase that distance in proportion to the elevation of the Organ above the ground.

936. The extent to which the sound of a west-end Organ is strengthened, by reflection from the surface behind, does not meet with a familiar illustration in a Church that has the instrument so situated; but in those Cathedrals wherein the Organ occupies a central position, a good example is presented by the effect of the "Choir Organ in front;" the tone of which sounds strong in the Choir, into which part it is directly reflected by the Great Organ case behind; but which sounds weak outside the Choir, on account of the Great Organ case standing between the Choir Organ and the auditor, and therefore presenting an interposition to the tone travelling in that direction. The extent to which the Great Organ case assists the tone of the Choir Organ in its forward progress into the Choir, and checks its backward course into the nave, are points that received distinct illustration in St. Paul's Cathedral during the present year (1854), on the occasions of the Sunday Morning Service being celebrated in the Choir of the Church, and the afternoon under the dome. In the

fore-mentioned part of the building, the tone of the Choir Organ, as far as the Principal—reflected as above—sounded louder, and afforded more support to the vocal Choir, than did the same Stops, with the Twelfth and Fifteenth added—impeded as above—when the singers sat outside the Choir. Another proof, though of a negative kind, of the extent to which a sound is strengthened by reflection, is afforded by the circumstance of its being so much weakened by the removal of the reflecting surface from behind. An illustration of this fact was given at Westminster Abbey, when the Great Organ was removed from the centre of the screen; which alteration, allowing more of the tone of the Choir Organ to travel backwards into the nave, caused it to appear more "faded" in the Choir.

Sound weakened by divergence.

937. As the rays of light would become more faint as they proceed and diverge, so sound becomes weaker the farther it travels and the more it disperses. "Whenever," says Dr. Brewer, in his work on the 'Phenomena of Sound," sound can diffuse itself freely round its centre of propagation, it loses in intensity what it gains in extent;" consequently, a sound that has travelled twice a certain distance, will only be heard with one-fourth its original strength; the loudness not diminishing inversely as the distance increases, but inversely to the square of that distance. This is the case in the open air; but in a building—as a church or a concert-room—the walls and roof limit the extent of the divergence of the sound, and prevent its fading away so rapidly. Moreover, after the sound has struck against them, and is checked by them, it is by them reflected back; and if the original sound has ceased, the reflected sound forms an echo; but if it continues, the latter mingles with the former, and enriches and strengthens it.

Echo.

938. When the return of the sound is perceptible to the ear, it is termed an echo. A certain time, however, must elapse between the production of the sound and its being reflected, or no echo will be perceived; and that time must be at least the twelfth part of a second, within which interval the ear is incapable of receiving separate impressions. The distance of the reflecting surface, therefore, must be at least forty-seven feet from the place whence the sound emanates to cause an echo. Echo, then, is caused by the reflection of sound from distant surfaces.

Resonance.

939. But the strength and quality of a musical sound are much increased and improved by the reciprocation of bodies in the more immediate neighbourhood whence the first sound emanates. Thus the vibrations of a tuning-fork will, on the tip of the handle of the fork being placed on a table, acquire a marked accession of strength. This augmentation of sound is due to resonance. The sonorous vibrations created by the tuning-fork, set the wood upon which it is placed in a similar state of excitation; the simultaneous vibrations of which being communicated to the superincumbent air, greatly increase the strength of the original sound. The front, back, sound-post, and all the air contained in the body of a double-bass or violin, in like manner contribute to produce the volume of tone elicited from the instrument, by vibrating in unison with the strings and with each other. If only the strings vibrated, the sound would be comparatively insigni-

ficant; but when the entire body of the instrument is set in motion, the impulse is sufficient to produce sounds of considerable power.

- 940. A sound thus increased and enriched is capable of further augmentation and improvement from resonance, if it is produced under circumstances favorable to the extension of that influence. The tone of a double-bass, for instance, is much increased in power by the instrument resting on a hollow platform—as the reciprocating floor of a concert-room orchestra. "The platform receives from the musical instrument a vibratory motion, imparts the same to the air between it and the floor of the building, and the whole combined gives a powerful impulse to the air in the concert-room." (Dr. Brewer, page 277.)
- 941. These several examples illustrate precisely the effect of resonance on the tone of an Organ. The tone of an Organ is much improved by the instrument being placed on a wooden floor; and it is still more beneficially affected when that floor is a raised one. The reasons are these. The sound-board acting something after the manner of the belly of a violin; the frame-work as the sound-post; and the wooden floor as the back; all are thrown into a state of greater or less vibration by the sounds, which in this case are produced by pipes and not strings.
- 942. The vibratory motion of portions of the framework is sometimes perceptible to the touch, even when a single Stop only is being sounded on the sound-board above—as, for instance, the Stopped Diapason; while that of the floor is frequently felt by the feet, when all the Stops are in full play.
- 943. The air between the sound-board and the ground is also set in motion, like that in the body of a violin; and sometimes its tremulousness is sufficiently great to cause the trackers to vibrate in their registers. The tone of a large pipe, again, is much strengthened by standing on a wooden floor, even as that of a double-bass is by resting on the platform of an orchestra. This is one of the reasons why Organ-builders place their great Pedal Diapason pipes as near to, if not actually on the floor, whenever this arrangement is practicable.
- 944. The wooden portions of the case of an Organ, again, are frequently of essential service in increasing the resonance. It has sometimes happened that a pipe that has produced but a weak sound, has, when tried in its situation, and been assisted by the vibrations of the case, produced one of the finest notes in the instrument.
- 945. When the wooden floor on which an Organ stands is a raised one, the platform, together with its supports, and also the free air about the whole, are all thrown into a state of vibration, to the augmentation and improvement of the sound; and when the heavy-toned Bass pipes are being used, the vibrations of the flooring or platform are sometimes communicated to the wooden fittings of the Church, or even to the very walls of the edifice.
- 946. Echo and resonance, therefore, each exercise great influence on the tone of an Organ. Echo imparts to it that inexpressibly charming, etherial, lingering effect which is so perceptible in Cathedrals and other large buildings that are comparatively free from absorbents, after the actual sound has ceased. Many buildings which do not produce a *perceptible* echo, yet impart a certain buoyant, free effect to musical sounds produced within them, that is highly beneficial to the quality of their tone, as well as favorable to their distribution.

947. Resonance is the cause of the agreeable, pleasant, humming effect which is heard to come from within the Organ itself. In low, broad, galleried buildings, where but little room has been allotted to the Organ, and where the contents of the instrument have in consequence been so crowded together as to leave but little free space inside it, the resonance is much decreased; and an effect is frequently perceived as though the sound of the Organ were struggling to develop and disperse itself, in spite of the impediments with which it is beset. The effect of an instrument so constructed and situated is frequently dead and palpable. Instead of the many different sounds which in an Organ are concentrated on each key, mingling together, and producing the effect of one excellent whole, every "item" falls on the ear as a separate and isolated sound.

Impediments to the equal distribution of sound.

948. The most common impediments to the equal dispersion of the tone of an Organ occupying a west gallery, are the lateral galleries. These catch the sound as it spreads, and prevent its descending into and pervading the aisles beneath so effectually as it would otherwise do.

Absorbents of sound. 949. The materials and fabrics, common in Churches, that soften and deaden sound, are wool, cloth, hair, tow, matting, &c. "They shut up a large quantity of air between their minute and detached parts; so that they cannot readily transmit an impulse." (Dr. Brewer.) Cushions, hassocks, curtains, people's dresses, and matting, therefore are all absorbents of sound.

Church arrangements that are favorable to sound.

950. The exclusion of lateral galleries from modern Churches, together with their baize linings; the introduction of low open seats, in place of high closed pews; the removal of hassocks in favor of kneeling boards; and the substitution of Minton's tiles for matting up the avenues; are all favorable steps towards the preservation of the acoustical properties of the building.

Absorbents sometimes introduced to subdue excessive echo.

951. While the influences of impediments and absorbents are, generally speaking, highly detrimental in their effect, there have been instances of the latter being made to serve a beneficial purpose; as when the echo in a building has been so great

as to render sounds, whether of the voice or of music, confused and indistinct. At the Chapel Royal, Whitehall, the echo was found to be so excessive, a few years ago, after the building was restored, that the clothing of an assembled congregation was insufficient to check the remarkable prolongation of sound; and crimson cloth was therefore hung, in festoons, round the building, which, not presenting a sufficiently hard surface to throw off all the tone, but, on the contrary, a sufficiently soft one to absorb some of it, produced the desired effect. At St. Paul's Cathedral, again, at the rehearsal of the music performed this year (1854) at the festival of the "Society for the Propagation of the Gospel in Foreign Parts," the semiquavers in Handel's Chorus, "Great was the company of the preachers," when played upon the Organ,

ran into each other, and produced a confused effect; but it was calculated that the clothing of the vast congregation expected to assemble under the dome, would so far lessen the echo as to render the same passages perfectly distinct, when performed in the Service, and this proved to be the case.

Velocity of sound.

952. The average rate at which sound travels in atmospheric air, is 1120 feet in a second of time; and high and low sounds, soft and loud sounds, all proceed with the same velocity. Thus the tones of the lightest Treble voice will reach the extremities of an extensive building as rapidly as those of the heaviest Bass voice; and the sounds of the most delicate Dulciana as quickly as the tone of the most ponderous Posaun. Were it otherwise, the acute and grave tones of voices, and the weak and strong-toned Stops of an Organ would be heard confusedly jarring after one another.

- 953. But for the same reason that the ripple caused by dropping a small pebble gently into a smooth piece of water, will not spread so far as those produced by casting a large stone into it, the sound-waves produced by a soft musical sound will not extend so far as those excited by a powerful one. Its precise strength depends, in the first instance, on the force of the shock that is imparted to the air; and which produces sound-waves of correspondingly decided character. The distance to which it will travel, depends on the extent to which the sound-waves can spread without meeting with an obstruction. When there are no impediments, and but few absorbents in their course, the sound not only reaches farther, but mellows as it progresses: when they meet with many obstructions or absorbing substances, it not only does not reach so far, but its strength is lessened and its quality impoverished.
- 954. The distance to which a sound will travel, depends also on its intensity, density, and perhaps gravity. A dense sound will travel farther than an intense one, as is proved by the fact of the beat of the great drum of a military band, playing in the open air, being distinctly audible at a greater distance than the united sounds of the Trombones and Ophiclides. Grave sounds also appear to travel farther than acute ones; at any rate the Open Pedal Diapasons of an Organ may be heard at a greater distance outside a Church than the higher Organ-sounds; and in like manner the tone of the double basses in an orchestra may be distinguished sooner than the treble instruments, as you approach a concert-room. The "Tenor" of a peal of bells is also frequently heard at a greater distance from a Church, or at any rate more distinctly, than the other bells.

The apparent strength of a sound, dependent on the position of the auditor, &c.

955. The apparent strength or weakness of a sound will depend on the relative position of the sounding body and the auditor; that is to say, whether they be near together, or far apart: and also, to a material extent, whether there be many

absorbing substances between them. A sound of a given strength will sound louder at a greater distance, when the intermediate space is comparatively free, than it will at a less distance with impediments interposed;—hence, the fact mentioned at the commencement of this chapter, of the tone of an inferior Organ being improved, and of a better one being injured, by its position; the acoustic capacity of the Church; and the nature of its fittings. If the auditor is stationed below the level of the

sounding body, he will hear the sound as it diverges downwards; if he is on either side of it, he will hear it as it spreads; but if he is on the same level with it, and near to it, he will experience its full and direct force, at the same time that his clothing will present an absorbing impediment to its free progress; while, on the contrary, if he is stationed at a distance, and other persons intervene, the sound will reach him in a weakened and faded form.

956. When the amount of absorbing substance in a Church is needlessly increased, and the Organ occupies a position unfavorable to the equal distribution of its tone, the instrument will sometimes sound "too loud" in some parts of the Church, at the same time that it will appear "too soft" in others. This inequality of effect, however, is, under such circumstances, unavoidable.

Penetration of sound. 957. Sound possesses the power of penetrating and passing through hard substances; hence the circumstance of the tone of an Organ being heard so plainly outside a Church. When an Organ is placed in a chamber built out from a Church, and is accompanied by other arrangements disadvantageous to the free dispersion of its tone, it will even be heard almost as distinctly outside the building as in it. Another illustration of the penetration of sound is presented by the Swell of an Organ, the tone of which is heard perfectly well, though in a sweetly subdued form, through the thick wooden box when the shutters are perfectly closed.

958. Having noticed such phenomena connected with sound as appeared to be necessary to illustrate our present subject, we may now proceed to consider the various situations occupied by Church Organs, as well as the merits of each.

The west end of a Church, as the situation for the Organ.

959. The most usual position assigned to the Organ, in Continental Churches, for at least the last three hundred years, has been the west end.

Old examples of west end Organs in Continental Churches. 960. A few examples and dates may be cited, illustrative of this fact. The Organ in Amiens Cathedral (Foreign Specifications, No. 14), which has a 16-feet front, and was com-

pleted in 1429, originally stood and still stands at the west end. The Organ in Chartes Cathedral, built in 1513, was first erected over the great western doorway. In the Cathedral at Constance, in Switzerland, the Organ at the west end was originally erected in that situation in the year 1518, which date appears on the case of the instrument (see Specifications, No. 115). The Organ at the west end of the nave of the Cathedral at Freiburg, in Breisgau, was built in 1520 (Specifications, No. 37). At Hamburgh, the oldest Organ in the town, previous to the conflagration of 1842—in St. Peter's Church—stood at the west end, and had a 32-feet front. It was not known when or by whom it was originally built; but the last two Manuals—it had four—were made at Hartzogenbach, in Brabant, by Mister Nargenhof, in 1543, and sent to Hamburgh by sea. This, M. Pfiffer, the Organist to the church, towards the latter part of the last century, informed Dr. Burney was upon record. Again, at Lübeck, in St. Mary's Church, the Great Organ, which has lately been re-

built, is similarly situated. It is not known when it was originally built, but the Front Choir Organ, which is a *subsequent* addition, was made as long ago as the year 1561, which date is ingeniously recorded among the ornamental carving at the top. The instrument is a "hanging" Organ, with a 32-feet front of tin; and the beams which support it are built into and project from the wall behind.

961. There are three old west end Organs also still standing in Churches at Liege. That in the Church of St. Denis, which has the Choir Organ in front, bears the date of 1539 carved on the case;—the second, in St. Jaques', also with Choir in front, was built in 1600;—and the third, in St. Anthony's Church, has the date of 1624 carved and gilt on the case.

The merits of the west end, as the situation for the Organ, considered.

962. In selecting the west end of the Church as the situation for the Organ, the Ecclesiastics, Architects, Organ-builders, Organists, or whomsoever fixed on that position, no doubt gave it the preference for the same reasons which in after times led to

the end of a Concert-room, being generally recognised as the best place for an orchestra;—namely, because the tone could travel "forwards, sideways, upwards, and downwards;" in fact, could be dispersed throughout the building more equally from that situation than from any other.

- 963. An orchestra, so placed, has the area of the entire length of the room before it; into which the sound, from the great concourse of instruments, can travel, and, in an united state, fall on the ear of the auditor. In the same manner an Organ, similarly situated in a Church, has the area of the entire length of the nave and chancel before it; into which the sound from the several pipes can travel, and, in an united and mellowed form, reach the ear of the Clergy and congregation.
- 964. The west end afforded sufficient space to admit of the Organ being erected on an elevated platform or gallery—as a modern orchestra is elevated above the level of an audience—whereby the resonance was increased, and additional freedom also imparted to the tone.
- 965. By elevating the instrument, the full force of its tone passed over, instead of overwhelming those nearest to it, into the open space before it; whence it was diffused throughout the edifice. A sound is distributed more equally from a raised position in *any* part of a Church, than from a low one; hence the necessity for a reading-desk, pulpit, and steps to the altar, to elevate the minister so that his voice may travel to the remote parts of the building.
- 966. The west end, at the same time that it admitted of the Organ being sufficiently elevated, presented facilities for this being done, and yet plenty of space being left between the top of the instrument and the roof of the Church; whereby the tone was still further and beneficially affected. Into this space the numerous pipes poured forth their separate sounds; which, there meeting and amalgamating, entered the Church with united and mellowed effect.
- 967. Had the Organ, however, been placed too near the roof, its tone would have been partially "smothered" in effect, and the instrument itself exposed to considerable injury from the excessive heat of the sun in summer (which might then often have been conducted into it through the roof), and from the cold and damp in winter. A certain amount of derangement from atmospheric change would at times

be unavoidable, as explained in a former chapter (see ante, page 160); but such variations would have told with much greater severity, had the Organ been placed close to the roof; where, in addition to its pipe-work being more frequently thrown out of tune by the excessive alterations of temperature, the mechanism would, by its exceeding dryness at some seasons, and dampness at others, have been rendered more subject to sticking, swelling, warping, ciphering, and many other evils of a like kind, with which casualties subsequent Organ-builders have nevertheless been compelled to become familiar, in consequence of their having to erect so many instruments in "second galleries."

968. The west end, again, generally admitted of more space being devoted to the Organ, which obviated the necessity for crowding the mechanism and the pipe-work.

969. When an Organ-builder is "cramped for room," the mechanism has often to be crammed so closely together, that, on the occurrence of some trifling fault, much additional derangement must be caused before the seat of the original failing can be arrived at. And the same with the Pipe-work; but with the additional disadvantage, that, when the Pipes are "packed too closely together," there will sometimes arise a beating or a jarring, or a weakness or unsteadiness of speech in some of the Pipes that will defy correction.

970. Another very important object attained by placing the Organ at the west end of the Church, was this. An efficient Organ was necessarily also a large one; and the larger the Organ, the greater probability of its becoming an eyesore. By erecting it, however, at the west end, it would not be within sight of, but at the *back* of the congregation; and would only be visible to its members on their turning to leave the Church.

971. The reasons, musical, acoustical, and structural, in favor of the west end, as an eligible situation for the Organ, therefore were very great.

An architectural objection to the Organ occupying the west end.

972. Architecturally considered, however, it was frequently open to one great objection. Most Churches had a west window; generally one of the most handsome in the building; to hide which would have been a serious sacrifice.

Many Organs were therefore made, so as still to occupy the west end for the sake of the musical effect; but so that the architectural feature should not be hidden, nor the light through it excluded from the Church. Several instruments so constructed are mentioned by Dr. Burney, in his tour through Germany and Italy, the particulars of which are here extracted.

Examples of divided west-end Organs, in Continental Churches.

973. "In the town of Courtray, the Organ, at the collegiate Church of *Notre Dame*, is disposed of in a very singular manner; it is placed in a gallery at the west end of the build-

ing; but, in order to preserve the window, which was necessary to light the body of the Church, the Organ is divided in two parts, one of which is fixed on one side of the window, and one on the other; the bellows run under the window, and communicate with both parts of the instrument, which is a large one of sixteen feet, with Pedals, and seems to have been but lately crected (1772). The keys are in the middle, under the window; but not to be seen below.

- 974. "The Organ at the Dominicans Church, at Frankfort, has an arch cut through it, to let the light into the Church from the west window; it is in a handsome case, the ornaments over the arch are in a good taste, and the side columns are well disposed. The keys are on the right hand *side* of the instrument, over which there is a small front; the compass is from C to C, the pedals have an octave below double C.
- 975. "In the Cathedral at Passau, which is a very beautiful modern building, of the Corinthian order, there is a very magnificent Organ, to look at. The case is finely carved and gilt, and the pipes are highly polished: it is divided into two columns of large pipes, one on each side, and has a complete little Organ in the middle, which joins them together, and saves the west window: it is what builders call a thirty-two feet Organ. The front pipes are of burnished tin."
- 976. St. Michael's Church, Vienna. "This instrument has no front; the great pipes are placed, in an elegant manner, on each side of the gallery; and there is a box only in the middle, of about 4 feet square, for the keys and Stops;—so that the west window is left quite open. The compass of the Organ, in the Manuals, extends only from double E\* in the bass, to C in alt; but the pedals of most German Organs have an octave lower than the lowest note of the keys that are played by the hands, which is the case with this instrument. It has forty Stops, and three sets of keys, which, by a spring of communication, can be played all together."
- 977. Prague. The Organ in the church of St. Nicholas "is divided into two parts, placed one on each side the gallery; and the keys, with a *positif*, or small choir Organ, are in the middle, but placed so low as to leave the west window clear: instead of wood, the framework, pillars, base, and ornaments of this instrument, in front, are of white marble."
- 978. To these examples may be added the Organ at Weingarten, in Suabia, which is so constructed as to admit light into the Church through six semicircular-headed windows, ranged in two rows, of three each. The Organ at the Minoreten Church, at Cologne, is also pierced with several window-like openings, to admit light from the west window into the body of the building.

Smith and Harris's Parish Church Organs usually placed at the west end.

979. When Smith and Harris settled in England, towards the latter part of the seventeenth century, for the purpose of taking part in supplying our Churches with new Organs, in place of those that had been so needlessly destroyed; they fol-

lowed the custom, usual in their own countries, of placing their Organs at the west end of Churches not of cruciform shape; but they at the same time erected them in that situation, whether there was a window there or not. No instances are known of a divided Organ having been made by either of those artists, for the purpose of preserving an architectural beauty. The earliest English specimen of an Organ constructed in this manner, appears to have been that made by Green, for New College, Oxford. Many others have since been constructed in this way; one of

<sup>\*</sup> The Organ is really of CC compass, but having short octaves; which fact appears to have escaped the Doctor. See Foreign Specifications, No. 107.

the most successful in its treatment being that by Hill, in the Church of the Immaculate Conception, Farm Street Mews.

Their Cathedral Organs usually placed on the Choir screen.

980. The Cathedral Organs built by Harris and Smith were usually placed on the Choir screen. This situation appears to have been selected for two reasons. The instruments

they were called upon to build for those spacious and venerable piles were scarcely a whit larger than those they made for ordinary parish churches; and it must therefore have been obvious, that if they were placed at the west end, the *firmness* of their tone would have been utterly spent before it could have reached the Choir. They were accordingly erected some 150 or 200 feet nearer to the vocal Choir, and generally in such a situation as a knowledge of acoustics prescribed as the best.

Harris's proposal for a grand west-end Organ in St. Paul's Cathedral. 981. Renatus Harris, indeed, made a proposal, in 1712, and therefore after the death of Smith, to erect an Organ in St. Paul's Cathedral, "over the west door, at the entrance into the body of the Church," which was to be such an one as "in art

and magnificence should transcend any work of that kind ever before invented;" and in its construction it was intended to "apply the power of sounds in a manner more amazingly forcible than had perhaps before been known." (See Hawkins's History of Music, vol. iv, page 356; quoting the Spectator, No. 553, for December 3, 1712.) Is it possible, as this quotation would imply, that Harris had some partial acquaintance with the principle that Cavaille has in our own times carried out with such fine effect in his Harmonic Flute-work, and Hill in his "Tuba" Reed-work? At any rate, to equal "any work before invented," Harris's must, in size, have been a 32-fect Organ. But whatever the details of his plan might have been, the plan itself was not accepted.

The crection of Father Smith's Organ on the Choir screen of St. Paul's, opposed.

932. Father Smith had previously erected an Organ on the Choir screen of St. Paul's; but whether it should occupy that position or not, had been a subject of warm contention between Sir Christopher Wren and the Dean and Chapter of the Cathedral.

983. "Sir Christopher Wren," says the article in the Musical Gazette, from which we have before quoted, "wished the Organ to be placed on one side of the Choir, as it was in the old Cathedral, that the whole extent and beauty of the building might be seen at one view: the Dean, on the contrary, wished to have it at the west end of the Choir; and Sir Christopher, after using every effort and argument to gain his point, was at last obliged to yield. Schmidt, according to his instructions, began the Organ; and, when the pipes were finished, found that the case was not spacious enough to contain them all: and Sir Christopher, tender of his architectural proportions, would not consent to let the case be enlarged to receive them, declaring the beauty of the building to be already spoiled by the—box of whistles. After all this contention, the architect, sorely against his will, was obliged to make an addition to the case. He not only had been niggardly in regard to the depth of it, where another foot would have been of no consequence whatever, but also in the height;

for when Schmidt came to put in the large Open Diapason pipes in the two side flats, they appeared through the top nearly a foot in length, and spoiled the appearance entirely. Schmidt now entertained hopes of having a new case; but Sir Christopher, who before would not suffer any ornaments on the top, was now obliged to add several feet, or else alter the case, which vexed him exceedingly. These ornaments consist of angels, with trumpets, standing at the side of a small altar. The colour of the wood that these are made of being lighter than the Organ case, the addition is soon discoverable."

984. In this struggle, Smith evidently viewed the question musically, while Sir Christopher Wren considered it architecturally; and both had reason on their side. Sir Christopher was of course correct in asserting that an Organ in the centre would prevent the whole extent of the building being seen at one view; but then the objection applied with equal force against the Choir screen, to defend which, and condemn the Organ, involved a manifest inconsistency.

985. The result of the contention was, as we have seen, that

" Music won the eause;"

and the arrangements just detailed were uniformly followed in Cathedral and other Churches, from the time of Smith and Harris, down to within the last few years.

The comparative merits of the several side situations considered.

986. In recent times, the west end of a Parish Church, as the position for the Organ, has been strongly objected to, particularly where there is a Choir; and there is no doubt that a much better musical effect results from the Choir and Organ

being near to each other—as a more united effect is produced in a Concert-room by the band and singers being together.

987. Next to the west end, the best place for the Organ, as indicated by the laws regarding the propagation of sound, will be some elevated position, having space above, and both sides free. These conditions point to the *side* of the Church; and in every instance, where all or most of them have been complied with, a very good effect has resulted.

988. The Organ in the new Church of St. Mary Magdalene, St. Pancras, built by Gray and Davison, may be cited as a successful example of an instrument so placed. It is supported on stone brackets, about 8 feet above the ground; has good head room; is entirely free at one side, and has a reflector immediately behind, in the south wall of the aisle.

989. In some instances, where sufficient room could not conveniently be found in the Church itself for the Organ, a recess or Organ-chamber has been built out from one of the sides for its reception. One old example of such an Organ-chamber exists in the Chapel of Christ's College, Cambridge. The tone of an Organ so placed is much weakened in consequence, as it cannot begin to spread and disperse till it has passed through and over the front of the case. The natural disadvantages of such a situation, however, can be considerably modified by making the chamber of ample dimensions, by lining it with wooden boards, and by furnishing it with a hollow wooden flooring. It is also of the highest consequence that there should be plenty of space between the top of the case and the turn of the arch; otherwise there will be no possible means of egress for the tone, which will then be smothered. All

these precautions were taken in constructing the Organ-chamber at the Temple Church, the flooring of which is 8 feet above the level of that of the Church; the Great Organ sound-board being 8 feet 9 inches above the chamber-flooring, and therefore 16 feet 9 inches above the ground; and there is also a clear height of nearly 13 feet between the spring of the gables of the case and the roof of the chamber.

990. An Organ that stands in a recess certainly appears to possess less strength of tone than if it were placed at the west end; but if there be plenty of head room over the Pipes, and attention paid to other circumstances favorable to resonance, what the instrument loses in power it frequently gains in sweetness of quality and Cathedral-like character of tone (as is particularly the case with that at the Temple); and as the loss of power can be easily compensated for by disposing additional Stops, there appears to be no reason why an Organ should not tell fully as well, if not better, at the side than from the west end, if every means be taken to make it do so.

991. By this it is not meant that an Organ placed in a side recess will tell as well, as the same kind of Organ would at the west end with space around it; but that if it be judiciously enlarged, in proportion to its loss of power, so as to counteract the otherwise ill effect exercised by the recess, it will then sound at least as well as the unenlarged west-end Organ. The distinction here intended to be drawn is well illustrated by the difference produced by a choral staff of a given number singing forte, as compared with a more numerous body singing sotto voce. Supposing the strength or abstract power of sound produced by each to be about the same, yet there will be a marked difference in the quality of the tone, which, under many circumstances, will be in favor of the larger, but softer, sounding body. The subduing influence of a recess, in a similar way, frequently imparts to the tone of an Organ a certain chasteness and kindliness of character, as well as a slight haziness—as though a fine veil were drawn over it—that is exceedingly pleasing, and even beneficial, if the volume and fulness of tone at the same time remain unreduced. The experiment of moving the Organ from the west end, and placing it in an ample and lofty Chancel Chapel, at the same time enlarging it, was being made at Doncaster Church at the time of the fire; and the effect of the few Stops that had been finished, are said to have promised the happiest result.

992. At Lübeck, the "little" Organ in St. Mary's Church—which, by the way, has upwards of 30 Stops, including 10 on the Pedal—partly projects from the east wall of the South Transept, and partly stands in a recess in that wall. The Choir Organ, containing 10 ranks of Mixture, stands in front; and the effect of the Instrument is altogether most admirable. The treatment of the position, so as to give to a moderately deep Organ only a shallow projection into the Church, is both ingenious and successful. Neither the view of the building on the one hand, nor the tone of the instrument on the other, is destroyed. This Organ is said to be about two hundred years old.

993. A most unfavorable plan, for the tone of an Organ, is that of putting the instrument in a recess, and placing the front Pipes so as to form an ornamental filling up of the arch. With walls on three sides, and a tier of large Pipes entirely occupying the fourth, the tone can only force its way through the interstices between the Pipes, as water escapes through the fissures in a flood-gate. The contrivance is, in fact, more calculated to keep the tone back, than to let it out. The Organ at All

Saints' Church, Manchester, built by Kirtland and Jardine, of that town, is most picturesquely treated, it being divided, and a portion placed in a recess on each side the Chancel; but the Pedal Open Diapason, which produces a very bold effect in the recess where it stands, sounds in the Church as weak as an ordinary Pedal Stopped Diapason. At the Church of St. Mark, Old Street Road, the Organ is similarly placed in a chamber; and the calculation of the Organ-builder, Bevington, is, that only one-fourth of the tone of the instrument finds its way into the Church. The melody of a Chorale played out on the Great Diapasons, Principal, and Trumpet of this Organ, sounds no stronger than it would do on the Stopped Diapason and Clarionet of most instruments that are favorably situated.

994. But the worst possible arrangement is that of putting the *Organist*, as well as the Organ, into a chamber at the side; filling up the arch, as before, with Pipes, which form an ornamental wall between the player and the congregation. This remarkable arrangement exists at St. Mark's, Old Street Road, where three-fourths of the Organ-tone is boxed in, and which, returning and descending on the Organist, often produces a din around him like that heard from a peal of bells in a belfry. The wall of Pipes is not only a serious impediment in the way of the Organ-tone travelling into the Church and reaching the congregation; but, telling both ways, it is as effectual a check to the voices of the congregation entering the recess and reaching the Organist. Added to this double impediment, the deep humming sound which the ornamental Pipes, forming the Bass portion of one of the Stops in most constant use—the Open Diapason—must be producing between the congregation and Organist, presents another difficulty in the way of the one hearing the other. Indeed this last arrangement has not one redeeming point to recommend it.

The east end of an aisle, or a Chancel Chapel, as the situation for the Organ, eonsidered.

995. It has been a frequent custom during the last few years to place the Organ either at the east end of one of the aisles, or in an Organ Chapel on one side of the Chancel. These arrangements are far preferable to the one last noticed.

In such a situation it is necessary (1) that the ground should be of wood, and hollow; (2) that the sound-boards should be kept as high as possible; (3) that there should be a good amount of clear space over the Organ; and (4) that as much ground space as possible should be allowed for the Organ.

996. The wooden floor increases the resonance; concerning which all has been already said that is necessary. The elevation of the sound-boards to a satisfactory height causes the mouths of the pipes to range above the heads of the congregation, whereby their tone is more likely to travel before it becomes absorbed, instead of being absorbed before it travels. It may easily be surmised how comparatively dull and muffled a clergyman's voice would sound, were he to stand only on the same level as the congregation; and the tone of an Organ that has its sound-boards kept low, will have a decided tendency towards the same fault. If the mouths of the Pipes, generally, can be kept as much above the level of the vocal Choir, as those of the Choir are above the level of the congregation, it will be so much the better both for singers and Organ.

997. The space over the Organ relieves the tone of the instrument from the force and hardness which its contracted situation, as compared with the west end, is

otherwise very liable to impart to it; while the greater space allowed for the Organ admits of the Pipes being planted in a less crowded and confused manner. Of the quantity of wind that enters at the foot of the pipes, something like three-fourths of it passes out again at the mouth; a comparatively small portion only entering the body of the Pipe. From this it must be obvious how necessary it is to allow the Pipes the utmost available room to "talk" in. When this is not the case, some Pipes have to be mounted on longer feet; others turned this or that way; and others grooved off here or there; not from design, or preference, but from necessity; and which packing and contriving give to the interior of an Organ a very unsystematic and disorderly appearance.

998. If the Organ be placed in a Chancel Chapel, there should be an arch—the more lofty, the better—opening into the Aisle, as well as one towards the Chancel. The importance of this arrangement is explained by the first fact mentioned at the commencement of this chapter, regarding the propagation of sound; and its object is to allow the tone of the Organ to pass down the Aisle, as well as across the Chancel. When there is no second arch, the whole strength of the Organ-tone is directed towards the vocal Choir in the Chancel, which is then more liable to be overpowered by it, at the same time that the congregation will scarcely experience any support from it. If there be two arches, and they are simply separated by a column, or a pier, this will be more favorable to the egress of the tone than an angle, formed by the junction of two walls, and having a hollow angle inside; which latter is apt to catch and throw some of the tone back, while the former would allow it to pass round and proceed onwards, diagonally, into and across the Nave of the Church.

999. As much free space as possible should also be left near to the Organ. This enables the tone to gct fairly from the instrument before it begins to be absorbed by the dresses of the congregation. The Organ in the "Catholic and Apostolic Church," Gordon Square, built by Gray and Davison, which stands at the end of the south transept, on the ground, has plenty of free space around and over it, and sounds very freely in consequence. Space being left, and the congregation not being seated so near to an Organ, together, allow of the instrument being voiced more boldly and Church-like, with little ill effect and much good resulting. The conditions necessary to cause the tone to travel to the extremities of the Church can then be better attended to, without causing inconvenience to any one; but if seats be placed too near to the Organ, those who occupy them will hear more of its tone than they wish, while their clothing will prevent its getting away, and reaching those at a distance so effectually, by absorbing some of it before it can do so.

1000. If the several precautions just enumerated be taken, to prevent deadening the sound of the Organ, and to lessen the partial and unequal distribution of its tone, to which all side situations have an unavoidable tendency, an Organ may be made to tell very well in either of the positions just considered.

The Chancel an eligible position for a divided Organ.

1001. Another, and more rare arrangement is that of dividing the Organ, and placing a portion of it on each side the Chancel, where there is room; as at St. Margaret's, Leicester.

(See Mr. Sparks' pamphlet on "Choirs and Organs," page 19, where this arrangement is illustrated with a wood-cut.) This plan is in every respect a most excellent

one. It is scarcely, if at all, inferior, even in a musical point of view, to that of a divided west-end Organ; while, under its working, the Organ is accommodated, without being sacrificed, to other arrangements that are now considered essential in most Churches. In the first place, as the Chancel is generally more lofty than the side Chapels, this circumstance admits of the sound-boards being kept up higher, the important advantage of which arrangement is already known to the reader. Next, as the Chancel is usually not very much less in height than the Nave, it affords nearly as much space over the instrument for the mellowing and sweetening of the tone. Thirdly, the Chancel being only occupied by the Clergy and Choir, it is comparatively unencumbered by absorbents and impediments; which is highly beneficial to the tone. Again, the Organ will still be at the "end" of the Church—although the opposite one to that which it frequently occupies—with the whole length of the edifice before it, into which its harmonious tones can travel. Moreover, by being placed to the east, with the vocal Choir nearer to the Nave, it will occupy its proper subordinate position in regard to the voices. No one would ever think of placing the instrumental staff between the vocal Choir and the audience in a Concert-room; and an analogous arrangement is equally ineligible in a Church. (In a theatre, the arrangement is different; but the sunken position of the band there tends to its subordination.) Such a distribution of the Organ might lead to a new use of the instrument, of an antiphonal character; of the advantage of which, however, we have at present had no practical experience in this country, although it would perhaps prove a source of many very fine and legitimate effects. The two parts could ordinarily respond to each other, after the manner of the separate sides of the Choir; and be united, by means of couplers, when the entire Choir joined in bursts of joyful exultation. Many Continental Churches are furnished with divided Organs in the Choir, or with two separate and distinct Organs; the effect of which, when used as above, is said to be singularly fine. Then, with regard to the construction of such an Organ, as the two parts would stand sideways, and therefore would be seen only in profile from the Church, their projection could be lessened, if room for greater breadth be allowed, whereby the view from west to east would be less interfered with. For the interior arrangements, the Abbé Vogler's system of Pipe arrangement might be advantageously employed, as being admirably calculated to facilitate the progress of the tone through the side of the case towards the Church.

The relative position of the vocal Choir and Organ.

1002. Respecting the relative position of the Choir and Organ in a Church, concerning which a few words may here be said; it may be accepted as a good general rule, that if the

Organ is to be in a line with the Choir, it should not be on a level with it; and if it is to be on a level with the Choir, it should not be in a line with it. That is to say, the Choir should never be subjected to the direct force of the tone of the instrument. When it is so—as, for instance, when the Organ is placed immediately behind one-half of the Choir—that half hears the tone too strongly and palpably, while the clothing of its members deadens it, before it reaches the other part of the Choir. No given amount of Organ-tone, whether much or little, is then so equally and agreeably distributed to both. When the Organ is out of a line, but on a level, with the Choir, the Choir hears its tone, as it is spreading, with less force, but with equal distinct-

ness: when it is in a line with the Choir, but elevated above it, the Choir eatches its sound as it descends in the course of its propagation. But, inasmuch as the sound produced at an elevation is necessarily less under the absorbing influence of the clothing of the congregation below, the plan of putting the Organ "in a line with the Choir, but above its level," is the preferable one. The tone of the Organ can then reach the congregation and support its voice, as well as that of the Choir. Hence the excellence of the arrangement at the Temple Church. At the Church of St. Mary Magdalene, St. Pancras, the Organ is above the level of the Choir, and also out of a line with it; and likewise produces an excellent effect.

Recent arrangements in Cathedrals.

1003. Much pains have been taken within the last few years to find a better place, architecturally speaking, for our Cathedral and Minster Organs.

1004. At the time the alterations in the interior of Westminster Abbey were in contemplation, a very excellent article appeared in the Parish Choir, No. 20, for August, 1847, from the pen of the Rev. Sir William Cope; in which it was proposed to erect the Organ at the west end of that Church, and at the same time to strengthen its tone as much as possible. The Choir screen was proposed to be placed at the west end, so as to extend across between the first pair of pillars of the Nave, with its architectural face to the east. The entire expanse of the Minster, from west to east, from the ground to the roof, would then have been seen at one view. "Let our readers," says the article alluded to, "now consider how splendid the whole expanse of the Church thus laid open would be; looking to the east end, the eye would rise from the Altar to the screen, and be led up by the beautiful apse to the vaulting of the roof; and if the spectator turned toward the west, he would see the stone screen surmounted by the Organ; above that would appear the whole extent of the perpendicular window, with its coloured glass, running up into the vaulting of the roof. And if, besides these architectural beauties, the eye of the Christian spectator were to rest on the vast multitude who (we are sure) would throng the expanse, and to see a reverent and attentive congregation joining, as they would then be able to do, with one mind and one heart, and, we trust, with one voice with the Clergy and Choir of that glorious Church, in those majestic hymns which form the Choral service of the English Church, would it not be a sight to which English Churchmen might point with an honest exultation?" This proposition possessed the unusual recommendation of treating the question musically, as well as architecturally; and, besides this, of providing for the orderly arrangement of a vast congregation. As the arrangements were subsequently carried out, the Choir screen was retained in its former position; the Organ was divided into four portions; the Great Organ being placed within an arch on the north side of the Church; the Swell under the corresponding arch on the south side; the 32-feet Pedal Pipes were laid horizontally along the west side of the screen; while the Choir Organ hung over the east side, in the usual way. The tone of the Organ, on the whole, tells exceedingly well, although the instrument is so much broken up; which, no doubt, arises partly from the two main portions not being put too much under the side arches, but partly projecting out from under them. The Organist, when scated at the keys, which are behind the Choir Organ, can hear the voices distinctly, and, what is of great consequence, can also hear and correctly judge of the effect of his instrument.

1005. At Ely Cathedral, the Organ, as reconstructed by Mr. Hill, under the direction of the able architect, Mr. Scott, is a hanging one; the appearance of which is most gorgeous. It projects from the side of the Choir, overhanging the stalls. The keys are placed behind—that is to say, on the aisle side; so that some portion of the Organ is directly between the Organist and the singers. The Organ, thus arranged, is very pleasant to sing to, and the Organist can hear the Choir Organ quite distinctly. The vocal Choir, also, he can hear pretty well; but the tone of the Great Organ does not reach him so readily.

1006. At Canterbury Cathedral, the Organ is placed in the triforium over the south side of the Choir, at a great altitude; and the keys are placed behind the stalls. The touch being both heavy and deep, it is a most laborious Organ to play upon; and on account of the length of the action between the keys and the pallets, and the manner in which the tone has to find its way down into the Choir, a perceptible interval occurs between the keys being struck and the sound being heard.

1007. In making praiseworthy endeavours to find a less prominent locality for our Cathedral Organs, every facility should be provided for the Organist hearing and seeing the Choir, and vice versà. For this purpose, it would be an admirable plan to make the Organ play at the side. This arrangement has so many recommendations, and not one drawback, that it is surprising it should not, long since, have been generally adopted. The Organist, by a mere turn of the head, would then have at least half the Choir under his view; and could by a gesture, imperceptible to the congregation, convey a suggestion down to its members, or by the same quiet means receive one up from them. Moreover, the Organist would in all cases hear the voices much better. In the instance of an Organ on the Choir screen, if the keys were placed in the manner here suggested, the Organist could probably see both sides of the Choir, instead of neither, as at present; and at the same time he could also see to both ends of the Cathedral. If the keys at St. Paul's Cathedral were placed at the side—say to the south, the Organist could, on looking to the right, see the vocal Choir, if congregated in the Choir of the Church; and on looking to the left, perceive them, if assembled under the dome. Another important end would be gained by placing the keys of a Cathedral Organ in the manner under consideration. The space of the Organ-loft could be taken into the Great Organ case, by moving the east front forward to the back of the Choir Organ, and inserting new panels to fill up the openings in the sides; which would admit of a material improvement in the Organ, by admitting of the introduction of many large Pipes, on the tone of which the true dignity of the Organ so much depends. The arrangement above recommended may be met with in Snetzler's Organ, at Beverley Minster; which instrument, standing on the Choir screen, has the keys on the north side.

## CHAPTER XXXIII.

THE SIZE OF THE ORGAN.

The Organ should be proportioned to the congregation and Church.

1008. The size or contents of the Organ should, as a rule, be regulated by the number of the congregation whose united voices the instrument will have to sustain; and by the dimensions of the Church in which it is to be placed. This is

assuming that the usefulness of instrumental support, as an aid to the voice, in devotional exercise, is admitted; which point, however, is not conceded by some religious denominations. The question before us, however, is not whether an Organ is admissible for the purpose above specified, but—that opinion being supposed to be acquiesced in—what should be the properties and attributes of the instrument, to render it adequate to its purpose. The size of the Organ would also be influenced by the kind of Stops chosen—whether they are chiefly of loud or soft intonation;—Dulcianas, Flutes, and Piccolos usually having little to do with the power of an Organ, although they increase the number of its Stops, and materially add to the number and variety of its soft and agreeable combinations.

Certain influencing eircumstances to be taken into account.

1009. The acoustical capacity of the Church, again, must be taken into account; some Churches being as good for sound, as others are bad; as is well known to most clergymen, who

find little difficulty in filling some, while they have great trouble in making themselves heard in others. If there be much echo—a circumstance that may soon be ascertained by sounding the voice in various parts of the Church—such a natural advantage will be much in favor of the Organ; but if the sound do not get away, but immediately fall dead, then more Stops should be disposed, to enable the Organtone to make its way; or a greater proportion of loud Stops might be introduced; or the whole should be more strongly voiced and blown. Some such steps would also have to be taken, if the Organ is to be placed where its tone is likely to be weakened; as, for instance, in a recess.

An approximate calculation of the number of Stops necessary for an Organ to have. 1010. From what has just been said, it is obvious that the number of Stops necessary for an Organ to have, cannot be deduced with absolute certainty from the number of the congregation; although an approximation to it may be drawn from that source. According to Seidel (page 161, in Ewers' English edition; 208, in the Breslau copy), for a congregation of from 200 to 300 persons, an Organ with from 8 to 10 Stops may suffice; for one of from 400 to 500, an Organ of from 12 to 16 Stops; and for a congregation of from 1000 to 2000, an Organ of from 24 to 30 Stops. In this calculation, allowance is not made for Half-stops; still less are the Couplers and other mechanical contrivances taken into account. Half-stops are of comparatively rare occurrence in German Organs; although Short-stops are common enough, particularly among the Flute-work. When a Stop only extends to Tenor c, it is usually grooved into the Bass octave of some other Stop below, instead of that other Stop being cut to draw in halves, as is the more frequent custom in England. Neither are Couplers included in the calculation, since they have no "voice"\* at all. With these exceptions, and making some allowance for the addition to the number of a few soft Stops that are in great favor in this country, the above calculation is a very good one.

Too small an Organ in a Church, most undesirable.

1011. As it is quite as great an evil to design too small an Organ for a large Church, as it is to plan too large an one for a small Church, it may be well to explain why an instrument

of fair proportions may with confidence be admitted into a place of worship. The primary purpose for which an Organ is introduced into a Church, is to support and direct the voices of the congregation. It therefore becomes necessary to ascertain, if possible, what may be the strength of that congregational voice which the Organ is expected to sustain.

The strength of the human voice, as compared with that of the Organ-wind.

1012. To this a clue may be obtained by a very simple experiment. If an anemometer be provided with a flexible tube, furnished at the end with a large mouthpiece, and the breath be freely expired into it; the index, prepared at the

side, will show that the human lungs produce, without any very great exertion, a current of air of 9 or 10 inches pressure; the Manual departments of a Church Organ being ordinarily voiced to a wind of from  $2\frac{1}{2}$  to 3 inches pressure. This result, perhaps scarcely expected by many, makes it apparent that the human voice, when firmly delivered, is sounded by a wind 3 or 4 times the strength of that which ordinarily gives speech to a Church Organ. Then the sound-waves which surround every singer—as they encircle an Organ-pipe that is speaking—are proportioned in strength to the power of the voice that originates them; and at the same time they to some extent prevent his hearing other external sounds distinctly.

The general requisites of a Church Organ.

1013. Now a Church Organ should possess sufficient fulness, penetration, and depth of tone, to make its way through all other sounds, to the ear of the congregation; and

<sup>\*</sup> In German Specifications, the Stops are generally called Klangbare Stimmen (sounding voices), and the Couplers and other mechanical contrivances Nebenregister (accessory or secondary registers).

support, keep in tune, and lead the united voices of its members. Whether much or little Organ will suffice for this, is a question that must depend not only on the number of the congregation, and the dimensions of the Church, to which its size and power should in the first place be adapted, but also on whether the entire congregation takes part in the singing, or only a portion; and whether the many or few who tune their voices, do so boldly or timidly. In those large Churches abroad, wherein great numbers assemble, and among whom the singing is both general and zealous; where, in fact, may be heard the finest congregational music-namely, in some of the Protestant Churches of Germany and Holland-there will also be heard the largest Organs in the world. The "music mill" has long been considered the necessary concomitant of the "vocal thunder;" and the two have been exercised conjointly, from week to week, for centuries;—the one in uttering, in unison, the inclody; the other, in playing in fine progressive harmony, the simple and magnificent Chorales of the former country; -without the one injuring the effect of, or obscuring, the other in the slightest degree\*. And it is now tolerably clear why no ill effect should have resulted from this union of instrumental with vocal sound. It would not be easy for an Organ, voiced to a  $2\frac{1}{2}$  or 3 inch wind, to interfere with an assemblage of 800 or 1000 voices, singing with a strength equal to a 9 or 10 inch pressure of Organ-wind, if its tone be mellow and its Stops well balanced.

An Organ of sufficient dimensions in a Church, a great acquisition. 1014. A fine Organ, then, may fairly be considered as a great acquisition for a Church to possess; provided, of course, that its powers only be fully exercised on rare and befitting opportunities. Mr. Spark, in his pamphlet on Choirs and

Organs, page 11, gives a good instance when the full peal of an Organ may be beneficially employed. "Who," he writes, "can have heard a crowded congregation in a large Church sing with heart and voice that glorious, time-honored tune, the Old 100th Psalm, accompanied with the full power of a great and beautiful Organ, and not acknowledge the powerful aid and thrilling effect which a grand Organ gives to some portions, at least, of our Church Service?" At such times, the propriety of a cheerful accompaniment is at once recognized by the members of the congregation: they raise their voices, energetically and earnestly, under the combined influence of the service, the occasion, and the appropriate tone-character of the Organ:—the Trebles, singing in unison with the melody, and the Tenors and Basses below, add immense strength, in the Unison and Double Diapason pitch, to the mass of musical sound,—the result being that the Choral song stands out distinctly in bold and grand relief, through the dignified and impressive peal of the full Organ.

1015. Thus much has been said to illustrate what an Organ should be capable of, when the upraised voice of the congregation may put its powers to the test. Of course, there are times and seasons when the hymn of praise and

<sup>\*</sup> It should be mentioned, that while unison singing is at once the most simple in kind; the most easy of execution; and the most appropriate for a congregation to adopt; it is at the same time the most powerful in effect, from its concentrating all the vocal force into one part; and is therefore the kind of congregational singing that requires the most Organ for its support.

thanksgiving would be hushed, and the song of sadness raised in its stead; and on which occasions the Organ-tone would have to be reduced to accommodate it to the altered sentiment of the words. The strength of the congregational voice itself would also, at such times, be much lowered. With regard to the Organ, however, this forms an entirely separate question; and presents no subject for consideration, while the power requisite for the instrument to possess is being discussed, but rather bears on an important matter connected with its after-use. On this latter head, much has been said in a former Chapter: it need, therefore, only be added in this place, that when a subdued tone is desired—produced of course by using a portion only of the Organ—those Stops should be selected that will give the requisite "tone-colouring" to the words, in addition to affording the exact amount of support required. On this point, a very correct idea will be obtained of the manner in which an Organ should be used, by a reference to the vocal and instrumental scores of Mozart, Spohr, Mendelssohn, &c.; from which it will be seen, that, however extensive the orchestra at disposal, their authors have not yielded to the temptation of using a single additional instrument beyond what were necessary for the particular purpose; but have first confined themselves within the proposed limits, then proceeded to select such instruments for use as would sympathise the most closely with the words to be sung, and yet at the same time produce so transparent an effect, that the voice could be heard clearly and definedly through the whole. These are precisely the several processes that should be gone through, to secure the best, because the most appropriate, kind of subdued Organ-tone for accompaniment; that is, if the Organ admit of a choice.

The power of an Organ partly due to its extent of tone.

1016. It was stated just now, that, while an Organ is commonly voiced to a  $2\frac{1}{2}$  or 3 inch wind, the human voice is frequently produced by a current of air equal to a 9 or 10 inch

wind. This fact would seem to imply that the tone of an Organ must be much weaker than that of voices; and although the above figures may or may not reprepresent the exact comparative strength of the two, yet there is no doubt of the fact, that unison Stops alone in an Organ would be quite unequal to the support of a large body of strong voices. Organs, therefore, are never made with this one class of Stops alone; because they then could not possess the requisite force and power. The "power" of an Organ is in a great measure due to its greater extent of tone, as compared with that of voices; pitch exercising a most remarkable influence on its loudness. Every one is aware that, in a quartet sung by the four varieties of male voice, the Treble part always sounds the most prominent, not because the boy's voice is the most powerful, for it may be the weakest, but because it is the highest. So great is the influence which acuteness of pitch exercises, that the general ear, and consequently voice, will follow the upper part of a four-part harmony, whether it should do so or not. Of this, a remarkable instance is given, on all occasions when Tallis's Responses are sung in Cathedrals, i. e. on Church Festival days. The chief Melody or "Plain Song" is set in the Tenor, for which reason it remains unrecognised by the congregation generally, who never follow it, but on the contrary, take the Treble or acute part, which in reality is only a portion of the Choral accompaniment.

1017. Now, for the same reason that the adult male members of a congregation hear the Trebles so much more clearly than the Choir voices that are in unison with their own, the Trebles hear those of an Organ-stop that sounds the octave above their voices much more distinctly than those that are in unison therewith. This fact must be familiar to all who have had much experience in accompanying a Choir, and who will have noticed this illustration of it, that if the Treble voices get flat, they will be set right much sooner by drawing the Principal, or by playing the inclody in octaves, which will produce the same kind of effect, than by adding a number of other Unison Stops. The addition of one Principal to the Great Diapasons will, at such times, be heard more distinctly by the Trobles, and will exercise a far greater corrective influence, than the addition of three or four Unison Stops from the Swell, by means of coupling, even if there be one or two Reeds included among the number. This, however, does not arise from any greater power possessed by the Principal; for in that respect it is inferior to the other accessory mentioned; but from its acuteness. The influence of high-toned Stops extends still further; for the same reason that the Principal adds clearness to the Diapasons. The Fifteenth and Twelfth impart a penetrative quality to the tone; while the Mixtures add sharpness and perhaps keenness, according to their composition and other circumstances. So much for the Stops sounding above the unison. But the remaining Stops also fulfil certain important conditions. The Unison and Double Stops impart a fulness to the tone that is appreciably felt by a Choir and eongregation, and conduces, in conjunction with the Pedal Bass, to convey that sensation of nearness of accompaniment to the singer that is of such essential consequence in infusing confidence and affording encouragement to those who need support. The Pedal Bass, in its turn, marks the progress of the music; and that much more effectually than any of the other Stops could do. Summing up, then, in a few words, the influence which the three classes of Stops exercise: the Octave and other acute Stops tend to keep the voices in tune; the Unison and Double Manual Stops afford them support; while the Pedal Diapasons, by marking the time in the course of the onward movement of the music, keep them together.

How the acoustic capacity of a Manual Organ is increased, to adapt its tone to a large building.

1018. What has hitherto been said, has had more especial reference to the requirements of an Organ as an accompanimental instrument. But it is necessary also to consider by what process of development an Organ, as an independent

instrument, is made to fill, with its musical tones, a building, however large its dimensions; particularly as this point has not the less bearing on the question eoncerning its efficiency and excellence in the eapacity already considered. The presence of a Double Diapason has already been mentioned, as being necessary in an Organ to support the Tenor and Bass voices in a congregation, as the unisons do the Trebles. But a Stop, or Stops, of that size are required to fulfil another end, totally distinct, but of not inferior consequence. If a chord be played in the Treble part of the Great Organ, of an instrument placed in a large building, and not having any Stops lower in pitch than the unison, there will be perceived a certain smallness of effect, which makes it evident that, although the Treble may possess sufficient brightness and intensity, perhaps even amounting to shrillness, yet it

lacks the amount of fulness and volume necessary to produce an ample and dignified tone. This arises from the fact of even the Unison Pipes in the Treble being comparatively acute in their sound; and, therefore, in the very nature of things, unpossessed of stately impressiveness. It thus becomes obvious that the harmonic corroborating series of Stops alone do not present *all* the resources necessary to form a satisfactory Organ. Something that is essential appears to be wanting; and a fresh element is felt to be necessary to supply that absent property.

The acoustical grounds on which Double Stops are introduced into an Organ, 1019. The property wanting is gravity; which possesses a character peculiar to itself, and for the absence of which no amount of intensity in the other sounds will compensate. Of the travelling and filling-up character of grave sounds we

have already spoken; and of the fact itself, a sufficient illustration is given in the circumstance of a Chant sung by twenty Tenor and Bass voices, in unison, pervading a building more completely than if sung by thrice the number of Trebles. Again, the deep tone of a Pedal Diapason will travel through a building more entirely than a doubled chord of six or seven notes played on the Manual Diapasons, from middle c1 upwards. Its sound will certainly not be nearly so well defined; but it will be of a more pervading character. The want felt, and above specified, however, is not a substitute for the harmonic sounds, but a new element, which, added to them, shall render the general tone larger and more ample. It is worth mentioning, that this want was so much felt, nearly three centuries and a half ago, abroad, that means were, even at that period, taken to supply the deficiency. It was about the year 1508, that a Covered Stop of 16-feet size of tone was invented in Holland; and which, to some extent, imparted the necessary, deep, resonant, humming effect to the other Stops, and was hence expressly called Bourdon; a name that means a hum or drone; and which Stop has never ceased to be highly valued abroad to this day.

1020. The strength of this under-sound has to be regulated by the size of the Organ, and the dimensions of the building in which it is to stand. For an ordinary Church Organ, a Bourdon (Double Stopped Diapason) is generally sufficient; for a larger instrument, a Double Open Diapason is also required, perhaps accompanied by Double Mutation Stops; for a still larger one, a 16-feet Double Trumpet is necessary; and for Organs of first class magnitude, a small Sub-Bourdon, in addition, of 32-feet tone, as far as Fiddle g or Tenor c, sounding GG or CCC. When a Manual Organ is thus developed, its Treble becomes endued with such a dignified character and a filling-up quality, that in the largest buildings it may be used by itself with the most impressive effect.

The effect of a large Organ not constructed on acoustic principles as well as on harmonic. 1021. It has been thought necessary to enter thus fully into this subject, because there are many who hold that all Double Stops are inadmissible, from the circumstance of their not being included in the harmonic suggestions of nature.

This opinion, however, does not imply a complete view of the question. The rearing of a large Organ is not governed simply by the laws of harmonics; but also by the laws of acoustics. These latter have already been sufficiently considered in

the previous chapter; and it only remains here to point out what an Organ becomes, when the claims of the latter are overlooked. The greater the number of Stops introduced into the Great Organ, and the greater the quantity of Chorus-work, the more is the tone of the Treble drawn upwards. The greater the number of ponderous Stops put on the Pedal, the more the Bass is drawn downwards. the size of the instrument is increased, so is this effect of the severance of the two parts in proportion; which accounts for the fact of the largest Organs, built not on acoustic principles as well as on harmonic, being the greatest failures. The two parts contain no one property or characteristic that is common to both. Instead of the Manual tone being extended downwards to meet the Pedal, by means of Doubles, &c. and the Pedal being extended upwards to meet the Manuals, by means of Mixtures, &c.; the 8-feet and smaller tones of the former, and the 32-feet tone of the latter, draw the two asunder. The sharpness of the one, and the turbulence of the other, instead of producing the effect of harmonious amalgamation, convey an impression of the two parts being engaged in an angry altercation. It then becomes necessary for the left-hand of the Organist to be employed in holding down nearly every concordant note within reach, to disguise the deficiency.

1022. It is inconsistent with the credit and real dignity of the instrument, that its good or bad effect should depend on the player's power of hiding a defect. All the properties and attributes for producing the best and a perfect effect, should be embodied in the Organ itself; but this will not be the case, unless what is acoustically necessary is provided, as well as what is harmonically so.

## CHAPTER XXXIV.

VARIOUS MATTERS CONNECTED WITH THE DIVISION OF THE STOPS, AND THEIR SELECTION ACCORDING TO THEIR SIZE.

The proportionate division of a given number of Stops among the several departments.

1023. In distributing a given number of Stops among the several departments of an Organ, care must be taken not to devote too great a proportion of that number to one department, and so few to another, that the latter will be insignificant

beside its compeer; but the endeavour should be made to develop all the departments that are proposed to be introduced at all, gradually and simultaneously.

1024. The Great Organ, as being the most important department, and the one required to have the fullest tone, should have the greatest number of Stops. The second Manual (Swell) need not have quite so many, although the difference ought not by right to be great. The third Manual, if there be one (Choir), would perhaps have somewhat fewer again. The Pedal might have, as the maximum number, as many Stops as the Great Manual; the German proportion often exceeding this. The minimum proportion for the Pedal should be one third as many Stops as there are on the Great Manual. Below this ratio the German Organ-builders never descend, except for instruments of the most unpretending description.

1025. According to the size of the proposed Organ, the Stops would be assorted into from 2 to 4 or 5 separate divisions. In thus assorting them, two extremes have to be avoided; namely, of reducing a moderate number of Stops into too many divisions, and of confining a large number of Stops to too few Claviers. By the former course, in consequence of the Stops of every Clavier having to commence with the unison, several and minute varieties of the same Stops must necessarily be introduced, which might, under the circumstances, be very well dispensed with; while the effect of the whole is small as compared with what it might be. On the other hand if a great number of Stops be assorted into too few divisions, the Stops that produce the more delicate gradations or shades of tone, if introduced, cannot then be used with the same facility, advantage, or convenience. A greater number of Manuals will always possess advantages over a smaller, provided the Organ-tone be not dispossessed of its proper dignity to secure them.

1026. As a rule, possessing sufficient accuracy to answer all general purposes, it may be laid down, that an Organ with 8 Stops might have 1 Manual; one having from 12 to 30 Stops, 2 Manuals; and one with from 24 to 60 Stops, 3 or 4 Manuals. In each case there should be separate Stops for the Pedal, as far as possible.

1027. It may in some cases happen that there are large funds at disposal. If, under such circumstances, it be thought desirable to add to the comparative completeness and efficiency of the Organ, without increasing its strength of tone, or throwing it out of proportion with the Church, this could be done either by adding a second Manual Organ (Swell); or, if that be already designed, a third Manual Organ (Choir); or it might be effected by proposing extra Stops of a delicate character of tone.

The size of Stop that should form the basis of the Manual and Pedal tone.

1028. The next point to be observed is the size of the Stop that forms the unison or basis of the Manual and Pedal tone. For all the Manuals this would be the same—namely, 8 feet; but for the Pedal, 16 feet. The Stops first to be

selected for the former must therefore be of 8 feet, or 8 feet size of tone; and for the latter, 16 feet, or 16 feet size of tone.

Stops of one size only, for Manual or Pedal, incorrect.

1029. At the same time it would be incorrect, for reasons already assigned, to place only 8-feet Stops on the Manual, and only 16-feet on the Pedal. The effect of such a selection

of Stops, at first serious and solemn, would gradually become dull and monotonous, and then oppressive and dispiriting. Other and smaller Stops are required to give life and energy to the Organ-tone, and to serve the numerous other purposes mentioned in former chapters.

The proper size for the Stops; and the order in which they should be selected. 1030. A Table of the smaller Stops just referred to was given on page 123. All these of course cannot be placed in every Manual Organ in the first instance. They are not indeed required; for the individuality of character in the tone of

the several Manual departments depends as much on the size and proportion, as on the choice and scale of the Stops with which they are each furnished.

1031. Where, however, fulness and power are required, as is always the case with regard to the Great Organ of even small instruments, the series of smaller or harmonic corroborating Stops should be introduced in a complete form as soon as possible, or the above-named essential requisites will not be secured to the full extent. When, however, the Church is very small, the funds limited, or there is any other circumstance to prevent the introduction of all the ranks of Pipes in question, then those Foundation ranks which are the nearest in pitch to the fundamental or ground-tone should be first selected. Thus the Principal, 4 feet, must be the first Stop of the series introduced, after the Unison Stop itself. Next to that, the Fifteenth. It is a rule never to propose a Third or a Fifth-sounding rank without the Octave-sounding rank the next smallest in size to itself being also introduced to cover its tone. This is why the Twelfth is never disposed before the Fifteenth; although its size is 2\frac{2}{3} feet, and that of the latter only 2 feet. In like manner the Seventeenth or Tierce, and the Nineteenth or Larigot, should always be accompanied by the Twenty-second or Octave Fifteenth, or the Mutation tone may appear remarkable, or even offensive.

The Stop from which the harmonic correborating Stops must be measured. 1032. As the tone, on the one hand, would tend towards thinness, if any of the requisite Mutation ranks were to be omitted; so, on the other, it would become thick and indistinct if Mutation ranks of too great size were to be introduced. It

is very necessary, therefore, to bear in mind from which Stop the harmonic series should be measured, as this will prevent the occurrence of either error. The proper Stop to be used for this purpose is the largest one of the Open Diapason species proposed to be placed on the same Manual. If that Stop is to be of 3 feet, the harmonic series would, for the theoretical reason before explained, be as follows:



1033. The order of the harmonic sounds will easily be committed to memory, if the series be viewed in this way. All the octave sounds are required. The interval of the first octave from the Fundamental tone must not be broken; the second should be broken by a Fifth only; while the third may be broken by a Third\* and Fifth. In the above example, the filling-up sounds, in their correct situations, are represented by minim notes.

1034. If a large Organ is proposed, having a 16-feet Stop—Double Open Diapason—the harmonic series will be of the following sizes and pitch.




2035. For a small Choir Organ, having no larger Stop of the Open Diapason species than the Octave or Principal of 4 feet, the following would be the proper sizes for the Harmonic series:



1036. As to the naming of the Stops of the Manuals, this point is always decided in England by their pitch in relation to the unison tone of those departments, as shown in the following scheme.

<sup>\*</sup> In Germany, the Tierce is not commonly introduced into new Organs of moderate dimensions, on account of its not harmonising so well with the sharp thirds of the equal temperament. The flat Twenty-first is never included, even in the largest Organs of that country.



1037. We perceive, from the middle column of the above scheme, that when the largest open cylindrical Stop of full scale is only of 8 feet, it would be wrong to introduce either a Fifth or Tenth (see directs); because they form no portion of the 8-feet harmonic series, but of the 16. Or, to put the fact in a practical instead of a theoretical form, the Fifth would break the first octave from the fundamental tone, and the Tenth would introduce a second filling-up sound into the second octave. In effect, these would, under such circumstances, obscure the Foundation tone, and render the whole thick and indistinct.

1038. The Twelfth, on the contrary, would be a necessary Stop to dispose to an 8-feet ground-tone. This, however, in its turn becomes inadmissible, when the largest Stop of the Diapason species is only 4 feet in length; as shown in the third column of the above scheme.

The meaning of the German terms, 16-feet Manual, 8-feet Manual, and 4-feet Manual.

1039. As the meaning of the German terms "16-feet Manual," "8-feet Manual," and "4-feet Manual," are by no means generally understood, an explanation of them may not be uninteresting in this place. They have by some been sup-

posed to signify a CCC Manual, a CC Manual, and a Tenor c Manual respectively: whereas, in reality, they refer to nothing of the kind. The German Manuals never descend below CC, and they very seldom fall short of that compass. The terms refer to the size of the greatest Stop of the Open Diapason kind on the Manual to which either of the three may be applied. If the Stop in question be of Sub-octave pitch, corresponding with the English Double Open Diapason of 16 feet, the Manual on which it stands is said to be a 16-feet Manual. If it be of 8-feet length, the Manual is said to be an 8-feet one. The fact of there being a Bordun of 16-feet tone, and

perhaps even a "Gedact-Quint," or a "Rohr-Quint" (Stopped Fifth,  $5\frac{1}{8}$ -feet tone), does not affect the classification. If the largest Stop of the Open Diapason species is of 4-feet length only, as is usually the case with English Choir Organs, that Manual is said to be only a 4-feet Manual. The presence of the Stopped Diapason, and perhaps other Unison Stops not of the governing kind, are again not permitted to affect the classification.

Stops of one class alone not sufficient to produce the best Organ effect.

1040. Two facts have already been mentioned, that the harmonic series of Stops are usually formed of Pipes of the Open Diapason species, and that the presence of that series is essential to the production of a full and satisfactory Organ-tone.

At the same time those Stops do not present all that is necessary to produce the best attainable effect. No single class of Stops can do this. For instance—Open Stops of the Diapason kind, alone, would produce rather a cutting tone; an Organ entirely of Covered Stops would sound weak and muffled; while one composed entirely of Reeds would be too strong and penetrating. The four great classes of Organ Stops—Open, Covered, Flute, and Reed—are, in fact, to a great extent dependent on each other for the production of the most satisfactory result. The Covered Stops impart a quiet solidity to the Open Stops; the Open Stops bestow roundness and firmness on the Covered Stops; the Flute Stops give variety and increased character to the soft combinations; while the Reed Stops impart to the full Organ stateliness and splendour, and in return receive fulness and brightness from the Open series of Stops.

The proportion to be observed in the number of Stops of different sizes.

1041. In selecting Stops from the Covered, Flute, or Reed species, for addition to those of the Diapason kind, certain proportions should be observed in regard to the number of each size proposed to be introduced, or the proper balance of the

general Organ tone will not be preserved. The foundation tone should in all cases predominate over the mutation sounds; and in like manner the unison sound should predominate over all the octave sounds. The former point is attained by *doubling* the number of 8, 4, and 2 feet ranks or Stops; and the latter by introducing more 8-feet stops than of 4-feet, and a greater number of 4-feet Stops than of 2-feet. For the regulation of these matters, certain general rules are laid down in Germany, which are embodied in what follows.

1042. A Great Organ Manual should ordinarily have, besides the Open Diapason, from one to three or four other 3-feet Stops, according to the size of the instrument. In addition to these, there should be a good proportionate number of 4-feet Stops. These latter should be, at the least, half as numerous as the 3-feet; and if of those of 3-feet there should be an odd number, the balance should be given in favor of the 4-feet Stops.

Thus, (1) to two 8-feet Stops, there should be one 4-feet Stop;
(2) to three or four 3-feet Stops, there should be two 4-feet Stops, and one 2-feet Stop;

(3) to four or five 8-feet Stops, there should be three 4-feet Stops, and

two 2-feet Stops.

1043. The Stops should, in fact, in regard to their proportion and size, be arranged after the manner of a pyramid; lessening gradually as they rise.

Thus, for a small Great Organ they should stand thus:

to three 8-feet Stops, two 4-feet Stops, one 2\frac{2}{3}-feet Stop, and one 2-feet Stop.

The Twelfth would be required, to give that kind of "Chorus" effect which is so desirable a characteristic for even the most limited Manuals of the kind to possess.

1044. A Great Manual that is to have 9 or 10 Stops should include a Twelfth, a Compound Stop, and a Bordun. This would make the second of the three tables just given take the following form:

One 16-feet sounding Stop; three or four 8-feet Stops, two 4-feet Stops, one  $2\frac{2}{3}$ -feet Stop, one 2-feet Stop, one Mixture of 4 or 5 ranks—9 or 10 Stops.

1045. If the Great Manual is to have 16 Stops, it should include two 16-feet Stops and a Quint of  $5\frac{1}{3}$ -feet. These would give to the third table the following form:

Two 16-feet Stops, five 8-feet Stops, one 5\frac{1}{3}-feet Stop, three 4-feet Stops, one 2\frac{2}{5}-feet Stop, two 2-feet Stops,

two Mixtures, comprising 7 ranks-16 Stops.

1046. It will be understood, from a glance at the foregoing tables, that it must be manifestly improper to propose two Twelfths with but one Fifteenth to cover them. If they were to speak out properly, the fifth sound would certainly be stronger than the octave, and the predominance of the foundation tone would be to some extent obscured. There would then appear a certain thickness and nasal quality in the tone. It would be equally wrong to propose a greater number of 4-feet Stops than of 8-feet; or a greater number of 2-feet than of 4-feet. Either of these latter miscalculations would have the effect of drawing the tone up from the unison pitch, whereby the requisite fulness and gravity would be lost, and an undue brightness and thinness substituted.

1047. The foregoing schemes and observations have more immediate reference to the properties requisite for the Great Organ to possess. They, however, apply equally to all the Manuals, and indeed to the Pedal also; but the Swell and Choir Organs are seldom furnished with as many Stops as the Great; and moreover are not developed in the same manner. For instance—the Harmonic series of Stops are

among the first to be proposed for the Great Organ; their importance is shared by the Reeds in the Swell; while, in the Choir Organ, they are the very last that find admission.

1048. The Swell may be considered as an Echo to the Great Organ in one sense, and as a Solo Organ in another; and the Stops that are selected for it in these two capacities, render it a most valuable division of an Organ for accompanimental purposes.

1049. To serve as an Echo to the Great Organ, the Swell should have, besides the two Diapasons, the Harmonic-corroborating series of ranks complete, as far as practicable; and also a Bordun. As a Solo Organ, it requires two Unison Reeds as a commencement. The proportion in the number of Unison and Octave Stops, even in a small Swell, will therefore almost of necessity stand in the following ratio; namely,

to four 8-feet Stops, one 4-feet Stop;

but the proportion would be much better preserved, and the effect more than equivalently improved, by the insertion of a second 4-feet Stop—as, for instance, a Clarion. One of the reasons why Reeds are so soon and so freely introduced into a Swell, is that, on account of the Stops being enclosed in a box, the tone must be of a more penetrating quality to make itself heard; and a strong and a weak Unison Reed are therefore proposed, which stand in about the same relation to each other, in regard to strength of tone, that the Open and Stopped Diapasons do to one another. It is also for the above reason that the second 4-feet Stop, proposed for the Swell, is almost always a Clarion in preference to a Flute.

1050. The Choir Organ should be of a lighter tone than either the Swell or the Great Organ. By this it is not meant that it should be so very much softer. Choir Organs have sometimes been voiced with the delicacy of a Chamber Organ; and have therefore, for Church purposes, been of little use. Excellent examples of what the comparative strength of the like Stops in the Great and Choir Organs should be, will be found in some of the best old instruments which still remain: not indeed that the Choirs of those Organs present good models for literal reproduction; for they are, or were, in their original form, very much out of proportion. It was a constant practice with the old builders to propose a Stopped Diapason only, to stand against two 4-feet Stops and one 2-feet Stop. Instead of the unison tone being properly maintained by such a specification, it was completely overbalanced by the higher sounds, and a quality of tone was produced that was characterised by excessive thinness, in spite of its sprightliness. Probably this misproportion in the old Choir Organs arose from the same cause which operated against the proper balancing of the old Great Organs; namely, lack of room, want of funds, or both. In later examples of Choir Organs, a Dulciana was generally introduced; but so weak an unison, even as an addition, was insufficient to reduce the strong-toned Principal and Fifteenth into proportion; hence the custom was introduced of voicing the last-mentioned Stops much more quietly than before; and this two-fold modification, while it certainly had the effect of producing a more equally balanced Choir Organ, at the same time brought in the chamber quality, as already mentioned. The attributes for a Choir Organ are lightness and variety, rather than fulness and power; hence a given number of Stops,

that would in the case of the Great Organ require a Twelfth and a Compound Stop, neither call for the one nor the other when appropriated to the Choir Organ. A good number of 8 and 4 feet Stops, comprising delicate accompanimental and Solo Stops, are among the first that should be selected for this department.

Manual Stops as circumstances will allow. A good complement of 16 and 8 feet Stops should first be disposed for this department; particularly as all smaller Stops can be conveniently borrowed by coupling the Manual to the Pedal. The 16-feet Stops are the most indispensable, because their tone forms the true basis of the Pedal tone. Of scarcely less importance are the 8-feet Stops. When there is a choice of Stops of this latter size, the Pedal can then, in soft playing, be freely used without there existing any necessity for coupling either of the Manuals thereto to produce a good effect. The left hand, moreover, will not then be constantly deceived by descending on a key that is already down.

1052. With regard to the proportion between the 16 and 8 feet Stops on the Pedal, this should be the same as in the Great Organ; and when there are 10 Pedal Stops, these should include either a Sub-Bourdon—32-feet tone, or a Double Open Bass of 32 feet.

#### CHAPTER XXXV.

#### THE COMPOSITION OF THE MIXTURES.

1053. WE have now arrived at the consideration of the composition of the Mixtures; that is, of the Compound Stops generally, under whatever name they may appear—as Sesqui-altera, Mixture, Furniture, Cornet, &c. This subject is one of great interest and importance. So great indeed is the influence which the class of Stops in question exercises, that, after taking the greatest care to preserve the Harmonic-corroborating series of Stops entire, and to secure the proper proportionate number of Stops of the different sizes, it is quite in the power of incorrectly compounded Mixtures to disturb those pre-arrangements, and to qualify the perfect effect of the work. For this reason, it becomes necessary to enquire what may be the several requisites of the class of Stops above named.

Why should there be breaks in a Compound Stop?

1054. The first question that presents itself is, why should there be any "breaks" in a Compound Stop? Because there is a practical difficulty in the way of continuing the smaller ranks throughout at the original altitude of pitch above the unison. It would be scarcely possible to make Pipes small enough for the purpose; and if made, they would be as difficult to tune. Moreover, they would be put out of tune again by the slightest change of temperature, or by the smallest particle of dust.

A Compound Stop without a break, not in accordance with the suggestions of nature.

1055. Moreover, there exists no necessity for continuing a Compound Stop up without a break. The Mixtures are intended to corroborate certain of the higher harmonic sounds; and these sounds are not heard to rise to so great an altitude when the Fundamental tone is higher up in the scale, as when it is lower down. For example—so long a series of harmonic sounds will not be traced rising above the middle c¹ as from the CC string of a Pianoforte. To continue a Compound Stop throughout, therefore, without a break, supposing it were practicable, would be to "corroborate" what cannot be heard.

The same compound not productive of the same effect in different parts of the scale.

1056. Furthermore, there is a very important practical fact, connected with the sound of the small Stops of an Organ, that should here be mentioned. It is no other than this: that the same combination or compound does *not* produce the same

effect in different parts of the scale, but appears to possess more prominence in the upper than in the lower part. For example—if the Great Organ Stops, as far as the

Fifteenth, be drawn, and this or any similar passage be played in the Treble,



a certain completeness of effect will be produced that will be satisfactory to the ear. Repeat the progression in the Bass,



and an equally perfect effect will not be experienced. The Mutation sound (Twelfth) will appear to be stronger than before; and, besides this, there will be a sensation of dulness as compared with the effect resulting from the previous experiment. If there be a 3-rank Sesqui-altera, and that Stop now be drawn; on repeating the same low notes, the Bass will be found to be brightened up, and the Twelfth-tone to be covered. If, however, the Treble of the added Stop be of the same composition as the lower part, and the foregoing passage be repeated in the higher part, the Treble will again appear to be in advance of the Bass, in regard to comparative brightness. These facts clearly show that there is a close connection between the extent of the audible harmonic series of sounds in nature, and the good effect of the harmonic corroborating Stops, when of approximate range. It is moreover evident, from their works, that the old English builders were aware of this, and that they worked accordingly, so far as circumstances permitted.

Might not a rank "die out," instead of presenting a break?

1057. The second question is, might not a rank, as its continuation becomes unadvisable or impracticable, be allowed to "die out?" No. For, in that case, the Treble, from

having fewer Pipes, would sound weaker than the Bass, and consequently would be overpowered by it. To prevent this, the same number of ranks should be maintained throughout; and when it becomes advisable to discontinue a rank at its original altitude of pitch above the fundamental sound, a duplication of some larger rank should be introduced in its stead; which, by strengthening one of the most important remaining tones, will add fresh energy to that tone, and so partly compensate for the loss of extent in the harmonic series.

The valuable aid rendered to the Treble of au Organ by the return ranks.

1058. These duplications, introduced where the breaks occur, and increasing as the harmonic series decreases, perform a most important and valuable office, when rightly managed. It has already been mentioned more than once in the course of this

work, that there is always a tendency in Organ Stops to become weaker and of lighter tone in the Treble than in the Bass. The duplications in question offer one means for almost entirely removing this defect from Organs of average dimensions; which they do by presenting a great accession of tone to the ranks that are "repeated," although they do not exactly double their power. These advantageous duplications of course alter the proportions as to the number of Stops and ranks of different sizes in the Treble, which modification takes place without any detriment, but, on the contrary, improvement to the general effect. The two chief rules to be observed in regard to the Treble, are (1) that, of the Foundation ranks, those of a smaller size shall never exceed those of

a larger, as more Fifteenths than Principals; and (2) that those of a Mutation rank must not be greater than those of the Foundation rank next below, as more Twelfths than Principals, or more Nineteenths than Fifteenths, &c. The more nearly the return ranks present a general duplication of the entire Treble, the better. The reinforced Treble then more nearly matches, in strength, the brighter Bass.

On what keys the breaks had better take place.

1059. The breaks, then, being not only unavoidable, but even *advantageous* when judiciously managed, the next question is, on what keys they had better be made. For these

changes no fixed positions were recognised by the old builders; nor have any been uniformly adopted by the modern. They are met with on c, c sharp, f, f sharp, and g, in different Organs. As, however, c is viewed as the normal note of the Organ for most other purposes, the key so named in each octave would appear to be the most appropriate seat for the returns or breaks in the Compound Stops, provided it can conveniently be rendered so. This it has in the great majority of instances been made, with excellent effect; and it is therefore in most cases also retained for the same purpose in the following plans for Compound Stops.

Where the broken ranks should return to.

1060. The next point to be considered is, where should the broken ranks return to? Seidel says, "in the repetition of a Mixture, Fifths and Octaves must be used alternately."

This refers to the Compound Stops of many modern Continental Organs tuned on Equal Temperament, in which there either are no Tierces, or they are made to draw separately. Smith sometimes broke his Mixtures by Octaves in the Bass; and used Fifths, Thirds, and Octaves successively in the Treble, England and Green more frequently used Fifths as well as Octaves for the breaks in the Bass; and Fifths, Thirds, and Octaves alternately in the Treble. But, in whatever way the breaks be made, the consequent duplication should be introduced with the view of preserving the predominance of the Foundation-tone, and the subordination of the Mutation.

1061. These precautions used not to be uniformly taken; hence certain misproportions will sometimes be met with in the old Mixtures of even some of the best builders. For example—in some old Organs there will be found, in the Tenor octave, to three Unison Flue Stops, one Principal and two Twelfths; the Fifthsounding ranks being in consequence more numerous than the Octave-sounding ranks the next below them in pitch: and from middle c¹ upwards to two Principals, three Twelfths and one Fifteenth—the mis-proportion being thus increased. When the sound of the Mutation ranks is strengthened beyond the necessary degree, it then no longer simply gives roundness to the tone, but imparts a slightly nasal quality to it, that has nothing to do with the production of the peculiarly rich and mellow tone that so frequently distinguishes the old Mixtures; but, on the contrary, it to some extent deteriorates it.

1062. In one Organ the writer examined not very long since, there were in the Treble of the Great Organ, to

1 Open Diapason—2 Principals—3 Twelfths—and 4 Fifteenths.

The tone was amazingly bright, on account of the Fifteenths being so much more

numerous than the Principals and Diapasons; but the fundamental sound was far from being properly maintained. In another there were, to

3 Principals—2 Twelfths—2 Fiftcenths—3 Tierces, and 4 Nineteenths.

In this case, the "Chorus" was anything but brilliant, although there was a great quantity of it, but rather was thick and indistinct, on account of the Tierces and Nineteenths being more numerous than the octave sounds immediately above and below them. On the Mixtures last referred to being subsequently revised, and the Foundation and Mutation ranks brought into better proportion, their power and clearness were considerably increased, without a single rank being added to the original number.

Plans for Compound Stops.

1063. Some compositions for Mixtures will now be given, in the preparation of which special care has been taken to guard against the appearance of any of the misproportions already alluded to. Advantage has also been taken of a personal examination of some of the finest English and Continental Mixtures, the best points in which have been freely incorporated, so far as the proposed number of ranks would in each case allow. As, however, two Mixtures of even the same number of ranks will produce a very different effect according to their composition, the one giving a sharp and clear tone, the other a full and bold tone; the terms "Full Mixture" and "Sharp Mixture" have been used, after the German manner. The term "Mixture" has also been applied alike to all the Compounds; for which, however, any other name would of course be substituted that might be preferred.

1064. The first kind of Compound Stop that is required for a small Organ, is one that will brighten up the Bass and Tenor, and add fulness, body, and firmness to the Treble, without, however, imparting sharpness or keenness thereto. The kind of Stop that is usually proposed for this purpose is a 3-rank Sesqui-altera, consisting of 17—19—22 in the Bass and Tenor octaves; and 12—15—17 from Middle c¹ upwards. Almost the only fault to be found with this composition is, that it places two Twelfths to one Principal in the Treble. This misproportion would be entirely removed by arranging the composition thus:

#### I. COMPOSITION FOR A FULL MIXTURE OF HI RANKS.

Key on Manual. Intervals in relation to the Unison. The corresponding sounds in Tablature. 
CC to middle b . . . 15-19-22. 
Middle  $c^1$  to the top. 8-12-15. 
CC to middle  $c^2$  to the top.  $c^2-g^2-c^3$ .

1065. This alteration is effected entirely by substituting some other rank for the Tierce; which latter might be added as a separate Stop, if thought desirable. The Fifteenth gives increased clearness to the Bass, while the Principal adds to the fulness of the Treble. The above composition is in frequent use among German Organ-builders, and produces an admirable effect: the Furniture in Mr. Hill's Organ at the Panopticon is also compounded as above.

1066. The goodness of a Mixture composition depends, as already explained, on the extent to which the predominance of the foundation tone and the rules of proportion are preserved, when its ranks are added to the other Flue Stops of the same Manual. Let the above composition, then, be tested in this manner. Suppose it to be added to a small Organ, such as that proposed as the First Specification immediately preceding the Appendix. The proportion in the size of the Stops as there given is as follows:

3 Unisons—2 Octaves—1 Twelfth—and 1 Super octave throughout.

With the above addition, it would stand thus:

From CC to Middle b... 3 Unisons—2 Octaves—1 Twelfth—2 Super octaves—19 and 22; and

From Middle c1 to the top. 3 Unisons—3 Octaves—2 Twelfths—2 Super octaves.

1067. For a somewhat larger Organ, such as our Specification No. IV, a 4-rank Mixture would be required. This might be of the following compound:

#### II. COMPOSITION FOR A CLEAR MIXTURE OF IV RANKS.

Key on Manual. Intervals in relation to the		The corresponding sound	
	Unison.	in Tablature.	
CC to Middle b	. 19—22—26—29.	 $g^{1}$ — $c^{2}$ — $g^{2}$ — $c^{3}$ .	
Middle c <sup>1</sup> to b <sup>1</sup> above	· 12—15—19—22.	 $g^2-c^2-g^3-c^4$ .	
Treble c2 to the top .	. 1— 8—12—15.	 $e^2 - e^3 - g^5 - e^4$ .	

1068. The duplication of the four principal ranks of the Organ from Treble c<sup>2</sup> upwards (an octave and a half) imparts great breadth and dignity to the upper part of the Manual. The Sesqui-altera in the Organ at the Stockport School-room, by Kirtland and Jardine, is compounded as above.

1069. If a keener tone should be required, the compound might have the following form:

#### III. COMPOSITION FOR A SHARP MIXTURE OF IV RANKS.

Key on Manual.	Intervals in relation to the	The corresponding sounds
	Unison.	in Tablature.
CC to Middle b	. 19—22—26—29.	 $g^1 - c^2 - g^2 - c^3$ .
Middle c1 to Treble f2	. 12—15—19—22.	 $g_2 - c^3 - g^3 - c^4$ .
Treble f <sup>2</sup> # to b <sup>2</sup> above	· 8—12—15—19.	 $f^{3}\sharp -c^{4}\sharp -f^{4}\sharp -c^{5}\sharp$ .
c <sup>3</sup> in alt. to the top	. 1— 8—12—15.	 $c^{3} - c^{4} - g^{4} - c^{5}$ .

1070. As compared with the preceding composition, the above presents a two-fold contrast from Treble  $c^2$  to  $b^2$  in alt—nearly a complete octave. In the first half of that octave it has a 19 and 22 in place of the Open Diapason and Principal ranks before proposed; and in the second half octave, nearly, it has a 19 in lieu of the Open Diapason.

1071. In both the above schemes, the same unbroken composition is preserved through the Bass and Tenor octaves. The upper rank, however, might have been

changed at Tenor c; and at Treble c<sup>8</sup> the 22nd might have been discontinued, leaving the 19th at top. These modifications would have caused the composition to stand thus:

#### IV. COMPOSITION FOR A QUINT MIXTURE OF IV RANKS.

Key on Manual.	Intervals in relation to the Unison.	The corresponding sounds in Tablature.
CC to Tenor b	19-22-26-29.	 $g^1 - c^2 - g^2 - c^5$ .
Tenor c to Middle b	15—19—22—26.	 $e^2 - g^2 - e^3 - g^3$ .
Middle $c^1$ to Treble $b^1$ .	12—15—19—22.	 $g^{2}$ — $e^{3}$ — $g^{5}$ — $e^{4}$ .
Treble c2 to b2 above	8—12—15—19.	 $c^{3}$ — $g^{5}$ — $c^{4}$ — $g^{4}$ .
c <sup>3</sup> in alt. to the top	1— 8—12—15.	 $c^{3}-c^{4}-g^{4}-c^{5}$ .

1072. A break here occurs on every c key throughout the scale; and the Octaves and Fifths are discontinued alternately, after the manner proposed by Seidel. The changes are therefore very gradual. In some respects this composition resembles that frequently adopted by England, who was very partial to the 26th as the top rank in the Tenor octave; and sometimes in the Bass octave also. In connection with the discontinuance of the Octave Fifteenth at Treble c², it may be mentioned, as a circumstance worthy of observation, that the tone of that particular rank has a decided tendency to fall on the ear with great prominence above that note, unless it be very carefully treated, and well balanced.

1073. If a very full tone be desired from the Mixture, the following composition would produce that effect.

#### V. COMPOSITION FOR A FULL MIXTURE OF IV RANKS.

Key on Manual.	Intervals in relation to the	The corresponding sounds
	Unison.	in Tablature.
CC to Tenor b	15—19—22—26.	 $c^{1}$ — $g^{1}$ — $c^{2}$ — $g^{2}$ .
Tenor c to Middle b	12—15—19—22.	 $g^{1}$ — $c^{2}$ — $g^{2}$ — $c^{3}$ .
Middle c1 to the top	1— 8—12—15.	 $c^{1}$ — $c^{2}$ — $g^{2}$ — $c^{3}$ .

- 1074. At Tenor c this composition is exactly like that adopted by Green in the Organ at Rochester Cathedral, excepting the omission of the Tierce; and the Treble is also the same as that planned by that builder for the same instrument, excepting the same omission and the substitution of the unison rank in its stead.
- 1075. Let these several IV-rank Mixtures now be tried in the manner prescribed in an earlier part of this chapter. The Great Organ in Specification No. IV would have, without the Mixture, Reed, and Double,
  - 3 Unisons—2 Octaves—1 Twelfth—and 1 Super octave throughout.

With the clear Mixture of IV ranks, it would have,

From CC to Middle b.....3 Unisons—2 Octaves—1 Twelfth—1 Super octave— 19—22—26—and 29;

From Middle c<sup>1</sup> to b<sup>1</sup> above.3 Unisons—2 Octaves—2 Twelfths—2 Super octaves—19—and 22; and

From Treble c<sup>2</sup> to the top...4 Unisons—3 Octaves—2 Twelfths—and 2 Super octaves.

With the Sharp Mixture of IV ranks, it would have,

From CC to Middle b.....3 Unisons—2 Octaves—1 Twelfth—1 Super octave—19—22—26—and 29.

From Middle c<sup>1</sup> to Treble f<sup>2</sup>.3 Unisons—2 Octaves—2 Twelfths—2 Super octaves—19—and 22.

From Treble f<sup>2</sup># to b<sup>2</sup> in alt..3 Unisons—3 Octaves—2 Twelfths—2 Super octaves—and 19.

From c<sup>3</sup> in alt to the top....4 Unisons—3 Octaves—2 Twelfths—and 2 Super octaves.

With the Quint Mixture of IV ranks, it would have,

From CC to Tenor b......3 Unisons—2 Octaves—1 Twelfth—1 Super octave—

19—22—26—and 29.

From Tenor c to middle b...3 Unisons—2 Octaves—1 Twelfth—2 Super octaves—19—22—and 26.

From Middle c<sup>1</sup> to b<sup>1</sup> above.3 Unisons—2 Octaves—2 Twelfths—2 Super octaves—19—and 22.

Erom Treble c<sup>2</sup> to b<sup>2</sup> in alt...3 Unisons—3 Octaves—2 Twelfths—2 Super octaves—and 19.

From c<sup>3</sup> in alt to the top....4 Unisons—3 Octaves—2 Twelfths—and 2 Super octaves.

With the Full Mixture of IV ranks, it would have,

From CC to Tenor b......3 Unisons—2 Octaves—1 Twelfth—2 Super octaves—19—22—and 26.

From Tenor c to Middle b...3 Unisons—2 Octaves—2 Twelfths—2 Super octaves—19—and 22.

From Middle c¹ upwards ...4 Unisons—3 Octaves — 2 Twelfths — and 2 Super octaves.

1076. We here see that the composition of a Mixture, consisting of a specified number of ranks, may be varied in many different ways, to adapt it to special purposes, or to cause it to suit individual tastes or feelings, and yet without creating any misproportion in any one instance. For a V-rank Sharp Mixture, the following composition would answer well:

## VI. COMPOSITION FOR A SHARP MIXTURE OF V RANKS.

Key on Manual. Intervals in relation to the Unison. The corresponding sounds in Tablature. CC to Middle b.....15—19—22—26—29.  $c^1 - g^1 - c^2 - g^2 - c^5$ . Middle c¹ to Treble f²#. 8-12-15-19-22.  $c^2 - g^2 - c^3 - g^5 - c^4$ . Treble f²# to b² in alt. 1-8-12-15-19.  $f^2#-f^3#-c^4#-f^4#-c^5#$ .  $c^5$  in alt to the top.... 1-5-8-12-15.  $c^3-g^3-c^4-g^4-c^5$ .

1077. In the Bass and Tenor octaves the above composition is identical with that used by Harris in the fine Organ at Doncaster, lately destroyed, excepting that

a 15 is substituted for the octave Tierce. The composition from Middle c¹ to Treble f² is also the same, with the exception of the substitution of a 22nd for the Tierce. The Fifth at c⁵ in alt, introduced after the manner common in German Mixtures, should be scaled and voiced as a Dulciana, when the Double is a Bordun. It is a noteworthy fact, that scarcely any of the old Organs contain a 22nd in the Treble, even when there are as many as six ranks of Mixture. The writer has not met with it in the Treble of any of the Organs by Smith, Harris, Snetzler, or England, that have come under his notice; and he has only met with it in one of Green's, namely, that in St. Katherine's Church, Regent's Park, and there it stops at Treble e².

1078. The omission of the 22nd from the Mixture compound in the Treble of old Organs, and the occasional appearance of the misproportion in that part of those instruments, seem to have arisen from three causes; (1) the omission of Doubles, which deprived the Treble of all depth of tone, and so prevented its successfully resisting the upward-directing influence of the octave Fifteenth; (2) the non-return of any Mixture rank to the unison tone, which further militated against the effectual balancing of the acute rank in question; and (3) the comparatively few intervals left to which the broken ranks could return, and which therefore were certain to be thrown out of proportion with the unison the more they were doubled.

1079. In the Organ at Newcastle on Tyne, built by Renatus Harris, and also in that at Halifax, by Snetzler, an Open Diapason rank, however, as well as a Principal, is comprised in the Mixture compound, in the Treble.

1080. In compounding two separate Mixtures, the same attention should be paid to the preservation of the proportion in the Bass, and the regular duplication of the ranks in the Treble, that has already been bestowed on the single Mixtures.

#### VII. COMPOSITIONS FOR

1081. Although it is true indeed that the octave Twelfth and octave Fifteenth sounds cannot be traced among nature's suggestions in the higher parts of the musical scale, yet those tones have a wonderfully fine effect in the Treble of an Organ, when they are well balanced. Moreover there are several arrangements which will aid in bringing those acute sounds into due subordination, without the two ranks which produce them being voiced weakly; as, for instance, the duplication of their octaves below, i. e. of the Twelfth and Fifteenth, which will be found to occur in all the best modern Mixtures, as well as in the old; the presence of a 4-feet or second Principal rank, which however is met with more frequently in old Organs than in modern; and more particularly the insertion of a Sub-octave sounding Stop, which is always found in new Organs of pretension, and never in old. These, in connection with the usual

proportion of Stops—as, for instance, those in Specification No.VIII—would produce so great a body of tone that there would be little chance of the 19 and 22 predominating in the Treble octave. At Treble c², where the 22 begins to produce an effect of remarkable acuteness—a fact, no doubt, observed by Green, as he discontinued that rank on the very next note, after completing the octave—an Open Diapason rank might be introduced, as suggested in the Full Mixture of the preceding composition; which, in conjunction with the Double, would certainly tame down that otherwise noisily inclined rank.

#### VIII. COMPOSITIONS FOR

a Full Mixture, III ranks, — and a Sharp Mixture, IV ranks.

CC to Middle b	15—19—22.	 19-22-26-29.
Middle $c^1$ to $b^1$ above	8—12—15.	 12—15—19—22.
Treble $c^2$ to $f^2$ above	1— 8—15.	 12—15—19—22.
Treble f <sup>2</sup> # to b <sup>2</sup> in alt	1- 8-15.	 8—12—15—19.
c <sup>3</sup> in alt to the top	1- 8-15.	 1— 8—12—15.

1032. On examining the above compounds, it will be seen that either of them could be used separately with the larger Stops as far as the Fifteenth, according as a full or a ringing tone might be required, without any lapse appearing in the progression; while both could be united for a third and fuller effect, without any misproportion occurring. This idea is taken from some of the Continental Mixtures. The separate Tierce, moreover, could be drawn with either of them, and thus the usefulness of that rank be doubled without its being repeated, which, in an equally tempered Organ, would have a most offensive effect.

#### IX. COMPOSITIONS FOR

a Full Mixture, III and IV ranks.—and a Sharp Mixture, V ranks.

	,	,	1 /
CC to Tenor b	15—19—22.		15—19—22—26—29.
Tenor c to Middle b 1	12—15—19—22.		15—19—22—26—29.
Middle c <sup>1</sup> to Treble f <sup>2</sup>	1- 8-12-15.		8-12-15-19-22.
Treble $f^2 \sharp$ to $b^2$ in alt	1- 8-12-15.		1 8121519.
$c^3$ in alt to the top	1- 8-12-15.		1— 5— 8—12—15.

1083. It may be as well, before proceeding further, to explain why one of the most generally received names for a Compound Stop—that of Sesqui-altera—has not, in the foregoing schemes, been retained.

1084. The Continental Sesqui-altera, from which the English Stop was originally derived, is a II rank Mutation Stop, composed of a Fifth and a Third-sounding rank; the Fifth being the lowest, and the Third the highest; the two thus sounding a major sixth—as g—e¹ on the CC key,—hence the name Sesqui-altera, from Sexta, a sixth. The size of the two ranks was usually 2\frac{2}{3} feet and 1\frac{3}{3} foot, which therefore corresponded exactly with the English Twelfth and Tierce. Sesquialteras of this kind will be found in the Great and Positif departments of the Rotterdam Organ (Foreign Specifications, No. 2); also on the Choir Manuals of the

Organs at Amsterdam (Foreign Specifications, No. 5); the Hague (Foreign Specifications, No. 8); Freiburg (Foreign Specifications, No. 37); Frankfort Cathedral (Foreign Specifications, No. 39); &c. When the Sesqui-altera consisted of III ranks, a Fifteenth was frequently added to the Twelfth and Tierce, making it sound g—c¹—c¹; and it was in this form that the Stop was introduced by Smith and others into the Treble of their English Organs. Sometimes the Sesqui-altera consisted of IV ranks, in which case a Principal was usually incorporated. This is the form in which the Stop stands in the Treble of Snetzler's excellent Organ at St. Mary's, Nottingham.

1085. Another II rank Mutation Stop used frequently to be admitted into Continental Organs, called a Tertian—from Tertia, a third. This consisted of an inversion of the two Sesqui-altera ranks; that is to say, the Fifth-sounding rank was the smallest, and therefore the highest in pitch. The two ranks thus sounded a third, as c<sup>1</sup>—g<sup>1</sup> on the CC key, and therefore agreed precisely with the Tierce and Larigot of English Organs. A Tertian of II ranks occurs on the Great Manual of the Haarlem Organ. (See Foreign Specifications, No. 1.)

1086. It will be seen, however, that the two Stops in question were named after the interval which their own two distinctive ranks conjointly produced, without reference to the relation in which they might stand to the fundamental tone of the Organ; and in this respect they differed from all the other Stops in the Organbuilder's vocabulary. In fact, the Sesqui-altera was, in a few cases, simply labelled "Sexta;" as on the Great Manual of the Organ at Mülhausen (Foreign Specifications, No. 49); and on the same department of that in the Church of St. Dominico, at Prague (Foreign Specifications, No. 85). A third Stop, of II ranks originally, and mostly composed of a Twelfth and Fifteenth on one slider, used also to be frequently introduced by German Organ-builders, under the name of Rausch-quint, or Rauschpfeif. (See Foreign Specifications, Nos. 65, 66, 85, 91, 92, &c.) This Stop is still in use. In English Organs, until recently, the first III rank Compound Stop usually disposed, and called Sesqui-altera, was really one of that nature from Middle c<sup>1</sup> upwards—namely, 12—15—17; but from that note downwards it was essentially a Mixture of III ranks—namely, 17—19—22. To the Sesqui-altera composition in the Treble, many modern Organ-builders and Organists have latterly taken great exception; some proposing to substitute in its stead a continuation of the 19 and 22 through the next octave and a half—thus forming a sort of III rank Sharp Mixture—while others suggest the introduction of a Principal in place of the Tierce, after the manner of the III rank Full Mixture already given. Both the compositions recommended remove almost every vestige of the original Sesqui-altera, even from the only half of the Manual range in which it ever appeared in English Organs; and on this account it becomes a subject well worthy of consideration whether the name should continue to be applied to a Stop to which it is no longer in the least degree appropriate. Following the modern German custom, the name was relinquished with the composition in the plans for Mixtures just now proposed; and other names were adopted, which very simply yet most clearly announce, even to the uninitiated, what are the distinctive properties of each; as "Full Mixture," and "Sharp Mixture." The only deviations from the Continental nomenclature consist in the addition of the adjective "full" to the largest Mixture; -which appeared to be necessary, inasmuch as fulness of tone is by no means a common attribute of an

English Mixture, although it is one of the leading characteristics of a German one, in the Treble;—and in the addition of the word "Mixture" to that of "Sharp," to intimate that such a Stop is a Stop of that kind; a fact known sufficiently well abroad to be understood without the announcement being placed on the Stop-label, but which probably would not be so at first in this country, supposing that name to be adopted.

1087. One of the chief objects for which the Sesqui-altera was originally used abroad, was to place a second Twelfth on the Manual of those large instruments in which the Mixture ranks were sufficiently numerous to require it to bind their tone more firmly to the large work of the same Manual. (See Foreign Specifications, Nos. 1, 2, 4, 46, 50, &c.) In the modern instruments of German builders, from which the Stop in question is mostly omitted, the second Twelfth is usually incorporated with the "Full Mixture," as illustrated in the IXth Composition already given. That plan might be followed for new Mixtures; or, if the introduction of a separate and genuine Sesqui-altera were desired, this would be well secured by arranging the composition after the following manner:

#### X. COMPOSITIONS FOR

a Sesqui-altera,	a Full Mixture,	and a Sharp Mixture,
II ranks,	III & IV ranks,	V ranks.
CC 12—17. ——	15—19—22. ——	15—19—22—26—29.
Middle c <sup>1</sup> 12—17. ——	1- 8-12-!5	8-12-15-19-22.
Treble $f^2$ 12—17. ——	1— 8—12—15. ——	1- 8-12-15- 19.
$c^3$ in alt 12—17. ——	1- 8-12-15,	1- 5- 8-12-15.

1038. The Tierce, or second rank of the Sesqui-altera, is, in modern German Organs, usually incorporated with the Sharp Mixture, and not the Full Mixturei. e. with the second Compound Stop, and not the first; and for this reason: When the unequal temperament was in vogue abroad, the pure thirds in the common scales so nearly accorded with the Third-sounding rank of the Mixtures, that the latter effected a direct improvement on the general tone of the Organ. On the equal temperament, however, being adopted, and the consequent sharpening of the thirds on the keys, the Tierce was found to harmonise less agreeably than before; hence arose the plan of not introducing a Third-sounding rank so soon as had previously been the custom. Five ranks of Mixture thus came to be generally proposed without a Tierce; and in its stead a duplication of the Fifteenth was usually introduced, which materially added to the distinctness and the silvery character of the Mixture-sound. And it may be mentioned here, that the superiority of a Mixture, having a few ranks, without a Tierce, over one including a Tierce, may be interestingly exemplified on Mr. Hill's Organ at the Panopticon, the Mixtures of which are of the following compounds:

Furniture, III ranks. Sesqui-altera, III ranks. Mixture, III ranks. 15—19—22. — 17—19—22. — 24—26—29. by trying the larger Stops first with the Furniture, then with the Sesqui-altera.

1089. With regard to the incorporation of the Tierce with the Sharp Mixture, this Continental custom was not followed in the preparation of the foregoing schemes, because in England the prevailing feeling is at present more frequently in favour of the

carly use of the Tierce than not; therefore by leaving it to be disposed as a separate Stop, it could be drawn either with the first Mixture or not, according as the taste of the Organist might dictate.

1090. There is another German Compound Stop, sometimes met with in large Organs, that might here be noticed, called the Cymbal. This frequently consists of a duplication of the two or three upper ranks of the Sharp Mixture, with sometimes an octave Tierce added. In connection with a Stop of this kind it may be mentioned, that when the Mixtures ascend very high, and are particularly strong in the Tenor octave, there is always a danger of the Treble being overpowered and obscured by them; and it is then that Cavaille's admirable increasing pressure system is so useful. For the Treble Reeds of large Organs the heavy pressure system is in-The tendency to weakness as the scale ascends was observed by the Dutch and German builders, nearly two centuries since, who proceeded to rectify it by furnishing the leading Manual Stops of their Organs with two Pipes to a key from Middle c, Fiddle g, or even Tenor C upwards; and also by increasing the number of ranks in the upper part of the Mixtures, as at Haarlem, Rotterdam, Amsterdam, Hamburgh, &c. The increasing pressure system attains the same end without such reduplications. The necessary repetitions which occur in the Treble of the Mixture Stops exercise a material influence in that direction, and the powerful wind does the rest. At the same time, all the proportions which have already been detailed, and the duplication of all larger ranks before smaller must be duly observed, otherwise it is not in the power even of a heavy wind to secure a well-balanced effect.

- 1091. No compositions for a Mounted Cornet are here given; as the purpose which that Stop was originally designed to fulfil is so much better attained by other Stops in modern English Organs. The Mounted Cornet was originally used for giving out the melody of a Chorale upon; and hence was usually only a Treble Stop in English instruments; but in Germany, where the Canto Fermo is frequently announced in the Tenor, a la Bach, it generally descends to Tenor C. In modern English Organs the Clarionet in the Choir, and the Reeds in the Swell, together, offer so many ways of giving out a melody prominently, either as the upper or an inner part, that for its original purpose the Mounted Cornet has become quite obsolete.
- 1092. In regard to scale, the Mounted Cornet was larger than the Open Diapason; the Principal and Twelfth ranks being three Pipes larger, and the Fifteenth and Tierce two Pipes larger.
- 1093. Herr Franz Weber, the excellent Organist of Cologne Cathedral, constantly uses the Mounted Cornet as an accompaniment to the priests' voices.
- 1094. As the Mixtures of many of the old English builders have been so frequently referred to in the present chapter, the composition of some of them may prove interesting to many readers, and are therefore subjoined.

#### SMITH.

(TEMPLE OHURCH.)					
Sesq	ui-altera, III ranks.	N	lixture, III and II ranks.		
CC	17-19-22.		22-26-29.		
Tenor c#	17-19-22.		19-22.		
Middle c <sup>1</sup> #			12—15.		
Treble $c^2 \sharp$			12—15.		
Treble f <sup>2</sup> #	81215.		12-15,		

## HARRIS AND BYFIELD.

## (DONCASTER CHURCH.)

	Tierce.	Sesqui-altera, V ranks.
CC to Middle b	17.	 19-22-24-26-29.
Middle c <sup>1</sup> # to the top	17.	 8—12—15—17—19.

## SNETZLER.

# (ST. MARY'S, NOTTINGHAM.)

# Sesqui-altera, IV ranks.

CC to Fiddle g	15-17-19-22.
Fiddle g#	
Middle gı#	

## GREEN.

# (ROCHESTER CATHEDRAL.)

Sesq	ui-altera, III ranks.	Mixture, II ranks.
CC	17 - 19 - 22.	 15—19.
Tenor c	17-19-22.	 12—15.
Fiddle g	15—17—19.	 1215.
Middle c <sup>1</sup>	12-15-17.	 812.

## GREEN.

## (ST. KATHERINE'S, REGENT'S PARK.)

Sesq	ui-altera, III ranks.	Mixture, II ranks.
CC	17—19—22.	 22-24.
Fiddle g	17-19-22.	 17-22.
Middle $e^1$	15-17-19.	 17—22.
Treble $c^2$	12-15-17.	 15-17.

#### ENGLAND.

## (LANCASTER CHURCH.)

(Enterior of the first)			
	Sesqui-altera, IV ranks.		Mixture, II ranks.
$\operatorname{CC}$	I7—19—22—26.		24—29.
$Gamut \ G \dots \dots \dots$	17-19-22-26.		22-24.
Tenor c	17-19-22-26.		19-22.
Tenor f	15-17-19-22.		19—22.
Middle c <sup>1</sup>	8-15-17-19.		15—19.
Middle f <sup>1</sup>	8-12-15-17.		15—19.
Treble c2	2121517		1915

## CHAPTER XXXVI.

#### THE EXTERIOR ARRANGEMENT OF THE ORGAN.

The Organ-Case. 1095. The two great desiderata in an Organ-case—the one referring to its appearance, the other to its influence on sound—are, that it should correspond in style with the building in which it is erected, and that it should impede the egress of the tone as little as possible.

1096. The most appropriate style for a Church Organ-case, generally speaking, is one of the periods of the Gothic; because in some one of these the great majority of our finest Ecclesiastical edifices, both ancient and modern, are built. No authentic examples, however, of cases in this style of early date are known to exist in England. In Germany a few still remain. One of the most beautiful is in the "Marien-Kirche" at Lübeck, at the west end of the building. It consists of three main compartments, flat; the centre one being the largest, and containing the 32-feet tin Pipe. The main compartments are separated by two subordinate ones, containing smaller Pipes. All the front Pipes are of pure tin, burnished, and slightly but exquisitely diapered about the mouth; and the Case, of some dark wood, has a great quantity of carved and gilt work about it, which gives a gorgeous effect to the whole. Underneath, it is groined, and handsomely illuminated and gilded.

1097. The oldest Organ-cases in England—those at Exeter, Shrewsbury, and Cambridge-are Italian in their detail. So also are those made by Smith and Harris, immediately after the Restoration. Literal copies of these are therefore unsuitable for Churches of Pointed design; even though the originals may stand in buildings erected in that style. Nevertheless, many of the specimens just referred to possess an air of great dignity, as well as considerable beauty and elegance of outline. Their various compartments are often very finely proportioned; while their relative sizes have been adjusted to each other with consummate judgment and taste. In most of the old Organs the largest Pipes of the original work, i. e. the lower Pipes of the Open Diapason, are almost always found in the front of the Case, in the Towers. They were originally placed there for two reasons: (1) to impart dignity to the general appearance of the instrument, and to secure for them plenty of speaking room. The larger the Pipe, the greater is the gust of wind emitted from its mouth; and consequently the more space must there be in the vicinity of the mouth to admit of the Pipe speaking clearly and firmly. By mounting the large Pipes in the manner already noticed, they not only had plenty of this necessary room, but, from the direction in which their mouths were turned, they could produce their sounds freely, without encroaching on the speaking room inside the case necessary to ensure the correct enunciation of the interior Pipe-work.

1098. In some modern Organs the case has been made with earved woodwork in front, instead of Pipes, giving the instrument a "shrine-like appearanee." If a case of this kind is proposed—although it is not elear what may be the merit of making an Organ look like what it is not—additional space should be allowed inside for the accommodation of the dismounted Pipes; for if one Pipe be placed too near to the back or side of a second, so that its mouth becomes shaded, the tone of the former will become muffled and flattened in pitch; or, if the mouth of one Pipe be placed so near to that of a second, that, when both are made to speak, the current of air emitted from the one intersects that from the other, the tone will be false and tremulous. The Organ-builder's greatest care is required to guard against the appearance of these casualties, even when circumstances are most favorable; but when standing and speaking room have to be found inside for several additional and large Pipes, without the necessary extra space being allowed internally, the Organ-builder's difficulties, and the chances of the tone of the Organ being unequal, are most unnecessarily increased.

1099. The principle of arranging large Pipes with their mouths turned outwards has in several instances been carried farther by the modern Organ-builders than by their predecessors, and with equally good results. The Pedal-Organ is usually planted either at the back of the instrument, or it is divided into two portions, and a part arranged at each side of the Organ, just inside the case. When there is sufficient clear space outside the Organ-ease in the vicinity of the Pedal-Organ, the larger Pipes of that department are often turned round and made to speak through openings or gratings in the case made for the purpose; as at St. Paul's Cathedral; Christ Church, Newgate Street; St. Olave's, Southwark; St. Peter's, Cornhill; &c. This plan is a very good one, not only because it prevents the possibility of the tone from the large Pipes being smothered and uncertain, but also because it admits of some of the other inside Pipes being planted close to them, back to back, as at St. Olave's, Southwark, whereby a great saving of room is effected.

1100. In a few instances the Organ-ease has been made with Metal Pipes at both sides, as well as in front; as in the instrument at Croydon Church, built by Avery in 1794; and also in that at St. Katherine's Church, Regent's Park, by Green. Organs that are to stand on a central screen should have an east and west front, not simply for ornament, but to allow the tone to travel up and down the building.

as be beneficial to the quality of some of its tones, if the front Pipes were to be made of pure tin, and the natural lustre of the material be left unobscured; instead of their being formed of an inferior compound, and then gilded or painted. This improvement might be the more easily effected, since the sum necessary to defray the cost of gilding, &c. added to the value of the metal Pipes of lower standard, would be amply sufficient to secure substantial Pipes of the more handsome and durable material.

The Manuals and Pedals; their width; and their proper situation in regard to each other.

1102. The width for a Manual that ranges from CC to f<sup>3</sup> in alt, 54 keys, is 2 feet 6 inches. For the Pedal-board there is in England, at present, no fixed width; which is a eircumstance much to be regretted. On this subject Dr. Burney

wrote, eighty years ago, "Scarcely two Organs in the kingdom have their Pedals

alike, either with respect to number or position; so that every performer who comes to an Organ with which he is not previously acquainted (be he ever so skilful in the use of Pedals), has the whole of his business to learn again." The want of uniformity complained of by Dr. Burney, as existing in his time, remains in full force in the present day.

- 1103. The natural Pedal Keys should, if possible, be a good inch in thickness; about 20 inches in length, and from 2 to  $2\frac{1}{2}$  inches in depth. If they are either too narrow, too long, or too shallow, they will have a tendency to spring. Their upper surface should not be much rounded off towards the sides; as in that case the foot would only touch the crown of the Pedal. The angles, however, would of course be bevelled off, to remove splinters, &c. The upper surface is sometimes rounded to assist the foot in slipping from one Pedal to the next; but this is reversing the order of things. The Pedal should be constructed to retain the foot steadily and firmly. It is the Organist's province to be able to change from one Pedal to its neighbour with facility, when necessary.
- 1104. The two great points to be observed in the construction of a good Pedalboard, are, that space shall be economised as far as is practicable, in order that as complete a compass as possible may be secured; and yet that the Pcdals be not placed so closely that they can only be made of the thickness of mere sticks.
- 1105. A good medium scale is obtained by planting the Pedals so that the naturals measure  $2\frac{1}{2}$  inches from centre to centre. This is the scale adopted by Mr. Hill, among other builders; and it admits of the introduction of a complete compass of Pedals without throwing the upper keys so much to the right as to be out of reach of the performer. In Germany the Pedals usually measure as much as from  $3\frac{1}{8}$  to  $3\frac{1}{4}$  inches from centre to centre; while in England they are as frequently placed too closely together.
- 1106. The Pedals are more agreeable to play upon when the naturals are about half an inch higher at the back (under the stool) than at the other end: the heel of the foot then sooner reaches the key. The upper part of the short Pedal Keys, which need not be more than five inches in length, are also the better for not being quite level. They should slightly incline upwards as they recede; leaving the front or lowest part about an inch above the neighbouring part of the naturals. When so shaped they meet the broad part of the foot more accurately. A frame should run across beyond the short Pedal Keys, to serve as a foot-rest; but not at the sides, as it would be in the way of the extreme keys.
- 1107. Several experiments have at various times been made with the view of bringing the Pedals more conveniently under the control of the performer. In the Organ at York Cathedral, erected in 1829, Mr. Hill made the Pedal-board on the radiating principle. In Germany, the Pedal-board is frequently made concave in shape, i. e. the Pedals to the extreme right and left are made to risc gradually in a curve.
- 1108. Lately, Willis of London, and Heinrich of Cologne, have been making Pedal-boards in which it has been the object to combine the peculiarities of the radiating with the concave principle.
- 1109. The Manual Keys should not be too short, otherwise the touch will be too shallow and too heavy. On the other hand, they should not be too long, other-

wise the touch will be too deep, and most likely also destitute of firmness. About  $\frac{3}{8}$  of an inch is a very good and a fair average depth for the Great Organ Keys to fall. All the Manuals, however, seldom descend to exactly the same depth. The performer, nevertheless, soon accommodates himself to a rather deeper or slightly more shallow touch than the average one, or even to one that is a degree heavier or lighter than usual. The condition of the greatest importance to him is that, whatever be the general depth and resistance, all the Keys on a Manual shall be alike in both these respects. If one key requires more power than its neighbours to press down, or descends lower, or not so low, the playing is rendered more difficult by such vexatious inequalities. Check-springs are a prolific source of unequal resistance.

- 1110. A springy resistance of greater or less amount, according to circumstances, is all that the finger or foot should have to overcome. Unequal, stiff, or sluggish touches are all defective. A little allowance, however, may fairly be made in favor of lately renovated or newly constructed Organs. In new mechanism of all kinds there will be a little friction at first, in proportion to the accuracy with which it is made; and the mechanism of an Organ offers no exception to the rule. If the Key-movement works "too easy" at first, it may rattle after a few years' usage.
- 1111. When the Manual Couplers are drawn, the resistance offered by the chief Manual to the finger will of course be increased. The touch, however, should still preserve its *elasticity*. Sometimes a very disagreeable grating sensation is experienced by the finger, as though the Coupler-stickers were working through scouring-paper.
- 1112. With regard to the arrangement of the Manuals, the best and most generally received plan is that of placing the one belonging to the Great Organ in the middle; with that of the Swell three inches above, and that of the Choir as many inches below. Sometimes, to lessen the distance to which the upper Manuals recede behind the lower, the front of the Great Organ keys is made to project over those of the Choir about an inch; and those of the Swell to stand forward in the same manner and to the same distance over the Great Organ keys. There are two ways of doing this: either by making the beading in front of the keys take the form of an ogee projection; or by bevelling away the under side of the key, upwards, commencing about an inch from the front, as in the Birmingham and Panopticon Organs. The latter plan is the best, as the hands can then be raised from one Manual to the next without danger of striking the knuckles.
- 1113. For the Pedals, thirty-one inches below the Great Organ Manual will be found a most convenient position. The centre C of the Pedals—that is, the middle one of the three bearing that name—should be planted directly underneath the middle c¹ of the Manuals; and the front of the short keys should come just under the front of the Great Manual short or black keys.
- 1114. In many Organs the Pedals are placed too far from the Manuals, and often also too forward. The Organist should be able to use either of the three Manuals or the Pedals freely, without experiencing the slightest tendency to fall from the seat. This firmness of location and command over the instrument will be secured, if (1) the Pedals are placed at twenty eight inches from the Choir Manual, with the front of the short keys placed as already described; (2) if the stool be arranged at a distance of twenty-two inches above the Pedals; and (3) if the stool be placed about six inches in front of the Choir Manual.

1115. When seated at the Organ, the feet should be suspended immediately in front of the short Pedals. If, when seated at a distance of twenty-two inches above the Pedals, the Manuals appear too high—or if, on increasing the height of the stool so as to bring the Manuals more under command, the feet are too far from the Pedals, it is a proof that the Pedals are at too great a distance from the Manuals. If, after placing the Organ-stool in such a position as will allow of the free use of the Pedals, the Manuals are too far off—and if, on adjusting it so that the Manuals are within convenient reach, the feet hang over the short Pedals—this shows that the Pedalboard is much too forward.

The Organ-stool. 1116. It adds much to the comfort of playing if the top of the Organ-stool be made of a good width, as it enables the player to sit with so much more firmness at the instrument. For this purpose it should be made about fourteen inches in width, and should not incline downwards towards the front, as this has a tendency to make the player slip forward when actively employed. For the same reason it is better not to cover the seat with a smooth substance, as certain kinds of leather, or horse-hair cloth; but simply with either a piece of carpet, or with rough leather, with a little stuffing. The plain wood is often left for the top. In such cases, it is much better for it not to be polished.

1117. In the top of the stool one or two drawers can be conveniently introduced, which are always useful to hold music or books. A rail across, under the stool, from end to end, about four inches above the Pedals, and five or six inches from the front, will be found a great convenience for resting the feet upon; as the frame under the Composition Pedals is too far off for constant use.

The Swell Pedal.

1118. The Swell Pedal is not at all times conveniently placed; it frequently being too high and too forward. About seven inches above the Pedal-board will be found a very convenient position for it. Sometimes it is so arranged that when the Swell is fixed open it crosses the upper short keys of the Pedals. This, of course, is not good. It might conveniently be made to project parallel with the Composition Pedals, so as to meet the foot, instead of through the jamb; and in such a position that when fixed down it would lie over some place where two naturals come together; as, for instance, over the upper e and f of the Pedals. On fixing open the Swell, it would then be far less in the way of the Pedals than it frequently is when it projects from the side.

1119. When the Swell Pedal projects from the side, and the leg has to be turned out so much before the Pedal can be got at that the position of the body at the keys becomes disturbed, it is a proof that the Pedal is too forward. If the thighjoint as well as the foot has to be raised before reaching the Pedal, it is an indication that the latter is too high. Sometimes the Organist has to throw his body backwards in order to preserve his equilibrium; or to place his thumbs on the beading in front of the keys, to prevent his falling forward. Either inconvenience is the consequence of some misarrangement in the region of the keys. Either the Swell Pedal will prove to be too high or too forward; or the Stool or Pedals will be too low or too forward,

The Music-desk. 1120. It is a matter of great convenience to have the Music-desk properly adjusted. When there are three Manuals, the desk should not be farther back than the front of the Swell Keys, and it may be placed nearly as forward as the front of the Great Manual. It is a great fault if the desk is placed at the back of the Swell Keys, as, from this cause, the Music is needlessly carried five or six inches farther from the Organist than there is any occasion for, and nearly as much too low also; thus rendering it necessary that he should look down upon the Music, instead of forward at it.

The Composition Pedals.

1121. The Composition movement should be of the "double-action" kind. The Pedals which operate upon them are sometimes made to project in a line with and just above the German Pedals; at other times from the sides, like so many long Swell Pedals. The former is not only the most neat, but the most convenient arrangement. It is a good plan to place the Composition Pedals immediately over where two naturals come together, as there is then no chance of the heel touching a short key when either of them is being pressed down. The Composition Pedals should not remain down so as to be in the way of the short Pedal Keys.

The arrangement of the Draw-Stops.

1122. The Draw-Stops should be so placed that they will not only be under the convenient control of the player, but also present a handsome and symmetrical appearance.

- 1123. In many of the old English Organs half the Stops belonging to each department are arranged on each side of the Manuals. A great number of the German and other Continental Organs also have their Stops assorted in a similar manner. The plan, however, is not by any means a good one, as it apportions the Stops into twice as many divisions as there is any occasion for, without serving any beneficial result.
- 1124. A far better arrangement is the modern English one of placing all the Stops of each department together, as the contents of each division can then be so much more easily distinguished from the rest.
- 1125. Besides keeping them separate, as above, the Stops of each department should further be placed where they can be combined or changed with the least difficulty to the performer. With a view to the attainment of this end, it is important to bear in mind the two following facts: (1) that, as a rule, the left hand can be more easily spared for a moment than the right; and (2) that the Great Organ Stops are more frequently brought under the control of the feet of the performer by means of Composition Pedals than those of any other department.
- 1126. The right-hand side is therefore the best side on which to place the Great Organ Draw-Stops, as they can be drawn in or out, in all the ordinary and most frequently required combinations, without any assistance whatever from the hand.
- 1127. The Swell and Choir Organ-Stops are not nearly so often acted upon by Composition Pedals. Moreover, as the numerous delicate shades and varieties of tone are produced from those departments chiefly—leaving the Great Organ for the broad contrasts—the left side appears the most proper one whereon to place their Draw-

Stops. As the Bass part of the Music can be continued by the Pedals, the left hand can, with a little contriving, be for a moment spared for effecting the necessary changes in the combinations, without in the least degree disturbing the progress or completeness of the Music.

1128. The Pedal Organ-Stops and the various Manual Couplers might be placed on the right-hand side, with a view to securing as nearly as possible an equal number of Stops on both sides of the keys, which is always desirable. But the Pedal Couplers should, whenever practicable, be ranged on the left-hand side, to facilitate the making of those quick changes from one Manual to another that are so constantly required in accompanying the Musical Service, as well as in Solo-playing.

1129. If there is a large Pedal Organ, it will be advisable to have some contrivance for reducing the full Pedal Organ to a few 16 and 8 feet Flue Stops of soft intonation, to form a Pedal Bass to the Choir or Swell. This can either be a Composition Pedal, or, by placing all the louder Stops on a second Sound-board, and introducing a valve into the second Wind-trunk—as is ordinarily done in small English Organs which have only "Pedal Pipes" by way of Bass—they can then be silenced by shutting off the wind. A third plan would be to have a movement, worked by the hand or foot, to disconnect the action of the loud-stop Sound-board from the Pedal. If a "Ventil" be introduced, and it be intended to work it by the hand, the handle should be placed near to the Great Pedal Coupler, that both may be changed together.

1130. In arranging the places for the several Stops of any one department, it is best, first, to keep the Reed and the Flue-Stops quite separate. The Reed Stops should be placed above, and the Flue Stops below.

- according to their standard length or their size of tone; giving to the largest the lowest positions, and the smallest the highest. According to this rule, all the Flue-Stops of 16 feet on the Manual, as being usually the largest, should occur at the bottom, with those of 8 feet next; and so on through the series in regular gradation. And the same with the Reeds. The disposition of even a large Organ may soon be learnt, as well as the places where the several Draw-Stops are to be found, when the latter are arranged in a methodical and intelligible manner. As an example, the size and comparative completeness of any of the German Organs described in the Appendix, may at once be ascertained from a perusal of the list of its contents arranged in the simple manner there given.
- 1132. The several Draw-Stops are generally arranged in single, double, or triple *vertical* rows on each side of the Manuals, according to their number and the size of the Organ. The Draw-Stops of the Organ in Cologne Cathedral are arranged in four *horizontal* rows; and so are those of many other Continental Organs. At Westminster Abbey, the Draw-Stops are also placed in this manner. Regarding the best method of distinguishing such Draw-Stops as belong to one department from the remainder, this matter must necessarily depend in some measure on individual circumstances.
- 1133. In small Organs of two Manuals, the Great and Swell-Stops are generally arranged so as to form each a separate row; one on the right, the other on the left. An ivory plate inserted above each row, bearing the name of the Clavier to

which that tier belongs, is in that case all that is required to mark the requisite distinction. This plan of identifying the Draw-Stops with the Clavier to which they belong is far preferable to that of crowding such announcement on every individual Stop-handle, in addition to the name. The less there is engraved on the knob besides the name and length of the Stop, the better. What is engraved not only then appears more distinct, but there is then room to cut it in a bolder and more legible type.

1134. If the Draw-Stops are intended to be placed in double rows, it will be found a convenient arrangement to let the Swell-Stops comprise one portion of the two tiers on the left-hand side, and those of the Choir the remainder. The list of contents of each department is then brought within much more convenient range of the eye than when extended over a long tier of Draw-Stops. In that case, the Swell-Stops should occupy the upper position, and the Choir the lower. This arrangement also presents an analogy with the situation of the respective Manuals.

1135. When the Draw-Stops are numerous, they are frequently arranged in triple instead of double rows. This plan is a good one, as it prevents the tiers becoming inordinately long, and, therefore, keeps the upper Draw-Stops more within reach. The best method of then classifying the Stops is to make those belonging to one department occupy the upper portion of the three rows, and those of another, the lower. A little extra space, if possible, left where those of one Clavier leave off, and those of another begin, in addition to the engraved plate, will be found most advantageous in making the point of separation more distinct.

1136. Other means are sometimes taken in addition to those already mentioned for distinguishing the Draw-Stops of each department. Thus, in addition to their being arranged in tiers or in clusters, the ivory plates in the face of the Stop-handles of some of the departments are sometimes stained red, blue, green, or some other colour. If colours be used, for which there is no absolute occasion, they should be of the lightest possible tint, or they will render the inscriptions indistinct. Different substances are also occasionally used for the name-plates, for increasing the distinction; as ivory for those of one department, mother-o'-pearl for a second, porcelain for a third, tortois-shell for a fourth; and so on. These, however, give to the general appearance of the Draw-Stops a motley effect; as the colours, if deep, give them a heavy and patchey appearance. The best plan is to have the names of one department on each side printed in black, and the other in red. This has a very light and handsome effect, particularly when the character chosen is the old church text. The red-lettered labels should be above, and the black below. Every Stop should have its name engraved on the handle, in preference to being placed over or at the side of it; as this prevents the possibility of the inscription being by mistake read as referring to any other than the right Draw-Stop. The names are sometimes engraved on plates of zinc or brass, and inlaid; but those metals soon become tarnished. Many Organs have the names of the Stops printed on pieces of paper, which are pasted on, near to the handles; but such labels are apt to become soiled or rubbed off, and at the best present but a mean appearance.

1137. The head of each Stop-handle is usually turned out, and a plate of ivory or some other bright material inserted, bearing the requisite inscription.

1138. The inscriptions should be engraved boldly and legibly. For this reason,

italics, with long flourishing tails to the g's, &c. should be avoided, as not being so easily deciphered. Capital letters are the most appropriate; and those of the Egyptian, German, old English, or modern English character are available according to taste. Old English text for the names has a handsome appearance, and is particularly appropriate for Church Organs. It is better to have the names engraved in horizontal lines rather than in a circle, following the outline of the plate. It is then deciphered more easily and more quickly.

- 1139. In connection with the question of distinctness of labelling, it may not be out of place to mention, that the person who plans the Organ, will most probably have also to decide on the nomenclature for the Stops. When settling this by no means unimportant matter, it will be well to bear in mind the purpose for which the labelling is introduced at all; namely, to assist and guide the player. To carry out this object, the labels should describe in a simple and as clear a manner as possible the Stops to which they apply. And to facilitate this end, names in English would appear to be clearly the best for English Organs, whenever they are applicable. Sometimes, however, it is preferred to call the Stops after some Continental fashion. When this is done, care should be taken to apply the names, so that an Organist or Organ-builder from the country whence the terms are derived shall understand them. This necessary precaution has not always been attended to.
- 1140. It is of importance that the Draw-Stops should move with freedom, and noiselessly. A stiff and stunted Draw-Stop action is most disagreeable. If, however, the Table of the Sound-board is covered with leather,—i. e. if the Sliders work upon leather,—they will move rather stiffly at first, until the leather has become tolerably smooth, for which stiffness some allowance should be made.
- 1141. From  $2\frac{1}{2}$  to 3 inches is a good distance for the Draw-Stops to move backwards and forwards.
- 1142. The Draw-Stops, which are better for being of a good medium size, should not be placed too closely together. If the knobs are  $1\frac{1}{2}$  inch in diameter, with ivory plates  $1\frac{1}{8}$  inch wide, and have the inscriptions cut in letters  $\frac{1}{16}$  of an inch high, they will have a bold and handsome appearance.

#### CHAPTER XXXVII.

#### THE INTERIOR ARRANGEMENTS OF THE ORGAN.

The building-frame. 1143. The building-frame that is to support the entire Organ should be very strong and substantial, and should be so constructed as to resist the great weight and pressure of the sound-boards and Pipes without sinking or giving in any manner.

The platform.

1144. It is not a less important and necessary precaution to see that the platform—when the Organ is to stand on one—is not only fully capable of supporting the entire weight of the instrument, but also that of any assembly that may be gathered around it from time to time;—as the members of an orchestra and chorus in a concert-room, or the choir and children in the gallery of a Church. Instances are known where this preventive course has not been sufficiently taken in music halls; the consequence being that, while the Organ is entirely free from cipherings and stickings at all other times, during concerts it is subject to both.

1145. With regard to the general arrangement of the interior of an Organ, the sound-boards and other main portions of the work would be distributed chiefly according to local circumstances.

The distribution of the sound-boards.

1146. The most usual positions assigned to the different sound-boards in English Organs were mentioned on page 1, and need not therefore be again described here.

1147. In some German Organs, occupying a very broad, high and shallow site, the "8-feet Great Organ" (*Haupt-manual*) is placed in the centre, with the "4-feet Choir" above (*Ober-manual*), and the "16-feet Pedal" half on each side; the largest Pipes of the "Principal" of each department, 8, 4, and 16 feet, being placed in the front of the case.

1148. In the Organ at St. Peter's Church, Cornhill, built by Hill, the large Swell is placed over the Great Organ, resembling in this respect the arrangement just mentioned; and when a church is very lofty, or an Organ is to stand at a great elevation above the ground, the Swell may be placed in this manner, without producing any disadvantageous effect; but rather the reverse, provided it be kept well up at the same time. The under side of the Swell sound-board then acts as a sort of reflector to the Great Organ, and directs its tone into the Church before it is too

much spent. The old English builders frequently put a top to their Cathedral Organs for the above-mentioned purpose: that to the instrument in St. Paul's remains to this day.

1149. In other German Organs, where the site is about the same width as before, but lower and deeper, the Choir Organ is placed in the centre, with the Great Organ, divided, flanking it on each side, and the Pedal behind. The object in placing the Great Organ partly on each side, rather than in the centre, no doubt, was to prevent its force being too sensibly felt at the keys. Other plans were sometimes adopted by the old English builders for shielding the Organist from the full strength of the instrument; such as keeping the impost of the ease very high, or placing a passage-board completely across the front, between the Great Organ Sound-board and the front pipes, as was originally the case at St. Michael's, Cornhill. When there are three Manuals, the third Manual Organ is frequently placed "in front," as it is termed in England; but "at back," as they say in Germany, where that division is hence called Ruckpositiv (Back-choir). In very large instruments, the Pedal Organ frequently occupies three separate sites, forming what are called "side Pedal Basses," and "back Pedal Basses"—an English example of which arrangement will be found in Mr. Hill's Organ at the Panopticon; or, where the largest metal "Principals" appear in front of the case, a four-fold division of the Pedal will sometimes be met with, forming "front Pedal Basses," "back Pedal Basses," and "side Pedal Basses." Of this latter distribution, an English example occurs in the Town Hall Organ at Birmingham, by Hill.

1150. These particulars are given here, to show that an Organ may be made to suit almost any site, provided only that the necessary room be allowed in some direction or other.

The cause of the bad proportions of many English Organs.

1151. English Organs have frequently been found fault with, on account of their square, solid, inelegant form, and their projecting so far into the buildings wherein they stand. But

this has in almost every case arisen from the builder being, in regard to room, so much restricted in the direction of width. In Churches which have west-end Organs, this has been more particularly the case; and for no better purpose than that of providing room for a mass of children up each side the instrument. In Continental Churches, where the whole width of the west-end is frequently devoted to the Organ, much larger instruments project to a far less distance into the buildings than do the smaller instruments in English Churches.

1152. It may be mentioned—as in some degree illustrating this point—that the performers in an orchestra are placed in comparatively a few long rows, from the correct supposition that such an arrangement has a more beneficial effect than if they were ranged in several shorter rows, behind one another, as though stationed on a wide staircase. For the same reason it will be conducive to the best musical result, if the Organ be made broad and shallow, rather than narrow and deep.

1153. In one or two instances the analogy between the interior arrangement of an Organ, and the distribution of an orchestra, has been carried to a still greater extent in German Organs; for sound-boards have occasionally been made to slope upwards from front to back, like a concert-room platform, upon which the Pipes

have been ranged in terrace-form, and with the largest Flue Stops at the back and the smallest in front. It was in the Organ at the Church of St. Maurice, at Halle, built by Schulze, that this last arrangement was for the first time practically brought to bear.

Much room conducive to the orderly arrangement of the Organ, 1154. But whatever general arrangements may be considered best to adapt an Organ to a particular site, it will be of essential service, in a variety of ways, to allot as much room to the instrument as can conveniently be spared.

1155. One of the first things which arrests the attention of a visitor, on entering a modern German Organ, whether of large or small dimensions, is the appearance of roominess which it presents; and this is speedily perceived to be accompanied by a very simple, yet orderly and systematic distribution of the several parts of which the Organ is composed.

The advantages of large Sound-boards.

1156. The roominess is soon discovered to arise, in a great measure, from the ample size of the Sound-boards, which, even in instruments of ordinary dimensions, frequently measure 9, 10, and 11 feet in length; and in large instruments, 15, 16, and even 17 feet from end to end. The orderly appearance of the Stops also is seen to result from the fact of the Sound-boards being sufficiently large to admit of their Pipes being placed "over their wind," whereby all compulsory recourse to the conveyancing off of Pipes is avoided.

1157. This plan—of planting all the Pipes on the Sound-board—might at first sight appear to involve a great "loss of room," as the phrase goes; but, on account of the admirable manner in which the Stops are sometimes planted, this is not the case to nearly the extent that might be imagined. The 8 and 4 feet members of the Flute-work are, in German Organs, as in English, frequently of Tenor C compass; and the way in which a Sound-board is sometimes laid out, so as to receive them, is as follows.

1158. The two Stops which form the basis of the Manual tone, corresponding to the English Open and Stopped Diapasons, of course extend to CC; and the twelve Pipes which form the 8 feet octave of each are ranged in a single row. The room which they require for their accommodation therefore is in the direction of width rather than of depth. At Tenor C, where the Pipes are little more than half size, the two 8-feet members of the Flute-work commence, and occupy the standing and speaking room now at liberty. For the sake of illustration, these may be supposed to be a Tenor C Gamba and a Tenor C Dulciana. To give to these two members of the Flute-work the effect of a complete range, when either may be used singly, the Dulciana is grooved into the Stopped Diapason in the 8-feet octave; and the Gamba, which is usually of fuller tone than most English Stops of the same name, is grooved into the Open Diapason in the Bass octave. At about middle dat, where the Pipes of the four Stops will have become reduced to half dimensions, the single row plantation is discontinued in favor of the double row zig-zag plan, described in a former chapter; and this arrangement is continued up to the top. In a similar way one or two additional 4 feet Flute-stops are also frequently worked in from the Tenor C groove upwards.

1159. From measurements taken of existing specimens, it was found that the average dimensions of a German Sound-board furnished with nine Stops, of which the following are the English equivalents—

were 3 feet in breadth, from back to front, and 11 feet in length.

1160. If we may judge from their works, the old English builders attached as much importance to placing the Pipes of their Organs over their respective grooves as the Germans do in the present day; for we find this system carried out in even their smallest Organs; the front Pipes frequently offering the only exception to the rule. They also followed the same plan in their larger instruments, as far as practicable; hence it is no very unusual circumstance to find the original sound-boards by Smith and Harris, Byfield and Bridge, measuring 8, 9, and 10 feet in length. A Great Organ sound-board by the first-mentioned builder, furnished with the following ten Stops, viz.

```
1—Open Diapason,
2—Stopped Diapason,
3—Principal,
4—Flute,
5—Twelfth,
6—Fifteenth,
7—Sesqui-altera, III ranks,
8—Mixture, II ranks,
9—Cornet,
10—Trumpet,
```

measured 2 feet 10 inches in width, and 9 feet in length.

- 1161. The sound-board to the Great Organ department of the instrument in St. Paul's Cathedral is about 13 feet in length. At the Panopticon, where a large opening had to be left through the very centre of the instrument, Mr. Hill nevertheless contrived to introduce Great Organ sound-boards about 10 feet in entire length; while, for the Pedal Basses, occupying the side wings and back, he provided others which are patterns for spaciousness and efficiency.
- 1162. In some German Manual sound-boards of the size indicated above, the grooves measured in the Bass octave 1 inch in width; in the Tenor and Middle octaves,  $\frac{3}{4}$  of an inch; and in the Treble octave and upper half octave,  $\frac{1}{2}$  an inch. The pallet-holes were of one length throughout, namely, 11 inches; and the grooves measured  $3\frac{1}{2}$  inches in depth. The continuation of the pallet-holes at an unreduced length, in the 4-feet octave, was for the purpose of feeding the extra 8-feet Stops that commenced there; and their further continuation in the Treble was to supply the large Mixture ranks, which there returned to an Open Diapason.
- 1163. It may be added, that, although the Mixture included a duplication of the Open Diapason, Principal, Twelfth, and Fifteenth in the Treble, there was not the slightest symptom of sympathy, robbing, or unsteadiness in the speech of the Pipes, when all the Stops were drawn.

"Unoccupied space" in an Organ, not "lost room." 1164. The difference between the sound-board measurements just quoted is not so great as many might have anticipated it to have been. This, however, is partly due to the scales being smaller than the English, concerning which more But had it been otherwise, it can never be correctly said that

1165. Some notice should here be taken of Abbe Vogler's

Bass of the German scales being smaller than the English, concerning which more is said further on. But had it been otherwise, it can never be correctly said that "unoccupied space" in an Organ, within reason, is "lost room;" since, next to the Pipes themselves, which are of course necessary to emit the primary sounds, free air is the most important element in the production of a buoyant and sweet quality of tone. It is, indeed, true that English Organ-builders have frequently been called upon to "get in" a great number of Stops into an unreasonably small space; and one cannot help admiring the manner in which they have frequently grappled with the difficulties which have beset them: at the same time, England is in consequence by no means destitute of Organs that are nearly as crowded, and almost as destitute of resonance, as a broker's shop. It is a fact always worth the remembrance of those who would limit an Organ-builder too strictly in regard to space, that one of the secrets of the good effect of many old instruments is their comparative emptiness. They have not only Pipes to produce tone, but breathing room to improve it.

The Abbe Vogler's Symplification system.

"symplification system;" of which Seidel has given a brief actem. count in his work on Organ-building. (See Ewer's English "At the end of the eighteenth and the beginning of the nineedition, page 26.) teenth centuries," says Seidel, "George Joseph Vogler, the famous musician, composer, and Organ-player (born 1749, in Wurzburg-died 1814), tried to reform thoroughly the whole former mode of Organ-building, an experiment in which he succeeded to a great degree. His system, aiming at a symplification of the whole mechanism of the Organ, created great sensation at the time, and found as many admirers as opponents. All that was superfluous, inappropriate, or too costly, he endeavoured to do away with. First of all, he rendered the action simpler by arranging the keys (grooves) in their natural succession; in consequence of which, the construction of the roller-board (key movement) became easier and simpler, and the touch lighter. Vogler's system was adopted in several places, and even now some Organ-builders make use of it." Among other Continental builders who construct their Organs on Abbe Vogler's system, may be mentioned Schulze, of Paulinzelle, near Erfurt, who placed an instrument, so made, in the Great Exhibition of 1851; which Organ was afterwards purchased by Charles McKorkel, Esq. of Northampton, and erected in the Exchange Room of that town: while, in England, the same plan has for some years past been adopted by Kirtland and Jardine, of Some disadvantages, as well as advantages, attend the semitonal arrangement; though, according to the account given to the writer by those builders in Germany and England who have had experience in making sound-boards on this principle—and of whose reports use is here freely made—the former are far outweighed by the latter.

1166. In Vogler's system, the grooves are arranged in their natural or semi-tonal succession throughout the sound-board; that is to say, the CC groove is placed

to the extreme left, and the f<sup>5</sup> in alt groove to the extreme right. The Pipes of all the Stops are arranged in the same order; so that in the Open Diapason, for instance, the CC or 8-feet Pipe is placed to the left of the Claviers, and the 4-inch f<sup>3</sup> in alt Pipe to their right; the intermediate Pipes forming a graduated series. The end of the sound-board to the right is therefore left clear of all but small Pipes.

1167. Among the disadvantages attendant on this system of groove arrangement, are mentioned the facts of the chief weight of the Pipe-work being thrown to one end of the sound-board and building frame; an increased consumption of wind taking place at that same end of the sound-board; longer conveyances being required to the front Pipes to the right, or a special little sound-board for them, or "mute" Pipes instead of speaking Pipes. The additional weight, and greater consumption of wind at one end, however, having each their ascertained limits, are provided against by a stronger building frame and larger wind-trunks; while a diminutive sound-board rids the Organ of long conveyances.

1168. The advantages attendant on the semitonal system of groove arrangement are stated to be as follow. The Pipes, being chiefly or entirely planted on their own wind, speak more promptly and plumply, and with a firmer tone than if grooved or conveyanced. But few Pipes, if any, being removed from over their grooves, few, if any, conveyances are required; hence a fertile source of loss of wind, hissings of escaping air, impediments to the wind from lodgment of chips, accidental damage of conveyances, and occasional repairs, are removed. The Pipes, when planted consecutively, have better speaking room.

1169. Below the sound-board, the action being in a direct line from the key to the pallet, no rollers are required; and there being no rollers, there are fewer centres. and consequently less friction. The direct-action thus secures a lighter touch, and more instantaneous response to the finger. The omission of the roller-boards clears the interior of the Organ of those walls of mechanism which not only impede the view of the instrument from front to back, but also prevent light penctrating to its remote parts. The tone, moreover, has then more room to spread, and is not thrown back, as must be the case to some extent when two or three roller-boards are in the Organ. Roller-boards being dispensed with, the remaining mechanism can be constructed or "set out" more compactly. There is also less liability to stickings in a radiating tracker movement, and less chance of its getting out of order; or, if out of order, it is easier and sooner repaired. The movement, by reason of its greater simplicity, is less affected by changes of temperature; and on account of its whole extent, from the key to the pallet, being under the eye, an Organist can at once detect and remedy any trifling disarrangement that might arise. An Organ built on Vogler's principle is more convenient to tune than one built in any other manner; and a larger Organ can be built on the simplification system, without the necessity for the Pneumatic Lever Action, than on the ordinary system. The larger and more ample sound-board will not increase the cost of the entire work, on account of the omission of the roller-board and numerous conveyances effecting a saving in the expense.

1170. Without waiting to discuss the validity of all the claims that are made in favor of the semitonal arrangement, or whether they are such as are likely to lead to the system in question superseding oth rs, a few words may yet be said con-

cerning certain situations in Churches, in the construction of Organs for which the semitonal groove arrangement seems to be peculiarly suitable. But first it is necessary to notice the climax to the simplification system that was effected by Mr. Hill, although not actually applied by him to an instrument made on that principle. This consisted in making the chief portions of the building-frame hollow, so that they might serve as wind-trunks as well as supports to the instrument; by which means some of the most bulky cumbrances left remaining in the Abbe's system were easily and advantageously dispensed with, and in an ingenious manner that appears never to have occurred to the worthy Abbe. It was in Mr. Hill's Organ that stood in the Exhibition building of 1851 that this clever device was for the first time tried, and successfully.

1171. The semitonal system of groove arrangement seems to be well adapted for an Organ that is to occupy some side or corner position; from either of which points the sound would have to travel in two directions. Suppose, for example, an Organ so made to be placed on the south side of a Church, or in an Organ Chapel on that same side, with its back towards the south wall; the back of the case would reflect the tone forward, i. e. through and over the front, in the usual way, and therefore across the Church; while the left side of the case would reflect it to the right, and therefore down the Church. The small Pipes to the right would present no impediment to the sound of the large ones passing over them into the Church; while the side of the case, to the right, facing the Church, by being filled with perforated paneling, or with Pipes, would facilitate the egress of the tone in that direction, at the same time that it would form an additional adornment to the instrument itself. Or, supposing an Organ so constructed to be stationed at the east end of the north aisle, or in a north Chapel, with its keys towards the west, the sound would travel through the front, down the aisle, in the usual way, and through the right side, across the Chancel and Church.

1!72. For a divided west-end Organ, also, the semitonal groove arrangement appears to be very suitable.

Passage-boards advantageous in more ways than one.

1173. It is very advisable that an Organ should be well furnished with wide passage-boards. These will enable one to move about the instrument, either for purposes of tuning or for examination, without unintentionally disturbing any of the Pipes, or of injuring the mechanism. Moreover, they are indirectly of beneficial service to the tone of the Organ, by being instrumental in securing a free current of air round the various masses of Pipes on the sound-boards.

The Pipes should be so arranged that the small ones are aeeessible. 1174. The Pipes should be so arranged on the sound-boards that they may all be easy of access for the purpose of cleaning, tuning, and regulating. If large and small Pipes be planted together in such a manner that the former present a

barrier in the way of the tuner reaching the latter, a frequent and "unnecessary touching or taking out of the Pipes" will have to be resorted to, which, as Seidel truly observes, is injurious; as Pipes are soon bruised or bent. "Besides," he

continues, "if a Pipe, after having been taken out, is not replaced exactly in its former position, it will sound too flat or too high, too strong or too weak."

1175. With regard to the construction of the sound-boards, nearly all that was necessary has been said in a former chapter. The leathering of the table, which is so much dwelt upon in many foreign works on Organ-building, is almost universally considered by English Organ-builders to be superfluous, if the table, sliders, and upper boards are accurately adjusted to one another.

Double grooves in the Bass of large sound-1176. If there are many Stops on a Manual to be supplied, it is better to have two distinct grooves to each key in the boards advisable. Bass octave, than one larger groove and one great pallet; and for this reason,—the large Pipes rapidly exhaust the wind from the groove, diminishing the pressure or density of the air therein; therefore, when drawn, they have the effect of flattening the pitch of the Mixtures, destroying their brightness, and of making the Reeds speak slow. By introducing two grooves, the Unison and Double Diapasons, and Principal, can be placed on one groove, and the Twelfth, Fifteenth, Mixtures and Reeds, on the other. The rollers would then, of course, be provided with two pallet-arms instead of one only; or, if squares were used, their second arm should be furnished with a small cross-bar, to each end of which a pull-down would be attached. John England, who first introduced double grooves into English Organs, used to perforate the sound-board bar that separated the two, for what reason does not clearly appear; but, in effect, this frequently allowed one groove to borrow from the other, and so to some extent permitted the reappearance of the defect the double grooves were designed to remove.

The roller-boards. 1177. The rollers should be so disposed that the tapped wires, buttons, hooks, &c. that communicate with them can be easily got at for purposes of regulation, renewal, &c. when occasion may require. Wooden arms are more silent in their action than iron, for which reason they are to be preferred; and some builders also bush the studs which support the rollers, i. e. line their perforations with cloth, or make the centre-pins work in leather buttons, to quiet the noise consequent on their motion.

The Bellows. 1178. The Bellows should be made of such dimensions that they will easily yield, and continue to give an abundant supply of wind, when all the Manuals are coupled together, with every Stop drawn, and the fullest chords are played on the Manuals and Pedal. The first thing Sebastian Bach used to do, when requested to examine an Organ, was to draw out all the Stops, and play on the full Organ. He used to say, he must first know whether the instrument had good lungs. (Forkel's Life of Bach.) A copious supply of wind is more particularly necessary, in the first instance, if the Organ is intended to receive subsequent additions. There should be no unsteadiness perceivable in the tone of the Organ at the moment when the feeders commence and complete their work; neither ought any clacking to be heard when the valves fall over the suckers in the feeders and the bottom-board; nor should there be any sucking or gasping noise heard when the feeders are being replenished; but which will be the case if the

suckers are too few or too small. The feeders and blowing-action should also work with but little noise. Many Organs have the Pedal as well as the Manual Organs supplied from the same bellows. When this is the case, the tone of the Manual Organs should remain perfectly firm and unaffected when any disjunct or staccato passage is being played on the Pedals.

1179. The reservoir of the bellows should of course have inverted ribs, counterbalances, and a waste pallet, which latter will cause the least noise if it be made to discharge the superfluous air into the feeders. The shape of the bellows is a matter of no importance: their proportions must necessarily be influenced in a great measure by local circumstances.

1180. As regards the situation for the bellows, the lower part of the Organ near to the ground is the place usually assigned to them in modern English instruments. In German Organs, they are more frequently put outside the case; as they were indeed in many old English instruments. Where the necessary additional room can be spared, the latter arrangement is the most advantageous, as it allows so much more space for the convenient distribution of the mechanism, as well as admitting of more ready means of access to its several parts for purposes of regulation, repair, &c.; besides which, the free space then left is beneficial to the resonance of the Organ. At Westminster Abbey, the bellows are in two chambers, under the Organ, in the Choir screen; at St. Paul's Cathedral, they are in a room behind the visitors' closets on the "Cantoris" side of the choir; at St. Martin's in the Fields, and at St. Philip's, Waterloo-place, they are placed in the belfry behind the Organ.

1181. If the bellows are to produce different pressures of wind,—to do which they will require to be furnished with upper reservoirs,—much additional height will be required for bellows' room. Under these circumstances, and if they are to be placed under the sound-boards, the latter must be well elevated; or, what would be much better, the bellows might be kept out of the Organ altogether.

The Wind-trunks.

1182. The Wind-trunks should be large enough to convey an ample supply of wind to the Wind-chests; otherwise it will be of little use the bellows yielding a good supply. Concussion bellows should also be applied, if found necessary; but if the Wind-trunks are of ample size, and are not very long, such appliances will probably not be required. If not absolutely necessary, they are almost better omitted than introduced. The writer is acquainted with an instance of a Concussion bellows being attached to a new Organ, in obedience to one of the conditions of the contract; and its disturbing the wind, which, before its introduction, was perfectly steady. It is a question whether Concussion bellows are not occasionally made too large. When it is seen how small a bellows, in the shape of a Tremulant, will disturb the wind, it seems that one four or five times the size can scarcely be necessary to correct the far less accidental disturbance that would be likely to occur in a well-winded Organ.

The Swell-box. 1183. The Swell-box should not be less than 2 inches in thickness; and it would be the better for being  $2\frac{1}{2}$ , particularly if it be a large one. The edges of the shutters should be faced with leather, cloth, or felt, to make them bed closely and shut in the tone. Walker lines the interior of

his Swell-boxes with very stout brown paper, about \( \frac{1}{8} \) of an inch thick, to further subdue the tone when the shutters are closed.

The scale for the 1184. The general dimensions of an Organ, containing a Pipe-work. given list of Stops, are influenced by no one thing more than by the scale adopted for the Bass Pipes. Or, to put the fact in another shape, no single circumstance affects the question as to the number of Stops which may be satisfactorily placed in a given space, more than the wide or narrow measure selected for the large Pipes. Continental Organs of moderate dimensions ordinarily contain from 4 to 6 Pedal Stops; while those of the first class frequently have from 15 to 18. (See all the Foreign Specifications, in the Appendix.) To any one who might be led to calculate the standing-room of such instruments by the amount of space necessary to accommodate a single English Stop of the scale to which many sets of "Pedal Pipes" have been made, it would seem that such Organs must occupy a site almost sufficient for a small Church. Such, however, is not the case. It was stated in the first Chapter of this Division, that, in Germany, most of the Pedal Stops are properly viewed as simply "Basses" to some of the Manual Stops. This being the ease, their scales exhibit but a very slight advance on those of the Manuals; one Pipe only frequently being the extent of the difference. The 16-feet Open Basses of Continental Organs, moreover, are frequently made of wood, as in English. Of the three fine instruments by Silbermann, at Strasbourg, two contain "Principal Basses" of this material (See Forcign Specifications, Nos. 35 and 36); and of these Organs the latter has two Open Wood Pedal Stops of 16 feet. Yet the largest of these only measures 9 inches by 11. In some very large German Organs, having about 16 Stops on the Pedal, and including two 16-feet Open Wood Stops, independently of the Violonc, the scale of one is sometimes advanced, and the Stop hence called "Major-Bass," i. e. Great-Bass; but even the CCC Pipe of this Stop soldom exceeds 10 inches in width by 12 in depth. In two instances only could the writer trace the existence of Stops of greater calibre in foreign Organs. The "Contra Violone" at Cologne Cathedral (Foreign Specifications, No. 25) measures 12 inches across the mouth; and a Stop approaching the scale of English Pedal Pipes oceurs in the St. Eustache Organ at Paris. (Foreign Specifications, No. 13, B.)

1185. In English Organs, even of ordinary size, the CCC Pedal Pipe not unfrequently measures 18 inches in width and 20 inches in depth: some examples are as much as 2 feet in depth.

1186. Then, of the Continental scales of longer wooden Pipes,—in the Organ at St. Paul's, Frankfort (Foreign Specifications, No. 40), built by the famous Walker, of Ludwigsburg, which has two Pedal Stops of 32 feet, one measures 11 inches across the mouth; the other, 15\frac{3}{4} inches. The CCCC Wood Pipe in the Cathedral Organ at Bremen (Foreign Specifications, No. 64), and in St. Mary's Church, Wismar (Foreign Specifications, No. 73), both by Schulze, measure exactly 12 inches each across the mouth. Comparing these dimensions with the English scale given above, it is seen that the 16-feet Pedal Pipe, as it exists in many of our ordinary-sized Organs, exceeds in bulk the 32-feet Pipe of Cathedral and other first class instruments of the Continent.

1187. The vast disparity of breadth in proportion to length between English

and foreign Organ Pipes naturally suggests these three questions—(1) how have Pipes of such huge bulk come into use? (2) what may be their effect? and (3) is that effect such as will justify the appointment of so much space, not easily spared, to their accommodation?

1188. The first Open Wood Pedal Pipes made in England were those added by Avery to the Organ in Westminster Abbey. They were "Unisons;" and, from that circumstance being designed simply to reinforce the Manual Diapasons in the Bass, no doubt proved sufficient for that purpose. What may have been the scale of those Pipes, the writer has not been able to ascertain; but, subsequently, the measure for the GG Unison Pedal Pipe became, and for several years continued to be, ordinarily, 12 inches for the depth; that is to say, the 10\mathbb{q} feet Pipe was equal in bulk to the 16-feet Major Bass Pipe of Continental Organs. When Pedal Pipes came to be altered in pitch from Unisons to Doubles, a single set, of the scale and power before in use, was incapable of asserting its independence.

1139. As, in former days, the compass of the Manuals was extended downwards, as a primitive method of obtaining from it deeper tones, so the calibre of the "Pedal Pipes" was now augmented, gradually, from little to more, in the hope of obtaining from them the effect of a proper Pedal Bass, until they at length assumed the dimensions already quoted. The huge scale, therefore, originated from a correct feeling, namely, a consciousness of the necessity for a Pedal Bass, proportioned in power to the Manual departments of the Organ, but accompanied at the same time by a misconception as to the proper method of carrying that feeling into effect. A "Bass" to the entire Organ was attempted to be forced from a single rank of Pipes, and with astonishing success, had one only, and that of an unvarying kind, been required from the Pedal. The effect of such a Pedal Stop was certainly most powerful and commanding, but not amalgamating. It formed no suitable Bass to any one Stop in the Organ. As a Pedal continuation to the Manual Diapason, it was without the true, serious, calm, deliberate, and mixing characteristics of that Stop. It was also too powerful and predominating for the numerous softer effects in constant requisition in all Organs, and only appeared to be in proportion when used in conjunction with the loud Organ: but the employment of the Full Organ being the exception, rather than the rule, the heavy sound of the great Stop constituted, in the great majority of cases, a very unsuitable Bass. Then, with regard to standing room, the large scale Pedal Pipes in some cases occupied as much room as would have accommodated three 16-feet Pedal Stops made to a more strictly correct measure; and it must be obvious that a Pedal Organ possessing an Open Diapason, Stopped Diapason, and Trombone, would have formed a far more efficient and tractable Bass to an instrument.

1190. Experiments subsequently made, together with a closer acquaintance with the Continental principles of the art, conduced to make evident the nature and extent of the original misconception to which reference has already been made; and to bring into clear view the true means by which it was to be rectified and superceded. These included a reduction of the measure previously adopted for Pedal Pipes, and an increase in the number of independent Pedal Stops. Among the first to revise their Pedal Bass scales were Hill and Robson. Mr. Hill, who had built a greater number of large Organs than any other man in England, and had therefore

given the large Pedal Pipe scale the most extended trial, thought it not inconsistent with his high position and character as a true artist, to scrutinise his former work, and, a few years since, to materially modify the hitherto approved proportions for large wood Pipes. Added to this, he insisted on the importance of securing several Stops instead of one; an honorable course, which he has not ceased to follow stead-fastly and consistently up to the present time.

1191. Reverting to the scales of Continental Stops before given, some of them will be viewed as being extremely small. The quantity of tone, however, produced from the largest of them is really most astonishing. Voiced on a heavier wind than the Manual Stops—a system not at first adopted in England with the Pedal Pipes, although a highly advantageous one-and being copiously winded, they speak with a promptness and fulness that is highly satisfactory. A very careful trial and comparison of the smaller scaled Open Wood Stops of Continental Organs with the huge scale Pedal Pipes of English instruments, however, leads to the firm impression that the most useful scale for musical purposes lies between the two. And that such a scale is equal to the production of the best effects, is exemplified in the excellent 32-feet Open Pipes of the Westminster Abbey Organ, made by Mr. Hill, the sound of which is sufficient to fill the Minster, yet does not overpower even a single voice, which is detected the moment it is added to that of the other Stops by the richness which it imparts; yet does not obtrude itself, but, on the contrary, blends in the happiest manner with the sound of the rest of the Organ. The scale of the 16-feet Pipe of this Stop is 10 inches by 11½, which is a slight advance on Silbermann's Strasburg scale already quoted; and of the 32-feet Pipe, 19 inches by 22 inches, which is a little in advance of the Frankfort scale. For a Unison Pedal Open, the German Major Bass scale already given, namely, 10 inches by 12 for the 16-feet Pipe, has been adopted by Robson, in his Organ in Trinity Church, Sloane Street, where, for a moderate sized Organ, it answers as well as could possibly be desired. At Westminster Abbey, where the Great Organ is extended down to CCC, to serve as a substitute for an independent Pedal, the 16-feet Pipe of the Pedal Open Diapason measures  $13\frac{1}{2}$  inches by 16 inches. This, although far below the old Pedal Pipe measure, yet forms an admirable and ample "Major Bass" scale to the rest of the Organ.

1192. Then, with regard to large metal Pipes, great variation has likewise at different periods been made in their scale, also, in English instruments. The Organ in St. Paul's Cathedral has two Open Diapasons, part of the original work of Father Smith, on the Great Manual. These have long enjoyed a high reputation for the fulness, richness, and equality of their tone. The article in the Musical Gazette, so often quoted, says of them, "they have always been esteemed the finest Schmidt ever made; and are regular and uniform in the quality of tone throughout." The largest of the two 8-feet or CC Pipes of those Stops measures somewhat less than 6 inches in diameter; the corresponding Pipe in the Temple Organ, by the same maker, is  $5\frac{1}{3}$  inches across. The original FFF Pipe at the Temple was 7 inches in diameter; and the largest of the two original CCC or 16-feet Pipes, at St. Paul's, is a little under 10 inches across. Towards the latter end of the last century, Green effected a considerable increase on the measurement above given. This was before the introduction of Pedal Pipes (which either originated with Avery, or about his

time); and no doubt was intended by Green to impart additional weight to the Bass of his Organs. The CC Pipe he increased in diameter from 6 to 8 inches; his GG to 11, and his FFF from 7 inches to 12; that is, to 2 inches beyond Smith's scale for the 16-feet Pipe. Avery and England, who succeeded Green, availing themselves of the advantage which a set of small Pedal Pipes presented, reduced the scale again for the Bass of the Metal Diapasons.

1193. In Specifications for modern Organs, even those for small Churches, it is sometimes stipulated that the CC Metal Pipe shall measure 8 inches in diameter; or, in other words, shall be wider than Smith's large Cathedral scale for the FFF As a matter that materially affects the question of room, it is worthy consideration whether the advantages of so greatly an enlarged scale are commensurate with the increased quantity of space required to accommodate Pipes of such a measure. Metal Pipes of so great a scale no doubt produce a somewhat heavier, thick, and more ponderous tone than others of less bulk; but not so close, firm, and clean a sound. There is always sufficient difficulty in obtaining an even tone from a Stop that increases in scale gradually from the lowest Pipe up to the top one. It was, in fact, this difficulty which led Muller of Amsterdam, and Batz of Utrecht, to apply duplicate Pipes to the Trebles of their Organs; and Cavaillé to adopt a heavier wind in the upper part of the Manual Compass, to overcome it. But if the scale be enlarged from the Tenor downwards also, and a more powerful tone really be produced in that direction, it seems clear that the tendency to an inequality in the general effect must be increased. It is well known that, for richness, fulness, and power, the Bass of Smith's Diapasons have never been surpassed. If they ever failed, as they occasionally did, it was in the upper part. Moreover, it is by no means a matter of course that an enlargement of scale will result in the production of a tone of an improved quality, as the following extract will show. The Christian Remembrancer for October, 1833, page 624, speaking of the Temple Organ, says, "it is somewhat remarkable that Schmidt should be able to produce so ponderous a tone in the lower notes of the Open Diapason, out of so small a scale Pipe; the FFF measuring only seven inches in diameter, whereas the same Pipe in Green's Organ at Greenwich Hospital measures twelve inches, and does not give so fine a note." The fact is, when the scale is increased, the Pipes then no longer remain members of the "Principal-work," but, from that enlargement, merge into the Flute-work (see ante, page 109, sec. 500; also Block-flute, page 119); and at the same time also cease to retain that clear and pure character of tone which is so closely associated with the idea of a true Diapason, and which then is exchanged for a heavier and less silvery tone. This refers to the large Pipes. As the "Diapason-measure" is exceeded, higher up in the musical scale, the Cornet-scale and tone is approached. For instance, if a Pedal Principal were to be made to a much-increased measure, so that its middle c1 Pipe (2 feet) were to be advanced from about 2 inches to nearly  $2\frac{1}{a}$  inches in diameter, it would produce a tone, powerful and broad, indeed, but utterly unlike that of a member of the Diapason-work.

1194. It has already been mentioned that the largest of the two 16-feet Pipes at St. Paul's Cathedral does not measure quite 10 inches in diameter; neither do those made by Cavaillé, in his magnificent new Organs at the Madelaine and St. Vincent de Paul, at Paris. And of upwards of twenty examples in German Organs

which the writer measured, not one exceeded 10 inches across; while the smallest was 9½ inches only. The corresponding Pipe in modern English work has occasionally been made as much as 14 inches across; that is, within an inch of the 32-feet Pipe at Haarlem, which measures but 15 inches over. There seems, however, to be no essential advantage arising from the use of such large scales; while the waste of room which they involve is very great.

1195. The subject of the scale of large Open Wood and Metal Pipes has been entered into thus fully, because those who have to decide on the comparative merits of different Specifications are sometimes apt to attach undue value to those which promise "good bumping scales," and think lightly of others which do not;—to consider the necessity for great scaled Pipes as an unquestionable fact, and their advantages as being beyond doubt.

1196. Stopped Wood Pipes present a no less variation in regard to scale than do those of the Open kind. The ordinary English measure for the CCC Bourdon or Double Stopped Diapason Pipe, 16-feet tone, is  $7\frac{1}{4}$  inches in width, by 9 inches in depth. Occasionally this scale has been increased to 12 inches in depth; but it has seldom been much lessened in England. The Swiss scale for Stopped Pipcs is somewhat larger than the first of the above-mentioned English measures; i. e. it is about 91 inches by 11 for the CCC Pipe. This scale was adopted for the Pedal Stopped Bass of the Temple Organ, added by Robson, and is remarkably effective. In some modern German Organs, the scale of the large Stopped Pipes has been much reduced, and that without involving any loss of tone, so that a great saving of room has been effected. The unreduced quantity of tone from the narrower Pipe is secured by allowing a more copious supply of wind to enter the foot, instead of shutting part of it off by plugging; and by cutting the mouth higher. In this way a firmer, plumper, and purer tone is obtained from a CCC Pipe, measuring  $6\frac{1}{8}$  inches by  $4\frac{5}{8}$ , than is to be heard from some English Pipes that are a foot deep. A Bourdon of the above scale occurs on the Great Manual of the German Organ in the Exchange Room at Northampton, and produces a remarkably full tone. The smaller scaled Pipes present the additional advantage of being more easily planted over their own wind on the Sound-board. It should be mentioned that the Pipes of a Stop made to the German scale just referred to, decrease in size or bulk more gradually than is common with English scales: that is to say, the scale is not reduced to half measure until it has reached the Pipe that sounds the interval of an eleventh from the Pipe whence the calculation commences. The following therefore presents an outline of the scale in question.

#### GREAT MANUAL BOURDON SCALE.

Pipe.	Depth.	Width.	Diam	eter of Foot-hole.
CCC	 $6\frac{1}{8}$ inches	 45 inches		1 5 inch.
GG	 $4\frac{5}{4}$ inches	 $3\frac{1}{4}$ inches		$1\frac{1}{2}$ inch.
CC	 $3\frac{5}{8}$ inches	 $2\frac{1}{1}\frac{3}{6}$ inches		$1_{\frac{5}{16}}^{\frac{5}{6}}$ inch.
FF	 $3\frac{1}{18}$ inches	 $2\frac{5}{16}$ inches		$1\frac{1}{8}$ inch.
Tenor c	 $2\frac{5}{16}$ inches	 $1\frac{3}{4}$ inches		15 inch.
Middle b flat	 1½ inches	 $1_{16}^{2}$ inches		minch.

1197. The height of mouth, for a 3-inch wind, is, on the average, about equal to half the width.

1193. Another class of covered Stops, producing a delicate tone, and called, in Germany, Lieblich Gedackt (Lovely-toned Stopped Diapasons), is made to a smaller scale again than the Bourdon. It occurs in many foreign instruments; and is also frequently introduced by Schulze to form the Unison and Double Stopped Diapasons of his Choir or Swell Organs. Its scale decreases in the same ratio as that of the Bourdon already noticed.

#### LIEBLICH GEDACKT SCALE, FOR CHOIR OR SWELL COVERED STOPS.

Pipe.	Depth.	Width.	D	iameter of Foot-hole.
CCC	 5 inches	 $3\frac{3}{8}$ inches		$\frac{1}{1}\frac{5}{6}$ of an inch.
GG	 $3\frac{3}{4}$ inches	 $2\frac{1}{1}\frac{1}{6}$ inches		$\frac{1}{1}\frac{5}{6}$ of an inch.
CC	 3 inches	 $2\frac{3}{16}$ inches		$\frac{3}{4}$ of an inch.
FF	 $2\frac{1}{2}$ inches	 $1\frac{1}{16}$ inch		$\frac{1}{1}\frac{1}{6}$ of an inch.
Tenor c	 $1\frac{7}{8}$ inch	 $1\frac{3}{8}$ inch		$\frac{9}{16}$ of an inch.
Middle b flat	 $1\frac{1}{4}$ inch	 $\frac{1}{6}$ of an inch	1	$\frac{3}{8}$ of an inch.

Stops consists more particularly in the comparatively small amount of standing and speaking room required for the accommodation of Pipes made to that measure. The CCC Pipe is scarcely any wider or deeper than the CC Pipe of some English scales; that is to say, the lowest Pipe of a Double Stopped Diapason made to the Lieblich Gedackt scale does not call for more standing room than the lowest Pipe of some Unison Stopped Diapasons made to the English scale. It consequently admits of the entire Stop being placed inside the Swell-box, whereby its whole range derives the advantage and benefit of the crescendo and diminuendo; whereas, on account of the size of the Bass Pipes of a Bourdon made to the usual English scale, the lowest octave of the Stop has generally to be placed outside the box, even in the largest Swells. Examples of Lieblich Gedackts, as Choir Organ Stops, of 16 and 3 feet tone, occur on the upper Manual of the Organ at the Exchange, Northampton.

1200. It will now be seen why a German Organ should not cover the great space that might at first have been imagined. The lowest Open, Stopped, and Pedal Pipes of an ordinary GG Organ frequently equal in bulk the 16-feet Pipes of a German Organ.

1201. There is one thing in connection with the question of large and small scales that is well worth mentioning in this place. It does not answer to plant large scale Bourdons semitonally. This fact was proved by an Organ-builder in the following manner. The CCC Pipe was put in its place, voiced and tuned; then the CCC# was completed in a similar manner, when it was found that the CCC Pipe had become uncertain and windy in its speech. The DDD was next added, and having in its turn been tuned and voiced, the CCC# was tried, and that was found to be spoiled by the DDD, as the CCC had been by the CCC#. Four more Pipes, up to FFF#, were added, one by one, and every successive Pipe destroyed the speech of the one below it. There was not a single exception; the only good sound

was from the FFF# Pipe, which completed the series. It was shown by this experiment, (1) that the speech of a Stopped Pipe is not affected by the note its semitone below, but by the semitone above; and (2) that the vibration at the mouth of a large scale Stopped Pipe has an influence upon the Pipe its semitone below, that does not appear in small scale Stopped Pipes; and it is argued from this, that the semitonal arrangement and the large scale English Stopped-work could not be satisfactorily combined. If this be true, it is curious that, in the system of semitonal arrangement, the scales should be required to be small, and for two very opposite reasons (at least, having no immediate relation); 1st, that they may be planted without loss of room; and 2nd, that an acoustical phenomenon or law requires them to be so, if planted semitonally; and of course it would be absurd to set out a sound-board semitonally to simplify the action, and then by conveyances, groove-boards, or such like means, to plant the Pipes otherwise.

The Materials for the 1202.The different metals, woods, and compounds used Pipe-work. in the construction of Organ Pipes were enumerated in a previous Chapter. In the Specification for which the Organ-builder's Estimate is afterwards to be obtained, it ought to be distinctly specified what materials are desired to be used in the formation of the Pipe-work; which Stops, if any, are to be made of pure Tin, which of Metal, and which of Wood: also, if some are designed to be made partly of Tin or Metal, and the remainder of Wood; on what note the Metal Pipes are to be discontinued and the Wood ones to commence; and lastly, the proportions of Tin and Lead to be employed in the composition of the Metal. One of the particulars on which the ultimate cost of an Organ rightly depends is the standard of the Metal that is to be used, and the gross weight of it to be embodied in the instrument; and an Organ-builder who proposes to employ Tim or the best Metal, in good quantity, must necessarily require a higher sum for his work than he would demand, were a less valuable Metal and a smaller quantity of it understood to be all that was desired. An Estimate, therefore, that would appear to be a high one, were not these circumstances to be taken into consideration, will often prove to be both just and reasonable when it is more closely examined. But English Organbuilders are by no means agreed on certain questions relating to Metal Pipes; some considering that "substance" in material is of more importance than quality, while others view quality as of more consequence than substance. Preparatory to offering any observations on these points, it may be observed that the bodies of Metal Pipes should vibrate, but not tremble; that is to say, they should vibrate from the natural elasticity of the metal or compound of which they are made, but not tremble from thinness of material or weakness of texture. Of the two materials which form the chief ingredients in Organ Pipe metal, Tin is light, firm, and elastic; and Lead, heavy, weak, and comparatively inelastic.

1203. Strictly speaking, it is the periodical motion of the column of air that is within a Pipe, rather than the Pipe which encloses it, that is the source of the tone. The substance and quality of the walls of the Pipe, however, have a great deal to do with the strength and character of the sound produced; and in this way, if the material of which a Pipe is made be thin in substance, it will be weaker, more pliant, and consequently less impatient to return to its state of repose. The Pipe

therefore will not bear much blowing, as, in that case, its sides would not be strong enough to resist or counterbalance the power of the wind; and would tremble, and produce a blurring sound. Being thus unable to resist any violent excitation of the column of air within, a thin Pipe can only be slightly blown, and hence will produce only a light tone. If thin material, however, be pure Tin, or good spotted metal, it will on that account be firmer; and the sharp and rapid vibration of a Pipe made from such sheets will cause the tone to be of a more refined and silvery quality.

1204. A Pipe made of thick metal will bear much more blowing, without its vibratory motion being exaggerated into a trembling; consequently it will be capable of producing a much fuller tone than a thin Pipe of the same scale. For instance, the stronger the Organ-wind, or the greater the quantity of it entering a Pipe through a larger foot-hole, the more powerfully will the column of air within the Pipe be excited, and consequently the greater will be its friction against the sides of the Pipe. If the strength and firmness of the Pipe have been correspondingly increased, it will successfully resist the influence of the stronger current; the whole resulting in the production of a clearer and better tone. If, added to its substance, the metal of the Pipe be compounded chiefly of Tin, this will cause it to be firmer still, and therefore more resisting at first; but if fully excited by the more copious blowing which it will bear, it will prove more elastic, and more impatient to return to its state of rest; and, from the great strength and power of its vibrations, will produce a sound remarkable for clearness as well as for a ringing character.

1205. It has been customary to attribute the distinction in the tone of the Organs of different builders to the voicing and winding of the Pipes, which is of course true to a great extent; but the substance and quality of the metal have been important primary agents in the matter. Father Smith used metal of fine quality and great substance, while Green employed good spotted metal, but of less thickness; and Smith could no more have obtained Green's light, playful, and musical tone from his thick Pipes, than could Green have produced Smith's powerful and ringing tone from his thin Pipes. Green was aware of this, particularly in regard to Bass Pipes—hence his great enlargement of the scale; but, from the thinness of their material, they would not bear much blowing—hence their inferiority in general effect, as already quoted.

1206. But, whatever difference of opinion may exist as to whether and to what extent the tone is influenced by the metal or compound used, there can be no doubt of the greater durability of Pipes formed of Tin, or chiefly so, over every other composition that has been commonly employed for the purpose. The metal used by Harris and Smith, for the chief part of the Pipe-work of their Organs, contained a great proportion of Tin among its ingredients; and the present condition of the original Pipes of many of the instruments constructed by those makers, fully confirms the correctness of the opinion as to the lasting character of Organ-pipes made, in the first instance, of metal of good quality and thick in substance. Harris's Organ, at St. Sepulchre's, was built in 1667; Smith's, at the Temple, in 1685; and that at St. Paul's Cathedral, by the last-mentioned builder, in 1695. The original Metal Pipes of these Organs are still so sound, after a lapse of 187, 169, and 159 years, respectively, that with care they will last another century at least. The com-

parative durability of metal compounds, of various kinds, was well illustrated in an Organ which passed not long since into the hands of an Organ-builder. The Organ had been made rather more than a century; and while the original Pipes, of spotted metal, were found to be quite sound, the feet of others of *subsequent* introduction, formed of inferior metal, had been so attacked by the strong acid in the wood of which the upper-boards were made, that the apex of the feet of several of them was completely eaten away.

1207. Other evidences of the great durability of substantial Pipes of Tin, or good Metal, are afforded by the great age of several continental Organs, the dates of the erection of which are authenticated. The Organ in the Cathedral at Constance, in Switzerland, was built in 1518; that in the Cathedral of Freiburg, in Breisgau, in 1520; that in the Cathedral at Antwerp, in 1645; and that in the Cathedral at Lucerne, in Switzerland, in the year 1651. The particulars of numerous other old Organs are contained in the Appendix; but, from the approximate age only having been ascertained, they cannot be quoted here.

1203. Moreover, the writer put the question distinctly to a German Organ-builder, how long he considered an Organ ought to last; and he gave it as his deliberate opinion that, if well constructed, out of the best and most substantial materials, and taken the best care of, it ought to continue good for four hundred years. An Organ lasting for so protracted a period will no doubt appear strange to many; but the undoubted age of numerous continental instruments, together with the good state of preservation the Pipes of many of them are in, fully justify the above calculation; while the fact of certain of the Stops of old Organs being in some cases retained in their successors, as at Cologne and Liege, further supports it.

1209. That Pipe-work made of metal of good quality and substance retains its fulness, brilliance, and "ring," for a very lengthened period, is a fact fully borne out by the effect of numerous old English Organs. Age, however, is said to have materially assisted in imparting to the tone that peculiar richness, purity, and healthy clearness for which many old instruments are so remarkable; and which some builders hold were not so strikingly among the original attributes of those instruments. That these opinions are well founded, the writer can testify, from what he observed in Organs of different ages abroad. In new Organs that had Pipe-work of substantial metal composed of equal parts of Tin and Lead, and the Pipes of which were well blown, the tone was firm, massive, and clear, but generally with a slight tendency to a piercing character. In other Organs, a few years old, voiced by the same hand, the latter characteristic no longer remained, but was giving place to the peculiar mellowness that all detect in the "old tone."

1210. But if time effects so much for an Organ, how important must it be to secure the use of the most durable metal for its Pipe-work; otherwise, at the very period when the mellowing hand of time ought to be bringing the instrument to perfection, the Pipe-work will have seen its best days, and be becoming useless at the very time that it ought to be enhancing in value.

1211. While, in some instances, the scale has been increased for the large metal Pipes, it has been decreased for the small ones forming the "chorus." When the scale of the harmonic series of Stops is "kept up," and the Pipes are well blown, a tone is produced that is remarkable for fulness, breadth, and power. When, on the

contrary, their measure is reduced more rapidly, the small Stops are less full and more penetrating in tone. In some German Organs, both codes of scales are adopted; that is to say, a rather large scale is followed for the harmonic series of Stops, including the *first* Mixture, and a smaller for the second Compound Stop; the 2-feet Pipe (c¹) of the latter being usually of the same diameter as the e¹ or f¹ Pipe of the Diapason; i. e. of Geigen Principal scale. The second Stop is then sometimes called "Scharf," or "Cymbal," either of which names would suggest the idea of a ringing, sharp-toned Stop. The third Compound Stop is usually a Cornet, so that on many German Great Manuals will be found, first, a Mixture of nearly full Principal scale, a second rather below, and a third one above that measure.

1212. Wood Pipe-work is introduced to a greater proportionate extent in modern than it was in old Organs, as it effects a judicious saving in the expense. Many of the largest Pipes in the Pedal Organ are almost invariably made of this material; so also is a great portion of the Flute-work of recent invention or introduction into this country. The Stopped Diapason and Flute Stops on every Manual of modern Organs, too, are frequently made of wood; so are the Bass Pipes of the Open Diapason; while, in old instruments, the Treble of the former and the Bass of the latter were more commonly made of metal. When long wood Pipes are made to a small scale, they are capable of producing a very close imitation of the "metal tone," and in that case form a most efficient substitute for good metal Pipes, in the Bass, when the latter are not attainable. In some foreign Organs, a wood Bass of this kind is united to a metal Treble so successfully, that it is scarcely possible to trace on what notes the one material is discontinued and the other commenced.

The price of the Organ.

1213. We have now arrived at the last, but by no means the least important question for consideration; namely, the price of the Organ. This matter necessarily rests, to some extent, with the builder chosen, but remains to a much greater degree in the hands of the purchasers.

- 1214. From what has been explained in the preceding sections, it must be obvious that there is a durable, complete, but *costly* way of building an Organ; and an unsubstantial, incomplete, and *cheap* way of making it. It is also equally evident that Organ-building may be viewed as a calling of high art, or treated merely as a matter of business; and it will be exercised in either the former or the latter spirit, according to circumstances.
- 1215. Under the most extreme circumstances, the Organ-builder must exist by the exercise of his calling; but at the same time it is only consistent with the proper feeling of ambition that actuates every genuine artist, that he would prefer also rearing specimens of his art to which he might point with pride, as well as his successors for generations after him. But this second condition must obviously depend on the means placed at his disposal.
- 1216. On being applied to to make proposals for the construction and erection of an Organ, an Organ-builder may draw up a Specification for an instrument of given contents, and, intending to use certain materials, and to devote much attention to various matters of detail and finish which cannot be specified in an estimate without extending it to the length of a pamphlet, place his charge at, say, £1000. He may, however, have good reason to know that that figure will ensure him the loss of

the "order;" accordingly, without altering one of the written conditions of his contract, or foregoing one penny of his own fair profit, but simply by reducing the standard or substance, or both, of his metal, and paying less regard to the minute excellences of his work, he can, "to meet circumstances," at once lower his estimate from £1000 to £850. It is in this sense that "the price of the Organ" is said to remain so much in the hands of the purchasers. But when the Organ is completed, will it rank as highly, as a work of art, as it was originally intended by its designer it should do? Will it reflect more than temporary credit on its builder? A few years pass, and the Organ itself probably solves these problems. And as though to reduce its existence to the shortest span, the erowded Organ has perhaps been devoted to a site bounded by cold or damp walls, where the leather-work has quickly rotted, the brass-work corroded, the iron-work rusted, the glue soddened, and the accurate adjustment of the several parts of the wood-work, by swelling, been disturbed. Crooked or bruised metal Pipes, cracked wooden Pipes, running soundboards, twisted rollers, double frictional resistance opposed to the fingers at the keys, and numerous other such fatalities, too frequently indicate what are and must ever be among the most probable distinctivenesses of the "cheap Organ." Nor is the builder exactly to be held responsible for all this, if he gave timely advice and warning.

1217. So far it has been shown by how easy a course the price of an Organ of a given size may be materially reduced, to accommodate the estimate to particular circumstances. But the process may be reversed; i. e. the size of an Organ may undergo great *apparent* increase, when "a grand Organ" is desired for the price of one of ordinary dimensions.

1218. An Organ with, say, fifty Stops will cost either about £1000 or nearly £2000, according to circumstances. If its Specification be drawn up in a spirit consistent with the magnitude of the work, as implied by the number of its Stops—if the Stops chosen are introduced mostly in a "complete" form, and if a just proportion be observed in the distribution of the Stops between the Manuals and Pedal—the cost of such an instrument will certainly approach the higher of the two rough estimates above given. But then it will also be a genuine specimen of the German system of Organ-building, carried out in its amplitude and integrity. Among the fundamental laws of that system are these: if a Great Manual be furnished with sixteen Stops, those should include at least two Double Stops, one of which must be a Double Open Diapason throughout. Or, to follow the German form of expression more closely, the Great Organ should be a "16-feet Manual." Then all the Manuals—by which is meant the Organs as well as the Keys—should be of equal, that is CC, range: and the Pedal moreover should, as a minimum proportion, have at least one-third as many Stops as the Great Manual.

1219. These and other governing rules of the science, however, can only be recognised, or at least followed, when "the price" will admit of their being so. But it too frequently happens that the approximate price for the Organ has already been fixed, and the hoped-for number of Stops also considered; in which case, all that is left for an Organ-builder to do, who desires to secure the order, is to prepare a design that will as little as possible run counter to these pre-formed expectations. He sees clearly that a plan for an instrument on the genuine German principle will

exclude itself by its appended estimate; that there is every probability of the prize falling into the hands of he who can prepare the most "promising" Specification; therefore ideas about "art" must subserve to those relating to "business."

1220. Nor can Organ-builders fairly be held accountable for adopting the obvious alternative thus imposed upon them, and which amounts to this in effect, if not in words: he who will prepare the Specification that seems to promise the most extensive instrument for the stated terms—who, in fact, can the most successfully make what would form a smaller Organ look like a larger, upon paper-will stand the best chance of securing "the order." And the ingenuity sometimes displayed in estimates drawn up to meet such expectations almost calls for admiration. First, instead of the Specification stating that the proposed instrument shall be built on the German system, which would be embodying a great deal; all it will promise, if it be prudently drawn up, is, that it shall be made to the German compass, which is at the same time the old English compass of two centuries ago, and implies but little. Next, several of the Stops are planned to draw in halves; every such divided Stop thus appearing as two; or they are introduced in an incomplete form, to meet other incomplete Stops\*. In this manner a great step is made towards securing the necessary array of "Stops;" many persons judging of the excellence of an Organ by the number of its handles, rather than by the excellence and completeness of what those handles govern. The Couplers, even, to swell the number, are sometimes enumerated as "Stops." Then the important distinction between "standard size" and "size of tone" is overlooked; and the two portions of the Stopped Diapason, which together form in reality but one Stop of 8-feet tone, in consequence bear the aspect of two Stops of 8 feet. The Bourdon, also, if divided, appears as two Stops of 16 feet. In this manner the Stops in question, and by consequence the department to which they belong, are left open to a flattering estimate of their real dimensions†. The one Sesqui-altera of V ranks, again, which is to be found in all the most important Organs of Germany, as well as in those of Bridge, Byfield, Harris, and Snetzler, has to be made to draw as two or even three Stops. Then the Swell Organ—which is essentially of English invention and development—is more highly and justly appreciated in this country than in any other in Europe—is a department in the construction of which an Organ-builder takes peculiar pride and interest—this must be cut short at Tenor c; which denudation deprives the Swell of its finest octave, though to be sure at the same time it effects a saving of nearly £100 in the cost of that department alone, in the instance of a design for a large Swell, and

<sup>\*</sup> As a matter of fact, it should be mentioned that three of the modern Organs that are the most free from half and incomplete Stops, are those in the Church of St. Mary at Hill; St. Walburgh's Catholic Church, Preston; and at the Panopticon; all by Hill. The former has but four such Stops among a series of thirty; the second, not one Stop of broken range among thirty Stops; and the latter, two only among sixty.

<sup>†</sup> It has already been explained (see page 245, see. 1031) that it is not the tone of the deepest sounding Covered Stop, but the "standard length" of the largest Stop of the Open Diapason species, that fixes the size of a Manual or Pedal Organ. Among other instruments, of which the Great Organ department is a 16-feet Manual, in the strict sense of the term, must be classed those at the Panopticon, by Hill; and at Buxton Road and Highfield Chapels, Huddersfield, by Robson and Walker.

must therefore be resorted to as one means of keeping down the price of the instrument. The Swell Manual indeed perhaps runs "throughout," though that is of little value without its proper Pipes. Numerous small and inexpensive Stops, again, find admission, which assist in making up the required number at no great outlay; while many large and eostly ones are necessarily excluded, to bring the instrument within the narrow bounds prescribed by the stipulated terms. In this manner the admirable rule which lies at the very foundation of the German system of Organbuilding—that the Pedal shall have, at the least, one-third as many Stops as the Great Manual—and which is specially intended to check all excess in small or incomplete Stops, as well as the slighting of large and more important ones, is perforce treated as though it had no existence. By the above and other such means, a Specification for an Organ of almost any number of Stops—i. e. handles—may be provided, to suit almost any sum that may be named. But it cannot be supposed that any Organ-builder who has a real love for his art can prefer building an instrument according to so unhealthy a system, however readily he may consent to do so. Yet, despite the discouraging influences under which it has been sometimes carried on, Organbuilding has nevertheless progressed marvellously within the last fifteen years, particularly in respect to those mechanical details which ensure quietness in the action generally, and which relate to lightness and promptness in the touch of large instruments, as well as in the selection and variety of the Stops; but in regard to the completeness of the compass of the Stops, and the excellence of the metal used in their conformation, great "progress" might still be made by going back to the customs of a century or more since. But these latter returns, whenever they may take place, must be preceded by a corresponding return to something akin to the fair and liberal terms paid to the artists of former times. What these might have been may be gathered from the following extracts, taken quite at random, from a list of many which were ready at hand. It is recorded that Father Smith had 1000 guineas for the Organ (about 20 Stops) at the Temple Church, and 500 more for the case; for the St. Paul's Cathedral Organ (about 28 Stops), £2000; and for that in Durham Cathedral (17 Stops), £700 and the old Organ. For the Westminster Abbey Organ (21 Stops), Schrider had £1000; and Green, for the Organ at Greenwich Hospital (26 Stops), £1000, exclusive of the case. Harris had for the St. Patrick's Cathedral Organ, Dublin (13 Stops), £505. Then, for a single Stop, Byfield received £50 for the Trumpet in the Cathedral Organ at Chichester. It is indeed true that most of the Stops in the Organs above mentioned were "whole" Stops, and not only so, but were even beyond the full necessary CC range: still, after making an ample reduction for the costly extra notes below, a sum remains that is far beyond what any English Organ-builder is accustomed to command in the present day for a similar amount of work. We need not wonder, then, at the completeness, so far as they went, goodness of material, excellence of finish, beauty of tone, and durability of old instruments made under such favorable auspices.

1221. For the Organ in the Church of St. Vincent de Paul (40 sounding Stops), at Paris, Cavaillé received £2000; and for that at the Madelaine (48 sounding Stops), £2500. The above matters relating to the price, excellence, and completeness of an Organ, have been entered into thus fully and unreservedly in this

place, first, because emanating as they do from one who is wholly unconnected with the Organ-building business, and who therefore can in no way be interested in the issue, beyond what is shared by all who admire excellence, irrespective of size, they may perhaps be permitted to exercise some influence with those who have to detect the actual merits of competing estimates; and secondly, because they really involve the permanent interest of the purchaser, the credit of the builder, and the progress of the art, in equal degrees. It need only be added, that a builder of high reputation will naturally expect, and will be entitled to receive, higher remuneration for his work than one of less eminence.

#### CHAPTER XXXVIII.

#### PLANS FOR ORGANS OF VARIOUS SIZES.

1222. Some plans or Specifications for Organs of various sizes will now be given, which will illustrate the several rules that have been explained in detail in preceding Chapters of this book; and will also serve to show by what easy and successive steps an instrument is gradually developed from a small Chapel Organ into a large Cathedral Organ, without any of the primary laws of the science; as, for instance, that relating to the standard compass of the Manuals being overturned or modified in any way. In their preparation, the schemes of the best English and Foreign Organs, of old as well as of recent times, have been consulted, and their best features embodied, so far as has been found practicable, or seemed to be in accordance with the requirements of an English Organ. As, however, nearly every Organ-builder and Organist has his predilection in favour of certain Stops, and as each would consequently arrange them somewhat differently in a scale intended to display them in the order of their relative importance; many of the Stops suggested in the following Specifications, particularly the members of the Flute-work, would probably be required to be cancelled in favour of other Stops, to accommodate the Specifications to particular tastes.

# I. SPECIFICATION FOR A SMALL ORGAN OF VIII SOUNDING STOPS, I MANUAL, AND PEDAL.

Manual, 7 Stops.

· ·		
1—Open Diapason, the Bass	4—Principal4 feet.	
octave of wood 8 feet.	5—Stopped Flute, to Te-	
2—Stopped Diapason 8 feet tone.	nor c 4 feet tone.	
3—Dulciana to Tenor c,	6—Twelfth	
grooved into Stopped	7—Fifteenth 2 feet.	
Diapason below 8 feet.		
Pedal, 1 Stop.		
8—Stopped Bass 16 feet tone.		
* *		

Accessory Stops, Movements, &c.

1—Coupler, Manual to Pedal.

2, 3, 4—Three Composition Pedals.

Manual range, CC to g<sup>3</sup> in altissimo, 56 notes.

Pedal range, CCC to Tenor f, 30 notes.

1223. If more power than the above Stops are calculated to produce should be required, without increasing the number of the Stops, or adding much to the cost of the instrument, this might be obtained by altering the Specification after the following manner.

Second Specification for a small Organ of 8 sounding Stops, 1 Manual, and Pedal.

Manual, 7 Stops.

1—Open Diapason, the Bass
octave of wood ..... 8 feet.

2—Clarabella Treble, with
Stopped Bass ..... 8 feet.

3—Gamba to Tenor c,
grooved into Open
Diapason below .... 8 feet.

Pedal, 1 Stop.
8—Stopped Bass.... 16 feet tone.

Accessory Stops, Movements, &c.

1—Coupler, Manual to Pedal.
2, 3. 4—Three Composition Pedals.
Manual range, CC to g in altissimo, 56 notes.
Pedal range, CCC to Tenor f, 30 notes.

1224. The Clarabella and Gamba would augment the Unison tone, and the Wald Flute the octave pitch, while the little II rank Mixture, consisting of a 19th and 22nd in the Bass, and a 12th and 15th from Middle c¹ upwards, would brighten the Bass and add more clearness to the Treble. With regard to the custom of grooving one Stop into a second one in the Bass, it might be imagined that the "two winds" would cause the corresponding Pipes to "overblow." Where, however, the Pipes are in the first instance well blown, and the sound-board grooves are large enough to hold an ample supply of wind for all the Pipes fed therefrom, this is not the case; as may be illustrated at the Panopticon, where a key may be held down on, say the Swell, and then the corresponding key on the side Manual, acting on a second pallet, be lowered, without any difference being perceptible in the intonation of the Pipes. Neither does any such defect appear in the grooved Stops of the well-winded Organs of the Continent.

# II. SPECIFICATION FOR AN ORGAN WITH XIII SOUNDING STOPS, II MANUALS, AND PEDAL.

Great Organ, 8 Stops.

1—Open Diapason . . . . 8 feet.

2—Gamba or Dulciana to
Tenor c . . . . 8 feet.

3—Stopped Diapason . . 8 feet tone.

4—Principal . . . . 4 feet.

5—Stopped Flute . . . 4 feet tone.

6—Twelfth . . . . 2 feet.

7—Fifteenth . . . 2 feet.

8—Mixture . III ranks.

# Swell Organ, 4 Stops.

9—Open Diapason..... 8 feet. 11—Principal...... 4 feet. 10—Stopped Diapason.... 8 feet tone. 12—Hautboy...... 8 feet,

Pedal Organ, 1 Stop.

13—Open Bass............ 16 feet. Octave Bass, by means of coupler . . 8 feet.

Accessory Stops, Movements, &c.

1—Coupler, Swell to Great.

2—Coupler, Great to Pedal.

3—Octave Pedal, already named.

4, 5, 6—Three Composition Pedals.

### Compass.

Great—CC to g<sup>5</sup> in altissimo, 56 notes. Swell—Tenor c to g<sup>5</sup> in altissimo, 44 notes. Pedal—CCC to Tenor f, 30 notes, with extra octave of Pipes to complete the "Octave-Bass" compass.

1225. The Octave-Bass Coupler has frequently been introduced by Robson into his Organs, and has been found of great service in increasing the efficacy of a small Pedal Organ. More concerning this further on. It should be mentioned that the Pedal Bass has now become really a "16-feet Pedal," as the Germans term it.

of two Manuals, on the modern principle, is the satisfactory treatment of the Bass or 8-feet octave of the second Manual or Swell, owing to the size of the Stops that are justly considered to be indispensable for even the most limited departments of that kind to possess. In the instance of the second Manual or Choir Organ of the instruments of the last century, no such difficulty existed, on account of the Stops generally selected for that department being comparatively small ones—as Stopped Diapason, 8-feet tone (4-feet literal length); Principal, 4-feet, and so on: but now that the Swell invariably takes the precedence of the Choir Organ, and an Open Diapason, 8-feet, and at least one Reed Stop of the same size are required for even the smallest specimens of that division of an Organ, the case is very different.

1227. By way of illustrating the extent of this alteration and increase in the size of the Stops, the following experiment might be tried on a Tenor c Swell, containing the following six Stops—

First, press down the Tenor c key, then draw the Bourdon, when a sound like that from a CC Stopped Diapason will be heard. The Open Diapason, when added, will sound like a Principal; the Stopped Diapason like a Flute; the Principal like a Fifteenth; the Cornet like a 2-rank Mixture; and the Hautboy like a Clarion. Thus it will be exemplified that the Tenor c Pipes of those six Swell Stops are as large as the CC Pipes of the following six Choir Stops—

 That is to say, the Swell Stops of a modern Organ are ordinarily twice the size of the Choir Stops of old Organs. This will at once give an idea of the great amount of extra standing-room a Swell must require beyond what is necessary for a Choir Organ of the same number of Stops, even supposing the necessary additional funds to secure the more costly Stops in a complete form to be forthcoming; added to which, there is the price of the expensive "large wooden room" or box, to hold them, to be taken into account. A Swell, therefore, with all its Stops of complete compass, could scarcely be expected in an Organ for so small a Church as the above would be calculated; yet, on the other hand, it is very disadvantageous to the effect of the music, as well as unsatisfactory to the player, when the range of the second Manual Organ is far short of what it should be.

1228. To overcome this difficulty, the Bass octave of the Stopped Diapason and Principal in the Great Organ have sometimes been "borrowed;" that is to say, they have been made to act on the corresponding octave of the Swell Manual, without the remaining Great Organ Stops sounding. Something analogous to this in principle used to be effected by Harris, who, in some of his Organs, borrowed the two lowest octaves of his "Choir Organ" from the Great, as at St. Andrew Undershaft, by means of double grooves, one set for each Manual, and two sliders to each borrowed Stop, of which also one was for each Manual. Conveyances or grooves extended from the upper-boards over the one slider to the Bass Pipes over the other; and small leather valves were placed over each set of sound-board holes to prevent any of the wind that came up from one department of the Organ passing down into the other division. The borrowing, however, has been effected in various ways; as, for instance, by partitioning off a small portion of the single sound-board grooves, and providing pallets and sliders as before. All such contrivances are designed to arrive at the same end; though a borrowed Bass is far better than the plan of making the Swell keys below Tenor c act on the entire Great Organ, which is a very primitive device. Another plan has been to introduce a small "Choir Bass" to act on the Bass octave of the second Manual to meet the Swell. This is a better arrangement still, as the Stopped Diapason Bass and Principal, of which it is usually composed, can be scaled and voiced with some reference to the strength of the Swell Stops. Still this is not entirely satisfactory, as of course it cannot be made to match the Swell Stops equally well, whether the Swell-box be open or closed. Of the several methods that have been devised, none appear to be open to so little objection as the following.

1229. The Open Diapason might, to save room, be discontinued at the 4-feet c Pipe, as in the ordinary Tenor c Swell; but the Stopped Diapason could be carried down to CC, the longest Pipe of which would even then only be of the same 4-feet length, although its sound would be of 8-feet pitch. The Principal might also be carried right down; the lowest Pipe of which Octave Stop would even then be no longer than the Open Diapason Pipe of the octave above, that is, 4 fect. Lastly, the Reed could be mitred down without any detriment to its tone, but rather the contrary, and so be reduced to the 4-feet height; or, if free Reeds were to be used, a 4-feet tube would be all that would be required. In this way the 8-feet octave of Manual tones could be secured to the Swell without increasing the height of the Swell-box at all; by adding to its breadth to some extent, and to its depth to a less degree; while its sounds would be rendered susceptible of being increased or dimi-

nished with the rest of the Swell, which power of course cannot be secured by any of the other plans. Robson has made a few Swells in this way, which have shown the plan to be a most successful one.

1230. A mistake sometimes finds its way to the labels of the Pedal Couplers, which it is worth while to point out. It is generally understood that, of the two Claviers named on the label of a Coupler, the *first* is that of the row of keys coupled, and the second that of the one to which it is united. Thus, "Swell to Great" is understood to mean that the former is coupled to the latter, which is the case; but with the Pedal Coupler the names frequently get reversed, and, although the mechanism attaches the Great Organ to the Pedal, yet the label announces that it unites the "Pedal to Great."

# III. SPECIFICATION FOR AN ORGAN WITH XVI SOUNDING STOPS, II MANUALS, AND PEDAL.

## Great Organ, 9 Stops.

1—Bourdon16 feet tone.	6—Flute 4 feet tone.	
2—Open Diapason 8 feet.	7—Twelfth $2\frac{2}{3}$ feet.	
3—Dulciana to Tenor c. 8 feet.	8—Fifteenth 2 feet.	
4—Stopped Diapason 8 feet tone.	9—Clear Mixture,	
5—Principal 4 feet.	IV ranks $1\frac{1}{3}$ foot.	
Swell Organ, 5 Stops.		
10—Open Diapason 8 feet tone.	13—Cornet, II ranks $2\frac{2}{3}$ and 2 feet.	
11—Stopped Diapason 8 feet.	14—Hautboy 8 feet.	
12—Principal 4 feet.		
Pedal Organ, 2 Stops.		
15—Open Bass16 feet.	a-Octave Bass. (borrowed by) 8 feet.	
16—Stopped Bass 16 feet tone	a—Octave Bass . { borrowed by means of a coupler, } 8 feet.	
Accessory Stops, Movements, &c.	Compass.	
1—Swell to Great.	Great—CC to g <sup>3</sup> in altissimo, 56 notes.	

4, 5, 6, 7, 8—Five double-action Composition Pedals, to act on the Stops of the Great Organ in the following manner.

Swell—Tenor c to g<sup>5</sup> in altissimo, 44 notes.

Pedal—CCC to Tenor f, 36 notes.

The first, to draw out the Dulciana, and reduce the full Organ to the same; The second, to draw out the Diapasons, and reduce the full Organ to the same; The third, to draw out to the Fifteenth, and reduce full Organ to the same;

The fourth, to draw out the full Crgan; and

2—Great to Pedal.3—Pedal Octave.

The fifth, to compound a Choir Organ, by drawing out the Stopped Diapason, Dulciana, Principal, and Flute, and reducing the full Organ to the same.

1231. The last Composition Pedal mentioned in the above scheme, although but seldom introduced, would prove of the greatest possible use in all small Organs which have no separate Choir Organ. It was tried for the first time (at the writer's suggestion) in the Organ built by Walker, for Trinity Church, Vauxhall Bridge, in

1852. As a Pedal of the kind does not belong to the series for increasing the strength of the Organ-tone by gradations from Piano to Forte, and for reducing it back again, but is designed to answer a distinct and special purpose, it had better be placed quite apart from the rest, say, to the extreme left, opposite to where the Swell Pedal is usually situated. The Bourdon is proposed to be acted on only by the Composition Pedal that is to draw out the full Organ; as its use is not governed by any laws analogous to those which regulate the employment of the other Stops, but is sometimes required in soft combinations, while at others it is not desired for much louder ones. For these reasons it will be better for it to be controlled chiefly by the hand.

1232. In many small English Organs, a Bourdon of 16-feet tone is placed on the second Manual, while all Stops of the same pitch are omitted from the first. This is not in accordance with the continental custom, as will be perceived on referring to any of the Specifications of small Organs contained in the Appendix. Neither is it in keeping with the theory on which is based the true method of establishing and developing the relative characters of tone of the different Manuals. According to that theory, if one Manual Organ is to be superior to the others in either of the three following particulars, namely, strength of tone, number of Stops, or in regard to the standard size or the size of tone of its largest Stops, that department should be the "Great" Organ; which, in fact, is so designated on those very accounts. It is not advisable, then, to place a Bourdon in the Swell, and yet no Stop of 16-feet pitch in the Great Organ; for, in that case, the tone of the former would be invested with greater gravity and fulness of tone than the latter.

1233. The addition to the Swell Specification is a Cornet of II ranks. A Stop of this kind, sounding a Twelfth and Fifteenth, was a favorite Stop with Nichols, the Organ-builder, who frequently introduced it into his small Swells with excellent effect.

1234. Two independent Pedal Stops are included in the Specification last given. Both those Stops are proposed to be of 16-feet; Flue Stops of that size or size of tone being the most important ones for the Pedal to have first, they forming the "Open and Stopped Basses" to the Diapasons of the Manual. Of scarcely less importance are the 8-feet Pedal Stops, which however are unattainable in an Organ of the size to which our Specification has at present attained. Where the Pedal Stops are few in number, it is a common custom with some English Organ-builders to introduce an Octave Pedal Coupler. This improves the general effect very considerably: for example, by uniting the 8-feet Pipes of, say, the 16-feet Pedal Stops just suggested, to the 16-feet Pedal key, and so on the octave throughout the Pedal compass, the two Stops are made to answer the purpose of four to a great extent. The drawbacks to their doing so quite effectually consists in there being no means for drawing the 8-feet range of one or both Stops with the 16-feet of the other—combinations that would frequently be advantageous.

1235. In an Organ lately built by the Messrs. Robson, for Newfoundland, a plan was tried, for the first time, which removed this objection. It was as follows—The CCC and CC grooves were placed side by side; the CCC sharp and CC sharp grooves the same; and so on throughout the sound board; an extra octave being added at the end to complete the 3-feet range. Each Pedal roller was then provided

with two lowering arms, one communicating with the CCC pallet, the other operating on a second pallet in the CC groove. On the table were twice the usual number of sliders, six instead of three; that is to say, in addition to those for the three actual Stops, the same number was introduced for the borrowed octaves, and those for the 16-feet Stop and the borrowed octave were in each case placed side by side. The CCC and CC Pipes also stood side by side on the sound-board, to save conveyancing or grooving; and all the other Pipes were arranged in the same manner. By these means the independence of the 8-feet range was so completely established that it was scarcely possible to discover that there were less than twice as many actual Stops as really existed. The mechanism necessary to accomplish all this, however, involved a considerable outlay.

# IV. SPECIFICATION FOR AN ORGAN WITH XX SOUNDING STOPS, II MANUALS, AND PEDAL.

#### Great Organ, 10 Stops. 7—Twelfth..... $2\frac{2}{3}$ feet. 1—Bourdon . . . . . . 16 feet tone. 2—Open Diapason .... 8 feet. 8—Fifteenth...... 2 feet. 2-Dulciana to Tenor c . 8 feet. 9-Clear Mixture, IV 4—Stopped Diapason... 8 feet tone. ranks..... $1\frac{1}{3}$ foot. 5—Principal..... 4 feet. 10—Trumpet..... 8 feet. 6—Stopped Flute . . . . 4 feet tone. Swell Organ, 8 Stops. 11—Bourdon . . . . . . . 16 feet tone. 15-Mixture, IV ranks.. 23 feet. 12—Open Diapason . . . . 8 feet. 16—Hautboy . . . . . . 8 feet. 13—Stopped Diapason.. 8 feet tone. 17—Horn . . . . . . . . . . 8 feet. 14—Principal..... 4 feet. 18—Clarion . . . . . . 4 feet. Pedal Organ, 2 Stops. a-Octave Bass (borrowed) 8 feet. 19—Open Bass...... 16 feet. 20—Stopped Bass ..... 16 feet tone. | b—Bass Flute \as before, \int 8 feet tone.

# Accessory Stops, Movements, &c.

1-Coupler Swell to Great.

2-Coupler Great to Pedal.

3-Pedal Octave.

4, 5, 6, 7, 8—Composition Pedals as before.

# Compass.

Great—CC to g<sup>3</sup> in altissimo, 56 notes. Swell—Tenor c to g<sup>3</sup> in altissimo, 56 notes.

Pedal—CCC to Tenor f, 30 notes, with extra octave of Organ, to complete the octave range.

# Composition for Swell Mixture.

```
Tenor c to treble f^2..... 12-15-19-22.
Treble f^2# to b^2 in alt.... 8-12-15-19.
c^3 in alt. to the top ..... 1-8-12-15.
```

1236. In Germany, a satisfactory Specification for a 10-Stop Great Organ always includes one Flue Stop of 16-feet tone, three or four of 8-feet, two of 4-feet,

and a Compound Stop of from III to VI ranks. This skeleton scheme cannot be improved upon, and there is the less occasion for even making the attempt, since there is so much room for indulging individual taste, in making the selection of Stops wherewith to fill it up.

1237. It will be seen that the "Double" in the Great Organ is proposed to be Stopped throughout (Bourdon), and not open in the Tenor and Treble, as it is sometimes made in England. The continental rule is, that when there is but one Stop of 16-feet pitch on a Manual, that should be a Covered Stop (see Specifications Nos. 8, 24, 25, 30, 34, 35, 36, 37, 38, 44, &c. in Appendix); and to this rule very few exceptions, indeed, exist (see, however, Nos. 6, 7, 25, and 104, in Appendix). A Bourdon, or kindred Stop, is first introduced, because it is more prompt in its speech than a Double Open Diapason; because it thickens the Organ-tone so admirably, without rendering the sub-octave sound so weighty and sonorous as to confuse it with the unison pitch in soft combinations; and because it is the less expensive Stop, and also requires less standing and speaking room. For these several reasons, its adoption has been recommended above. Sometimes a Quintaton, 16 feet (Fifth-sounding Covered Stop, 16 feet size of tone) is found proposed, as in Foreign Specifications, Nos. 44, 45, 46, 47, &c. A Stop of the kind is not designed to give its actual tone purely, but to produce its Twelfth, of 53 feet, as strongly as its ground-tone. original design of such a Stop is to obtain the effect of two from one rank of Pipes, on which account the Stop in question is, in Germany, termed a "simple mixed Stop." It of course is never intended to be used by itself.

1238. The Flute on the Great Manual of the Organ at Hampton Court, by Father Smith, is really a Quintaton of 4-feet ground-tone. It is formed of metal Pipes, with metal caps without chimneys.

1239. It will be observed that the composition suggested for the Swell Chorus Stop is identical with the Sharp Mixture, in the upper octave and a half of its compass. This has been proposed for the following reason: the Swell Compound-stop may almost be said to be never used without the Reeds, and consequently only at such times when there is a great body of 8 and 4 feet tone to support it. Moreover, when a Mixture is enclosed in a box, the tone of its acute Pipes does not then stand out so prominently; but, on the contrary, when used in conjunction with the other Stops, including a Bourdon, which is now generally and very properly included in every 7 or 8 Stop Swell, simply imparts a bell-like and playful ring to the whole. The Great Organ Mixtures are frequently required to be used "without Reeds;" and, in fact, it is one of the tests of their goodness, that they should be capable of being employed in that way with perfectly good effect. But as the unison tone of the Flue-work of a Great Organ to the above Specification would be scarcely strong enough to cope with a full-toned Sharp Mixture, one consisting of a composition more nearly allied to that of the Treble of certain excellent old Compound Stops has been suggested instead. The old builders were sometimes very successful in this matter of obtaining great boldness and power from their Mixtures without the use of very small Pipes in the Treble. The modern builders are generally more successful than the old, save Byfield, in obtaining a fine and powerful, yet rich, smooth, and equal quality of tone from their Reeds, of which class of Stops four are included in the foregoing Specification.

1240. What has been said in respect to the Sharp Mixture composition for the Swell, applies also to the introduction of the 4-feet Reed into that department. The Clarion imparts a silvery character to the general effect of the Swell that is most charming; and not only so, but the Stop is there constantly available for accompanimental purposes, as well as for solo playing.

# V. SPECIFICATION FOR AN ORGAN OF XXVIII SOUNDING STOPS, III MANUALS, AND PEDAL.

Great Organ, 10 Stops.		
1—Bourdon 16 feet tone.	6—Stopped Flute, wood. 4 feet tone.	
2—Open Diapason 8 feet.	$7$ —Twelfth $2\frac{2}{3}$ feet.	
3—Spitzflöte, or Gamba, 8 feet.	8—Fifteenth 2 feet.	
4—Stopped Diapason,	9—Sharp Mixture,	
Metal Treble 8 feet.	V ranks 2 feet.	
5—Principal 4 feet.	10—Trumpet 8 feet.	
Swell Organ	, 9 Stops.	
11—Bourdon 16 feet tone.	16—Mixture, IV ranks 2 <sup>2</sup> / <sub>3</sub> feet.	
12—Open Diapason 8 feet.	17—Hautboy 8 feet.	
13—Stopped Diapason 8 feet tone.	18—Horn 8 feet.	
14—Principal 4 feet.	19—Clarion 4 feet.	
15—Fifteenth 2 feet.		
Choir Organ, 5 Stops.		
20 — Dulciana 8 feet.	22—Principal 4 feet.	
21—Stopped Diapason—	23—Stopped Flute, metal, 4 feet tone.	
wood 8 feet tone.	24—Clarionet, to Tenor c, 8 feet.	
Pedal Organ, 4 Stops.		
25—Open Bass 16 feet.	27—Principal Bass 8 feet.	
26—Stopped Bass 16 feet tone.	28—Posaune, wooden tubes, 16 feet.	
Accessory Stops, Movements, &c.	Compass.	
1—Swell to Great.	Great—CC to g <sup>3</sup> in altissimo, 56 notes.	
2—Great to Pedal.	Swell—Tenor c to g in altissimo, 44 notes.	
3—Choir to Pedal.	Choir—CC to g in altissimo, 56 notes.	
	Pedal CCC to Tenor f, 30 notes.	
4 5 6 & 7—Four double-action Composition Pedals, to act as follows:		

- 4, 5, 6, & 7—Four double-action Composition Pedals, to act as follows:
- 4, to draw out Diapasons (2, 3, and 4), and reduce full Organ to the same.
- 5, to draw out to Fifteenth, and reduce full Organ to the same.
- 6, to draw out full Organ without Reed, and draw in Trumpet.
- 7, to draw out full Organ.

1241. In the above fifth Specification, the third Manual (Choir Organ) appears in these plans for the first time, the utility of which department can scarcely be overestimated. The Great Organ has the same number of Stops as before, but the Dulciana is transferred from that department to the Choir Organ, to which latter division it more correctly belongs, and a Spitzflote or Gamba proposed in its stead.

1242. Three distinct Stops have, at various times, been made in England under the one name Gamba. There is the cylindrical Gamba, that is to say, of "Principal" shape, though not of Principal scale: the Bell Gamba, invented by Hill; and the Cone Gamba, i. e. without the bell, as introduced by Hill in his Stepney and Panoption Organs. The two former are distinctly of a reedy tone; while the latter has more of the Diapason character about its sound, and is frequently called, in Germany, Spitzflöte (Spire-flute, from its tapering outline). Two names are inserted in the place for the third Stop in the foregoing Great Organ Specification, to intimate that either a kind of "second Open Diapason," or a Stop of greater contrasting tone to that of the governing Diapason, might there be appropriately introduced, the name Spitzflöte being intended to refer to the smoother-toned Stop, and that of Gamba to the others of more cutting intonation. A Gamba, when of strong pungent tone, is of great utility, both for leading voices, and for part-playing, after the manner of a string quartett. Moreover, when added to the Diapasons, it produces an effect in some respects resembling that arising from the coupling on of the Unison Swell Reeds, with the advantage that the Swell is left entirely independent of the Great Organ, and can be prepared for any subsequent effect that may be necessary. The custom, so general in England, of coupling the Swell with Reeds to the Great Diapasons, is an interesting instance of the means by which Organists have compounded a particular kind of Organ-tone which they felt to be at times advantageous for purposes of accompaniment, but for the production of which no special Stops were introduced into the English Organ until within the last few years. When the above combination is prepared, the Reeds impart a certain crispness and decidedness to the tone, which is precisely the effect produced by a strong-toned Gamba.

1243. The effect of a second Open Diapason would of course be to increase the quantity of smooth unison-tone. Most English Organs of the size represented in the preceding Specification, would contain the repetition in question; whereas very few of the Continental instruments include any such duplication of the equivalent Stop; i. e. of the "Principal, Prestant, or Octave of 8 feet." The Organs at Rotterdam, Freiburg, and Tours, offer exceptions to the rule (see Foreign Specifications, Nos. 2, 16, and 110, which, however, are all much larger instruments). It might therefore be supposed that the foreign Organs do not contain any Stop corresponding with the English "second Open;" which inference, however, would only be correct so far as the name is concerned, for they very generally do possess a second Unison Open Metal Flue Stop of rather strong tone. It is true, indeed, that they usually present but one "Principal, or most important Stop of 8 feet," which, forming the basis from which the length and scale of the whole series of Harmonic corroborating Stops are calculated, thus constitutes the diapason thereto; but then they have, in lieu of a second Stop of that same name and size, some member of the Flute-work, which is selected according to the character of tone it is desired the "second Open" shall produce.

1244. The point of difference, therefore, in this particular, between the English and the Continental system, is this—that whereas in this country the second open Stop is almost always labelled "Open Diapason," although its tone may differ much, and advantageously so, from the full and sonorous character of that of the first Stop of the same name; in Germany, the several varieties of tone are, on the contrary, produced from as many different kinds of Stops, each of which has something peculiar

in its form to distinguish it to the Organ-builder; something special in its tone to distinguish it to the auditor; and something distinct in its name to distinguish it to the Organist. Thus, in some German Organs, we find a "second Open," sightly conical in form, producing a rather lighter tone than the first, of a slightly flutey quality, and bearing the inscription "Spitzflöte 8 feet." In others, we find the second 8-feet open Stop more conical than the last-mentioned, producing a clear, piping, and chirping quality of tone, and labelled "Gemshorn 8 feet." Other Organs contain a second open Stop, that is more or less reedy in tone, and larger or smaller in scale, bearing the name Gamba, Salicional, Geigen Principal, &c. as the case may be. Any Specification in the Appendix may be referred to for an illustration of these particulars.

1245. The origin of the introduction of a second Open Diapason into the English Organ is possibly connected in some way with the custom, prevalent in the seventeenth century, of erecting the Organ on the choir screen, which rendered a "double front" necessary, demanding two sets of cylindrical Pipes wherewith to adorn them. And it is worthy of observation, that although Father Smith frequently introduced "two Opens," he generally voiced the smallest one so that it produced a tone partaking in some degree of the peculiar flutey quality of the German Spitzflöte. The custom of introducing two Open Diapasons has prevailed very generally in England, from the time of Smith and Harris down to our own.

1246. The particular, however, in which the English system is felt to be insufficient, is, in its not possessing any nomenclature whereby the Stops producing the several characters of tone can be distinguished and specially referred to. That the adoption of something of the kind would prove advantageous, there can scarcely be a second opinion. All must have experienced the convenience of being able, for instance, to distinguish a Dulciana from an Open Diapason by a name instead of a description, and a Keraulophon from both by the same simple means.

1247. The second Open Diapason is sometimes indeed labelled "small Open;" but this addition only refers to the scale of the Stop, and not to the quality of its sound, which may vary considerably in different examples. Moreover, one builder's "small" Open will not unfrequently nearly equal in size the "large" Open of another. What the performer requires most especially, is a key to the tone-character of the Stop; and if some special term could be applied to every Stop, the sound of which differed from that of the actual "Diapason," such a series of names would doubtless prove most acceptable. Under this impression, the second unison open Stop on the Great Manual of the last Specification is marked "Spitzflöte 8 feet;" for which, however, some other 8-feet Stop could be substituted, or even the hitherto usual English Stop and terminology, if preferred.

1248. In selecting the particular kind of Stopped Diapason and Flute for the Great and Choir Manuals, a better opportunity is afforded for the exercise of individual choice, than is the case with almost any other class of Stops in an Organ. It was a frequent custom with the younger Harris to make the Treble of his Choir Stopped Diapason and Flute of metal, as in the late Doncaster Organ; while the younger Smith as often made his both of wood throughout, as at Finedon. The elder Smith, on the contrary, frequently made the two Stops of a different kind of material; so that if the Stopped Diapason was of wood, the Flute would be of metal, as in the Choir

Organ at the Temple; and when the Stopped Diapason was of metal, the Flute was of wood, as on the Great Manual at the Temple. In a few cases, he made the one Stopped and the other Open, as in the Durham Cathedral Organ, where, to a Stopped Diapason of wood on the Great and Choir Organs, a Hollflöte of octave pitch was placed in each instance.

1249. The "crossing" of the Stopped Diapason and Flute, in regard to their material, after the manner adopted by the elder Smith, has long been a prevalent practice, though by no means an invariable one, with the German Organ-builders. It was followed by Silbermann in his fine instruments at Dresden, in the Choir Organs of each of which it will be seen, on referring to Specifications Nos. 79, 80, 81, and 82, that to a "Gedact of 8-feet tone" he introduced a "Rohrflöte of 4-feet tone." It will be noticed, also, that to the "Gedact of 8-feet tone" in the Choir, he in each case disposed a "Rohrflöte of 8-feet tone" in the Great Organ.

1250. By making one of the Covered Stops on the same Manual of wood, and the other of metal, greater individuality of character in the tone is obtained from each than is usually secured by the voicing alone; and by making two Stops of similar nature on two different Manuals—as, for instance, the Stopped Diapasons on the Great and Choir Organs—of different materials, a nice, mild contrast is caused to exist even between Stops which (in England, at any rate) usually bear the same name.

1251. The plan of making the Covered Stops of 8 and 4 feet tone "cross," has been adopted by Mr. Hill for the Choir Organ of his noble instrument at the Panopticon; it has also been followed by Mr. Walker for some years past.

1252. In most of the preceding Specifications, as well as that just given, a Stopped Diapason and Stopped Flute have been proposed for the Great Organ department; in lieu of which, however, a Clarabella and Wald-flute are sometimes preferred. It may, therefore, be well to state under what circumstances these substitutions may be made with good effect. It is the nature of all good Stops of Flute quality of tone, whether they be stopped or open, metal or wood, to impart to the metal tone of those members of the Diapason-work with which they sound in unison, a certain fulness and mellowness of effect not attainable without them: and this mollifying influence is exercised to the most beneficial extent when the Flute sound is fully proportioned to that of the metal, yet without being so strong as to prevent its mixing perfectly with, and merging, as it were, in the metal tone. For an Organ that is to be lightly and sweetly voiced, somewhat after the Green model, for instance, a Stopped Diapason and Stopped Flute would answer best; as a Clarabella and Wald-flute would in that case be likely to produce rather a "hooting" effect through the light foundation and Chorus-work. Instead of simply imparting body and breadth to the Open Diapason and Principal, they would tend to obscure the predominance and "glisten" of the metal quality by their nearer equality of strength, and would thus serve only to thicken and deaden the tone. But if the Diapason and Harmonic series of Stops are to be boldly and fully voiced, a Clarabella and Wald-flute might be advantageously introduced; for the reasons that, while they would be covered by the peal of the ringing Mixtures, they would in their turn assist in supporting them by the broader effect which they would impart to the unison and octave sounds.

1253. The Charabella is generally of excellent quality in the upper octave and a half of its compass, being clear and smooth, yet powerful; but in the middle octave its tone is sometimes thick and woody, probably on account of the largeness of its scale. In the German equivalent for the above-named English Stop—the Hohlflute—the Pipes increase in bulk far more gradually downwards, yet the most perfect evenness of quality is preserved. The Piccolo, which now appears in the Great Organ Specifications for the first time, completes the Flute or wood Organ, consisting of the Bourdon, Stopped Diapason, Flute, and Piccolo—a series of Stops of the greatest service for purposes of accompaniment and for solo playing.

1254. The Swell Organ may now be assumed to be of its full and proper compass. This completeness of range is not only of the highest importance in the eyes of those who sufficiently estimate correct playing, but it admits of the introduction of octave and sub-octave couplers, which place at the disposal of the Organist a number of combinations not otherwise attainable from the same instrument. A singular mistake is sometimes made in the labelling of the Swell octave coupler, which it is necessary to notice. The coupler in question is frequently marked super-octave, which would indicate that it operates in the 2-feet pitch, whereas it in reality acts in the single octave or 4-feet pitch. This error is the more confusing where the terms octave or super-octave are applied to any of the 4 or 2 feet Organ Stops.

# VI. SPECIFICATION FOR AN ORGAN OF XXVI SOUNDING STOPS, II MANUALS, AND PEDAL. Great Organ, 12 Stops.

#### 7—Twelfth $\dots 2\frac{2}{3}$ feet. 1—Bourdon......16 feet tone. 2—Open Diapason . . . . 8 feet. 8—Fifteenth...... 2 feet. 3—Spitzflote..... 8 feet. 4—Stopped Diapason .. 8 feet tone. 10-Sharp Mixture, Vranks, 2 feet. 5—Principal ..... 4 feet. 11—Trumpet . . . . . . 8 feet. 6—Stopped Flute .... 4 feet tone. 12—Clarionet . . . . . . 8 feet tone. Swell Organ, 10 Stops. 13—Bourdon......16 feet tone. 18—Fifteenth...... 2 feet. 14—Open Diapason .... 8 feet. 19—Mixture, IV ranks.. $1\frac{1}{3}$ foot. 15—Stopped Diapason .. 8 feet tone. 20—Hautboy...... 8 feet. 16-Gamba to Tenor e .. 8 feet. 21—Horn . . . . . . . . 8 feet. 17—Principal . . . . . 4 feet. 22—Clarion . . . . . 4 feet. Pedal Organ, 4 Stops. 23—Open Bass, wood . . . . 16 feet. 25—Principal Bass, metal. 8 feet. 26-Posaune, wooden tubes . 16 feet. 24—Stopped Bass, wood..16 feet tone. Accessory Stops, Movements, &c. Compass. 1-Swell to Great. Great - CC to g<sup>5</sup> in altissimo, 56 notes. 2-Great to Pedal. Swell- CC to g<sup>3</sup> in altissimo, 56 notes. 3-Swell to Pedal. Pedal—CCC to Tenor f .... 30 notes. 4-Swell Octave.

5—Swell Sub-octave. | 6, 7, 8, 9—Four Composition Pedals, as before.

1255. The Octave and Sub-octave Couplers are usually made to attach the "Swell to Great;" but it is a question whether they would not be the source of even a greater number of excellent combinations than usual, if they were in the first instance made to operate upon the Swell itself in the octave above and below. In that case, the octave sound, each way, that is to say, upward and downward, could be concentrated on a single Swell key—provided only that the octave be within the standard compass of the Manual—which would afford means for drawing from the Swell many effects that are not attainable when the Couplers operate in the more usual way. The Octave and Sub-octave Swell Couplers would thus be freely available, without the independence of the Great Organ being of necessity lost for the time being. Then, if either the Octave or the Sub-octave effects, or both, were required in conjunction with the Great, these would still be obtainable by drawing the usual Coupler Swell to Great; when, of course, every key united to the Swell unison would also descend, on that key being drawn down by the corresponding key of the Great Organ. The only effect lost would be that of attaching the Swell to the Great in the Octave and Sub-octave, without the Swell unison.

1256. Several excellent Pedal effects would also then be placed at the Organist's command. For instance, the Swell—with the "Swell Octave" drawn—on being coupled to the Pedal, would, by means of the Clarion, produce the effect of a 2-feet Reed, and thus impart to the Pedal entry of a subject a great amount of point and brightness: or, with the Sub-octave drawn, which would attach the CC Swell key to the second c of the Pedals, and consequently bring the 16-feet CCC Bourdon tone on to the same CC Pedal, the effect of a light Pedal Stop of 32-feet tone would be obtained through the octave and a half of the Pedal range from that key upwards.

1257. Octave and Sub-octave Couplers occur in most of the Italian Organs, whether of ancient or recent date. It would be interesting to know positively the exact period of the introduction of such useful movements. The Unison Coupler would naturally be the first kind thought of; and from the prominent way in which that description of Accessory Stop is mentioned in the old account of the Lucerne Organ (Foreign Specifications, No. 114), it is not improbable that a Clavier Coupler was, at the period of the construction of that instrument, 1561, then positively a new feature in Organ-building, or at any rate a great novelty in the science.

# VII. SPECIFICATION FOR AN ORGAN OF XXXVI SOUNDING STOPS, III MANUALS, AND PEDAL.

# Great Organ, 13 Stops.

1—Bourdon 16 feet tone.	8—Fifteenth 2 feet.
2—Open Diapason 8 feet.	9—Piccolo 2 feet.
3—Spitzflote 8 feet.	10—Full Mixture,III ranks 2 feet.
4—Stopped Diapason 8 feet tone.	11—Sharp Mixture, IV ranks 1 ½ foot.
5—Principal 4 feet.	12—Trumpet 8 feet.
6—Stopped Flute 4 feet tone.	13—Clarion 4 feet.
7—Twelfth $2\frac{2}{3}$ feet.	

Swell Organ, 10 Stops.			
14—Bourdon 16 feet tone.	19—Fifteenth 2 feet.		
15—Open Diapason 8 feet.	20—Mixture, IV ranks. 1\frac{1}{3} foot.		
16—Stopped Diapason,	21—Hautboy 8 feet.		
metal treble 8 feet tone.	22—Horn 8 feet.		
17—Bell Gamba 8 feet.	23—Clarion 4 feet.		
18—Principal 4 feet.			
Choir Orga	n, 7 Stops.		
24—Open Diapason 8 feet.	27—Spitzflote 4 feet.		
25—Stopped Diapason,	28—Metal Flute 4 feet tone		
wood 8 feet tone.	29—Gemshorn 2 feet.		
26—Duleiana 8 feet.	30—Clarionet, to Tenor c 8 feet tone.		
a—Pedal Or	gan, 6 Stops.		
31—Open Bass, wood 16 feet.	34—Principal Bass, metal 8 feet.		
32—Stopped Bass, wood 16 feet tone.	35—Flute Bass, wood 8 feet tone.		
33—Great Quint, Bass,	36—Posaune, wooden		
wood, stopped10% feet tone.	tubes 16 feet.		
b—Pedal, 6 Stops.			
1—Open Bass 16 feet.	4—Fifteenth Bass 4 feet.		
2—Stopped Bass 16 feet tone.	5—Mixture, V ranks $3\frac{3}{5}$ feet.		
3—Principal Bass 8 feet.	6—Posaune 16 feet.		
e—Pedal, 6 Stops.			
1—Open Bass 16 feet.	4—Posaune 16 feet.		
2—Principal Bass 8 feet.	5—Trumpet 8 feet.		
3—Fifteenth Bass 4 feet.	6—Clarion 4 feet.		
Accessory Stops, Movements, &c.			
1—Coupler Swell to Great.	6—Swell to Pedal.		
2—Swell Octave.	7—Choir to Pedal.		
3—Swell Sub-octave.	8, 9, 10, 11, Four Composition Pedals		
4—Choir to Great.	to Great.		
5—Great to Pedal.	12, 13, Two Composition Pedals to Swell.		
Compass.			

Great, CC to g<sup>3</sup> in altissimo, 56 notes. Swell, the same. Choir, the same. Pedal, CCC to Tenor f, 30 notes.

1258. Three distinct plans are given for a Pedal of 6 Stops in the foregoing Specification. The first contains a Great Quint Bass, of 10\(^2\) feet tone; which Stop, though but little used in England, is capable of great effect. Many German and Flemish Organs produce a mild, yet distinct, 32-feet tone from a Pedal Organ, which nevertheless contains no Stop of that pitch. The sounds which would be supposed to proceed from such a Stop are in reality only an "acoustical illusion," resulting from the introduction of a Stop of the above kind; every third vibration of

which coincides with every *second* vibration of the 16-feet Stops, and with every *fourth* vibration of the 8-feet Stops; which, together, so reinforce the periodical vibrations which occur thirty-two times in a second, that they produce the effect above mentioned. Where room and expense are objects, and no Sub-Bourdon is therefore obtainable, the above plan of obtaining the deepest musical tones, by making the phenomenon of sub-harmonic sounds subservient to practical use, might advantageously be adopted, particularly as the additional Stop necessary to produce them is of no greater length than a Pedal Twelfth.

1259. The second plan for a 6-Stop Pedal Organ is a favorite English scheme; while the third is almost a literal reproduction of one held in high esteem by Silbermann and other German builders. See Specifications in Appendix, Nos. 22, 26, 79, 81, &c. The first of the three schemes appears, on the whole, to be the best adapted for the accompaniment of the English Church Service, whether Choral or Congregational; while the second unquestionably would form the best Chorus Organ. In many Continental Churches, the Canto Fermo, or melody of the old Church Chant, thundered forth in unison by a large choir of Priests, is made the Bass in the accompaniment, the harmony appearing as a kind of superstructure; the effect of which arrangement of the parts is frequently most commanding. For this kind of use the third Specification, with its three octaves of Reeds—16, 8, and 4 feet—would be the best; it being equal to the production of the most impressive effects when employed in this manner.

1260. The consideration of the above three Pedal Specifications offers a striking illustration of the immeasurable superiority of the system of Organ-building which treats the Pedal as an independent department of an Organ, over that which recognizes the extension of the Manuals down below CC as a substitute for it. In the former case, several plans, consisting of the same number of Stops, but very dissimilar in their selection, each possessing merits of its own, and each specially adapted to answer a distinct end, can be prepared, and from these a final selection be made, according to special requirements; whereas in the latter this is not possible, for the very existence of the Pedal as an independent and important division of an Organ is then scarcely recognised.

# VIII. SPECIFICATION FOR AN ORGAN OF FIFTY SOUNDING STOPS, THREE MANUALS, AND PEDAL.

# Great Organ, 17 Stops.

1—DoubleOpenDiapason 16 fect.	10—Twelfth $2\frac{9}{5}$ feet.
2—Bourdon 16 feet to	ne. 11—Fifteenth 2 feet.
3—Open Diapason 8 feet.	12—Piccolo
4—Spitzflote 8 feet.	13—Full Mixture, III
5—Stopped Diapason—	ranks 2 feet.
metal Treble 8 feet to	ne. 14—Sharp Mixture, V
6—Quint $5\frac{1}{3}$ feet.	ranks $1\frac{3}{5}$ foot.
7—Principal 4 feet.	15—Double Trumpet 16 feet.
8—Gemshorn 4 feet	16—Posaune 8 feet.
9—Stopped Flute—wood 4 feet to	ne. 17—Clarion 4 feet.

PLANS FOR ORGANS	S OF VARIOUS SIZES.		
Swell Organ, 12 Stops.			
18—Bourdon 16 feet tone.	$24$ —Twelfth $2\frac{9}{3}$ feet.		
19—Open Diapason 8 feet.	25—Fifteenth 2 feet.		
20—Stopped Diapason 8 feet tone.	26—Mixture, IV ranks 1½ foot.		
21—Bell Gamba — to	27—Hautboy 8 feet.		
Tenor c 8 feet.	28—Horn 8 feet.		
22—Principal 4 feet.	29—Clarion 4 feet.		
23—Open Flute 4 feet.			
Choir Orga	n, 10 Stops.		
30—Open Diapason 8 feet.	35—StoppedFlute—metal 4 feet tone.		
31—Stopped Diapason—	36—Gemshorn 2 feet.		
wood 8 feet tone.	37—Flageolet 2 feet.		
32—Dulciana—to Tenor e 8 feet.	38—Mixture, II ranks 1\frac{1}{3} foot.		
33—Keraulophon — to	39—Corno de Bassetto—		
Tenor c 8 feet.	throughout 8 feet tone.		
34—Spitzflote 4 feet.			
Pedal Organ, 11 Stops.			
40—Sub-Bass—stopped . 32 feet tone.	46—Flute Bass—wood 8 feet tone.		
41—Open Bass—metal 16 feet.	47—Fifteenth Bass 4 feet.		
42—Great Bass—wood 16 feet.	48—Mixture, V ranks 3½ feet.		
43—Stopped Bass—wood 16 feet tone.	49—Trombone 16 feet.		
44—Quint Bass—stopped 102 feet tone.	50—Trumpet 8 feet.		
45—PrincipalBass—metal 8 feet.			
Accessory Stops, Movements, &c.			
1—Coupler Swell to Great.	8—Pedal Ventil.		
2—Coupler Choir to Great.	9—Tremulant to Swell.		
3—Swell Octave.	10, 11, 12, 13—Four Composition Pedals		
1 Corell Cub satores	to the Creet Owers		

1—Coupler Swell to Great.	8—Pedal Ventil.
2—Coupler Choir to Great.	9—Tremulant to Swell.
3—Swell Octave.	10, 11, 12, 13—Four Composition Pedals
4—Swell Sub-octave.	to the Great Organ.
5—Great to Pedal.	14, 15—Two Composition Pedals to the
6—Swell to Pedal.	Swell Organ.
7—Choir to Pedal.	

#### Compass.

Great, CC to g3 in altissimo, 56 notes.

Choir, the same.

Pedal, CCC to Tenor f, 30 notes.

As a Solo Organ to the above, the following 4 Stops would form a good addition; to be operated upon by a fourth Manual.

```
1—Diapason Harmonic. 8 feet. 3—Tuba...... 8 feet. 2—Flute Harmonic... 4 feet. 4—Tuba Clarion.... 4 feet.
```

There should in that case be two Couplers; namely, one to unite "Solo to Great," and a second to attach "Solo to Pedal."

1261. A German Great Manual Organ, containing 16 Stops, is usually furnished with two or three Stops of 16 feet, a Quint, and two Metal Open Flue Stops of 4 feet. All these excellent features are embodied in the plan for the Great Organ department

of the preceding Specification. The Great Organ has, in fact, now become strictly a "16-feet" Organ. Two Principals, like two Open Diapasons, have frequently been introduced into large English Organs, as in the fine Instruments at St. Sepulchre's, Snow Hill; Christ Church, Spitalfields; Hereford Cathedral; Winchester Cathedral, &c.; and when there is much Mixture-work above, a second Stop of the kind, or nearly allied to it, is a most advisable one for an Organ to have, as it strengthens the medium tone of the Instrument materially. As, however, German Organbuilders seldom "repeat themselves," the second 4-feet Open Mctal Stop in their Specifications is never a repetition of the Principal, but more generally a member of the Flute-work, as a Gemshorn or a Spitzflote of 4 feet. Sometimes the Stop in question is an Octave to the 8-feet Stop, occupying the position corresponding to our second Open Diapason, as in Foreign Specifications, Nos. 55, 58, 65, 83, &c. More frequently, however, the Spitzflote and Gemshorn "cross," after the manner of the Stopped Diapason and Flute, as already detailed; i.e. if the 8-feet Stop be a Gemshorn, the 4-feet will be a Spitzflote, and vice versa, as in Foreign Specifications, Nos. 80, 82, &c. The latter plan is the most highly esteemed in Germany, and is therefore suggested above.

1262. But the above Great Organ Specification contains 17 Stops. This number has been preferred, since it allows of the incorporation of the Piccolo of 2 feet, which Stop is less highly esteemed in Germany than in England; and therefore does not usually appear on the 16-Stop Great Manuals of the former country.

1263. As the full-compass Swell presents a second complete Manual Organ composed of cylindrical Stops, a few Stops of tapering outline might be proposed for the Choir Organ, for the purpose of obtaining greater individuality of tone, if preferred. Thus a Spitzflote of 4 feet, and a Gemshorn of 2 feet, have been suggested in lieu of the usual Principal and Fifteenth, after a plan that was much in favor with Father Smith. The Stops will be seen to be half the size of the similarly named Stops in the Great Organ; but in some German Organs, the Flute-work of the Choir is made to "cross" that of the Great Organ, after the manner of the Covered-work. Thus, if the Great has a Spitzflote of 8 feet and a Gemshorn of 4 feet, the Choir would have a Gemshorn of 8 feet and a Spitzflote of 4 feet; so that there are many ways of varying a Specification with good effect.

1264. It has sometimes been the custom in England to put a Double Reed in the Swell, and not one in the Great Organ. This, however, is quite contrary to the practice of the French and German Organ-builders, as well as being counter to the general theory of Organ-building already detailed, when speaking of the introduction of the Double Diapason; and the plan has therefore not been recommended here. Moreover, there is the less reason for making such a deviation from the usual course, since such excellent 16 feet Reed effects can be obtained from the Swell through the instrumentality of the Sub-octave Coupler.

1265. It is a rule with German Organ-builders, that when a Pedal Organ contains 10 Stops, it should include a Stop of 32 feet size of tone. Sometimes a Stop of that pitch occurs even in a Pedal of 7 or 8 Stops. A Mixture, however, is seldom included in a 10-Stop German Pedal. This latter Stop is nevertheless too highly and justly appreciated in England to be omitted here; and the preceding Specification is therefore made to consist of 11 Stops, that it may be included.

1266. Most German Pedals of 4 Stops and upwards contain a "Violone of 16 feet." This is a particularly fine Stop; but, being at present entirely unknown in this country, it has not been proposed in these Specifications. It is an Open Stop, usually of wood, and of small scale, the block of the 16-feet CCC generally measuring only  $5\frac{1}{2}$  inches by 7 inches. It forms the "Pedal Bass" to the Gamba and other stringtoned Manual Stops. Its intonation is very crisp and pungent, and is in close imitation of the bowing on a large string instrument; hence its name Violone (Double Bass).

1267. In the Organ at Cologne Cathedral, the 16 Violone Pipe measures as much as 12 inches across the mouth, and is, from its great scale, called "Contra Violone." When heard from the Choir of the Cathedral, its tone is very like a fine Pedal Diapason combined with a soft 16-feet Reed of equal quality and accurate intonation.

# IX. SPECIFICATION FOR AN ORGAN OF NINETY STOPS, FOUR MANUALS, AND PEDAL.

# Great Organ, 25 Stops.

1-Sub Bourdon, to the	14—Wald Flote, to Tenor c 4 feet.		
Tenor c key 32 feet tone.	15—Twelfth $2\frac{2}{3}$ feet.		
2—DoubleOpenDiapason 16 feet.	16—Fifteenth 2 feet.		
3—Bourdon 16 feet tone	17—Piccolo 2 feet.		
4—Open Diapason 8 feet.	18—Sesquialtera, II ranks $2\frac{2}{3}$ & $1\frac{3}{5}$ feet.		
5—Open Diapason 8 feet.	19—Full Mixture, III		
6—Spitzflote 8 feet.	ranks 2 feet.		
7—Gamba 8 feet.	20—Sharp Mixture, V		
8—Stopped Diapason—	ranks 2 feet.		
metal 8 feet tone.	21—Cymbal, IV ranks 1 foot.		
9—Clarabella, to Tenor c 8 feet.	22—Double Trumpet 16 feet.		
10—Quint $5\frac{1}{3}$ feet.	23—Posaune 8 feet.		
11—Principal 4 feet.	24—Trumpet 8 feet.		
12—Gemshorn 4 feet.	25—Clarion 4 feet.		
13 -Stopped Flute, wood 4 feet tone.			
Swell Organ, 20 Stops.			
26—Bourdon 16 feet tone.	37—Octave Flute 2 feet.		
27—Open Diapason 8 feet.	38—Mixture, V ranks 2 feet.		
28—Bell Gamba 8 feet.	39-Echo Dulciana Cornet,		
29—Echo Dulciana 8 feet.	V ranks 4 feet.		
30. Stopped Diapason 8 feet tone.	40—Double Bassoon 16 feet.		
31—Stopped Quint 5\frac{2}{3} feet tone.	41—Hautboy 8 feet.		
32—Principal 4 feet.	42—Trumpet 8 feet.		
33—Gambette 4 feet.	43—Horn 8 feet.		
34—Flute 4 feet.	44—Clarion 4 feet.		
35—Twelfth $2\frac{2}{3}$ feet.	45—Vox Humana 8 feet tone.		
36—Fifteenth 2 feet.			

Choir Organ	Choir Organ, 15 Stops.		
46—Bourdon 16 feet tone.	54—Flute 4 feet tone.		
47—Open Diapason 8 feet.	55—Twelfth		
48—Stopped Diapason 8 feet tone.	56—Gemshorn 2 feet.		
49—Clarinet Flute 8 feet tone.	57—Flageolet 2 feet.		
50—Dulciana 8 feet.	58—Mixture, IV ranks 1\frac{1}{3} foot.		
51—Keraulophon 8 feet.	59—Corno de Bassetto 8 feet tone.		
52—Spitzflote 4 feet.	60—Bassoon, throughout 8 feet.		
53—Dulcet 4 feet.			
Solo Organ	, 12 Stops.		
61—Bourdon 16 feet tone.	67—Contra Fagotto 16 feet.		
62—Diapason Harmonic 8 feet.	68—Clarinet 8 feet tone.		
63—Stopped Diapason—	69—Hautboy 8 feet.		
metal 8 feet tone.	70—Hautboy Clarion 4 feet.		
64—Flute Harmonic 4 feet.	71—Tuba 8 feet.		
65—Stopped Flute, metal 4 feet tone.	72—Tuba Clarion 4 feet.		
66—Piccolo Harmonic 2 feet.			
Pedal Orga	n, 18 Stops.		
73—Double Open Bass 32 feet.	82—Flute Bass 8 feet tone.		
74—Sub-Bass 32 feet tone.	83—Twelfth Bass $5\frac{1}{3}$ feet.		
75—Open Bass, metal 16 feet.	84—Fifteenth Bass 4 feet.		
76—Great Bass, wood 16 feet.	85—Mixture, VI ranks 3 feet.		
77—Dulciana Bass 16 feet.	86—Contra Posaune 32 feet.		
78—Stopped Bass 16 feet tone.	87—Posaune 16 feet.		
79—Great Quint Bass 10 <sup>2</sup> / <sub>3</sub> feet tone.	88—Bassoon 16 feet.		
80—Principal Bass, metal 8 feet.	89—Trumpet 8 feet.		
81—Octave Bass, wood 8 feet.	90—Clarion 4 feet.		
Accessory Stops, Movements, &c.			
1—Coupler Swell to Great.	8—Tremulant to Swell.		
2—Choir to Great.	9—Pneumatic Lever attachment.		
3—Solo to Great.	10, 11—Pedal Ventils.		
4—Great to Pedal	12, 13, 14, 15—Four Composition Pedals		
5—Swell to Pedal.	to Great Organ.		
6—Choir to Pedal.	16, 17, 18—Three Ditto to Swell.		
7—Solo to Pedal.			
Compass.			

Manuals, CC to g³ in altissimo, 56 notes. | Pedal, CCC to tenor f, 30 notes.

1268. It will be seen that the German custom referred to at page 202, sec. 886, namely, of attaching the word "Bass" to the Pedal Stops of double size to the Manual Stops of like kind, has been followed in all the preceding Specifications. This has been done, not only because it is the most simple system of nomenclature that has yet been devised, but also because it is the only system that appears to be likely to clear away the confusion that has so long existed in England as to the only correct manner of naming and classifying the Pedal Stops. It has frequently been

the case, that the 8-feet Pedal Stops have been classed as Diapasons instead of as Octaves; whereas the Pedal Stops are, in nearly every instance, twice the length of the similarly labelled Manual Stops. Exceptions to this rule, however, are presented by the Trumpet and Clarion, which are 8 and 4 feet Stops respectively, whether placed on the Manual or Pedal.

1269. There are several excellent Stops in German Organs that are not at present made in England, for which reason their names have not been included in the foregoing Specifications. They will, however, be readily traced in the plans of Foreign Organs that will now be given in the form of an Appendix. An examination of these schemes, and a comparison of different Specifications comprising the same number of Stops, with the view of ascertaining their point of difference, will be found not only a very interesting, but also a very instructive employment.



# APPENDIX,

CONTAINING

## AN ACCOUNT OF FOREIGN AND BRITISH ORGANS.

#### 1. HAARLEM.

THE Organ in the Cathedral Church of St. Bavon, in this city, has long been celebrated in the annals of Organ-building as one of the largest, as well as one of the finest instruments in the world. It was built by Christian Muller, of Amsterdam, and was nearly three years and a half in course of construction; it having been commenced on the 28rd of April, 1735, and finished on the 13th of September, 1738. The Haarlem Organ has 60 sounding Stops, among which are two of 32 feet, and eight of 16 feet; and all the Stops are whole ones, excepting the Cornets, and the Hautboy in the Great Organ. Many of the Stops, farther, have two Pipes to each key in the Treble. This is the case with the Prestant of 16 feet (Double Open Diapason), which not only extends throughout the entire range of the Great Manual, but has duplication Pipes from the middle b key (Gamut B Pipe) upwards. The Octave, of 8 feet (Open Diapason), also has two Pipes to a note, commencing on the same key. The Prestant of 8 feet (Open Diapason), on the Choir Manual, similarly has two Pipes to every note, commencing as low down in the scale as Gamut G; and the corresponding Stop (Prestant) in the Echo also has double Pipes, beginning at The ranks of Mixture likewise increase in number as the scale ascends. All the Stops are made of metal, excepting the Pedal Sub-Bass, which is of wood, and is a subsequent insertion. The front Pipes, which include the Pedal "Sub-Principal" of 32 feet, are of pure English tin, burnished; and all the interior metal Pipes are formed of a composition consisting of half tin and half lead. 32-feet Pipe, which is 15 inches in diameter and nearly 40 feet long, stands in one of the chief towers. The instrument, with its magnificent case, altogether cost about £10,000. The following is a list of its Stops:

Great, 16 Stops, 1209 Pipes.		
Pipes.	Pipes.	
1—Prestant16 feet 78	9—Quint prestant $$ 2 feet $$ 51	
2—Bourdon16 feet tone 51	10—Woud-fluit 2 feet 51	
3—Octaav 8 feet 78	11—Tertian, II ranks. 1 g feet 102	
4—Roerfluit 8 feet tone 51	12-Mixtur, VI, VIII, and X ranks .339	
5—Viol di Gamba 8 feet 51	13—Trompet16 feet 51	
6—Roer-quint $5\frac{1}{3}$ feet tone 51	14—Trompet 8 feet 51	
7—Octaav 4 feet 51	15—Hautbois 8 feet 51	
8—Gemshorm 4 feet 51	16—Trompet 4 feet 51	
Choir, in front, 14 Stops, 1268 Pipes.		
17—Prestant 8 feet 95	24—Sesquialtera, II, III, and IV	
18—Quintadena 8 feet tone 51	ranks144	
19—Holfluit 8 feet 51	25—Mixtur, VI, VII & VIII ranks .360	
20—Octaav 4 fect 51	26—Cimbel, II ranks	
21—Fluit-doux 4 feet 51	27—Cornet, V ranks108	
22—Speel-fluit $2\frac{2}{3}$ feet 51	28—Fagot16 feet 51	
23—Super-octaav 2 feet 51	29—Trompet 8 fcet 51	
1	30—Regal	

Echo, 15 Stop.  31—Quintadena 16 feet tone 51 32—Prestant 8 feet 81 33—Baar-pyp 8 feet 51 34—Quintadena 8 feet tone 51 35—Octaav 4 feet 51 36—Flag-fluit 4 feet 51 37—Nassat 2\frac{2}{3} feet 51 38—Nacht-horn 2 feet 51	s, 1,098 Pipes.    39—Flagcolet1\frac{1}{3}\text{ feet.}	
Pedal, 15 Stops, 513 Pipes.		
46—Sub-Principal 32 feet 27	54—Holfluit 2 feet 27	
47—Prestant16 feet 27 48—Sub-bass16 feet 27	55—Ruis - quint, V	
49—Roer-quint $10\frac{2}{3}$ feet tone. 27	ranks $2\frac{2}{3}$ feet $27$ 56—Buzain $32$ feet $27$	
50—Octaay 8 feet 27	57—Buzain16 feet 27	
51—Holfluit 8 feet 27	58—Trompet 8 feet 27	
52—Quint	59—Trompet 4 feet 27	
53—Octaav 4 feet 27	60—Cinq 2 feet 27	
Accessory Stops, Movements, &c.	Compass.	
1—Coupler, Choir to Great.	Manuals, CC to d <sup>3</sup> in alt. 51 notes.	
2—Coupler, Echo to Great.	Pedals, CCC to tenor d, 27 notes.	
3, 4—Two Tremulants.	Number of Pipes.	
5—Wind to Great Organ.	Great	
6—Wind to Choir Organ.	Choir 1268	
7—Wind to Echo Organ.	Echo	
8—Wind to Pedal Organ.	Pedal 513	
Twelve Bellows, 9 feet by 5.		
	Total 4088	

## 2. ROTTERDAM.

The Organ in the Cathedral Church of St. Lawrence, situated at the upper part of Rotterdam, is a very fine and powerful Instrument, and will, when completed, be one of the largest in the world. It already contains 76 Stops, and is designed to have 92. Its Pipes at present amount in number to about 5,700, the largest of which, standing in front, measures 32 feet speaking length, and 16 inches in diameter. Among the Stops are included 3 of 32 feet, and 12 of 16 feet. The distribution of its Stops is as follows:

## Great, 18 Stops.

1—Prestant 16 feet.	10—Octave 2 feet.
2—Bourdon 16 feet tone.	11—Woud-flute 2 feet.
3—Octave 8 feet.	12—Sesquialtera, II ranks $2\frac{2}{3}$ feet.
4—Prestant 8 feet.	13—Mixtur, IV, V, and VI ranks.
5—Holpfeif 8 feet.	14—Scharf, IV and V ranks.
6—Quint $5\frac{1}{3}$ feet.	15—Cornet, VI ranks.
7—Octave 4 feet.	16—Trompete 16 feet.
8—Speelflute 4 feet.	17—Dulcian 16 feet.
9—Quint $2\frac{2}{3}$ feet.	18—Trompete 8 feet.

#### Positif, 18 Stops.

19—Bourdon 16 feet tone.	28—Octave	
20—Prestant 8 feet.	29—Gemshorn 2 feet.	
21—Rocrflote 8 feet tone.	30—Mixtur, VI and VII ranks.	
22—FluteTraverse, discant 8 feet.	31—Mixtur, IV and V ranks.	
23—Dolce 8 feet.	32—Cornet, VI ranks.	
24—Oetave 4 feet.	33—Fagotto 16 feet.	
25—Roerflote 4 feet tone.	34—Trompete 8 feet.	
26—Gemshorn 4 feet.	35—Oboe	
27—Sesquialtera, II ranks 2\frac{2}{3} feet.	36—Fagotto 8 feet.	
21 Conditioner of Transfer 25 1000	00 1450000	
Choir, 1	5 Stops.	
37—Quintadena 16 feet tone.	45—Octave	
38—Prestant 8 feet.	46—Flute	
39—Quintadena 8 feet tone.	47—Flageolet 1 foot.	
40—Gamba 8 feet.	48—Cornet, III ranks.	
41—Holpfeif 8 feet.	49—Vox Humana 8 feet tone.	
42—Octave 4 feet.	50—Sehalmay 8 feet.	
43—Open Flute 4 feet.	51—Carillon, III ranks.	
44—Roerflote 4 feet tone.	·	
Echo, 8	Stops.	
52—Bourdon 8 feet tone.	56—Vox Angelica 8 feet.	
53—Salcional 8 feet.	57—Saleional 4 feet.	
54—Barpfeif 8 feet.	58—Fluit 4 feet.	
55—Gamba 8 feet.	59—Gemshorn 2 feet.	
Pedal, 1	6 Stops.	
60—Prestant 32 feet.	68—Oetave 8 feet.	
61—Sub-bass 32 feet tone.	69—Oetave 4 feet.	
62—Prestant 16 feet.	70—Octave	
63—Sub-bass 16 feet tone.	71—Buzain 32 feet.	
64—Bourdon 16 feet tone.	72—Buzain 16 feet.	
65—Prestant 16 feet.	73—Trombone 8 feet.	
$66$ —Quint $10\frac{2}{3}$ feet.	74—Trompete 4 feet.	
67—Prestant 8 feet.	75—Cincq	
of Alesanders, see a content	onicq 2 leet.	
Accessory Stops, Movements, &c.		
1—Coupler, Echo to Choir.	5, 6—Two Tremulants.	
2—Coupler, Choir to Great.	7, 8, 9, 10, 11—Five Wind - trunk	
3—Coupler, Positif to Great.	valves.	
5—Couplet, Tositii to Oreac.	varves.	

# Compass.

Manuals, CC to f<sup>3</sup> in alt. 54 notes. Pedal, CCC to tenor f, 30 notes.

4-Coupler, Great to Pedal.

## 3. ROTTERDAM.

The Organ in the Octagon Church at Rotterdam was built by Batz, of Utrecht, in 1850, and is a very fine Instrument. It has 3 Manuals and Pedal of 8 Stops, and is one of the very few German Organs which have a Swell and Composition Pedals. The following is an enumeration of its Stops, &c.

Great, 13 Stops.		
1—Prestant	8—Octaaf	
4—Bourdon	11—Fagot	
5—Octaaf 4 feet. 6—Fluit 4 feet.	12—Trompet	
7—Quint	15—Claimet Tiett.	
Choir, 1	1 Stops.	
14—Bourdon       16 feet tone.         15—Prestant       8 feet.         16—Viola da Gamba       8 feet.         17—Rohrfluit       8 feet tone.	20—Nazard	
18—Octaaf 4 feet.	24—Dulcian 8 feet.	
19—Open-fluit 4 feet.		
Swell, 8	8 Stops.	
25—Gamba	29—Rohrfluit       4 feet tone.         30—Gemshorn       2 feet.         31—Schalmey       8 feet.         32—Vox Humana       8 feet.	
Pedal, 8 Stops.		
33—Prestant       16 feet         34—Sub-bass       16 feet tone         35—Octaaf       8 feet         36—Fluit-bass       8 feet	37—Octaaf       4 feet.         38—Buzain       16 feet.         39—Trombone       8 feet.         40—Trompet       4 feet.	
Accessory Stops, Movements, &c.		
1—Swell to Choir. 2—Choir to Great. 3—Tremulant Swell. 4—Great to Pedal.	5—Octave Pedal. 6, 7, 8, 9—Four Wind-trunk Valves. 10, 11, 12—Three Composition Pedals.	

## Compass.

Manuals, CC to f3 in alt. 54 notes. Pedal, CCC to tenor f, 30 notes.

#### 4. Amsterdam.

The Organ in the Old Church at Amsterdam was begun in 1725. It is a most effective Instrument; all the Foundation Stops are *doubled*, which increases the fulness and solidity of the tone. The Reed Stops and Mixtures are also very good, and the mechanism is very fair for so old an Organ. This Instrument contains 51 Stops, distributed as follows:

## Great, 16 Stops.

	r
1—Prestant 16 feet.	9—Octaaf
2—Bourdon 16 feet tone.	10—Fluit
3—Octaaf 8 feet.	11—Flageolet 1 foot.
4—Holpyp 8 feet.	12—Sesquialtera, IV ranks 2 <sup>2</sup> / <sub>3</sub> feet.
5—Quint $5\frac{1}{3}$ feet.	13—Mixtur, VI, VII, and VIII ranks.
6—Octaaf 4 feet.	14—Scherp, VI ranks.
7—Roerfluit 4 feet tone.	15—Trompet 16 feet.
8—Roerquint 24 feet tone.	16—Trompet 8 feet.

#### Choir, 12 Stops.

17—Prestant       8 feet         18—Gedact       8 feet tone         19—Quintaton       8 feet tone         20—Dulciana       2 feet         21—Octaaf       4 feet         22—Fluit       4 feet	23—Quint	
Echo, 13	3 Stops.	
29—Quintadeen       16 feet tone.         30—Prestant       3 feet.         31—Baarpyp       3 feet.         32—Gamba       3 feet.         33—Octaaf       4 feet.         34—Gemshorn       4 feet.         35—Nasat       2 feet.	36—Superoctaaf 2 feet. 37—Sesquialtera,III ranks 2½ feet. 38—Cymbal, III ranks. 39—Fagotto 16 feet. 40—Trompet 8 feet. 41—Vox Humana 8 feet.	
Pedal, 1	o Stops.	
42—Prestant       16 feet         43—Sub-bass       16 feet tone         44—Octaaf       8 feet         45—Roerquint $5\frac{1}{3}$ feet tone         46—Octaaf       4 feet	47—Nachthorn       2 feet.         48—Buzain       16 feet.         49—Trompet       8 feet.         50—Trompet       4 feet.         51—Cornetin       2 feet.	
Accessory Stops, Movements, &c.		
Coupler, Echo to Great. Coupler, Choir to Great.	Coupler, Great to Pedal. Tremulant Echo.	
Compass.		
Manuals, CC to d3 in alt.	Pedal, CCC to tenor d.	

#### 5. AMSTERDAM.

The Organ in the New Church at Amsterdam is also a very old one, like the last. The original builder's name is unknown; but it was repaired and enlarged in 1673 by J. Duyschor van Goor, of Dordrecht. It is a most excellent Instrument, though scarcely equal to that in the Old Church. The Mixtures, however, are very brilliant, and the Reeds are very well voiced. It has 44 Stops, of which the following is a list:

#### Great, 12 Stops.

1—Prestant	16 feet tone. 8 feet. 8 feet. 4 feet.	7—Quint	
6—Gemshorn	4 feet.	12—Trompet 8 feet.	
Choir, 14 Stops.			
13—Prestant	8 feet.	20—Fluit	
14—Holpyp	8 feet.	21—Siflet 1 foot.	
15—Quintadena	8 feet tone.	22—Sesquialtera, II ranks 23 feet.	
16—Octaaf		23—Mixtur, III ranks.	
17—Fluit	4 feet.	24—Scherp, VI ranks.	
18—Quint-fluit		25—Quartane, IV ranks.	
19—Octaaf	2 feet.	26—Cornet, V ranks.	

2—Coupler, Choir to Great.

3—Coupler, Great to Pedal.

33-Nazard and compo-

sita, II ranks....  $2\frac{2}{3}$  feet. 34—Super-octave..... 2 feet.

Echo,	10	Stops	
-------	----	-------	--

27—Prestant	32—Fluit		
Pedal, 8 Stops.			
37—Prestant	41—Octaaf       4 feet.         42—Buzain       16 feet.         43—Trompet       8 feet.         44—Trompet       4 feet.		
Accessory Stops, Movements, &c.			
1—Coupler, Echo to Great.	4—Tremulant Echo.		

## Compass.

5-Tremulant Choir.

6, 7, 8, 9-Four Wind-trunk Valves.

Manuals, CC to d3 in alt. 51 notes. Pedal, CCC to tenor d, 27 notes.

#### 6. NYMENGEN.

The Organ in the Church of St. Stephen, at Nymengen, in Holland, was built in 1766, by König, of Cologne. It is a much larger as well as more complete Instrument than any which König built for his own city. It contains altogether 53 Stops, 3 Manuals, and Pedal; the latter comprising 12 Stops. The following is the Specification of the above-named Instrument, which is one of the best in Holland, particularly in regard to its Solo Stops;

Great Organ, 13 Stops.			
1—Prestant 16 feet.	8—Tertiaan 3½ feet.		
2—Octaaf 8 feet.	9—Super-octaaf 2 feet.		
3—Gemshorn 8 feet.	10—Mixtur, VI ranks.		
4—Roer-gedact 8 feet tone.	11—Fourniture, III ranks.		
5—Quint-gedact $5\frac{1}{3}$ feet tone.	Trompete Discant ) 16 foot		
6—Octaaf 4 feet.	12—{Trompete Discant Trompete Bass}		
7—Roerflote 4 feet tone.	13—Trompete 8 feet.		
Choir, 14 Stops.			
14—Bourdon 16 feet tone.	21—Klein octave 2 feet.		
15—Prestant 8 feet.	22—Flageolet 1 foot.		
16—Flauto Traverso 8 feet.	23—Mixtur, VI ranks.		
17—Klein Bourdon 8 feet tone.	24 — Carillon, II ranks.		
18—Octaaf 4 feet.	25—Trompete 8 feet.		
19—Flaut a becq 4 feet.	26—Bassoon 8 feet.		
20—Quint $2\frac{2}{3}$ feet.	27—Vox Humana 8 feet tone.		
Echo, 14 Stops.			
28—Quintadeen 16 feet tone.	35—Quint Flute $1\frac{1}{3}$ feet.		
29—Koppel 8 feet.	36—Mixtur, V ranks.		
30—Viola di Gamba 8 feet.	37—Cornet, V ranks.		
31—Weide Gedact 8 feet tone.	38—Echo, II ranks 8 & 4 feet.		
32—Octaaf 4 feet.	39—Hauthois 8 feet.		

40—Vox Humana ....

41—Vox Angelica Bass.

8 feet tone.

#### Pedal, 12 Stops.

42—Principal	16 feet.	48—Quint	5½ feet.
43—Violon	16 feet.	49—Octaaf	4 feet.
44—Sub-bass	16 feet tone.	50—Bombarde	16 feet.
45—Quint-bass	10⅓ feet tone.	51—Trompete	8 feet.
46—Octaaf	8 feet.	52—Clairon	4 feet.
47—Roer-bass	8 feet tone.	53—Cornet-bass	2 feet.

#### Accessory Stops, Movements, &c.

1—Great to Pedal. 2—Choir to Great. 4—Tremulant to Choir.

5, 6, 7, 8—Four Wind-trunk Valves.

3-Echo to Great.

Compass.

Manuals, CC to f<sup>3</sup> in alt. 54 notes.

Pedal, CCC to tenor d, 27 notes.

#### 7. GOUDA.

The Organ in the Church of St. John the Baptist, at Gouda, was built by Moreau, in 1736. One of the chief features in this Instrument is its Vox Humana Stop, which is particularly fine; but the tone of the whole Organ is most excellent. It has 3 Manuals and Pedal, and 51 Stops, the names and distribution of which are as follow:

## Great, 13 Stops.

Great, 1	o stops.	
1—Prestant 16 feet.	8—Octaaf 2 feet.	
2—Prestant 8 feet.	9—Mixtur, IV and VI ranks.	
3—Holpyp 8 feet.	10—Cornet, V ranks.	
4—Quint	11—Trompet 16 feet.	
5—Octaaf 4 feet.	12—Trompet 8 feet.	
6—Roorfluit 4 feet tone.	13—Schalmey 8 feet tone.	
7—Open-fluit 4 feet.	·	
Choir, 1	5 Stops.	
14—Bourdon 16 feet tone.	22—Woud-fluit 2 feet.	
15—Prestant 8 feet.	23—Mixtur, VI ranks.	
16—Holpyp 8 feet.	24—Scherp, VI ranks.	
17—Fluit-traverso 8 feet.	25—Cornet, VI ranks.	
18—Octaaf 4 feet.		
19—Fluit-douce 4 feet.	26—{ Carillon discant, III ranks. Carillon bass, II ranks.	
20—Quint	27—Trompet 8 feet.	
21—Octaaf	28—Dulciaan 8 feet.	
Echo, 12	2 Stops.	
29—Prestant 8 feet.	35—Octaaf 2 feet.	
30—Salicional 8 feet.	36—Nacht-hoorn 2 feet.	
31—Echo Holpyp 8 feet.	37—Sesquialtera, II ranks 2\frac{2}{3} feet.	
32—Quintadeen 8 feet tone.	38—Flageolet 1 foot.	
33—Octaaf 4 feet.	39—Echo Trompet 8 feet.	
34—Echo Fluit 4 feet.	40—Vox Humana 8 feet tone.	
Pedal, 11 Stops.		
41—Prestant 16 feet.	47—Holfluit 2 feet.	
42—Sub-bass 16 feet tone.	48—Buzain 16 feet.	
43—Prestant 8 feet.	49—Trompet 8 feet.	
44—Wyd-gedact 8 feet tone.	50—Clairon 3 feet.	
45—Roor-quint $5\frac{1}{3}$ feet tone.	51—Cornetin 2 feet.	
46—Octaaf 4 feet.		

## Accessory Stops, Movements, &c.

1—Great to Pedal.
2—Choir to Great.

4—Tremulant Echo.
5, 6, 7, 8—Four Wind-trunk Valves.

3-Echo to Great.

Compass.

Manuals, CC to d3 in alt. 51 notes. | CCC to tenor c, 25 notes.

#### 8. THE HAGUE.

The Organ in the Lutheran Church at the Hague is a very good Instrument, possessing 3 Manuals and Pedal, and 39 Stops, the names and distribution of which latter are as follow:

## Great, 14 Stops.

1—Bourdon	16 feet tone.	8—Octaaf	2 feet.
2—Prestant	8 feet.	9—Woudefluit	2 feet.
3—Roorfluit		10-Mixtuur, VI ranks.	
4—Quintadon	8 feet tone.	11—Cornet, V ranks.	
5—Octaaf	4 feet.	12—Fagot	16 feet.
6—Nachthoorn	4 feet.	13—Trompet	8 feet.
7—Quint	$2\frac{2}{3}$ feet.	14—Trompet	

## Choir, 9 Stops.

15—Prestant	8 feet.	20—Sesquialtera, II ranks.	$2\frac{2}{3}$ feet.
16—Holpyp	8 feet.	21—Flageolet	1 foot.
17—Octaaf		22—Mixtuur, III ranks.	
18—Fluit		23—Dulciana	8 feet.
19—Octaaf			

## Echo, 8 Stops.

24—Prestant	8 feet.	28—Roorfluit	4 feet tone.
25—Baarpyp	8 feet.	29—Fluit	2 feet.
		30—Schalmey	8 feet tone.
27—Salicional	.4 feet.	31—Vox Humana	8 feet tone.

#### Pedal.

32—Prestant 16	6 feet.	36—Octaaf	4 feet.
33—Bourdon 1	6 feet tone.	37—Trompet	16 feet.
34—Prestant	8 feet.	38—Trompet	8 feet.
35Roor-quint 5	$\frac{1}{3}$ feet tone.	39—Trompet	4 feet.

## Accessory Stops, Movements, &c.

1—Choir to Great.	4-Tremulant Echo.
2—Echo to Great.	5—Tremulant Choir.
0 C4 t- D-1-1	C = 0 0 D 137

3—Great to Pedal. 6, 7, 8, 9—Fuur Wind-trunk Valves.

#### Compass.

CC to  $c^{5}$  in altissimo, 49 notes.

Pedal CCC to Tenor c, 25 notes.

#### 9. Delft.

The Organ in the new Church at Delft was built by Batz, of Utrecht, and is altogether a very fine Organ, especially the Reed Stops. It has 3 Manuals and Pedal, and 43 Stops, of which latter the following is a list:

#### Great, 13 Stops.

1—Prestant 16 feet.	8—Oetaaf 2 feet.		
2—Bourdon 16 feet tone.	9-Mixtuur, IV, VI, &		
3—Oetaaf 8 feet.	VIII ranks.		
4—Roorflote 8 feet tone.	10—Cornet, V ranks.		
5—Oetaaf 4 feet.	11—Fagot 16 feet.		
6—Gemslioorn 4 feet.	12—Trompet 8 feet.		
7—Quint 2¾ feet.	13—Trompet 4 feet.		
Choir, 1			
14—Prestant 8 feet.	20—Octaaf		
15—Holpyp 8 feet.	21—Mixture, III, IV, &		
16—Quintadon 8 feet tone.	VI ranks.		
17—Oetaaf 4 feet.	22—Cornet, IV ranks.		
18—Roorfluit 4 feet tone.	23—Trompet 8 feet.		
19—Quint 2 <sup>2</sup> / <sub>3</sub> feet.	24—Duleian 8 feet.		
Echo, 9			
25—Prestant 8 feet.	30—Salieional 4 feet.		
26—Holpyp 8 feet.	31—Woudefluit 2 feet.		
27—Viol de Gamba 8 feet.	32—Trompet 8 feet.		
28—Quintadena 8 feet tone.	33—Vox Humana 8 feet tone.		
29—Open-fluit 4 feet.			
Pedal, 10 Stops.			
34—Prestant 16 feet.	39—Octaaf 4 feet.		
35—Sub-bass 16 feet tone.	40—Bazuin 16 feet.		
36—Octaaf 8 feet.	41—Trompet 8 feet.		
37—Fluit-bass 8 feet.	42—Trompet 4 feet.		
38—Roor-quint $5\frac{1}{3}$ feet tone.	43—Cineq		
33 leet tone.	To—Onicq Z leet.		
Accessory Stops, Movements, &c.			

<ul><li>1—Echo to Great.</li><li>2—Choir to Great.</li><li>3—Great to Pedal.</li></ul>	4—Tremulant. 5, 6, 7, 8—Four Wind-trunk Valves.
--	---

#### Campass.

Manuals, CC to f<sup>3</sup> in altissimo, 54 notes. | Pedals, CCC to Tenor e, 29 notes.

#### 10. UTRECHT.

The Organ in the principal Protestant Church at Utreeht is a very fine one, and is remarkable for having two Pipes to each key from Middle c upwards, throughout all the Stops of the Great Organ. It was built by Batz, of Utreeht, in 1826, and contains 51 Stops, 3 Manuals, and Pedal. The following is a list of its contents:

#### Great, 13 Stops.

1—Prestant 16 feet.	7—Quint 2\frac{2}{3} feet.
2—Bourdon, Metal Treble,	8—Oetaaf 2 feet.
Wood Bass 16 feet tone.	9—Gemshorn 2 feet.
3—Oetaaf 8 feet.	10—Sesquialtera, IV ranks.
4—Roerfluit 8 feet tone.	11—Mixture VII ranks.
5—Oetaaf 4 feet.	12—Fagott 16 feet.
6—Gemshorn 4 feet.	13—Trompet 8 feet.

Choir, 13 Stops.			
14—Prestant, 2 Pipes all through 8 feet. 15—Holpyp 8 feet. 16—Quintadena 8 feet. 17—Octaaf 4 feet.	20—Octaaf 2 feet. 21—Fluit 2 feet. 22—Mixture . V ranks. 23—Scharf, VIII ranks. 24—Cornet, V ranks.		
18—Roerfluit	25—Trompet 8 feet. 26—Dulcian 8 feet.		
Echo, 1	13 Stops.		
27—Prestant	33—Flute, open, large 4 feet. 34—Quint Fluit 2 feet. 35—Woud-Fluit 2 feet. 36—Flageolet 1 foot. 37—Trompet 8 feet. 38—Vox Humaine 8 feet. 39—Carillon . II ranks.		
Pedal,	12 Stops.		
40—Prestant, of metal, in front 16 feet. 41—Sub-bass, of wood 16 feet tone. 42—Octaaf, of metal 8 feet. 43—Fluit-Bass 8 feet tone. 44—Roer-quint 5½ feet tone. 45—Octaaf, of metal 4 feet.	46—Mixture, VI ranks 2\frac{2}{3} feet. 47—Bazuin, CCC, 10 inch. 16 feet. 48—Trombone 8 feet. 49—Trompet 4 feet. 50—Cinq 2 feet. 51—Clairon 1 foot.		
Accessory Stops,	, Movements, &c.		
<ul><li>1—Positif to Great.</li><li>2—Echo to Great.</li><li>3—Great to Pedals.</li></ul>	4—Tremblant Positif. 5, 6, 7, 8—Four Wind-trunk Valves.		
7 7 7 7 7 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1	pass. Pedal, CCC to Tenor d, 27 notes.		
11. Ti	RIEBEL.		
	ebel, in the Netherlands, has 22 Sounding ving is a list of the Stops:		
Great,	10 Stops.		
1—Bourdon, 10 loth metal in the treble; the bass of wood, 16 feet tone.  2—Principal, 14 loth tin. polished, and in front, 8 feet.  3—Salicional, 14 loth English tin 8 feet.  4—Hohlflote, 10 loth metal to tenor c; the 8-feet octave of wood 8 feet.  5—Octave, 12 loth English tin 4 feet.  6—Fullflote, 10 loth metal 4 feet.  7—Quinte, 12 loth tin 2 feet.  8—Super-octave, 12 loth tin 2 feet.  9—Mixture, IV ranks . 2 feet.  10—Trompete 8 feet.			
Choir, 8	-		
11—Viola di Gamba, 14 loth English tin	15—Wald-flote, 10 loth English tin 2 feet. 16—Flageolet,12 loth Eng.tin, 2 feet. 17—Cornet, 12 loth English tin, III ranks. (Obec. 12 loth Eng. tin)		
tin $2\frac{9}{3}$ feet.	18{Oboe, 12 loth Eng. tin} 8 feet.		

#### Pedal, 4 Stops.

19—Principal, 14 loth Eng. tin, in front; the five	20—Subbass, wood 16 feet tone. 21—Octave, wood 8 feet.
lowest Pipes of Pine,	22—Posaune 16 feet.
and Stopped 16 feet.	

#### Accessory Stops, Movements, &c.

1—Choir to Great. 2—Great to Pedal. 3, 4, 5—Three Wind-trunk Valves.
Three Bellows, 10 feet long.
Six Sound-boards.

#### Compass.

Manuals, CC to f<sup>5</sup> in alt, 54 notes. | Pedal, CCC to Tenor d, 27 notes.

#### 12. St. Denis.

The Organ in the Abbey Church of St. Denis, near Paris—the Westminster Abbey of France,—is a particularly fine instrument. It was made by MM. Cavaillé Coll, Organ-builders of Paris, and was opened on the 21st of September, 1841. It contains 69 Sounding Stops, among which are 12 for the Pedal; and there are 3 Manuals. The "Clavier de Bourbordes" is not furnished with a separate Manual, as at the Madelaine, which is to be regretted, but communicates with the Great Organ keys. Among the most remarkable features in this Organ is the adjustment of the wind. Not only are the Reed Stops placed on a heavier wind than those of the Flue species, but the upper octaves of all the Stops are in common supplied with a stronger blast than the lower; upon the principle that wind instrument players exercise a greater pressure of the muscles upon the lungs when producing the acute sounds. There are also several Stops of a novel kind, called by Cavaillé "Harmonique," which sound the octave above the note that the length of the Pipe would indicate. The Organ has also the Pneumatic Lever attachment for lightening the touch, and 8 Composition Pedals of novel and convenient construction. The following is a list of its Stops:

## Clavier du Grand Orgue, 20 Stops.

	6,[
Pipes.	Pipes.
1-Montre, through-	11—Doublette 2 feet 54
out; of spotted	12—Grosse Fourniture,
metal to CCC;	IV ranks216
last octave of	13—Grosse Cymbale,
wood 54	IV ranks216
2—Montre54	14—Petit Fourniture,
3—Bourdon16 feet tone 54	IV ranks216
4—Montre 8 feet 54	15—Petit Cymbale,
5—Bourdon 8 feet tone 54	IV ranks216
6—Viole 8 feet 54	16—Première Trom-
7—Flute traversiere	pette harmonique 8 feet 54
harmonique 8 feet 54	17—DeuxièmeTrom-
8—Prestant 4 feet 54	pette harmonique 8 feet 54
9—Flute octaviante	18—Basson et cor an-
harmonique 4 feet 54	glais 8 feet 54
$10$ —Nasard $2\frac{2}{3}$ feet $54$	19—Cornet à pavillon 8 feet 54
	20—Clairon octaviant 4 feet.

326	APPENDIX.			
Clavier des Bombardes, 12 Stops.				
21—Bourdon16 feet ton 22—Flute	Bombarde 8 feet 54 10 54 30—Trompette har- 11 54 31—Clairon harmo- 12 54 32—Clairon octaviant 4 feet 54			
Clavier de	Recitecho expressif, 8 Stops.			
33—Bourdon 8 feet ton 34—Flute harmonique 8 feet. 35—Flute octaviant harmonique 4 feet. 36—Quint 2\frac{2}{3} feet. 37—Octavin harmonique 2 feet.	18 54 38—Trompette har- monique 8 feet 54 39—Voix Humaine, harmonique 8 feet 54 40—Clairon harmo- nique 4 feet 54			
Clav	ier du Positif, 17 Stops.			
41—Bourdon16 feet tor 42—Salcional8 feet 43—Fluteharmonique 8 feet 44—Bourdon8 feet tor 45—Prestant4 feet 46—Flute4 feet 47—Flute octaviante. 4 feet 48—Quint2 feet 49—Doublette2 feet 50—Flageolet harmonique2 feet	10. 54 51—Tierce			
Clavier de Pedales, 12 Stops.				
58—Flute ouverte	feet25 pette(12 ft.) 8 feet25			
	ombination Pedals, &c.			
1—Recit. (Swell) to Great.	6—The Bass of ditto to ditto.			

- 1—Recit. (Swell) to Great.2—Bombardes to Great Manual.
- 3-Swell Stops.
- 4—Positif to Great.
  5—The Treble of Positif Reed and Harmonic Stops to Foundation Stops.
- 6—The Bass of ditto to ditto. 7—Manuals, Basses to Pedal.
- 8-Sub-octave Manual.
- 9-Tremulant Swell.

#### Compass.

Manuals, CC to f<sub>3</sub> in alt, 54 notes. Pedal, FFF to tenor f, 25 notes.

Barker's Pneumatic lever was first used in this Organ.

## 12 A. St. VINCENT DE PAUL, PARIS.

The Organ in the Church of St. Vincent de Paul, at Paris, was built by Cavaillé Coll, and is quite on an equality with the same builder's admirable instrument at the Madelaine, both in regard to refinement of tone and perfectness of finish in the mechanism. It stands at the west end of the Church, and is divided, so as not to obstruct the light through the west window. The Stops are 40 in number, of which the following is a list:

## Great Organ, 14 Stops.

1—Montre 16 feet.		8—Quinte	2≇ feet.
2—Bourdon 16 feet	tone.	9—Doublette	2 feet.
3—Montre 8 feet.		10—Fourniture, V ranks	
4—Gamba 8 feet.		11—Cymballe, III ranks	
5—Bourdon 8 feet	tone.	12—Trompette	8 feet.
6—Prestant 4 feet.		13—Cornet à pavillon	8 feet.
7—Flute 4 feet.		14—Clairon	4 feet.

## Choir Organ, 10 Stops.

15—Bourdon 16 feet tone.	20—Flute octaviante	4 feet.
	21—Doublette	
17—Salicional 8 feet.	22—Octavin harmonique	2 feet.
18—Bourdon 8 feet tone.	23—Trompette	8 feet.
	24—Cromorne	

## Swell Organ, 8 Stops.

		*	
		30—Trompette harmo-	
26—Bourdon	8 feet tone.	nique	8 feet.
27—Prestant	4 feet.	31—Cor Anglais	8 feet.
28—Flute douce	4 feet.	32—Voix Humaine	8 feet tone.
29—Voix Celeste			

## Pedal Organ, 8 Stops.

	0	_ `	
33—Grand Bourdon	32 feet tone.	37—Bombarde	16 feet.
34—Montre	16 feet.	38—Basse-contre	16 feet.
35—Contre-basse	16 feet.	39—Trompette	8 feet.
36—Flute ouverte	8 feet.	40—Clairon	4 feet.

## Accessory Stops, Movements, &c.

1 to 8—Manual and Pedal Couplers.	23—Pneumatic lever attachment.
9 to 22—Fourteen Composition Pedals.	

## Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, CCC to tenor c, 25 notes.

## 13. THE MADELAINE, PARIS.

The fine instrument in the Church of the Madelaine, at Paris, was built by the eminent artists who constructed the St. Denis Organ, MM. Cavaillé Coll. It was completed in 1846, and was opened in the Church on the 29th of October of that

328 APPENDIX.

year, with a performance of Vocal and Instrumental Sacred Music. The Organ has 4 Manuals and Pedal, and 48 Stops, distributed in the following manner:

## Clavier du Grand Orgue, 12 Stops.

Ciavier du Grand	Orgue, 12 Stops.
1—Montre	7—Prestant
Clavier de Bomb	pardes, 10 Stops.
13—Sous-Basse       16 pieds         14—Basse       8         15—Flute Harmonique       8         16—Flute Traversiere       8         17—Flute Octaviante       4	18—Octavin
Clavier du Po	sitif, 10 Stops.
23—Montre	28—Dulciana
Clavier de Récit.	Expressif, 8 Stops.
33—Flute Harmonique       8 pieds.         34—Bourdon       8 —         35—Muzette       8 —         36—Flute Octaviante       4 —	37—Octavin
Clavier de Pé	dales, 8 Stops.
41—Quintaton	45—Grosse Flute

## Combination Pedals, &c.

ombination reads, ec.		
1—Positif to Great. 2—Great to Pedal. 3—Bombarde to Positif 4—Pedal to Great. 5—Great Organ Sub-octave. 6—Bombarde Sub-octave. 7—Pedal octave above.	8—Tremulant to Choir and Swell. 9—Great Reeds. 10—Bombarde Reeds. 11—Choir Reeds. 12—Swell Reeds. 13—Pedal Reeds.	
7—Pedal octave above.		

## Compass.

## 13 B. St. Eustace, Paris.

The magnificent new Organ in the Church of St. Eustache was built by Ducroquet, of Paris, and was opened in the autumn of 1854. It contains 67 Sounding Stops, 4 Manuals, and a Pedal of 18 Stops. The following is a list of its contents:

## Great Organ, 16 Stops.

1—Montrc	<ul><li>8 feet.</li><li>8 feet.</li><li>8 feet tone.</li><li>4 feet.</li><li>4 feet.</li></ul>	9—Doublette	16 feet. 8 feet. 8 feet.
8—Nazard	3 feet.	16—Clairon	4 feet.

### Clavier des Bombardes, 10 Stops.

17—Gamba	16 feet.	22—Gamba	4 feet.
		23—Salicional	
19—Gamba		24—Bombarde	
20—Salicional		25—Trompette	
		26—Clairon	4 feet.

## Positif, 14 Stops.

27—Montre	feet tone. feet. feet. feet.	34—Cor Anglais 35—Trompette 36—Hautbois (free Reed) 37—Cromorne 38—Basson 39—Clairon	8 feet. 8 feet. 8 feet. 8 feet tone. 8 feet.
-----------	------------------------------	--	--

## Recit. Expressif, 10 Stops.

40—Bourdon	16 feet tone.	45—Trompette	8 feet.
41—Flute Harmonique	8 feet.	46—Hautbois	8 feet.
42—Bourdon	8 feet tone.	47—Euphone	8 feet.
43—Flute Harmonique		48—Voix Humaine	8 feet tone.
44—Trompette	16 feet.	49—Clairon	4 feet.

## Pedale, 18 Stops.

50-Flute, montre	32 feet	59—Salicional	4 feet
51—Flute, wood	16 feet	60—Bombarde	
52—Contre-Basse		61—Bombarde	
53—Bourdon		62—Basson	
54—Flute		63—Trompette	
55—Salicional	8 feet.	64—Trompette	8 feet.
56—Violoncello	8 feet.	65—Basson	8 feet.
57—Flute		66—Clairon	4 feet.
58—Flute ouverte	4 feet.	67—Basson	4 feet.

#### 14. AMIENS.

The Organ in the Cathedral at Amiens, which has a 16-feet front, was completed in the year 1429, and was built at the expense of Alphonse de Myrhe, one of the chamberlains of King Charles the Sixth. It still retains its interesting antique appearance, and stands at the west end of the nave, with the west entrance below, and a handsome circular window, filled with stained glass, above. The Amiens Cathedral Organ has 3 Manuals and Pedal, and 40 Stops; of which latter the following is a list:

0	Great, 1	6 Stops.	
1—Montre 2—Bourdon 3—Montre 4—Bourdon 5—Flute 6—Prestant 7—Nazard 8—Doublette		9—Tierce 10—Furniture 11—Cornett 12—Bombarde 13—Trompette 14—Trompette 15—Clarion 16—Vox Humaine	15 feet. 16 feet. 16 feet. 16 feet. 16 feet. 16 feet. 17 feet. 18 feet. 18 feet.
	Choir, 1	1 Stops.	
17—Montre	8 feet. 8 feet tone. 8 feet. 4 feet. 2 <del>g</del> feet. 2 feet.	23—Tierce	<ul> <li>1 5/5 feet.</li> <li>8 feet.</li> <li>8 feet tone.</li> </ul>
	Recit.	3 Stops.	
28—Bourdon	8 feet tone. 8 feet. 4 feet.	31—Cornett	8 feet. 8 feet.
	Pedal,	7 Stops.	
34—Flute 35—Bourdon 36—Flute 37—Flute	16 feet. 16 feet tone. 8 feet. 4 feet.	38—Bombarde	16 feet. 8 feet. 4 feet.

#### 15. AMIENS.

The Organ in the Church of St. Remy, at Amiens, was built by the monks of St. Basil, and finished by them in the year 1842, at a cost of £1000. It has 34 Sounding Stops, 3 Manuals, and Pedal. The following is an enumeration of the Stops:

## Great, 14 Stops.

	Ø10 <b>40</b> ,	rr coops.	
1—Bourdon	16 feet tone.	8—Doublette	2 feet.
2—Montre		9—Fourniture	
3—Bourdon	8 feet tone.	10—Cornet	
4—Prestant		11—Trompette	
5—Dulciana	4 feet.	12—Trompette	
6—Flute		13—Voix Humaine	8 feet tone.
7—Nazard	24 feet.	14—Clairon	4 feet.

Choir,	10	Stops.
--------	----	--------

	1
15—Bourdon	20—Quarte de Nazard 2 feet.
16—Prestant 4 feet.	21—Fourniture
17—Flute 4 feet.	22—Cornet
18—Nazard	23—Cremona, through 8 feet tone.
19—Doublette 2 feet.	24—Clairon 4 feet.
Q 11	- a.
Swell,	6 Stops.
25—Bourdon 8 feet tone.	28—Nazard
26—Prestant 4 feet.	29—Hauthois 8 feet.
27—Flute 4 feet.	30—Trompette 8 feet.
D 11	
Pedal,	4 Stops.
31—Flute 16 feet.	33—Bombarde 16 feet.
32—Flute 8 feet.	34—Trompette 8 feet.
Com	ipass.
	.*
Great, CC to f <sup>3</sup> in alt, 54 notes.	Swell, tenor c to f <sup>3</sup> in alt, 42 notes.
Choir, CC to f <sup>3</sup> in alt, 54 notes.	Pedal, FFF to tenor f, 25 notes.

#### 16. Tours.

The Cathedral Organ at Tours possesses immense power. It was built by J. B. U. Le Fevre, of Rouen; and has 4 Manuals, and 60 Sounding Stops, supplied by 13 Bellows. The Stops are distributed in the following manner:

## Great, 23 Stops.

1—Grosse Principal	32 feet.	13—Quint	3 feet.
2—Sub-Bourdon	32 feet tone.	14—Doublette	2 feet.
3—Prestant	16 feet.	15—Tierce	$1\frac{3}{5}$ feet.
4—Bourdon	16 feet tone.	16—Quint	1 foot.
5—Montre	8 feet.	17—Mixture, XV ranks.	_
6—Prestant	8 feet.	18—Cornett, V ranks.	
7—Principal	8 feet.	19—First Trompette	8 feet.
8—Bourdon	8 feet tone.	20—Second Trompette	8 feet.
9—Quint	6 feet.	21—Third Trompette	8 feet.
10—Octave	4 feet.	22—First Clarion	4 feet.
11—Octave	4 feet.	23—Second Clarion	4 feet.
12—Tierce	$3\frac{1}{5}$ feet.		
	Choir, 1	6 Stops.	
24—Bourdon	16 feet tone.	32—Tierce	$1\frac{5}{5}$ feet.
25—Principal	8 feet.	33—Quint	$1\frac{1}{2}$ foot.
26—Prestant	8 feet.	34—Mixture, IX ranks.	_
27—Bourdon	8 feet tone.	35—Cornett, V ranks.	
28—Octave	4 feet.	36—Trompette	8 feet.
29—Quint	3 feet.	37—Clarion	4 feet.
30—Octave	2 feet.	38—Cremorne	8 feet.
21. Doublotto			
31—Doublette	2 feet.	39—Vox Humana	8 feet.
51—Doublette		e, 6 Stops.	8 feet.
40—Bourdon		e, 6 Stops.	8 feet.
	Bombarde	e, 6 Stops.	

# Fourth Manual. A general Echo to the Great Organ.

## Pedal, 15 Stops.

46—Grosse Principal	16 feet.	54—Octave	2 feet.
47—Octave	8 feet.	55—Tierce	$1\frac{3}{5}$ feet.
48—Prestant	8 feet.	56—Bombarde	
49—Quint	6 feet.	57—Trompette	16 feet.
50—Octave		58—Trompette	8 feet.
51—Flute	4 feet.	59—Clarion	
52—Tierce	$3\frac{1}{5}$ feet.	60—Clarion	2 feet.
53—Quint			

#### 17. ROUEN.

The Organ in the magnificent Church of St. Ouen, at Rouen, was built in the year 1630. It has 5 rows of keys; a Pedal Organ of 2 octaves in compass; 12 pairs of Bellows; and 49 Sounding Stops, distributed as follow:

Great, 13 Stops (Fourth Manual).

Great, 13 Sups (	(Fourth Manual).	
1-Montre 16 feet (throughout,	7—Quart	
in metal.)	8—Tierce 1 5 foot.	
2—Bourdon 16 feet (throughout).	9—Fourniture.	
3—Montre 8 feet.	10—Cymbale.	
4—Bourdon 8 feet.	11—Bassus de Trompette 8 feet.	
5—Prestant 4 feet.	12—Voix Humain 8 feet.	
6—Quint $2\frac{2}{3}$ feet.	13—Clarion 4 feet.	
Choir, 14 Stops	(Lower Manual).	
14—Prestant 8 feet.	21—Cornett.	
15—Bourdon 8 feet.	22—Galonbel.	
16—Prestant 4 feet.	23—Pleinjeu.	
17—Flute 4 feet.	24—Cromorne 8 feet.	
18—Nazard $2\frac{2}{3}$ feet.	25—Bassoon et Hauthois 8 feet.	
19—Doublette 2 feet.	26—Trompette	
20—Tierce $1\frac{3}{6}$ foot.	27—Clarion 4 feet.	
Echo, 4 Stops (	(Upper Manual).	
28—Flute 8 feet.	30—Trompette	
29—Cornett.	31—Clarion 4 feet.	
Recit. 6 Stops (Second Manual).		
32—Bourdon, Recit 8 feet.	35—Hauthois, Recit 8 feet.	
33—Flute, Recit 4 feet.	36—Trompette, Recit 8 feet.	
34—Cornett, Recit.	37—Clarion, Recit 4 feet.	
Bombarde, 4 Stops (Third Manual).		
38—Bombarde 16 feet.	40—Clarion 4 feet.	
39—Trompette 8 feet.	41—Cornett.	
•		
Pedal, 8 Stops.		
42—Prestant 16 feet.	46—Prestant 4 feet.	
43—Gamba 16 feet.	47—Bombarde 16 feet.	
44—Prestant 8 feet.	48—Trompette	

49—Clarion ...... 4 feet.

45—Quint ...... 5<sup>3</sup> feet.

#### 18. Abbeville.

The Organ in the Cathedral at Abbeville is placed over the west entrance, where it has a majestic appearance. The Case of the Great Organ has five towers, with the smallest one in the centre: the Choir Organ Case has three towers, with the largest one in the centre. The 16-feet montre stands in front, and is of polished Tin. The Organ is an old one, and originally belonged to the Church of St. George, which building was completely demolished in the Revolution of 1793. The Organ escaped sharing the same fate through the care of Honoré Blondin, the nephew of whom is the present Organist. The instrument was enlarged and thoroughly repaired by M. Charles Lefevre, of Abbeville, about ten years since, and now contains 42 Stops, distributed as follow:

Great, 18 Stops.		
1-Montre (throughout).	16 feet.	10—Doublette 2 feet.
2—Bourdon (throughout)	16 feet tone.	11—Flute 2 feet.
3—Montre	8 feet.	12—Fourniture
4—Bourdon	8 feet tone.	13—Grand Cornett
5—Flute	8 feet.	14—Trompette 8 feet.
6—Prestant	4 feet.	15—Trompette 8 feet.
7—Flute	4 feet.	16—Clarion 4 feet.
8—Flute tacet	4 feet.	17—Cromorne (throughout) 8 feet.
9—Nazard	2½ feet.	18—Voix Humaine 8 feet.
Choir, 12 Stops.		
19—Bourdon	8 feet tone.	25—Petit Nazard $1\frac{1}{3}$ foot.
20—Montre	4 feet.	26—Fifre
21—Flute a Cheminee	4 feet.	27—Fourniture
22—Nazard	2\ feet.	28—Hauthois tacet 8 feet.
23—Super octave	2 feet.	29—Clarion 4 feet.
24—Doublette	2 feet.	30—Cromorne (throughout) 8 feet.
	Swell,	6 Stops.
31—Dulciana	8 feet.	34—Flute 2 feet.
32—Flute	4 feet.	35—Hautbois 8 feet.
33—Nazard	$2\frac{2}{3}$ feet.	36—Trompette 8 feet.
Pedal, 6 Stops.		
37—Fluto Allemande	16 feet.	40—Musette
38—Fluto	8 feet.	41—Bombarde, wood 16 feet.
39—Fluto	4 feet.	42—Trompette, metal 8 feet.

There are four Manuals: the lower one for the Choir Organ; the second for the Great; the third for the Pedal Organ, which is of the same compass as the other Organs; and the fourth for the Swell. The compass of the Great, Choir, and Pedal is from CC to f<sup>5</sup> in alt. The Swell, to Tenor f; the Pedal-board is from CCC to Tenor f, two octaves and a half. The Manuals are coupled together by being drawn out about half an inch.

## 19. St. Sulpice, Paris.

The large Organ at St. Sulpice, in Paris, was long considered the most complete instrument in France. The new one at St. Denis, however, now rather exceeds it in the number of the Stops. It originally had 5 Manual Organs; Great, Choir,

334 APPENDIX.

Bombarde, Recitative, and Echo, besides the Pedal Organ, as at Rouen; but the number of Manuals has within the last few years been reduced to 4, and many new Stops introduced by MM. Cavaillé: so that the instrument now has 4 Manuals; Pedal Organ of 12 Stops, and, altogether, 66 Sounding Stops. It originally had 14 pairs of bellows, 6 feet in length and  $3\frac{1}{2}$  in breadth; 6 for the Great Organ, 4 for the Choir, &c. and 4 for the Pedal. The distribution of the Stops is as follows:

## Grand Organ, 22 Stops.

1—Montre	16 feet. 16 feet tone. 8 feet. 8 feet tone. 8 feet. 8 feet. 4 feet. 2 feet. 2 feet.
13—FournitureIX ranks. *14—Fourniture	
15—CymbaleIV ranks. 16—CornettV ranks.	
*17—Euphorne	
18—Trompette of pewter	
20—Clarion of pewter	
*21—Clarion	4 feet.
*22—Clarinette	8 feet.

The Great Organ originally contained 21 Stops, not including those marked with an asterisk, which are subsequent insertions, and introduced chiefly in the places of a Grosse Nazard,  $5\frac{1}{3}$  feet; Quarte de Nazard, 2 feet; Grosse Tierce,  $3\frac{2}{3}$  feet; Voix Humaine; and a Third Trumpet.

## Positif, 18 Stops.

23—Bourdon			
24—Montre	8 feet.	33—Cymbale . IV ranks.	
25—Bourdon	8 feet tone.	34—Cornett V ranks.	
26—Flute	8 feet.	35—Trompette	8 feet.
*27—Gamba	8 feet.	36—Clarion	4 feet.
28—Prestant	4 feet.	37—Bassoon	8 feet.
*29—Dulciana	4 feet.	*38—Hautbois	8 feet.
30—Nazard	$2\frac{2}{3}$ feet.	39—Clarionette	8 feet.
31—Doublette	2 feet.	40—Cromorne	8 feet.

The original Positif Specification included a "Quart de Nazard, Tierce, and Larigot;" for which a Gamba, Dulciana, and Hautbois have been substituted, as indicated by the asterisks above.

#### Recit. 10 Stops.

42—Flute	6 feet tone. 8 feet. 8 feet tone. 4 feet.	48—Hautbois 8 49—Cor Anglais 8	feet. feet. feet.
Bombarde Clavier, 4 Stops.			
51—Bombarde 1 52—Trompete		53—Clarion 4 54—Cornett, V ranks.	feet.
Pedal, 12 Stops.			
56—Flute	2 feet. 6 feet. 6 feet tone. 8 feet. 8 feet. 4 feet.	62—Bombarde 16 63—Trompette 8 64—Trompette 8 *65—Bassoon 8	feet. feet. feet. feet. feet. feet.

The Pedal originally contained a 32-feet Sounding Stop only (Grosse Bourdon, 32 feet tone), which has been removed, and a Wood Open Stop, or, as it is labelled, a Flute of 32 feet, placed in its stead. There was also a Grosse Nazard, 10\frac{2}{3} feet, which has made way for a Bourdon of 16-feet tone; and a Bassoon has likewise been added. See stars above.

#### 20. BEAUVAIS.

The Organ in the Cathedral at Beauvais has 5 Manuals and Pedal, and 64 Sounding Stops, of which the following is a list:

## Grand Orgue (Great), 19 Stops.

1—Montre 16 feet.	11—Quarte de Nasard 2 feet.		
2—Bourdon 16 feet tone.	12—Tierce		
3—Montre 8 feet.	13—Grosse Fourniture		
4—Flute 8 feet.	14—Fourniture		
5-Gamba 8 feet.	15—Cymbale		
6—Bourdon 8 feet tone.	16—Great Cornet		
7—Grosse Nasard $5\frac{1}{3}$ feet.	17—Premiere Trompette. 8 feet.		
8—Prestant 4 feet.	18—Deuxieme Trompette 8 feet.		
9—Grosse Tierce $3\frac{5}{5}$ feet.	19—Clairon 4 feet.		
10—Nasard $2\frac{9}{3}$ feet.			
Positif (Choi	r), 14 Stops.		
20—Montre 8 feet.	27-Fourniture, III ranks		
21—Bourdon 8 feet tone.	28—Cymbale, II ranks		
22—Flute 8 feet.	29—Cornet, V ranks		
23—Prestant 4 feet.	30—Trompette 8 feet.		
24—Nasard 2 ½ feet.	31—Clairon 4 feet.		
25—Doublette 2 feet.	32—Croniorne 8 feet	tone.	
26—Tierce $1\frac{5}{5}$ foot,	33—Basson 8 feet.		
Bombarde, 4 Stops.			
34—Bombarde 16 feet.	36—Clairon 4 feet.		
35—Trompette 8 feet.	37—Grand Cornet		

### Recit Echo 14 Stons.

necu. Ech	), 14 Sups.	
38—Salicional       8 feet.         39—Bourdon       8 feet tone.         40—Flute       8 feet.         41—Flute Harmonique       8 feet.         42—Principal       4 feet.         43—Flute douce       4 feet.         44—Quinte       2 \( \frac{2}{3} \) feet.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	
Swell, 3 Stops.		
52—Conoclite. 53—Euphone.	54—Terpomele.	
Pedal, 10 Stops.		
55—Flute ouverte       16 feet.         56—Contre-basse       16 feet.         57—Bourdon       16 feet tone.         58—Flute       8 feet.         59—Quinte       5 \frac{1}{3} feet.	60—Flute	

## Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, FFF to tenor f, 25 notes.

#### 21. ANTWERP.

The Organ in the Cathedral at Antwerp was built by De la Haye, of Antwerp, in 1645, and repaired by Folder, of Brussels, in 1834. It has 44 Stops, 3 Manuals, and Pedal. The following is a list of its contents:

## Great Organ, 18 Stops.

1—Montre	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
Choir Organ, 10 Stops.		
19—Montre	25—Fourniture	
Swell Organ, 6 Stops.		
29—Montre discant       8 feet.         30—Bourdon       8 feet tone.         31—Prestant       4 feet.	32—Flute	

#### Pedal, 10 Stops.

35 - Montre	16 feet.	40—Flute	4 feet.
36—Bourdon	16 feet tone.	41—Fourniture.	
37—Prestant	8 feet.	42—Bombarde	16 feet.
38—Bourdon	8 feet tone.	43—Trompette	8 feet.
		44—Clairon	

## Compass.

Manuals, CC to f3 in alt.

Pedals, FFF to tenor f.

#### 22. Antwerp.

The Organ in the Church of St. Paul at Antwerp was built by Terbrugen, of Antwerp, in the year 1670, and was repaired and improved in 1825. It has 3 Manuals and Pedal, and 51 Stops. The Pedal-board is very inconveniently arranged, and the touch is disagreeable; otherwise it is a very satisfactory instrument, and rather superior to that in the Cathedral. The following is a list of its Stops:

## Great Organ, 19 Stops.

1—Principal	16 feet.	11—Nazard 3 feet.
2—Bourdon	16 feet tone.	12—Doublette 2 feet.
3—Montre	8 feet.	13—Fourniture.
4 — Bourdon	8 feet tone.	14—Cimbale.
5—Quintaton	8 feet tone.	15—Cornett.
6—Grand Nazard	6 feet.	16—Bombarde 16 feet.
7—Prestant	4 feet.	Trompette discant
8 - Flute	4 feet.	Trompette discant \ Trompette basse \ 8 feet.
9—Flute traverse	4 feet.	18—Clairon 4 feet.
10—Gros Tierce		19—Vox Humaine 8 feet.
		n, 15 Stops.
22 P 1	O	
20—Bourdon	8 feet tone.	28—Tierce
21—Viol di Gamba	8 feet.	29—Fourniture.
22—Prestant	4 feet.	30—Cornett.
23 - Flute	4 feet.	31—Trompette 8 feet.
24—Flute traverse	4 feet.	32—Hauthois 8 feet.
25—Nazard	3 feet.	33—Vox Angelica 8 feet.
26—Doublette	2 feet.	34—Bassoon
27—Flute Champ	2 feet.	
	Echo, 1	0 Stops.
35—Bourdon	8 feet tone.	$40$ —Tierce $1\frac{3}{5}$ feet,
36—Prestant	4 feet.	41 — Fourniture.
37—Flute	4 feet.	42—Cornett.
38 Nazard	3 feet.	43—Trompette 8 feet.
39—Doublette	2 feet.	44—Vox Humaine 8 feet.
Pedal, 7 Stops.		
A.S. Duranta and	_	•
45—Prestant	16 feet.	49—Bombarde 16 feet.
46—Quintaton	16 feet tone.	50—Trompette 8 feet.
47 - Flute	8 feet.	51—Clairon 4 feet.
48 — Prestant	4 feet.	
Compass.		

Compas

Manuals, CC to f<sup>3</sup> in alt.

Pedals, CCC to tenor c.

#### 23. Brussels.

The Organ in the Cathedral Church of St. Gudule, at Brussels, contains 47 Stops, 3 Manuals, and Pedal containing a 32-feet Reed. The following list shows the distribution and names of the Stops:

## Great, 18 Stops.

Great, 10 Stops.		
1—Bordun, discant       32 feet tone.         2—Montre       16 feet.         3—Bordun       16 feet tone.         4—Prestant       8 feet.         5—Bordun       8 feet tone.         6—Octave       4 feet.         7—Flute       4 feet.         8—Nazard       2½ feet.         9—Doublette       2 feet.         10—Tierce       1½ foot.	11—Quint	
Choir, 1	2 Stops.	
19—Bordun       16 feet tone.         20—Bordun       8 feet tone.         21—Flute       8 feet.         22—Prestant       4 feet.         23—Flute       4 feet.         24—Nazard       2 feet.		
Echo, 7 Stops.		
31—Prestant       8 feet.         32—Bourdon       3 feet tone.         33—Octave       4 feet.         34—Flute       4 feet.	35—Doublette 2 feet. 36—Fourniture. 37—Trompete 8 feet.	
Pedal, 10 Stops.		
38—Montre.       16 feet.         39—Bourdon.       16 feet tone.         40—Flute       8 feet.         41—Bourdon.       8 feet tone.         42—Quinte.       5 \frac{1}{3} feet.	43—Flute	

#### 24. LIEGE.

The Organ in the Church of St. Martin at Liege, built by Clerinex, at a cost of £1000, has 3 Manuals and Pedal, and 36 Sounding Stops, of which the following is a list:

## Great, 14 Stops.

1—Bourdon	16 feet tone.	8-Super Octave	2 feet.
2—Principal	8 feet.	9—Sesquialtera, III ranks	3 feet.
3—Bourdon	8 feet tone.	10—Fourniture, IV ranks	
4—Gamba		11—Cornett, IV ranks.	
5—Flute Travers	8 feet.	12—Trompet	8 feet.
6—Prestant	4 feet.	13—Clarion	4 feet.
7—Flute pointue		14—Cromhorne	

## Choir, 9 Stops.

		±	
15—Saleional 16—Bourdon 17—Prestant 18—Old Flute 19—Super octave	8 feet. 8 feet tone. 4 feet. 4 feet. 2 feet.	20—Sesquialtera. 21—Cornet. 22—Trompete 23—Hautbois	8 feet. 8 feet.
Echo, 6 Stops.			
24—Bourdon	8 feet tone. 4 feet.	27—Super octave 28—Cornet. 29—Trompete	2 feet.
20 Trageores.	Pedal, (		o icci.
30—Montre, metal 31—Flute, wood open 32—Soubasse	16 feet.	33—Montre 34—Bombarde* 35—Bombarde	16 feet.

#### 25. Cologne.

The present Organ in the Cathedral of Cologne is composed partly of an older instrument, said to have been about 300 years old at the time of its reconstruction. Mass, the late Organ-builder at Cologne, repaired and considerably added to it about ten years since; more than half the Pipes, the mechanism, &e. being made by him. The Organ has now 40 Stops, 3 Manuals, and Pedal; the names and distribution of the former being as follow:

## Great, 11 Stops.

1—Principal, tin, in front, 2—Octave 3—Viol di Gamba 4—Hohlflote 5—Super-octave 6—Flautin	16 feet. 8 feet. 8 feet. 4 feet. 2 feet.	7—Rauschwerk V ranks, 8—Cymbal IV ranks, 9—Sesquialtera, II ranks, 10—Posaune	$2\frac{2}{3}$ feet. 16 feet.
	Choir, 1	11 Stops.	
12—Principal	<ul> <li>8 feet.</li> <li>8 feet tone.</li> <li>8 feet.</li> <li>4 feet tone.</li> <li>2 feet.</li> </ul>	18—Cornet . IV ranks.  19 {Bourdon, discant } Contrafagot, bass }  20—Clairon	16 feet. 8 feet. 8 feet tone.
	Echo,	9 Stops.	
23 {Hohlflote, discant} (Hohlflote, bass) 24—Queerflote, discant 25—Prestant 26—Hohlflote 27—Super-octave	· .	28—Super-flote	

### Pedal, 9 Stops.

32—Contra Violon			
33—Subbass	16 feet tone.	38—Trompete	8 feet.
34—Violon			
35—Octave Subbass	8 feet tone.	40—Clarinett	2 feet.
36—Super octave	4 feet.		

#### Compass.

Manuals, CC to  $f^3$  in alt .... 54 notes. Pedal, CCC to tenor c .... 25 notes.

#### 26. Cologne.

The Organ in the Minorets Church is said to be no less than 400 years old. Its tone is exceedingly good; and it has 33 Stops, of which the following is a list:

## Great, 15 Stops.

1—Bourdon 16 feet tone.	9—Salicena, oder Quint . 2 <sup>2</sup> / <sub>3</sub> feet.
2—Prestant 8 feet.	10—Super-octave 2 feet.
3 Gamba, discant 8 feet.	11—Quint
Gamba, bass So leet.	12—Mixture, III and IV
4—Violoncello 8 feet.	ranks.
5—Hollpfeife 8 feet.	13 Trompet, discant 8 feet.
6—Octave 4 feet.	Trompet, bass
7—Flote 4 feet.	14—Clairon 4 feet.
8—Wald-flote 4 feet.	15—Vox Humana 8 feet tone.

#### Choir, 12 Stops.

16—Hollpfeife 8	feet.	22—Octave	2 feet.
17—Flaut Traverse 8	feet.	23—Cymbal, III ranks.	
18—Prestant 4	feet.	24—Carillon, II ranks.	
19—Flaut douce 4	feet.	25—Hauthois	8 feet.
20—Vox Angelica 4	feet.	26—Clarinet	3 feet tone.
21—Quint flaut 23	feet tone.	27—Vox Humana	8 feet tone.

## Pedal, 6 Stops.

28-Principal, in front	16 feet.	31—Posaune	16 feet.
29—Octave-bass		32—Trompete	
30-Super-octave		33—Clairon	4 feet.

#### Accessory Stops.

1—Choir to Great. 2—Great to Pedal.

#### Compass.

Manuals, CC to d<sup>5</sup> in alt, no top c<sup>3</sup> sharp, 50 notes. Pedal, CCC to EE, 17 notes.

#### 27. Cologne.

The Organ in the Jesuits' Church at Cologne is a particularly fine instrument. It was originally built about the year 1750, and was repaired and enlarged in 1822. It has now 34 Stops, 3 Manuals, and a Pedal of 6 Stops.

## Great, 11 Stops.

1—Principal 16 feet.	7—Superoctave 2 fcet.	
2—Prestant 8 feet.	8—Mixture, IV ranks.	
3—Gamba 8 feet.	9—Cornet V ranks.	
4—Bourdon 8 feet tone.		
5—Octave 4 feet.	10 { Trompete, discant } 8 feet.	
6—Quint 23 feet.	11—Clairon 4 feet.	
Choir, 1		
12—Prestant 8 feet.	18—Flautino 4 feet.	
13—Gamba 8 feet.	19—Superoctave 2 feet.	
14—Hollpfeif 8 feet.	20—Carillon, II ranks.	
15—Travers-flote 8 feet.	21—CornetV ranks.	
16—Octave 4 feet.	22—Clarinet	
17—Flote 4 feet.		
Echo, 6 Stops.		
23—Gemshorn 8 feet.	26—Flote 4 feet.	
24—Hollpfeife 8 feet.	27—Hauthois 8 feet.	
25—Prestant 4 feet.	28—Vox Humana 8 feet tone.	
·		
Pedal, (	Stops.	
1—Subbass 16 feet.	4—Posaune 16 feet.	
2—Octave 8 feet.	5—Trompete 8 feet.	
3—Violone	6—Clairon 4 feet.	
Accessory Stops, Movements, &c.		
1—Choir to Great.	3—Great to Pedal.	
2—Echo to Choir.	4—Tremulant to Choir.	
·		
Comi	nass.	

## 28. COLOGNE.

Pedal, CCC to FF,  $1\frac{1}{2}$  octave, 18 notes.

Manuals, CC to f<sup>3</sup> in alt, 54 notes.

The Church of St. Maria de Capitol, at Cologne, contains an imposing-toned Organ, erected by Ludwig König, of Cologne, in 1767. In the year 1839 a Cornett and Flautino were added, and the Organ raised to its present pitch by Engelbert Maas, of Cologne. It has now 40 Stops; 3 Manuals, and Pedal of 10 Stops. The following is the disposition:

#### Great, 12 Stops.

orcar, i	12 800ps.		
16 feet.	7—Quint $2\frac{2}{3}$ feet.		
8 feet.	8—Mixture, IV ranks 2 feet.		
8 feet.	9—Cymbel, III ranks 1 foot.		
8 feet.	10—Cornett, IV ranks.		
4 feet.	11—Trompete 8 feet.		
4 feet.	12—Clairon 4 feet.		
Choir, 12 Stops.			
8 feet.	20—Flautino 2 feet.		
8 feet.	21—Quint Flaut $1\frac{1}{3}$ foot.		
8 feet.	22—Carillon, II ranks 4 feet.		
8 fcet.		ie.	
4 feet.	3. 5 Clarinett, discant ( 2 foot		
4 feet.	Hauthois, bass 5 o leet.		
2 feet.			
	16 feet. 8 feet. 8 feet. 4 feet. 4 feet. Choir, 1 8 feet. 8 feet. 8 feet. 4 feet. 4 feet. 4 feet. 7 feet. 8 feet. 8 feet. 9 feet. 1 feet. 1 feet.	8 feet.       8—Mixture, IV ranks.       2 feet.         8 feet.       9—Cymbel, III ranks.       1 foot.         8 feet.       10—Cornett, IV ranks.       3 feet.         4 feet.       11—Trompete       3 feet.         2 Clairon	

### Echo, 6 Stops.

25—Hollpfeife	8 feet.	29—Hauthois, discant 8 feet.
26—Geinshorn	4 feet.	30 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
27—Flaut	4 feet tone.	Vox Humana, bass \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
28—Super-octave	2 feet.	
D. 1.1 O.		

## Pedal, 10 Stops.

· · · · · · · · · · · · · · · · · · ·	1	
1—Bourdon 16 feet.	6—Octave	4 feet.
2—Viola di Gamba 8 feet.	7—Posaune	16 feet.
3—Prestant 8 feet.	8—Trompete	8 feet.
4—Gemshorn 8 feet.	9—Clairon	4 feet.
5—Quinte $5\frac{1}{3}$ feet.	10—Clarino	2 feet.

## Accessory Stops, Movements, &c.

1—Great to Pedal. | 2—Tremulant Echo. | 3—Tremulant Positif.

## Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, CCC to Gamut A, 22 notes.

#### 29. Cologne.

The Organ in the Church of St. Columba, at Cologne, was made by König, in 1753; and presents the remarkable peculiarity, for a German Organ of that size, of being entirely without Pedal Stops. The following is a list of the contents of the above-named instrument:

### Great, 12 Stops.

1—Prestant 16 feet.	7—Super-octave 2 feet.
2—Principal 8 feet.	8—Sesquialtera, III ranks, 2 <sup>2</sup> / <sub>3</sub> feet.
3—Viol di Gamba 8 feet.	9—MixturIV ranks, 2 feet.
4—Gedact 8 feet tor	ne 10—Posaune 16 feet.
5—Octava 4 feet.	11—Trompet 8 feet.
6—Flaut douce 4 feet.	12—Clairon 4 feet.
Cho	ir, 9 Stops.
13—Gedact 8 feet tor	ne.   18—Quint-Flaut $1\frac{1}{3}$ foot.
14—Prestant 4 feet.	19—Carillon, II ranks.
15—Flaut travers 4 feet.	20—Clarinett, discant 8 feet tone.

#### 30. COLOGNE.

4 feet.

2 feet.

21-Vox Humana.....

8 feet tone.

16—Flaut douce

The Organ in the Church of St. Ursula is a new instrument, and was built by Heinrich, of Cologne. It contains 25 Stops, 2 Manuals, and a Pedal of 6 Stops. The following is a list of its contents:

#### Great, 11 Stops.

1—Bourdon	16 feet tone.	7—Quinte	$2\frac{2}{3}$ feet.
2—Principal	8 feet.	8—Octave	2 feet.
3—Bourdon	8 feet tone.	9—Mixtur, IV ranks.	
4—Gamba		10—Cornet.	
5—Octave		11—Trompet	8 feet.
6—Flote		1	

00			Ct.	
- C1	mir,	- 23	Stol	DR.

		16—Flaut	
13—Bourdon	8 feet tone.	17—Octave	2 feet.
14—Salicional	8 feet.	18—Oboe	8 feet.
15—Fernflote	4 feet.	19—Basset Horn	8 feet.
	Pedal,	6 Stops.	
20—Subbass	16 feet.	23—Posaune	16 feet.
21—Violoncello	8 feet.	24—Trompet	8 feet.
22—Octave-bass	8 feet.	25—Clairon	4 feet.

#### 31. Bonn.

There is a fine old Organ in the Cathedral at Bonn, containing 30 Sounding Stops, among which is a particularly fine 16-feet Posaune on the Pedal, of wood. The instrument has 2 Manuals and Pedal, among which the Stops are thus distributed:

## Great, 12 Stops.

1—Bourdon	16 feet tone.	7—Quint	3 feet.
2—Principal	8 feet.	8—Super octave	2 feet.
3—Bourdon	8 feet tone.	9—Octavine	1 foot.
4—Gamba	8 feet.	10—Mixture.	
5—Salcional	8 feet.	11—Trompete	8 feet.
6—Octave	4 feet.	12—Clarion	4 feet.
1	Choir, 1	11 Stops.	
13—Bourdon	8 feet tone.	19—Octave	3 feet.
14—Flote discant	8 feet.	20—Mixture.	
15—Principal	4 feet.	21—Trompete	8 feet.
16—Octave	4 feet.	22—Bassoon	8 feet.
17—Rohrflote	4 feet tone.	23—Vox Humana	8 feet.
18—Quint	3 feet.		
	Pedal,	6 Stops.	
24—Subbasse	16 feet tone.	27—Posaune	16 feet.
25—Principal	8 feet.	28—Posaune	8 feet.
26—Violoncello	8 feet.	29—Posaune	4 feet.

#### 32. Bonn.

The Organ in the Protestant Church at Bonn, by Weil, is an excellent instrument. It has 19 Stops, of which the following is a list:

#### Great, 9 Stops.

1—Bourdon	16 feet tone.	6—Flote	4 feet.
2—Principal	8 feet.	7—Salcional	4 feet.
3—Bourdon		8—Super octave	
4—Gamba	8 feet.	9—Trompete	8 feet.
5—Octave	4 feet.	-	
	Choir,	7 Stops.	
1—Flote	8 feet.	5—Rohrflote	4 feet.
2—Hollflote		6—Super octave	
3—Harmonica		7—Krumhorn	

## Pedal, 3 Stops.

4 feet.

4—Principal . . . . . . . .

1—Principal.. 16 feet. | 2—Sub-bass.. 16 feet tone. | 3—Octave.. 8 feet.

#### 33. Coblentz.

The Organ in the Church of Castor, at Coblentz, has 39 Stops, distributed among 3 Manuals and Pedal, as follow:

Great, 16 Stons.

Grea	Great, 16 stops.			
1—Gross-gedact       16 feet ton         2—Principal       8 feet.         3—Viol di Gamba       8 feet.         4—Holpfeif       8 feet.         5—Quintadena       8 feet ton         6—Coppel       8 feet.         7—Octave       4 feet.         8—Salicional       4 feet.         9—Fleut       4 feet.	11—Super-octave 2 feet. 12—Vox angelica 2 feet. 13—Terz $1\frac{3}{3}$ foot.			
Chair	, 9 Stops.			
17—Bourdon				
Eab	7 Stone			
26—Bourdon. 8 feet ton 27—Flaut. 4 feet. 28—Salicional 4 feet. 29—Quint. 2 <sup>2</sup> / <sub>3</sub> feet.	o, 7 Stops. e. 30—Octave 2 feet. 31—Trompet 8 feet. 32—Vox Humana 8 feet tone.			
Dod	al, 7 Stops.			
33—Violon-bass 16 feet. 34—Sub-bass 16 feet ton 35—Principal-bass 8 feet. 36—Octave-bass 4 feet.	37—Posaune-bass 16 feet.			
· · · · · · · · · · · · · · · · · · ·	ps, Movements, &c. t to Pedal.   3—Tremulant Echo.			
Compass.				
Manuals, CC to d3 in alt, 51 notes.	Pedal, CCC to Gamut G, 20 notes.			

#### 34. STRASBOURG.

Strasbourg has long been famous for its Bell-founders, Clock-makers, Organbuilders, and for its Freemasons. So early as the 13th century there were several Organs in its Cathedral, very curious in their structure, and sonorous in their tone. The present instrument was built by Silberman, of Strasbourg, and was completed in August, 1716. It has 42 Sounding Stops, of which number 7 are on the Pedal; 2242 Pipes; and 6 Bellows, 12 feet by 6. The Organ is placed on the north side of the Nave, where it projects from the Triforium about 50 feet above the pavement of the Cathedral. The following are the particulars of the instrument:

#### Great, 13 Stops.

1—Bourdon 16 feet tone. 9—Cymbal.				
2—Montre, tin 8 feet. 10—Cornett, V ranks.				
3—Bourdon 8 feet tone. Trompette, discant?	۲.			
3—Bourdon 8 feet tone. 4—Prestant 4 feet. 11 { Trompette, discant} 8 Trompette, basse }	ieet.			
5—Nazard $2\frac{2}{3}$ feet. $12$ —Trompette 8	feet.			
6—Doublette 2 feet. Clairon, discant				
6—Doublette 2 feet. 7—Tierce 13 Clairon, discant 4	feet.			
8—Fourniture.				
,				
Choir, 11 Stops.				
14—Montre, tin 8 feet.   20—Tierce $1\frac{5}{5}$	foot.			
15—Bourdon				
16—Prestant 4 feet. 22—Fourniture.				
17—Flute 4 feet. 23—Cymbal.				
18—Nazard 2\frac{2}{3} feet.	C 4			
18—Nazard	ieet.			
Echo, 11 Stops.				
*	Cont			
1	feet.			
	feet.			
	feet.			
	feet.			
29—Prestant	feet.			
30—Flute 4 feet. Bassoon, basse 5				
Pedal, 7 Stops.				
36—Montre, tin 16 feet. 40—Bombarde 16 feet.	eet.			
	feet.			
38—Montre	eet.			
	feet.			

## Accessory Stops, Movements, &c.

Tremulant to Great. | Tremulant to Echo.

The Echo and Choir Manuals couple to the Great by being drawn out a little.

#### Compass.

Manuals, CC to c<sup>3</sup> in alt, 49 notes. | Pedal, CCC to tenor c, 25 notes.

#### 35. Strasbourg.

The Organ in St. Thomas's Church is also the work of Silberman, and bears the date of 1740. It has undergone some alterations by Weltzer, a resident Organ-builder in Strasbourg. It contains 36 Sounding Stops, of which number 7 are on the Pedal. The distribution of the Stops is as follows:

#### Great, 13 Stops.

	I and a second s
1—Bourdon, stopped metal	8—Doublette 2 feet.
to tenor c, then wood, 16 feet tone.	9—Fourniture, IV ranks.
2—Montre 8 feet.	10—CornettV ranks.
3—Bourdon, metal 8 feet tone.	11 Trompette, discant. 3 feet.
4—Salicional 8 feet.	Trompette, basse § 3 leet.
5—Prestant 4 feet.	12 Clairon, discant 4 feet.
6—Flute 4 feet.	Clairon, basse \ \frac{4}{1} leet.
7—Nazard $2\frac{2}{3}$ feet.	13—Vox Humaine 8 feet.

Choir,	8	Sto	ns
Chon,	U	200	11230

14—Bourdon, metal	8 feet tone.	18—Flute	4 feet.
15—Quintatena	8 feet.	19—Nazard	3 feet.
16—Prestant	4 fect.	20—Doublette	2 feet.
17—Cordedain	4 feet.	21—Cromorne	8 feet.
	Echo, 8	3 Stops.	
22—Montre	8 fect.	27—Cordedain, a kind of	
23—Viola de Gamba	8 feet.	flaut traverse, of	
24—Bourdon, metal	8 feet tone.	metal	4 feet.
25—Salicional	8 feet tone.	28—Trompette	8 feet.
26—Flute	4 feet.	29—Bassoon	8 feet.
	Pedal,	7 Stops.	
30—Principal, wood	16 fect.	34—Bombarde, wood	16 feet.
31—Octave	8 feet.	35—Trompette, metal	8 feet.
32—Quint	6 feet.	36—Clairon, metal	4 feet.
33—Prestant	4 feet.	ŕ	

### Compass.

Manuals, CC to c<sup>5</sup> in alt, 49 notes. | Pedal, CCC to tenor c, 25 notes.

The Echo and Choir Manuals move and couple to Great.

#### 36. STRASBOURG.

The Organ in the Protestant Church, called the "Temple neuf," is also the work of Silberman. Like the last, it is an excellent instrument throughout; but is especially remarkable for the beauty of its Diapasons and Metal Flutes, which are of great excellence. It has 46 Stops, 3 Manuals, and Pedal. The specification is as follows:

Great, 14 Stops.

1—Bourdon. 2—Montre 3—Bourdon. 4—Quintaton. 5—Prestant. 6—Flute. 7—Quint. 8—Doublette	16 feet tone.  8 feet.  8 feet tone.  8 feet.  4 feet.  4 feet tone.  2 \( \frac{2}{3} \) feet.  2 feet.	9—Tierce
		0 Stops.
15—Bourdon	<ul><li>8 feet tone.</li><li>8 feet.</li><li>4 feet.</li><li>4 feet tone.</li><li>4 feet.</li></ul>	20—Doublette       2 feet.         21—Larigo $1\frac{1}{3}$ foot.         22—Hautbois, discant       3 feet.         23—Cromorne       3 feet.         24—Cor de basset       3 feet.
	Echo, 1	3 Stops.
25—Bourdon	8 feet.	32—Sifflute 1 foot. 33—Fourniture, III ranks. 34—Cornet IV ranks.
28—Viol di Gamba 29—Prestant	8 feet. 4 feet. 4 feet tone.	35—Trompete 8 feet. 36—Bassoon 8 feet. 37—Voix Humana 8 feet.

#### Pedal, 9 Stops.

38—Principal, wood 16 feet.	43—Plein jeu, II ranks.
39—Bourdon (open wood) 16 feet.	44—Bombarde, metal 16 feet.
40—Octave 8 feet.	45—Trompete, metal 8 feet.
41—Violoncello 8 feet.	46—Clairon metal 4 feet.
42—Prestant 4 feet.	

#### 37. FRIBURG IN BRISGAU.

The Cathedral of Friburg, in Brisgau, so long celebrated for its beautiful Gothic Spire, contains two Organs, both of which are small, but of remarkably sweet and full tone. The one in the Nave is very old, having been put up in 1520; that in the Choir, which is about the same size, was built in 1811. The nave Organ has 24 Stops, 2 Manuals, and Pedal, of which the following are the particulars:

## Great, 10 Stops.

1—Bourdon		
Choir,	10 Stops.	
11—Principal       8 feet.         12—Bourdon       8 feet tone.         13—Salicional       8 feet.         14—Gamba       8 feet.         15—Octav       4 feet.		
Pedal, 4 Stops.		
21—Montre 16 feet. 22—Bourdon 16 feet tone.	23—Octav	

#### Compass.

Manual, CC, short octave, up to a<sup>2</sup> in alt. | Pedal, CCC to CC, one octave complete.

#### 38. FRIBURG IN BRISGAU.

The Organ in the Lutheran Church at Friburg in Brisgau, was built about 300 years ago, but has lately been repaired. It has 2 Manuals and Pedal, and 32 Stops, of which the following is a list:

## Great, 14 Stops.

1—Bourdon	16 feet tone.	8—Quint	$2\frac{2}{3}$ feet.
2—Principal		9—Super-octave	2 feet.
3—Hohlflote	8 feet.	10—Waldflote	2 feet.
4—Bourdon	8 feet tone.	11—Cymbal, III ranks.	
5—Octav		12—Mixtur, II ranks.	
6—Flote	4 feet.	13—Cornet, V ranks.	
7—Fugara	4 feet.	14—Trompete	8 feet.

## Choir, 10 Stops.

15—Principal	8 feet.	20—Gemshorn	4 feet.
16—Bourdon	8 feet tone.	21—Flote	4 feet.
17—Gamba	8 feet.	22—Rohrflote · · · · · ·	4 feet tone.
18—Salicional	8 feet.	23—Superoctav	2 feet.
19—Octav	4 feet.	24—Trompete	8 feet.
	Pedal,	8 Stops.	
25—Montre	16 feet.	29—Bourdon	8 feet tone.
26—Bourdon			

28—Principal..... 8 feet.

27—Quintaton..... 16 feet tone.

31—Posaune..... 16 feet. 32—Trompete.... 8 feet.

Compass.

Coupler.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. Pedal, CCC to Gamut G,  $1\frac{1}{2}$  octave. Choir to Great.

#### FRANKFORT.

The Organ in the Cathedral at Frankfort was built in the early part of the seventeenth century, by Meyer; who also repaired the Cathedral Organ at Ulm, in 1630. The tone of the full Organ is particularly mellow, resonant, and ringing; and there is good weight and fullness of tone on the Pedal. It contains 34 Stops, of which the following is a list:

## Great Organ, 14 Stops.

	8 , 1	
1—Gross Gedackt (Bourdon)	t. 10—Quint 2\frac{2}{3} feet. t. 11—Octave 2 feet. t. 12—Mixture, V ranks. t. 13—Cornet, V ranks. t. 14—Trompete 8 feet.	
Cho	oir Organ, 12 Stops.	
15—Principal 8 feet		
16—Flöte Major 8 feet	t. 22—Octave	
17—Octave 4 feet	t. $23$ —Sesquialtera, II rks. $2\frac{2}{3}$ feet.	
18—Flöte Minor 4 feet	t. $24$ —Nazard	
19—Salicional-octave 4 feet	t. 25—Vox Humana 8 feet.	
20—Spitzflöte 4 feet		
Pec	edal Organ, 8 Stops.	
27—Subbass, metal 16 feet	t. 31—Mixtur, III ranks.	
28-Principal Bass, wood, 16 feet		
29—Principal 8 feet		
30—Violone 8 feet		

#### Compass.

Manuals, CC to c<sup>3</sup> in alt, 4 octaves. | Pedal CCC to CC, 1 octave.

#### 40. Frankfort.

The very large and fine new Organ in St. Paul's Church, Frankfort, was built by Walker, of Ludwigsburg. It contains 74 Stops, 3 Manuals, and 2 Pedals, and 12 Bellows 14 feet long by  $5\frac{1}{2}$  broad. The Draw-stops are placed over as well as at the sides of the Manuals. The quality and varied tones of the numerous 16, 8, and 4 feet Manual Flue Stops, are deserving of all praise. The following is an enumeration of the Stops in this Organ:

## Great, 23 Stops.

Orcat, 2	o cups.
1—Manual-untersaz . 32 fect tone. 2—Principal, in front . 16 feet. 3—Gamba major . 16 feet. 4—Tibia major . 16 feet. 5—Octave . 8 feet. 6—Viola di Gamba . 8 feet. 7—Gemshorn . 8 feet. 8—Jubal Flote, 2 mouths 8 feet. 9—Quint . 5\frac{1}{3} feet. 10—Octave . 4 feet. 11—Hohlpfeife . 4 feet. 12—Fugara . 4 feet.	13—Gemshorn-terz 3
Choir, 1	5 Stops.
24—Bordun	32—Flauto Traverso 4 feet.   33—Rohrflote 4 feet tone.   34—Gemshornquint 2\frac{2}{3} feet.   35—Octave 2 feet.   36—Mixtur, V ranks . 2 feet.   37—Posaune 8 feet.   38—Vox Humana 8 feet.
Kaho 1	1 Stone
Echo, 1	4 Stops.
39—Quintaton       16 feet tone.         40—Prineipal       8 feet.         41—Harmonica       8 feet.         42—Bifaro       8 feet.         43—Hohlflote       8 feet.         44—Gedact, two mouths,       8 feet tone.         45—Spitzflote       4 feet.	46—Dolcissimo. 4 feet. 47—Flute d'amour 4 feet. 48—Gedact 4 feet tone. 49—Nazard 2 <sub>g</sub> feet. 50—Flautino 2 feet. 51—Hautbois 8 feet. 52—Physharmonica 8 feet.
First Padal	l, 15 Stops.
53—Contra-bass, open 32 feet. 54—Subbass, open 32 feet. 55—Principal-bass, in front 16 feet. 56—Octav-bass 16 feet. 57—Violon 10 get. 58—Quint 10 get. 59—Octave 3 feet. 60—Violoncello 8 feet.	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
00 1101011011011011	
Second Ped 68—Subbass 16 feet tone. 69—Violon d'amour 16 feet. 70—Principal 3 feet. 71—Flote 8 feet.	al, 7 Stops.       4 feet.         72—Flote

## Accessory Stops, Movements, &c.

1—Choir to Great.

2—Echo to Choir.

3—Great to first Pedal.

4—Choir to second Pedal. 5—Second to first Pedal.

6, 7, 8, 9, 10—Five Wind-trunk Valves.

### Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 keys. | Pedal, CCC to tenor d, 27 keys.

#### 41. FULDA.

The Organ in the Town Church at Fulda has 48 Sounding Stops, 3 Manuals, and Pedal of 9 Stops. The following is its disposition:

## Great, 15 Stops.

## Large Scale and full intonation.

1—Principal, tin, the 16	11—Octave, II ranks, tin 2 feet & 1ft.
feet octave in front 16 feet.	12—Mixtur, IV ranks,
2—Bourdon, wood 16 feet tone.	c, e, g, c 2 feet.
3—Principal, tin in front 8 feet.	13—Cymbal, III ranks,
4—Bourdon, wood 8 feet tone.	g, c, g $\dots$ $1\frac{1}{3}$ foot.
5—Hohlflote, wood 8 feet.	14—Cornet, III ranks,the
6—Quint, wood bass,	first and second
tin treble $5\frac{1}{3}$ feet.	ranks, wood stop-
7—Gamba Quint $5\frac{1}{3}$ feet.	ped, c, g, c 8 feet tone.
8—Octave, tin 4 feet.	15—Trompete, tin, with
9—Hohlflote, wood 4 feet.	free reeds 8 feet.
10—Quint, tin $2\frac{2}{3}$ feet.	

## Choir, 12 Stops.

#### Smaller Scale and clear intonation.

16—Principal, the bass and tenor octaves of wood, the treble of tin	20—Quintaton, tin 8 feet tone 21—Octave, tin 4 feet. 22—Flote, wood 4 feet. 23—Klein Gedact, tin 4 feet tone. 24—Waldflote, tin 4 feet. 25—Quint, tin 2 feet. 26—Octave, II ranks, tin, 2 feet & 1 foot. 27—Mixtur, IV ranks,
of tin 8 feet.  19—Still-gedact, wood. 8 feet tone.	tin, c, e, g, c 2 feet.

## Echo, 12 Stops.

## Smallest Scale and delicate intonation.

28—Quintaton, the bass	33—Oetave, tin	4 feet.
octave of wood, the	34—Spitzflote, tin	4 feet.
remainder of tin 16 feet tone.	35—Flote travers, wood.	4 feet.
29—Geigen Principal, tin,	36—Flageolet, tin	2 feet.
in front 8 feet.		1 foot.
30—Salicional 8 feet.	38—Mixtur, III ranks,	
31—Gedact, wood 8 feet tone.	tin, c, g, c	2 feet.
32—Flote travers, wood, 8 feet.	39—Clavioline	8 feet.

## Pedal, 9 Stops.

## Largest Scale and fullest intonation.

40—Untersatz, wood	32 feet tone.	45—Octaven-bass, wood.	8 fcet.
41-Principal-bass, wood		46—Violoncello, wood	8 feet.
42—Violon, wood · · · · ·		47—Traversen-bass	8 feet.
43—Sub-bass, wood	16 feet tonc.	48—Posaune, wooden	
44—Traversen-bass, wood	16 feet.	tubes	16 feet.
ii iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	10 1000	1	

#### Accessory Stops, Movements, &c.

· ·	•
<ul> <li>1—Coupler Choir to Great.</li> <li>2—Coupler Echo to Great.</li> <li>3—Coupler Great to Pedal.</li> <li>4—Coupler Choir to Pedal.</li> </ul>	5—Tremulant. 6, 7, 8, 9—Four double-action composition Pedals, one to each manual.

#### Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, CCC to tenor d, 27 notes.

#### 42. GOTHA.

The Organ in St. Augustine's Church, at Gotha, was built in 1841, by Schulze, and contains 34 Stops, of which the following is a list:

## Great, 15 Stops.

1—Bourdon to fiddle g . 32 feet tone.	6—Hohlflote	8 fcet.
2—Principal; bass and	7—Octave	4 feet.
tenor octaves of	8—Hohlflote	4 feet.
wood; from middle	9—Gedact	4 feet tone.
c¹ upwards, of tin 16 feet.	10—Quint	2⅔ feet.
3—Bourdon 16 feet tone.	11—Octave	2 and 1.
4—Octave; bass octave	12—Mixtur, V ranks	2 feet.
of wood; from te-	13—Cymbal, HII ranks.	2 feet.
nor c upwards, of	14—Cornet, III ranks.	
tin 8 feet.	15—Trompet	8 feet.
5—Gamba 8 feet.	•	

#### Choir, 11 Stops.

	1	
17—Geigen Principal; bass octave of wood 8 feet. 18—Salicional 8 feet.	21—Leiblich Gedact	feet. feet. feet.
19—Flauto Traverso 8 feet.	25—Octave 2	2 feet.
20—Harmonica 8 feet.	26—Scharf, III ranks	2 feet.

#### Pedal, 8 Stops.

27—Principalbass 16 feet.	31—Violoncello 8 feet.
28—Violonbass 16 feet.	32—Gedactbass 8 feet tone.
29—Subbass 16 feet tone.	33—Posaune 32 feet.
30—Octavebass 8 feet.	34—Posaune 16 feet.

#### 43. Gотна.

The Organ in the Church of St. Margaret, at Gotha, was also built by Schulze It contains 26 Stops, distributed as follows:

### Great or Lower Manual, 13 Stops.

	realition, 10 10 to put	
1—Principal       16 feet         2—Bourdon       16 fect tone         3—Principal       8 feet         4—Gamba       8 feet         5—Hohlflote       8 feet         6—Gedact       8 feet tonc         7—Harmonica       8 feet	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	
Choir or Upper Manual, 7 Stops.		
14—Leiblich Gedact 16 fect tone. 15—Geigen Principal 8 feet. 16—Salicional 8 fect. 17—Leiblich Gedact 8 feet tone.	18—Flauto Traverso 8 feet.   19—Principal 4 feet.   20—Flauto Traverso 4 feet.	
Pedal, 6 Stops.		
21—Principal-bass        16 feet.         22—Violon        16 feet.         23—Sub-bass        16 feet tone.	24—Octavenbass	

#### 44. Haarhausen.

The Organ in the Church at Haarhausen, in the Dukedom of Gotha, has 2 Manuals and Pedal, and 22 Stops. The following is its disposition:

## Great, 10 Stops.

		1	
1—Quintaton 16 feet 2—Principal, Eng. tin 8 feet 3—Gedact 8 feet 4—Gamba 8 feet 5—Hohlflote, of wood 8 feet	tone.	6—Octave	4 feet. 2 \( \frac{2}{3} \) feet. 2 feet. 2 feet. 1 foot.
Choir, 8 Stops.			
12—Stillgedact 8 feet	tone.	15—Nachthorn	4 feet. 2 feet. 2 <sup>2</sup> / <sub>3</sub> feet. 1 foot.
Pedal, 4 Stops.			
19—Violonbass 16 feet 20—Subbass 16 feet	tone.	21—Octavenbass 22—Posaunenbass	8 fect. 16 feet.
Accessory Stops, &c.			
1—Choir to Great.		3, 4, 5—Three Wind-to	runk Valves

#### 45. ELTSLEBEN.

2-Great to Pedal.

The Organ in the Church at Eltsleben, in the Princedom of Schwartzburg, was built by Francis Volkland. It has 2 Manuals and Pedal, and 28 Stops, the names and distribution of which latter are as follow:

## Great, 12 Stops.

	•		
1—Quintaton       16 feet tone.         2—Principal, Eng. tin       8 feet.         3—Bordun       8 feet tone.         4—Gamba       8 feet.         5—Flauto Traverso       8 feet.         6—Octave       4 feet.	7—Quinta		
Choir, 10 Stops.			
13—Gedact	18—Hohlflöte 4 feet. 19—Octave 2 feet. 20—Sesquialter, II ranks 2\frac{2}{3} feet. 21—Mixture, IV ranks . 1\frac{1}{3} foot. 22—Vox Humana 8 feet tone.		
Pedal, 6 Stops.			
23—Violon-bass 16 feet. 24—Sub-bass 16 feet tone. 25—Octaven-bass 8 feet.	26—Violon-bass 8 feet. 27—Hohlflöten-bass 4 feet. 28—Posaunen-bass 16 feet.		
Accessory Stops, Movements, &c.			
1—Coupler Choir to Great. 2—Coupler Great to Pedal.	4, 5, 6—Three Wind-trunk-valves to Manuals and Pedal.		

#### 46. Waltershausen.

7—Cymbelstern, g, h, d, g. 8—Cymbelstern, c, e, g, c.

3—Tremulant to Choir.

The fine Organ at Waltershausen, in the Dukedom of Gotha, contains 3 Manuals and Pedal, and 50 Sounding-Stops; the names and distribution of which latter are as follow:

## Great, 17 Stops.

1—Bordun 16	6 feet tone.	9—Octave	4 feet.
2—Quintaton 16	feet tone.	10—Rohrflote	4 feet tone.
3—Praestant, Engl. tin,	į	11—Salcional	4 feet.
	3 feet.	12—Quinta	2₹ feet.
4—Bordun	B feet tone.	13—Superoctave	2 feet.
5—Gamba 8	3 feet.	14—Sesquialter, II ranks	$2\frac{2}{3}$ feet.
6—Gemshorn 8	3 feet.	15—Mixtur, VIII ranks.	
7—Quintaton 8	3 feet tone.	16—Fagott	16 feet.
	3 feet tone.	17—Trompete	8 feet.
Choir, 12 Stops.			
18—Spitzflote Major 8	3 feet.	24—Gemshorn quinta	23 feet.
	feet.	25—Nasat	
20-Principal, Engl. tin,	į	26—Octave	
	feet.	27—Sesquialter	
	feet tone.	28—Mixtur, IV ranks	$2\frac{2}{3}$ feet.
	feet.	29—Hauthois	8 feet.
	feet.		

## Echo. 7 Stops.

30—Geigen-Principal, Engl. tin, in front 8 feet. 31—Doppel-Flute 8 feet. 32—Hohlflote 8 feet.	33—Flauto Traverso       8 feet.         34—Spitzflote       4 feet.         35—Still-Gedact       4 feet tone.         36—Hohlflote       2 feet.
Pedal, 1	4 Stops.
37—Gross-Untersatz 32 feet tone. 38—Gross-Principal, Engl. tin, in front 16 feet. 39—Quintaton 16 feet tone. 40—Violon 16 feet. 41—Untersatz 16 feet tone. 42—Octaven-Principal 3 feet. 43—Bordun 3 feet tone.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$

## Accessory Stops, Movements, &c.

	J	1 '	
1—Coupler Choir to Great.			4—Tremulant to Choir.
2—Coupler Echo to Great.			5—Cymbelstern.
3—Coupler Great to Pedal.			6, 7, 8, 9—Four Wind-valves.

#### 47. Zerbst.

The new Organ in the Church of St. Nicholas, Zerbst, was built by Zuberbier and his partner Geibelin in 1840. It contains 37 Stops, 2 Manuals, and a Pedal of 9 Stops. The details of the instrument are as follow:

#### Great, 15 Stops.

0.1040, 1	o cops.	
1—Principal, in front 16 feet.	9—Gedact 4 feet tone.	
2—Quintaton 16 feet tone.	10—Gemshorn 4 feet.	
3—Octave 8 feet.	11—Quinta	
4—Gedact 8 feet tone.	12—Quinta decima 2 feet.	
5—Viola di Gamba 8 feet.	13—Mixtur, VI ranks.	
6—Hohlflote 8 feet.	14—Cornett, IV ranks.	
7—Quinta $5\frac{1}{3}$ feet.	15—Trompete 8 feet.	
8—Super Octave 4 feet.		
Choir, 13 Stops.		
16—Bordun 16 feet tone.	23—Flaut douce 4 feet.	
17—Principal 8 feet.	24—Quint	
18—Gedact 8 feet tone.	25—Superoctave 2 feet.	
19—Quintaton 8 feet tone.	26—Waldflote 2 feet.	
20—Flauto traverso 8 feet.	27—Tertia	
21—Octave 4 feet.	28—Mixtur, IV ranks $2\frac{2}{3}$ feet.	
22—Salicet 4 feet.		
Pedal, 9 Stops.		
29—Untersaz 32 feet tone.	34—Violoncello 8 feet.	
30—Principal, in front 16 feet.	35—Superoctave 4 feet.	
31—Subbass 16 feet tone.	36—Posaune 16 feet.	
32—Violone 16 feet.	37—Trompete 8 feet.	
33—Octave 8 feet.		
Accessory Stons Movements &c		

#### Accessory Stops, Movements, &c.

1—Coupler Great to Pedal.

2, 3, 4—Three Wind-trunk-valves. Six Bellows, 10 feet by 5.

#### 48. Langensulza.

The new Organ in the Church of St. Boniface, at Langensulza, contains 34 Stops, distributed among 2 Manuals and Pedal in the following manner:

3	8
Great,	14 Stops.
1—Bordun, of wood       16 feet tone.         2—Principal, of Engl. tin       8 feet.         3—Bordun       8 feet tone.         4—Gemshorn       8 feet.         5—Viola di Gamba       8 feet.         6—Flauto major       8 feet.         7—Octave       4 feet.	3—Spitzflote
Choir,	13 Stops.
15—Quintaton 16 feet tone. 16—Principal, of Engl. tin 8 feet. 17—Gedact, wood 8 feet tone. 18—Flauto Traverso, pear-tree wood 8 feet. 19—Kleingedact, metal . 4 feet tone. 20—Nachthorn 4 feet.	21—Flach-flote, pear-tree   wood
Pedal,	7 Stops.
28—Gross-Untersatz, wood	31—Sub-bass, wood 16 feet tone. 32—Traversen-bass, wood 16 feet. 33—Oetaven-bass, wood. 8 feet. 34—Posaun-bass, wood. 16 feet.
Accessory Stops,	Movements, &c.

- 1—Coupler Choir to Great.
- 2—Coupler Great to Pedal.
- 3—Coupler Choir to Pedal.

4—Tremulant to Choir.

5, 6, 7—Three Wind-trunk-valves.

8—Cymbelstern.

#### 49. Muhlhausen.

The Organ at the Church at Muhlhausen has 60 Sounding-Stops, 3 Manuals and Pedal. The following is a list of the Stops:

### Great, 15 Stops.

1—Bordun 16 feet tone.	9—Superoctave 2 feet.
2—Surdun 16 feet tone.	10—Waldhorn 2 feet.
3—Prineipal 8 feet.	11—Sexte
4—Spitzflote 8 feet.	12—Sifflote
5—Saleional 8 feet.	13—Mixtur, VII & VIII
6—Oetave 4 feet.	ranks.
7—Offeneflote 4 feet.	14—Mixtur, VI ranks.
8—Quint $2\frac{2}{3}$ feet.	15—Zink (reed) 8 feet.
Choir,	14 Stops.
16—Prineipal 8 feet.	23—Superoetave 2 feet.
17—Gedaet 8 feet tone.	24—Gemshorn 2 feet.
18—Quintaton 8 feet tone.	25—Tertian 2 feet.
19—Hohlflote 4 feet.	26—Sifflote
20—Quintaton 4 feet tone.	27—Mixtur, VI ranks.
01 0	
21—Querflote 4 feet.	28—Dulcian 16 feet.

-			
Echo.	12	Sto	ne
ECHO.	10	NU	UD.

Ecno, 1	e props.
30—Salcional 16 feet.	37—Waldflote 2 feet.
31—Principal 8 feet.	38—Tertia 2 feet.
32—Viol di Gamba 8 feet.	39—Cymbal, IV ranks.
33—Hohlflote 8 feet.	40—Harfen-regal 16 feet.
34—Spitzflote 4 feet.	41—Hautbois 8 feet.
35—Flote douce 4 feet.	42—Trompete 4 feet.
$36$ —Quinte $2\frac{2}{3}$ feet.	
Pedal, 1	8 Stops.
43—Subbass	52—Super-superoctave 1 foot.
44—Principal 16 feet.	53—Mixtur, X ranks.
45—Sub-bass 16 feet tone.	54—Posaune 32 feet.
46—Octave 8 feet.	55—Posaune 16 feet.
47—Waldflote 8 feet.	56—Dulcian 16 feet.
48—Octave 4 feet.	57—Trompete 8 feet.
49—Quintaton 4 feet tone.	58—Krummhorn 8 feet tone.
50—Nachthorn 4 feet.	59—Schalmei 4 feet tone.
51—Superoctave 2 feet.	60—Cornet 2 feet.

### 50. Merseburg.

The Cathedral Organ at Merseburg, in Saxony, has 75 Stops, 62 of which are whole ones. It has 4 Manuals and a Pedal of 17 Stops, and 6 large Bellows. The following is an enumeration of the whole Stops:

### Great, 14 Stops.

1—Rohrflote 16 feet tone.	8—Octave		
2—Quintadena 16 feet tone.	9—Sesquialtera, II ranks $2\frac{9}{3}$ feet.		
3—Principal 8 feet.	10—Mixture, VI ranks.		
4—Quintadena 8 feet tone.	11—Cymbal, III ranks.		
5—Quint	12—Bombarde 16 feet.		
6—Octave 4 feet.	13—Trompette 8 feet.		
7—Flute 4 feet tone.	14—Chalmey 8 feet tone.		
· · · · · · · · · · · · · · · · · · ·			
Choir, 1	3 Stops.		
15—Bourdon 16 feet tone.	22—Octave 2 feet.		
16—Principal 8 feet.	23—Rohrflote 2 feet tone.		
17—Rohrflote 8 feet tone.	$24$ —Tierce $1\frac{3}{5}$ foot.		
18—Viol di Gamba 8 feet.	25—Mixture, VI ranks.		
19—Stahlspiel 4 feet.	26—Vox Humana 8 feet tone.		
20—Flageolet 4 feet.	27—Chalmey 8 feet tone.		
21—Nason			
· · · · · · · · · · · · · · · · · · ·	l and Gr		
	nt, 10 Stops.		
28—Quintadena 8 feet tone.	33—Flute 4 feet.		
29—Gedact 8 feet tone.	34—Rohrflote 4 feet tone.		
30—Rohrflote 8 feet tone.	35—Quint		
31—Principal 4 feet.	36—Terz		
32—Dulciana 4 feet.	37—Flageolet 2 feet.		
Echo, 8 Stops.			
38—Bourdon 8 feet tone.	42—Octave		
39—Principal 4 feet.	43—Tierce $1\frac{3}{5}$ foot.		
40—Salicional 4 feet.	44—Octave I foot.		

45—Mixture, IV ranks.

### Pedal, 17 Stops.

45—Subbass	32 feet tone.	54—Flutc	4 feet.
46—Principal	16 fect.	55—Flagcolet	2 feet.
47—Violonc	16 fect.	56—Flute octave	1 foot.
48—Subbass	16 fect tone.	57—Mixture, VI ranks.	
49—Principal	8 feet.	58—Trombone	32 feet.
50—Violoneello	8 feet.	59—Trombonc	16 feet.
51—Klein Subbass		60-Trompete	8 feet.
52—Quint	$5\frac{1}{3}$ feet.	61—Cornct	4 feet.
53—Octave			

### 51. HALLE.

The Organ in the Church of St. Maurice, at Halle, built by Schulzc, contains 40 Stops, distributed between 3 Manuals and Pedal. The Sound-boards are made to slope upwards from front to back, so that the Stops stand in terrace form.

### Great, 14 Stops.

1—Bordun to g 32 feet tonc.	$8$ —Quinte $5\frac{1}{3}$ fect.		
2—Principal 16 feet.	9—Octave 4 feet.		
3—Bordun 16 feet tone.	10—Flote 4 feet.		
4—Octave 8 feet.	11—Quint & Octave. $.2\frac{2}{3}$ & 2 fect.		
5—Gedact 8 feet tone.	12—Mixtur, V ranks 2 fcet.		
6—Gamba 8 feet.	13—Cornet, III ranks.		
7—Hohlflote 8 feet.	14—Trompete 8 feet.		
Choir, 1	0 Stops.		
15—Bordun 16 feet tone.	20—Octave 4 feet.		
16—Principal 8 feet.	21—Hohlflote 4 feet.		
17—Gedact 8 feet tonc.	$22$ —Quinte $2\frac{2}{3}$ feet.		
18—Flote	23—Octave		
19—Salicional 8 feet.	24—Scharf, V ranks 2 feet.		
Echo, 8	Stops.		
25—Leiblich-Gedact 16 feet tone.	29—Harmonica 8 feet.		
26—Geigen-Principal 8 feet.	30—Schweizerflote 8 feet.		
27—Leiblich-Gedact 8 feet tone.	31—Geigen-Principal 4 feet.		
28—Flauto Traverso 8 feet.	32—Gedact 4 feet tone.		
Pedal, 8 Stops.			
33—Principal Bass 16 feet.	37—Gedactbass 8 feet tone.		
34—Subbass 16 feet tone.	38—Violoncello 8 feet.		
35—Violone 16 feet.	39—Posaune 32 feet.		
36—Octavebass 8 feet.	40—Posaune 16 feet.		

#### 52. Loiz.

The Organ in the Marien-Kirche at Loiz, built by Johann Frederic Schulze, has 34 Sounding Stops, 2 Manuals, and Pedal. The following is a list of its contents:

### Great, 14 Stops.

1—Bordun to g 32 feet tone.	8—Octave	4 feet.
2—Bordun 16 feet.	9—Gedact-flote	4 feet tone.
3—Principal 8 feet.	10—Quinte	$2\frac{2}{3}$ feet.
4—Gedact 8 feet tone.		
5—Gamba 8 feet.	12—Mixture, V ranks	2 feet.
6—Hohlflote 8 feet.	13—Scharf, III ranks	2 feet.
7—Quinte $5\frac{1}{3}$ feet.	14—Trompete	8 feet.

Choir,	12 Sto	ps.
--------	--------	-----

0.1011, 1	- C
15—Leiblich-Gedact       16 feet tone.         16—Geigen-Principal       8 feet.         17—Leiblich-Gedact       8 feet tone.         18—Salicional       8 feet.         19—Flauto Traverso       8 feet.         20—Harmonica       8 feet.	21—Octave       4 feet.         22—Flauto Traverso       4 feet.         23—Quinte       2 met.         24—Octave       2 feet.         25—Scharf, III ranks       2 feet.         26—Æoline       8 feet.
Pedal, 8	8 Stops.
27—Violone	31—Gedact

### Compass.

Manuals, CC to f3 in alt, 54 tones. | Pedal, CCC to Tenor d, 27 tones.

#### 53. Katscher.

The Organ in the Catholic Church at Katscher was built by Müller, sen. in 1843. It has 21 Sounding Stops, distributed among 2 Manuals and Pedal in the following manner:

### Great, 11 Stops.

1-Bourdon... Maple-wood

1-Wind to Great.

2-Wind to Choir.

3-Wind to Pedal.

the remaining 2 oc-

Manuals, CC to d3 in alt.

Pedal, CCC to tenor d.

3 Bellows, 9 feet by  $4\frac{1}{2}$ .

1-Dourdonmapie-wood	the remaining 2 oc-
in the Treble, Pine-	taves 8 feet tone.
wood in the Bass 16 feet tone.	5—Portunalflaut 8 feet.
2—Principal, 5 tin, in front, 8 feet.	6—Principal 4 feet.
3—Salicet Maple-wood	7—Doppelrohrflaut of
to Tenor c, the re-	Oak 4 feet tone.
maining Octave of	8—Gemshornquinte, metal, 22 feet.
Pine 8 feet.	9—Super octave, metal 2 feet.
4—Doppelrohrfiöte Oak	10-MixturProbetin, V ranks.
to middle c1, Pine for	11—Trompete
Choir, (	3 Stops.
12—Principalin front 8 feet.	15—Salicet 4 feet.
13—Salicetof Probetin in	16—Portunal of Maple
the treble, Pine in	and Pear-tree woods
the Bass 8 feet.	to tenor c; the last
14—Flaut major Oak in	octave of Pine 4 feet.
the treble, Pine in	17—Violini14 loth. Probe-
the Bass 8 feet tone.	
Pedal,	4 Stops.
18—Violon of Pine-	20-Violon of Pine-
wood, 16 feet.	wood
19—Subbassof Pine-	21—Posaune Peartree-
wood 16 feet tone.	
Accessory Stops, &c.	Compass, &c.

### 54. ERDMANNSDORF.

The Organ in the Church at Erdmannsdorf was built by Buckow, in 1840; and has 19 Sounding Stops, of which the following is a list:

Great, 9 Stops.			
1—Bourdonwood 2—Principalof Eng. tin	16 feet tone.	6—Nasard (conical) 12 loth. tin	3 feet.
in front	8 feet.	7—Super octave . 14 loth.	2 feet.
tin	8 feet.	8—Cornetti . 12 loth. tin,	<b>22</b> 1000.
4—Principal octave Eng. tin in front	4 feet.	of conical pipes	2 feet.
5—Gemshorn 14 loth.	4 feet.	9—Progressio . 14 loth.tin, III and IV ranks.	2 feet.
	Choir,	6 Stops.	
10—SalicionalEng. tin. 11—Viola di Gamba14	8 feet.	14—Flaut d'amour 10 loth metal	4 feet.
loth. tin	8 feet.	15—Flautino 12 loth. Probetin conical	
metal, lower octaves of wood	8 feet.	pipes	2 feet.
13—PrincipalEng.tin	4 feet.	of	8 feet.
	Pedal,	4 Stops.	
17—Violonwood	16 feet.	per notes of Probe-	
18—Subbasswood	16 feet tone.	tin	8 feet.
19—Violoncellothe up-		20—Posaune 1	6 feet.
Accessory Stops,	&c.	Compass.	
1—Coupler, Choir to Grea		Manuals, CC to f <sup>5</sup> in al	t.
2—Coupler, Great to Ped		Pedal, CCC to Tenor d.	
3, 4, 5—Three Wind-tru	nk Valves.		

### 55. KRUMOLS.

The Organ in the new Catholic Church at Krumols has 22 Sounding Stops, of which the following is a list:

Great, 10 Stops.

Creati, 10 Stops.		
1—Bourdon . metal treble,	6—Gemshorn 12 loth.	
wood bass 16 feet tone.	English tin 4 feet.	
2—Principal Eng. tin,	7—Quinte 12 loth. Eng.	
polished, and in front, 8 feet.	$tin \dots 2^{\frac{2}{3}}$ feet.	
3—Gemshorn 14 loth.	8—Super octave 12	
English tin 8 feet.	loth. English tin 2 feet.	
4—Hohlflötethe upper	9—Progressio 12 loth.	
$3\frac{1}{2}$ octave in 10 loth.	Eng. tinIII, IV,	
metal, the remain-	and V ranks 2 feet.	
der of wood 8 feet.	10—Trompete 8 feet.	
5—Octave12 loth. Eng.		

4 feet.

tin .....

### Choir, 8 Stops.

Choir, o Buops.		
11—Viola di Gamba15 loth. English tin 8 feet.	15—Quinta dulcis 2\frac{2}{3} feet. 16—Flautino 12 loth.	
12—Flaut douce10 loth. metal to tenor c,	Eng. tin 2 feet	
last octave wood 8 feet.	loth. Eng. tin 1 foot.	
13—Principal 14 loth.	18—Cornetti 12 loth.	
Eng. tin, in front . 4 feet.	Eng. tin, III ranks.	
14—Flût d'amour 10		
loth. metal 4 feet.		
Pedal,	4 Stops.	
19—Principalwood 16 feet.	21—Octave12 loth. tin. 8 feet.	
20—Subbasswood 16 feet tone.	22—Posaune 16 feet.	
Accessory Stops, Movements, &c.	Compass, &c.	
1—Coupler, Choir to Great.	Manuals, CC to f <sup>3</sup> in alt.	
2—Coupler, Great to Pedal.		
	Pedal, CCC to tenor d.	
3, 4, 5—Three Wind-trunk Valves.	Three Bellows, 10 feet long.	

### 56. HALBERSTADT.

The Organ in the Great Church at Halberstadt was built by J. F. Schulze, and is remarkable for having a 32-feet Reed on the Manual. This instrument has 65 Sounding Stops, and about 4250 Pipes. There are 4 Manuals, and a Pedal Organ of 18 Stops. The Specification of the Stops is as follow:

Firet	Manua	1 15	Stone
PIESE	TVI ALITHIA	1. 1.0	OLUHS.

9—Octave . . . . . 2 feet.

1—Principal..... 16 feet.

i illicipate e e e i o icce.	5 Colare		
2—Octave 8 feet.	10—Mixtur VI ranks.		
3—Gemshorn 8 feet.	11—Scharf IV ranks.		
4—Gedact 8 feet tone.	12—Cornett IV ranks.		
5—Nasat $5\frac{1}{3}$ feet.	13—Contrafagott 32 feet.		
6—Octave 4 feet.	14—Trompete 16 feet.		
7—Gedact 4 feet tone.	15—Trompete 8 feet.		
8—Quinte $2\frac{9}{3}$ feet.	•		
Second Manu	al, 13 Stops.		
16—Gedact 16 feet tone.	23—Flute douce 4 feet.		
17—Quintaton 16 feet.	$24$ —Quinte $2\frac{2}{3}$ feet.		
18—Principal 8 feet.	25—Octave 2 feet.		
19—Viola di Gamba 8 feet.	26—MixturV ranks.		
20—Hohlflöte 8 feet.	27—Cymbel III ranks.		
21—Gedact 8 feet tone.	28—Hauthois 8 feet.		
22—Octave 4 feet.			
Third Manual, 11 Stops.			
29—Bourdon 16 feet tone.	$35$ —Nasat $2\frac{9}{3}$ feet.		
30—Principal 8 feet.	36—Octave		
31—Salcional 8 feet.	37—Mixtur IV ranks.		
32—Gedact 8 feet tone.	38—Cornett III ranks.		
33—Octave 4 feet.	39—Vox Humana 8 feet tone.		
84—Spitzflöte 4 feet.			
1			

### Fourth Manual, 8 Stops.

40—Lieblich Gedaet 16 feet tone.	44—Lieblich Gedact	8 feet tone.
41—Terpodion 8 feet.	45—Principal	4 feet.
42—Harmoniea 8 feet.	46—Flauto	4 feet.
43—Flauto traverso 8 feet.	47—Physharmoniea	8 feet.
Pedal, 1	8 Stops.	
48—Untersatz 32 feet tone.	57—Tertia	63 feet.
49—Principal 16 feet.	58—Nasat	$5\frac{1}{3}$ feet.
50—Violone 16 feet.	59—Octave	4 feet.
51—Subbass 16 feet tone.	60—MixturVl ranks.	
52—Subbass 16 feet.	61—Cornett V ranks.	
$53$ —Grossnasat $10\frac{2}{3}$ feet.	62—Posaune	32 feet.
54—Octave 8 feet.	63—Posaune	16 feet.
55—Violoncello 8 feet.	64—Trompete	8 feet.
56—Gedact 8 feet tone.	65—Trompete	4 feet.

### 57. HIRSCHBERG.

The large Organ in Christ Church, Hirschberg, has 62 Sounding Stops, 4 Manuals, Pedal of 16 Stops, and 3844 Pipes. The Stops are disposed in the following manner:

## First Manual, 16 Stops.

That manda, 10 boops.		
1—Principal tin	16 feet.	10—Vigesima secunda . tin 2 feet.
	16 feet tone.	11—Rauschquinte. II ranks,
3—Principal Eng. tin .	8 feet.	tin $1\frac{1}{2}$ foot.
4—Gemshornmetal	8 feet.	12—Mixtur V ranks, tin 2 feet.
5—Hohlflöte wood	8 feet.	13—SeharfIV ranks, tin $1\frac{1}{3}$ foot.
6—Nasardtin	5½ feet.	14—Cymbel. III ranks, tin 1 foot.
7—Super octave tin	4 feet.	15—Tromba $\frac{3}{4}$ tin 16 feet.
8—Flute doucewood	4 feet.	16—Trompete. \(\frac{3}{4}\) tin \(\dots\). 8 feet.
9—Quintetin	23 feet.	•
	Second Manu	ual, 13 Stops.
17—Bourdonoak-wood.	16 feet tone.	24—Super octavetin 2 feet.
18—Principal, in front . tin	8 feet.	25—Terz 15 foot.
19—Gedaet metal	8 feet tone.	26—Flageolet tin 1 foot.
20—Quintatonmetal	8 feet tone.	27—Mixtur . VI ranks, tin 2 feet.
27—Octave tin	4 feet.	28—Cymbel. III ranks, tin $1\frac{1}{3}$ foot.
22—Gemshorn tin	4 feet.	29—Vox Humana 3 tin 8 feet tone.
23—Quinte tin	$2\frac{2}{3}$ feet.	
Third Manual, 10 Stops.		
30—Principal . English tin	8 feet.	35—Quinte $2\frac{2}{3}$ feet.
31—Fugara pine and		36—Super octave 2 feet.
maple-wood	8 feet.	37—MixturIV ranks.
32—Gedaetoak-wood	8 feet tone.	38—SesquialteraII ranks.
33—Oetave	4 feet.	39—Schalomotin 8 feet tone.
34—Rohrflöte metal	4 feet tone.	
Fourth Manual, 7 Stops.		
40—Prestanttin	8 feet.	44—Super octave tin 2 feet.
41—Flüt doucewood	8 feet.	45—Cornet . II ranks . tin 1\frac{1}{3} foot.
42—Octave tin	4 feet.	Oboe im descant wood
43—Flüt traversiere .wood	4 feet.	46 { Oboe im descant. wood } 8 feet.
10 2 Tav traversiere, wood	1 1000.	( Lagotto III Dass. Wood )

### Pedal, 16 Stops.

47—Untersazwood		55—Super octavetin 4 feet.
48—Principal . English tin	16 feet.	56—Nachthorntin 2 feet.
49—Violon		57—Mixtur. V ranks. tin 23 feet.
50—Quintatön	16 feet tone.	58—Rauschquinte. II ranks. tin.
51—Subbass	16 feet.	59—Contraposaune . wood . 32 feet.
52—Octave wood & metal	8 feet.	60—Posaune wood . 16 feet.
53—Violoncello	8 feet.	61—Trompete \( \frac{3}{4} \) tin . 8 feet.
54—Quinte metal.	$5\frac{1}{3}$ feet.	62—Clarino 3 tin . 4 feet.

### Accessory Stops, &c.

1, 2, 3, 4—Couplers for all 4 Manuals. | 6 to 12—Seven Wind-trunk Valves. 5—Coupler, Great to Pedal. | 13—Tremulant.

#### 58. NAUMBERG.

The Organ in the Church of St. Wenzel, in Naumberg, contains 52 Sounding Stops, 3 Manuals, and a Pedal of 12 Stops; 3000 Pipes, and 7 large pairs of Bellows. The oldest parts of the instrument date as far back as 1613, to which additions were made in 1734 (by Hildebrand, of Leipzig), in 1787, and in 1810. The present contents of the Organ are as follow:

### Great, 15 Stops.

,	T .	
1—Principal 16 feet.	9—Quinte 3 feet.	
2—Quintatön 16 feet tone.	10—Octave 2 feet.	
3—Octave 8 feet.	11—Weitpfeife 2 feet.	
4—Spitzflöte 8 feet.	12—MixturV ranks.	
5—Gedact 8 feet tone.	13—Cornett V ranks.	
6—Prestant 4 feet.	14—Bombard 16 feet.	
7—Spitzflöte 4 feet.	15—Trompete 8 feet.	
8—Gedact 4 feet tone.	10 Minipotor Control	
	4 Stops.	
	-	
16—Bourdon 16 feet tone.	23—Gemshorn 4 feet.	
17—Principal 8 feet.	24—Gedact	
18—Principal undamar 8 feet.	25—Quinte 3 feet.	
19—Hellflöte 8 feet.	26—Octave 2 feet.	
20—Flauto traverso 8 feet.	27—Waldflöte 2 feet.	
21—Clav. Æoline 8 feet.	28—Sifflöte	
22—Prestant 4 feet.	29—MixturV ranks.	
Choir, 1	1 Stops.	
30—Tibia major 16 feet tone.	36—Quintaton 8 feet tone.	
31—Principal 8 feet.	37—Prestant 4 feet.	
32—Gemshorn 8 feet.	38—Rohrflöte 4 feet tone.	
33—Viola di Gamba 8 feet.	39—Octave	
34—Fugara 8 feet.	40—MixturV ranks 3 feet.	
35—Rohrflöte		
Pedal, 12 Stops.		
41—Principal 16 feet.	47—Octave 4 feet.	
42—Violon	48—Octave	
43—Subbass	49—MixturV ranks 3\frac{1}{5} feet.	
43—Octavbass	50—Posaune	
To—Octaviass o feet.	oo rosaune oz leet.	

8 feet.

6 feet.

45—Violon .....

46—Quinte .....

#### 59. TREBNIZ.

The Organ in the Catholic Church at Trebniz has 33 Sounding Stops, which are distributed as follows:

#### Great, 13 Stops. 1—Bourdon, wood.... 16 feet tone. 7—Gemshornquinte . metal . . . . . . . . . . . . . . . . . $5\frac{1}{3}$ feet. 2-Principal . . Eng. tin, 8-Octave . . Eng. tin, in in front ..... 8 feet. 3—Salicet...7 tin to tenor front....... 4 feet. 9-Doppelrohrflöte . ma-F, wood bass .... 8 feet. 4 feet. 4—Gemshorn . metal, exple-wood ..... 10—Quinte..metal .... $2\frac{2}{3}$ feet. cept the bottom octave, which is of wood 8 feet. 11-Super octave . . metal . 2 feet. 5-Quintaton . half tin . . 8 feet tone. 12—Mixtur .V ranks. 8 feet. 6-Rohrflöte . metal, ex-13—Trompete.. $\frac{7}{8}$ tin . . . cept the 8 feet octave, 8 feet. which is of wood ... Choir, 9 Stops. 14—Principal.. Eng. tin. 8 feet. 19—Portunal..... 4 feet. 15—Salicet .. 7 tin, the 20—Gemshornquint . . half lowest octave of wood 8 feet. 3 feet. 16-Portunalflöte..wood. 8 feet. 21—Super octave..metal. 2 feet. 17—Flaut major .. wood . 8 feet tone. 22—Cymbel. . III ranks. 18—Salicet..tin . . . . . . 4 feet. Pedal, 11 Stops. 29—Salicet ....wood... 23—Principal...wood... 16 feet. 8 feet. 30-Doppelflaut . . wood . . 8 feet tone. 24—Gamba....wood.. 16 feet. 25—Salicet . . . . wood . . 16 feet. 31—Super octave. wood... 4 feet. 26—Subbass ....wood.. 16 feet tone. 32—Posaune ....wood.. 16 feet.

# 8 feet. Accessory Stops, &c.

1—Coupler, Choir to Great. 2—Coupler, Great to Pedal.

28—Octavenbass . wood...

3, 4—Two Wind-trunk Valves.
Four Bellows, 9 feet by  $4\frac{1}{2}$ .

33—Trompete . . .  $\frac{7}{8}$  tin . .

Compass.

Manuals, CC to f3 in alt.

27—Quintenbass.wood.. 10<sup>2</sup> feet.

# Pedal, CCC to tenor d.

#### 60. SALZWEDEL.

The Organ in the Church of St. Catharine, in the new town of Salzwedel, has 42 Sounding Stops, and was built by Friedrick Turley, of Treuenbritzen, in 1838.

#### Great. 15 Stops.

1—Principalin front 16 feet.	10 — Super octave 2 feet.	
2—Octave 8 feet.	11—CornettIV ranks,	
3—Spitzflöte 8 feet.	6, 4, $3\frac{1}{5}$ and 2 feet.	
4—Gedact	12—Scharf IV ranks,	
5—Quinte $5\frac{1}{3}$ feet.	$2, 1\frac{5}{5}, 1\frac{1}{3}, \text{ and } 1 \text{ foot.}$	
6—Super octave 4 feet.	13—Cymbel III ranks,	
7—Rohrflöte 4 feet tone.	1, $\frac{1}{2}$ , and $\frac{1}{4}$ foot.	
8—Leiblichgedact 4 feet tone.	14—Trompete 16 feet.	
	15—Trompete 8 feet.	

### Choir, 13 Stops.

16—Bourdon 16 feet tone.	23—Gemshorn 4 feet.	
17—Principalin front 8 feet.	24—Nassat 3 feet.	
18—Viola di Gamba 8 feet.	25—Super octave 2 feet.	
19—Salicional 8 feet.	26—MixturIV ranks,	
20—Quintatön 8 feet tone.	$2, 1\frac{1}{3}, 1, \text{ and } \frac{1}{2} \text{ foot.}$	
21—Lieblichgedact 8 feet tone.	27—Æoline 16 feet.	
22—Octave 4 feet.	28—Hauthoisto c <sup>1</sup> 8 feet.	
Pedal, 14 Stops.		
29—Principal. in front 16 feet.	36—Nasat 6 feet.	
30—Violon 16 feet.	37—Super octave 4 feet.	
31—Subbass 16 feet tone.	38—Compensation Mixtur, V ranks.	
32—Gross-Nassat 12 feet.	39—Posaune 16 feet.	
33—Octave 8 feet.	40—Dulcian 16 feet.	
34—Gedact 8 feet tone.	41—Trompete 8 feet.	
35—Tertia $6\frac{2}{5}$ feet.	42—Clarion 4 feet.	
Accessory	Stons &c.	

#### Accessory Stops, &c.

1—Coupler, Cho	ir to Great.
2—Tremulant.	

Manuals, CC to f3 in alt.

3, 4, 5—Three Wind-trunk Valves. Six Bellows.

Pedal, CCC to tenor d.

#### 61. Weissenfels.

The Organ in the Lock Church at Weissenfels was built by Schulze. It has 19 Stops, 2 Manuals, and Pedal. The following is a list of its contents:

### Great, 10 Stops.

1—Bourdon 16 feet tor	ne. 6—Octave 4 feet.	
2—Principal 8 feet.	7—Quinta	
3—Viola di Gamba 8 feet.	8—Octave	
4—Hohlflöte 8 feet.	9—MixturV ranks 2 feet.	
5—Gedact 8 feet tor	ne. 10—ScharfIII ranks 2 feet.	
Cho	ir, 5 Stops.	
11—Lieblich Gedact 16 feet ton	e.   14—Lieblich Gedact 8 feet tone.	
12—Salcional 8 feet.	15—Principal 4 feet.	
13—Flauto traverso 8 feet.		
Ped	al, 4 Stops.	
16—Gedact 16 feet ton	ne.   18—Gedact 8 feet tone.	
	19—Posaune 16 feet.	
Accessory Stops.		
1—Coupler, Choir to Great.	2—Coupler, Great to Pedal.	
2 Couplet, Chief to Greate	2 Soupros, State to Teath.	

#### 62. CELLE.

Compass.

The Organ in the Ludwigs Church at Celle has 15 Stops, 2 Manuals, and Pedal. The following are the names of the Stops:

Great, 7 Stops.		
1—Bourdon metal to	3—Rohrflote . metal treble,	
middle c1, the re-	wood bass 8 feet tone.	
maining 2 octaves	4—Octave . 4 loth metal 4 feet.	
of wood 16 feet tone.	5—Gemshorn . 4 loth metal 4 feet.	
2—Principal . 12 loth. tin,	6—Octave . 4 loth metal 2 feet.	
in front 8 feet.	7—MixturIII ranks.	
Choir, 4 Stops.		
8—Salcional 8 feet.	10—Rohrflote. 4 loth. metal 4 feet tone.	
9—Gedact . metal treble,	11—Waldflote . 4 lotl1 me-	
wood bass 8 feet tone.	11—Waldflote . 4 lotli me- tal 2 feet.	
Pedal, 4 Stops.		
12—Subbasswood 16 feet tone.	14—Octave4 loth.metal. 4 feet.	
13—Principal.12 loth.metal 8 feet.	15—Posaune 16 feet.	

#### 63. VERDEN.

The Organ in the pretty little Cathedral at Verden is a particularly fine Instrument, built by Schulze, containing 34 Sounding Stops, of which the following is a list:

Great, 1	4 Stops.	
1—Bourdon 32 feet tone.	8—Octave 4 feet.	
2—Bourdon 16 feet tone	9—Flote 4 feet.	
3—Principal 8 feet.	10—Hohlflote 4 feet.	
4—Gedact 8 feet tone.	11—Quint and Octave $2\frac{2}{3}$ & 2 feet.	
5—Gamba 8 feet.	12—Mixtur V ranks 2 feet.	
6—Hohlflote 8 feet.	13—Cymbal, III ranks 2 feet.	
7—Quint $5\frac{1}{3}$ feet.	14—Cornett, III ranks 4 feet.	
Choir, 11 Stops.		
	•	
15—Leiblich Gedact 16 feet tone.	21—Geigen Principal 4 feet.	
16—Leiblich Gedact 8 feet.	22—Flauto Traverso 4 feet.	
17—Geigen Principal 8 feet.	23 — Quint and Octave 22 & 2 feet.	
18—Salicional 8 feet.	24—Scharf, III ranks.	
19—Flauto Traverso 8 feet.	25—Æoline 8 feet.	
20—Harmonica 8 feet.		
Pedal, 9 Stops.		
26—Principal-bass 16 feet.	31—Gedact-bass 8 feet.	
27—Sub-bass 16 feet.	32—Violoncello 3 feet.	
28—Violon 16 feet.	33—Posaune 32 feet.	
29—Quinten-bass 103 feet.	34—Posaune 16 feet.	
30—Octave-bass 8 feet.		
Compass.		
Manuala CC to 63 in alt 54 notes	•	

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, CCC to Tenor d, 27 notes.

### 64. Bremen.

The Organ in the Cathedral Church at Bremen was built by Schulze, and contains 59 Stops, 16 of which are devoted to the Pedal. It presents the peculiarities of having a Stop of 32-feet tone on the Choir as well as on the Great Manual, and of having a Great Stopped Quint of  $21\frac{1}{3}$  feet tone on the Pedal. The following is the Specification of the above-named Instrument.

### Great, 16 Stops.

1—Bourdon, to Tenor ckey 32 feet tone. 2—Principal. 16 feet. 3—Bourdun 16 feet tone. 4—Principal 8 feet. 5—Gedact 8 feet tone. 6—Gamba 3 feet. 7—Hohlflote 8 feet. 8—Quint 5 \frac{1}{3} feet.	9—Octave 4 feet.  10—Flote 4 feet.  11—Quint and Octave 2 <sup>2</sup> / <sub>3</sub> & 2 ft.  12—Mixture, V ranks . 2 feet.  13—Cymbel, III ranks . 2 feet.  14—Cornett, III ranks . 4 feet.  15—Trompet 16 feet.  16—Trompet 8 feet.	
Choir, 1	3 Stops.	
17—Bourdon, to Tenor ckey       32 feet tone.         18—Bourdon       16 feet tone.         19—Salicional       8 feet.         20—Gedact       8 feet tone.         21—Flote       8 feet.         22—Principal       8 feet.         23—Octave       4 feet.	24—Flote       4 feet.         25—Spitzflote       4 feet.         26—Quint and Octave       2½ & 2 ft.         27—Mixture, V ranks       2 feet.         28—Scharff, III ranks       2 feet.         29—Phizharmonica       3 feet.	
Swell, 1	4 Stops.	
30—Leiblich Gedact       16 feet tone.         31—Geigen Principal       8 feet.         32—Harmonica       8 feet.         33—Leiblich Gedact       8 feet tone.         34—Terpodion       8 feet.         35—Gedact-flote       8 feet tone.         36—Flauto traverso       8 feet.	37—Geigen Principal       4 feet.         38—Flauto traverso       4 feet.         39—Zart-flote       4 feet.         40—Quint       2g feet.         41—Octave       2 feet.         42—Mixture, III ranks       2 feet.         43—Æoline       8 feet.	
Pedal, 16 Stops.		
$44$ —Principal-bass $32$ feet. $45$ —Gross-Quinten-bass $21\frac{1}{3}$ ft. tone. $46$ —Principal-bass $16$ feet. $47$ —Major-bass $16$ feet. $48$ —Violon $16$ feet. $49$ —Sub-bass $16$ feet tone. $50$ —Quinten-bass $10\frac{2}{3}$ ft. tone. $51$ —Octaven-bass $8$ feet.	52—Gedact-bass       8 feet tone.         53—Floten-bass       8 feet.         54—Violoncello       8 feet.         55—Octave       4 feet.         56—Posaune       32 feet.         57—Reim       16 feet.         58—Posaune       16 feet.         59—Trompet       8 feet.	

### 65. Hamburg.

The ancient city of Hamburg was long celebrated for the number and excellence of its 32-feet Organs, two of which, however, perished in the great conflagration of 1842. Of the three which remain, that in the present Church of St. Michael is the best known, and is also the most modern one.

#### THE CHURCH AND ORGAN OF ST. MICHAEL'S, HAMBURG.

The old Church of St. Michael being struck by lightning and burnt down, the present edifice was commenced in 1750, from the designs of Mr. Ernst George Sonnin, and opened for scrvice in 1762. The height of the church inside is 93 feet, its length 249 fect, and its breadth 178 feet. The Organ stands at the west end and contains the following stops:

## Great Organ, 18 Stops.

Great Organ, 18 Sups.		
1—Prineipal, tin	11—Octave, tin 2 feet.     12—Rauschpfeif, II ranks,	
Choir Organ	n, 16 Stops.	
19—Rohrflote, wood and metal 16 feet tone. 20—Principal, tin 8 feet. 21—Principal, to fiddle g. 8 feet. 22—Rohrflote, metal 8 feet tone. 23—Flauto Traverso, wood 8 feet. 24—Klein Gedact, wood. 8 feet tone. 25—Oetave, tin 4 feet.	27—Nasat, tin	
26—Rohrflote, metal 4 feet tone.	34—Trompete, tin 4 feet.	
	the same Manual, 20 Stops.  r-work.    43—Oetave, tin	
37—Quintadena, wood and metal	45—Cymbal, V ranks,  tin	
Sw		
51—Octave	the treble, II in the bass 54—Trompete 8 feet.	
Pedal, 16 Stops.		
55—Prineipal, tin	63—Gedaet, tin	

### Accessory Stops.

1—Tremulant to great
Manual.

2—Cymbalstar.

3—Wind to Great Organ.

4—Wind to Choir Organ.
5—Wind to Upper-work.
6—Wind to Pedal Organ.

The case presents a handsome front, sixty feet in height, and sixty feet in width. The thirty-two feet pipe stands in the centre by itself, in an immense pilaster, the remainder of the thirty-two feet stop in two great concave compartments, one on each side, and every pipe is supported below by a base, and finished off above with a Corinthian capital, gilded, the pipes themselves forming the shafts, being of their natural bright silvery colour.

The organ is finely laid out inside, in four stories, to each of which free access is obtained by wide staircases with hand-rails. Passage-boards occur in abundance; and any pipe in this immense instrument can be got at without disturbing a second one.

There are no "conveyanced off" pipes, except those which appear in the front of the case, the site of the organ being so favourable as to allow of the sound-boards being made of ample dimensions.

Those of the Great Organ are made "in halves," each half measuring from  $8\frac{1}{2}$  to 9 feet in length, and the pipes of every stop stand in a single row, even to the 16-feet double trumpet.

The C C C C pipe in the middle of the front is made of pure tin, is 35 feet 6 inches in length, weighs upwards of 960 pounds, is 20 inches in diameter, and the body was cast in one sheet.

The diameter of the 32-feet Posaune is 16 inches at the bell, and of the 16-feet Posaune, 10 inches. A light sieve of metal wire, with wide meshes, placed over the bell of each of the large reed-pipes, keeps out the birds—a most necessary and excellent precaution. The tops of a great portion of the large metal pipes also have an addition that is by no means common. This consists of a sliding cylinder, introduced to aid the process of tuning, which is drawn up or pressed down according as the pitch of the pipe may require flattening or sharpening. The top of the pipe is further covered with leather outside, to prevent the cylinder slipping. None of the pipes are pressed out of shape, none present bent or ragged tops, as is too frequently the case in English Organs, but all preserve their symmetry of outline.

Silberman, the celebrated organ builder, of Dresden, was invited to construct the new St. Michael's Organ, which invitation he accepted; but, dying shortly afterwards, the execution of the work was entrusted to his principal workman, Hildebrand. This was about the year 1768. T. Mattheson, the celebrated composer and theorist, left, by will, £4000 towards paying for this Organ; which sum, however, did not nearly equal the amount expended in its fabrication.

#### 66. Hamburg.

It is not known by whom the fine-toned Organ in St. Catharine's Church at Hamburg was built; but it is said to be about 400 years old. It contains 54 Sounding Stops, distributed among 4 Manuals and Pedal; and, like the preceding, has a 32-feet front of Tin.

### Great, 11 Stops.

Great, 11 Stops.		
1—Prineipal       16 feet         2—Quintadena       16 feet tone         3—Octave       8 feet         4—Spitzflote       8 feet         5—Gamba       8 feet         6—Octave       4 feet	7—Rauschpfeife, H rks. 2½ and 2 feet. 8—Octave	
Choir, 1	3 Stops.	
12—Bourdon, 3 top oetaves only	18—Nasat	
Echo, 10 Stops.		
25—Principal       8 feet         26—Rohr-flote       8 feet tone         27—Gedaet       8 feet tone         28—Octave       4 feet         29—Flote       4 feet	30—Wald-flote	
Swell, '	7 Stops.	
35—Prineipal	39—Seharf, VII ranks. 40—Trompete	
Pedal, 13 Stops.		
42—Principal, in front. 32 feet. 43—Principal 16 feet. 44—Subbass 16 feet tone. 45—Quinte 10\(^g\) feet. 46—Octave 8 feet. 47—Octave 4 feet. 48—Octave 2 feet.	49—Mixtur III ranks. 50—Posaune	
Aeeessor	y Stops.	
1—Cymbelstern. 2—Tremulant. 3—Gloekenspiel.	4—Caleant-glock. 5 to 10—Six Wind-trunk Valves.	

### 67. Hamburg.

The fine Organ in the Church of St. Jacobi, at Hamburgh, was built by the Abbe Schnittker, and was completed towards the close of the seventeenth century. It has 60 Sounding Stops, 4 Manuals, and Pedal of 14 Stops. The following is the disposition:

### Great, 12 Stops.

1—Principal       16 feet         2—Quintadena       16 feet tone         3—Octave       8 feet         4—Viola di Gamba       8 feet         5—Spitzflote       8 feet         6—Octave       4 feet         7—Rohrflote       4 feet tone	8—Quinte	2 <sup>2</sup> / <sub>3</sub> feet. 2 feet. 16 feet.
Choir,	13 Stops.	
13—Principal       8 feet.         14—Bauerpfeife       8 feet.         15—Quintadena       8 feet tone.         16—Gedact       8 feet tone.         17—Octave       4 feet.         18—Blockflote       4 feet.         19—Nasat       2 feet	20—Octave	2 feet. 1 foot. 22 feet. 8 feet. 8 feet.
Echo, 13 Stops.		
26—Principal       8 feet.         27—Holzflote       8 feet.         28—Rohrflote       8 feet tone.         29—Octave       4 feet.         30—Spitzflote       4 feet.         31—Nasat       2\frac{2}{3} feet.         32—Octave       2 feet.	33—Gemshorn 34—Cymbel, III ranks. 35—Scharf, VI ranks. 36—Trompet 37—Oboe, to middle c <sup>1</sup> 38—Vox humana	2 feet. 8 feet. 8 feet tone.
Swell	, 8 Stops.	
39—Principal       8 feet.         40—Octave       4 feet.         41—Hohlflote       4 feet.         42—Waldflote       2 feet.         43—Sesquialtera, 2 ranks       2 feet.	44—Scharf, VI and VIII ranks. 45—Dulcian	8 feet. 8 feet.
Pedal 14 Stops.		
47—Principal, in front. 32 feet. 48—Octave	54—Rauschpfeife, II rks. 55—Posaune 56—Posaune 57—Dulcian 58—Trompete 59—Trompete	32 feet. 16 feet. 16 feet. 8 feet. 4 feet. 2 feet.
The 4 Manuals can be coupled together.		

### Accessory Stops.

1 to 5—Five Wind-trunk Valves.	7—Glockenspiel.
6—Cymbelstar.	8—Trommel.

The name of the builder of the above excellent Organ is held in great veneration in Germany; where his Instruments are as highly prized for their stability, as they are justly celebrated for their dignified and impressive tone. The Abbe Schnittker

resided at a place about 36 English miles from Hamburg, in the Hanoverian territories, in a house that has gone by the name of "the Organ-builder's box" or Villa ever since.

The three fine Instruments just noticed form most interesting objects for examination to an English admirer of the Organ; not simply on account of the very distinct character in the tone of each, but because they so closely resemble in quality the Organs of three of the most celebrated builders of this country of past times; and they therefore picture to the hearer what the Instruments of those builders would have been, had the Art in England been in a more advanced state in their day.

The Organ in the Church of St. Catherine, which is the oldest of the three, is strikingly like Harris's in tone; clear, ringing, and dashing in the Mixtures. That in the Church of St. Jacobi calls to mind the Instruments of Father Smith; resonant, solemn, and dignified; with somewhat less fire than that at St. Catherine's, but rather more fulness. The Organ at St. Michael's, the most recently constructed one of the three, is also the largest in scale; is less powerful than the others, but very musical and pleasing; and, in all these respects, forcibly calls to mind the excellent Instruments of Green.

#### 68. Hamburg.

The Organ that lately stood in the Church of St. Nicholas, at Hamburg, had 67 Sounding Stops, and, like the last, was built by Schnittker, who completed it in the year 1686. The following is a list of the Stops that were contained in this Instrument.

Great, 14 Stops.		
1—Principal       16 feet         2—Quintadena       16 feet tone         3—Octave       8 feet         4—Spitzflote       8 feet         5—Salcional, wood       8 feet         6—Viola di Gamba       8 feet         7—Octave       4 feet	8—Spitzflote	2 feet.
Echo, 14 Stops		
15—Quintadena 16 feet tone. 16—Octave 8 feet. 17—Quintadena 8 feet tone.	22—Flachflote 23—Scharf, IV to VI rks. 24—Cymbel, III ranks.	2 feet.
18—Rohrflote 8 feet tone.	25—Trompete	8 feet.
19—Octave 4 feet.	26—Trompete	4 feet.
20—Rohrflote 4 feet tone.	27—Krumhorn	8 feet tone.
21—Nasat 2\frac{2}{3} feet.	28—Vox humana	8 feet tone.
Choir, in front, 13 Stops.		
29—Bourdon 16 feet tone.	36—Sifflote	2 feet.
30—Principal 8 feet.	37—Querflote	2 feet.
31—Quintadena 8 feet tone.	38—Scharf, VI to IX rks.	
32—Gedact 8 feet tone.	39—Dulcian	16 feet.
33—Octave	40—Trompete	8 feet.
34—Rohrflote 4 feet tone.	41—Trompete to middle	
35—Sesquialtera, II rks. 2 <sup>2</sup> / <sub>3</sub> feet.	c1	8 feet.

в в 2

D 1 1

### Brustwerk, 10 Stops.

42—Principal       8 feet.         43—Barpfeife       8 feet.         44—Blockflote, wood       8 feet.         45—Principal       4 feet.         46—Blockflote, wood       4 feet.	47—Rauschpfeif, II rks. 2\frac{2}{3} feet. 48—Waldflote 2 feet. 49—Nasat	
Pedal, 16 Stops.		
52—Principal	60—Nacht-horn 2 feet. 61—Mixtur, VI to X rks. 62—Posaune 32 feet. 63—Posaune 16 feet. 64—Dulcian 16 feet. 65—Trompete 8 feet. 66—Krumhorn 8 feet tone. 67—Trompete 4 feet.	
Accessory Stone		

### Accessory Stops.

1—Cymbelstar. 4—Riegal.
1 Cyllipoister. 1 Hogai.
2—Glockenspiel. 5 to 10—Six Wind-trunk Valve
3—Tremulant. 11—Coupler, Choir to Pedal.

### 69. Hamburg.

The Organ that stood in St. Peter's Church previous to the fire was the most ancient one in the City. It is not known when or by whom it was originally built; but the last two Manuals, which were subsequent additions, were made upwards of 300 years ago, i. e. in 1548, at Hartzogenbuch, in Brabant, and sent thither by sea. The Stops in the above Organ were as follow:

#### Great, 11 Stops.

1—Principal 16 feet.	7—Octave 4 feet.	
2—Gedact 16 feet tone.	8—Rauschpfeife, II rks. 2\frac{2}{3} feet.	
3—Octave	9—Mixtur, IV ranks.	
4—Rohrflote 8 feet tone.	10—Scharf, III ranks.	
5—Viola di Gamba 8 feet.	11—Trompete 16 feet.	
6—Quint 5 ½ feet.		
Echo, 14 Stops.		
12—Quintadena 16 feet tone.	19—Sesquialtera, II rks. 2½ fcet.	
13—Principal 8 feet.	20—Mixtur, IV ranks.	
14—Principal 8 feet.	21—Cornet, V ranks.	
15—Gedact 8 feet tone.	22—Trompete 8 feet.	
16—Octave 4 feet.	23—Trompete 8 feet.	
17—Spitzflote 4 feet.	24—Oboe discant 8 feet.	
$18$ — $\hat{N}$ asat $2\frac{2}{3}$ feet.	25—Vox humana 8 feet tone.	
Choir, in front, 12 Stops.		
26—Principal 8 feet.	1 32—Flote	

#### 

30—Blockflote...... 4 feet. 31—Sesquialtera, II rks. 2% feet. 36—Trompete...... 8 feet. 37—Trompete, tenor c.. 8 feet.

#### Pedal, 13 Stops.

#### 70. LUBECK.

The Marien Kirche, in the ancient Town of Lübeck, contains two Organs; the largest of which stands at the west end of the Church, a stately Gothic edifice, measuring upwards of 120 English feet in height inside, and about 300 feet in length. At what period the west-end organ was first erected is not known; but the Choir Organ in front, a subsequent addition, was made as far back as the year 1561, which date is ingeniously recorded among the ornamental carving on the top. The case presents a most noble and magnificent, though not elaborate, facade; and is from 70 to 30 feet in height, 40 in width, and 7 feet in depth. It has the 32-feet metal Pipes in front, the largest of which is 19 inches in diameter. All the front Pipes are of pure Tin, burnished; and are slightly but exquisitely diapered about the mouth. The case is made of a handsome dark wood, probably walnut, and has a great quantity of carved and gilt work about it, which gives a gorgeous effect to the whole.

This Instrument has just had a new inside put to it, by J. F. Schulze, of Paulinzelle, from a Specification drawn up by H. Jimmerthal, the organist to the Church. It is laid out in four stories, the Swell occupying the upper one. The frame-work and Sound-boards are almost entirely of oak; the Front-boards of the latter being of polished mahogany, handsomely inlaid with ebony. The Front-boards are fastened on with \*cooden\* screws having large six-sided heads, which present the great advantage of being capable of being turned by the fingers unaided. The beams that support the Organ are built into the wall behind; and the Organ hangs, pendant fashion, therefrom, with most elegant effect.

The Organ contains 82 Sounding-stops, distributed among 4 Manuals and 2 Pedals; and includes 3 Stops of 32 feet; 17 of 16 feet; and 30 of 8 feet.

The following is a detailed account of its contents:

### Great, 21 Stops.

1—Bordun, to tenor c 32 feet tone.	12—Spitzflote	4 feet.
2—Principal 16 feet.	13—Gambette	4 feet.
3—Viola Major 16 feet.	14—Nassat	23 feet.
4—Bordun 16 feet tone.	15—Rausch-quinte, II	
5—Principal 8 feet.	fach	$2\frac{2}{3}$ —2 feet.
6—Gemshorn 8 feet.	16—Mixtur, V fach	2 feet.
7—Hohlflote 8 feet.	17—Cymbel, III fach	2 feet.
8—Viola di Gamba 8 feet.	18—Cornett, IV fach.	
9—Gedackt 8 feet tone.	19—Trompete	
10—Quinte $5\frac{1}{3}$ feet.	20—Trompete	
11—Octave 4 feet.	21—Trompete	4 feet.

### Choir, 16 Stops.

Choir, 16 Stops.		
22—Principal       16 feet         23—Bordun       16 feet tone         24—Principal       8 feet         25—Salicional       8 feet         26—Spitzflote       8 feet         27—Czakan Flote       8 feet         28—Gedackt       8 feet tone         29—Octave       4 feet	30—Gemshorn       4 feet         31—Rohrflote       4 feet tone         32—Quinte       2½ feet         33—Octave       2 feet         34—Mixtur, V fach       2 feet         35—Scharf, III fach       2 feet         36—Physharmonika       16 feet         37—Trompete       8 feet	
Echo, 1	4 Stops.	
38—Leiblich Gedackt . 16 feet tone.         39—Geigen Principal . 8 feet.         40—Terpodion 8 feet.         41—Leiblich Gedackt . 8 feet tone.         42—Flauto Traverso 8 feet.         43—Doppel-flöte 8 feet tonc.         44—Geigen Principal . 4 feet.	45—Zart-flöte	
Swell, 1	0 Stops	
52—Quintaton       16 feet tone.         53—Principal       8 feet.         54—Fugara       8 feet.         55—Gedackt       8 feet tone.         56—Harmonika       8 feet.	57—Principal 4 feet. 58—Viola d'amore 4 feet. 59—Mixtur, III fach 2 feet. 60—Aeoline 16 feet. 61—Clarinetto 8 feet tone.	
Great Peda	l, 16 Stops.	
62—Gross Principal       32 feet         63—Principal Bass       16 feet         64—Basso Magiore       16 feet         65—Violon       16 feet         66—Quinte       10½ feet         67—Principal Bass       8 feet         68—Basso Minore       8 feet         69—Violoncello       8 feet	70—Terz $6\frac{2}{3}$ feet.         71—Quinte $5\frac{1}{3}$ feet.         72—Octave       4 feet.         73—Cornett, V fach.         74—Contra Posaune       32 feet.         75—Posaune       16 feet.         76—Trompete       8 fcet.         77—Clarine       4 feet.	
Choir Pedal, 5 Stops.		
78—Subbass 16 feet tone. 79—Doppelflotenbass 16 feet tone. 80—Violoncello 8 feet.	81—Gedackt 8 feet tone. 82—Fagotto 16 feet.	
Accessory Stops, &c.		
<ul> <li>1—Wind to Great.</li> <li>2—Wind to Choir.</li> <li>3—Wind to Echo.</li> <li>4—Wind to Swell.</li> <li>5—Wind to great Pedal Basses.</li> </ul>	6—Wind to Pedal Reed-work. 7—Wind to Choir Pedal. 8—Coupler, Choir to Great. 9—Coupler, Echo to Great. 10—Coupler, Great to Pedal.	

### 71. LUBECK.

The second Organ in this Church—the "little Organ," as it is called—contains 33 Steps; 3 Manuals and Pedal; has a 16-feet speaking front, and has the Choir Organ in front. The Specification is as follows:

### Great, 8 Stops.

1—Quintaton       16 feet tone.         2—Principal       8 feet.         3—Spitzflote       8 feet.         4—Octave       4 feet.	5—Flote	
Choir, 1	1 Stops.	
9—Principal	15—Sesquialtera, II ranks,   2\frac{2}{3} and 1\frac{3}{5} feet.   16—Mixture, IV ranks.   17—Scharf, V ranks.   18—Fagotto	
Swell, 4	4 Stops.	
20—Gedact	22—Cornet, III ranks. 23—Trompete 8 feet.	
Pedal, 10 Stops.		
24—Principal, in front 16 feet.         25—Gross Quint, Stopped. 10½ feet tone.         26—Octave 8 feet.         27—Gedact 8 feet tone.         28—Octave 4 feet.	29—Octave       2 feet.         30—Mixture, III ranks       2½ feet.         31—Posaune       16 feet.         32—Trompete       8 feet.         33—Schalmay       4 feet tone.	

### 72. Lubeck.

The Organ in the second Church, not the Cathedral, has 4 Manuals and Pedal, and 45 Stops, of which the following is a list:

### Great, 9 Stops.

1—Principal 16 feet. 2—Quintaton 16 feet tor. 3—Octave 8 feet. 4—Viola di Gamba 8 feet. 5—Octave 4 feet.	6—Flote 4 feet. 7—Rauschpfeife, II rks. 2½ feet. 8—Mixtur, VIII ranks. 9—Scharf, VI ranks.	
Cho	ir, 10 Stops.	
10—Principal       8 feet         11—Gedact       8 feet ton         12—Quintaton       8 feet ton         13—Barpfeife       8 feet         14—Octave       4 feet		
Echo, 10 Stops.		
20—Principal       8 feet.         21—Hohlflote       8 feet.         22—Zink       8 feet.         23—Principal       4 feet.         24—Flote       4 feet.	25—Nassat	
Swell, 7 Stops.		
30—Gedact	34—Scharf, IV ranks. 35—Dulcian 16 feet.	

### Pedal, 9 Stops.

37—Principal	16 feet.	42—Octave	4 feet.
38—Subbass	16 feet tone.	43—Mixtur, IV ranks.	
39—Octave	8 feet.	44—Posaune	16 feet.
40—Violoncello	8 feet.	45—Trompet	8 feet.
41—Gedact	8 feet tone.	-	

### 73. WISMAR.

The Organ in St. Mary's Church, at Wismar, was built by J. F. Schulze, and finished in 1840. It has 56 Sounding Stops, 8 Bellows, and 3 Manuals and Pedal. The following is a list of the Stops:

### Great, 15 Stops.

1—Bourdon to g 2—Principal		9—Octave	
3—Quintaton		11—Scharf, V ranks.	
4—Octave		12—Cymbel, III ranks.	
5—Hohlflote	8 feet.	13—Cornet, III ranks.	
6—Terpodion	8 feet.	14—Trompete	16 feet.
7—Gedact		15—Trompete	8 feet.
8—Quinte	5⅓ feet.		

## Choir, 13 Stops.

17—Principal	8 feet. 8 feet. 8 feet. 8 feet.	23—Spitzflote 4 feet. 24—Flote 4 feet. 25—Quinte & Octave, II ranks, 2 <sup>2</sup> / <sub>3</sub> & 2 ft 26—Mixtur, IV ranks 1 <sup>1</sup> / <sub>3</sub> foot. 27—Physarmonica 16 feet.
21—Gedact	8 feet tone.	

### Swell, 11 Stops.

29—Leiblich Gedact	16 feet tone.	35—Octave	4 feet.
30—Geigen Principal	8 feet.	36—Fugara	4 feet.
31—Salicional	8 feet.	37—Waldflote	2 feet.
32—Zartflote	8 feet.	38—Mixtur, III ranks.	
33—Flauto Traverso	8 feet.	39—Æoline	8 feet.
34—Leiblich Gedact			

### Pedal, 17 Stops.

40—Principal-bass 32 feet.	49—Gedact-bass 8 feet tone
41—Principal 16 feet.	50—Octave 4 feet.
42—Quintaton 16 feet tone.	51—Mixtur, V ranks.
43—Major-bass 16 feet.	52—Posaune 32 feet.
44—Sub-bass 16 feet tone.	53—Posaune 16 feet.
45—Quinte $10\frac{2}{3}$ feet tone.	54—Bombarde 16 feet.
46—Octaven-bass 8 feet.	55—Trompete 8 feet.
47—Violone	56—Clarino 4 feet.
48—Minor-bass 8 feet.	

### 74. Perleberg.

The Organ in the Church at Perleberg was built by Tobias Turley and his son John F. Turley, in 1831, and has 36 Sounding Stops:

•		
Great, 14 Stops.		
1—Bourdon 16 feet tone.	8—Lieblich gedact . metal 4 feet tone.	
2—Principal Eng. tin,	9—Quinte . Prussian tin . 3 feet.	
in front 8 feet.	10—Super octave Prus-	
3—Spitzflote metal to	sian tin 2 feet.	
tenor C, lowest oc-	11—Scharf . V ranks, Prus-	
tave wood 8 feet.	sian tin. $2, 1\frac{3}{5}, 1\frac{2}{3}, 1$ , and $\frac{2}{3}$ feet.	
4—Hohlflöte metal to	12—Cymbel III ranks,	
tenor C, lowest oc-	Prussian tin 1, $\frac{1}{2}$ , and $\frac{1}{4}$ foot.	
tave wood 8 feet.	13—Cornett III ranks,	
5—Rohrflote metal 8 feet tone.	Eng. tin $2\frac{2}{3}$ , 2, and $1\frac{5}{5}$ foot.	
6—Octave . Prussian tin . 4 feet. 7—Gemshorn metal 4 feet.	14—Trompete 8 feet.	
7—Gemshornmetal 4 feet.		
Choir, 1	12 Stops.	
15—Bourdonmetal, ex-	19—Gedactmetal 8 feet tone.	
cept the lowest oc-	20—Octave 4 feet.	
tave, which is of	21—Rohrflöte 4 feet tone.	
wood 16 feet tone.	$22$ —Nassat $2\frac{2}{3}$ feet.	
16—Principalin front 8 feet.	23—Super octave 2 feet.	
17—Viola di Gamba	24—MixturIII ranks.	
Eng. tin to tenor C,	$1\frac{1}{3}$ , 1, and $\frac{2}{3}$ feet.	
last octave wood 8 feet.	25—Æolinewood16 feet.	
18—Flauto traverso . pear-	26—Hauthois treble 8 feet.	
tree wood 8 feet.		
Pedal, 10 Stops.		
27—Untersatz wood 32 feet tone.	32—Gedact bass . wood 8 feet tone.	
28—Principalin front 16 feet.	33—Tertia wood 62 feet.	
29—Subbass wood 16 feet tone.	34—Super octave . metal . 4 feet.	
30—Gross-Nasatwood. 10 <sup>2</sup> / <sub>3</sub> feet.	35—Posaune 16 feet.	
31—Octave wood 8 feet.	36—Trompete 8 feet.	
	_	

### 75. BERLIN.

The Organ in St. Mary's Church at Berlin was originally built in 1722 by Joachim Wagner, but has received subsequent additions at the hands of Buchholz, of Berlin. It now has 40 Sounding Stops, 3 Manuals, and Pedal of 9 Stops; and 6 pairs of Bellows, 9 feet long by  $4\frac{1}{2}$  broad. The Stops are distributed as follows:

## Great, 12 Stops.

	Cicu, i	- Cops
1—Bourdon	16 feet tone.	7—Quinte 2 <sup>2</sup> / <sub>3</sub> feet.
2—Principal	8 feet.	8—Super-octave 2 feet.
3—Rohrflote		9—Cornett V ranks.
4—Viola di Gamba	8 feet.	10—Scharf V ranks.
5—Octave		11—Cymbel III ranks.
6—Spitzflöte	4 feet.	12—Trompette 8 feet.

### Choir, 9 Stops.

011011;	o Etops.	
13—Salcional 8 feet.	18—Fugara 4 feet.	
14—Gemshorn 8 feet.	19—Leiblich Flöte 4 feet tone.	
15—Gedact 8 feet tone.	20—Nassard	
16—Quintaton 8 feet tone.	21—Super-octave 2 feet.	
17—Octave 4 feet	1	
Echo, 10	O Stops.	
22—Quintaton 16 feet tone.	28—Super-octave 2 feet.	
23—Principal 8 feet.	29—Sifflote 1 foot.	
24—Gedact		
25—Octave 4 feet.	30 \{ Mixture major \cdots \} IV ranks.	
26—Rohrflote 4 feet tone.	Hauthois discant.	
$27$ —Nassard $2\frac{2}{3}$ feet.	31 { Hauthois discant. } 8 feet.	
Pedal, 9 Stops.		
32—Principalin front 16 feet.	37—Bass-flote 8 feet tone.	
33—Subbass 16 feet tone.	38—Octave 4 feet.	
34—Violon 16 feet.	39—Contra-Posaune 32 feet.	
35—Gross Nassard $10\frac{2}{3}$ feet.	40—Posaune 16 feet.	
36—Gemshorn 8 feet.		
Accessory Stops.		
1—Coupler, Choir to Great.	3—Coupler, Great to Pedal.	
2—Coupler, Echo to Great.	4, 5, 6, 7—Four Wind-trunk Valves.	
Trans.	, , , , , , , , , , , , , , , , , , , ,	

### 76. BERLIN.

The Organ in the Garrison Church at Berlin was built in 1725 by Joachim Wagner, and contains 50 Stops, 3 Manuals, and Pedal of 12 Stops. The names and distribution of the Stops are as follow:

### Great, 13 Stops.

	,	o lo refrai	
1—Bourdon	16 feet tone.	8—Quinte	$2\frac{2}{3}$ feet.
2—Principal	8 feet.	9—Octave	2 feet.
3—Rohrflote	8 feet tone.	10—Mixture IV ranks.	
4—Viol di Gamba	8 feet.	11—Cornett V ranks.	
5—Flauto Traverso	8 feet.	12—ScharfVI ranks.	
6—Octave	4 feet.	13—Fagott	16 feet.
7—Spitzflote	4 feet.	9	
	Echo, 11	Stops.	
14—Gedact	8 feet tone.	20—Flageolet	2 feet.
15—Quintaton	8 feet tone.	21—Terz	13 foot.
16—Principal	4 feet.	22—Quint	
17—Rohrflote	4 feet tone.	23—Cymbel IV ranks.	
18Nassat	$2\frac{2}{3}$ feet.	24—Vox Humana	8 feet tone.
19—Octave	2 feet.		
Choir, 13 Stops.			
25—Quintaton	16 feet tone.	32—Octave	2 feet.
26—Principal	8 feet.	33—Wald-flote	2 feet.
27—Gedact	8 feet tone.	34—Sifflote	1 foot.
28—Salcional	8 feet.	35—ScharfV ranks.	
29—Octave	4 feet.	36—CymbelIII ranks.	
30—Fugara	4 feet.		O. frat
31—Quinte	2 <sup>2</sup> / <sub>3</sub> feet.	37 { Trompette discant . } Trompetten-bass }	8 feet.

### Pedal, 12 Stops.

38-Principalin front	16 feet.	44—Quinte	23 feet.
39—Violone		45—Mixture . VIII ranks.	
40—Octave	8 feet.	46—Posaune	32 feet.
41—Gemshorn	8 feet.	47—Posaune	16 feet.
42—Quinte	$5\frac{1}{3}$ feet.	48—Trompete	8 fect.
43—Nacht-horn	4 feet.	49—Clarion	4 feet.

#### 77. KRONSTADT.

The fine Organ in the Cathedral Church at Kronstadt was built from the plans of C. Buchholz, of Berlin, in 1839. It contains 63 Sounding Stops, 4 Manuals, and Pedal of 17 Stops; and 9 large pairs of Bellows. The Stops are distributed as follows:

Great	t. 1	5	Sto	ns.

Great, 15 Stops.		
1—Principal 16 feet.	9—Spitzflote 4 feet.	
2—Quintaton 16 feet tone.	10—Waldflote 4 feet.	
3—Principal 8 feet.	11—Quint $2\frac{2}{3}$ feet.	
4—Rohrflote 8 feet tone.	12—Super octave 2 feet.	
5—Gemshorn 8 feet.	13—Cornett V ranks.	
6—Viol di Gamba 8 feet.	14—Scharf V ranks.	
7—Nassat $5\frac{1}{3}$ feet.	15—Cymbel V ranks.	
8—Octave 4 feet.		
Echo, 1	3 Stops.	
16—Bourdon 16 feet tone.	23—Rohrflote 4 feet tone.	
17—Principal 8 feet.	24—Fugara 4 feet.	
18—Gedact	$25$ —Nasat $2\frac{2}{3}$ feet.	
19—Salcional 8 feet.	26—Super-octave . II ranks. 2 feet.	
20—Hohlflote 8 feet.	27—Mixture V ranks.	
21—Quintaton 8 feet tone.	28—Hautbois 8 feet.	
22—Octave 4 feet.	20—Hautbuis O lect.	
	1 C4	
	1 Stops.	
29—Salcional 16 feet.	35—Viol d'amour 4 feet.	
30—Principal 8 feet.	36—Flauto dolce 4 feet.	
31—Gedact 8 feet tone.	$37$ —Gemshorn Quinta $2\frac{2}{3}$ feet.	
32—Viol di Gamba 8 feet.	38—Decima Quinta 2 feet.	
33—Flauto Traverso 8 feet.	39—Progressio harmonica,	
34—Octave 4 feet.	III to V ranks.	
Reed-work Manual, 7 Stops.		
40—Fagott 16 feet.	44—Rohrflote 8 feet tone.	
41—Trompette 8 feet.	45—Violino 8 feet.	
42—Clarionetto 8 feet.	46—Principal 4 feet.	
43—Vox Angelica 8 feet.	Nos. 5, 6, & 7, are Lip Stops.	
Pedal, 17 Stops.		
47—Principal 32 feet.	56—Gemshorn 8 feet.	
48—Untersatz 32 feet tone.	$57$ —Quinte $5\frac{1}{3}$ feet.	
49—Principal 16 feet.	58—Octave 4 feet.	
50—Subbass 16 feet tone.	59—MixtureIV ranks.	
51—Violone 16 feet.	60—Contra-Posaune 32 feet.	
52—Nassat	61—Posaune 16 feet.	
53—Principal 8 feet.	62—Trompette 8 feet.	
The Desire of Control	00 0	

8 feet tone.

8 feet.

63—Cornette.....

4 feet.

54—Bass-Flote.....

55—Violone ....

### Accessory Stops, Movements, &c.

1, 2, 3—Three Manual Couplers. 4-Pedal Coupler.

5 to 9—Five Wind-trunk Valves.

Compass.

Manuals, CC to g³ in altissimo, 56 notes. | Pedal, CCC to fiddle g, 32 notes.

#### 78. Leipzig.

The Organ in the University Church at Leipzig is a very fine instrument; but the touch is so heavy, that playing on it is a great labour. It has 3 Manuals and Pedal, and 58 Stops, of which latter the following is an enumeration:

Great, 18 Stops.			
1—Principal 16 feet.	10—Quinta 2\frac{2}{3} feet.		
2—Bourdon 16 feet tone.	11—Octave 2 feet.		
3—Octave 8 feet.	12—Tertia $1\frac{5}{5}$ foot.		
4—Gemshorn 8 feet.	13—MixturVI ranks.		
5—Gamba 8 feet.	14—Cymbal III ranks.		
6—Rohrflote 8 feet tone.	15—Cornet V ranks.		
7—Quinta	16—Fagotto 16 feet.		
8—Octave 4 feet.	17—Trompete 8 feet.		
9—Gemshorn 4 feet.	18—Clairon 4 feet.		
	2 Stops.		
19—Salicional 8 feet.	25—Nassat		
20—Flote 8 feet.	26—Octave 2 feet.		
21—Rohrflote 8 feet tone.	$27$ —Quinta $1\frac{1}{3}$ foot.		
22—Principal 4 feet.	28—Flageolet 1 foot.		
23—Flote 4 feet.	29—MixturIV ranks.		
24—Gedact 4 feet tone.	30—Oboe 8 feet.		
Echo, 1	4 Stops.		
31—Quintadon 16 feet tone.	38—Rohrflote 4 feet tone.		
32—Principal 8 feet.	$39$ —Quinta $2\frac{2}{3}$ feet.		
33—Spitzflote 8 feet.	40—Octave 2 feet.		
34—Fugara 8 feet.	41—MixturV ranks.		
35—Quintadon 8 feet tone.	42—CornetIII ranks.		
36—Gedact	43—Physharmonica 8 feet tone.		
37—Octave 4 feet.	44—Vox Humana 8 feet tone.		
Pedal, 14 Stops.			
45—Principal 32 feet.	$52$ —Quinta $5\frac{1}{3}$ feet.		
46—Octave 16 feet.	53—Octave 4 feet.		
47—Violone 16 feet.	54—MixturVI ranks.		
48—Subbass 16 feet tone.	55—Posaune 32 feet.		
49—Quinta	56—Posaune 16 feet.		
50—Octave 8 feet.	57—Trompete 8 feet.		
51—Violoncello 8 feet.	58—Clairon 4 feet.		
	Movements, &c.		
1—Echo to Great.	4—Tremulant Echo.		
2—Choir to Great.			
3—Great to Pedal.	5, 6, 7—Three Wind-trunk Valves.		
Compass.			
Manuals, <b>C</b> C to $e^3$ in alt.	Pedal, CCC to tenor e.		

#### DRESDEN.

The five principal Churches in the city of Dresden all contain very fine Organs, four of which are by Silbermann, one of the most renowned German Organ-builders of the last century, and whose name (Silverman) very well describes the sparkling and chaste tone of his instruments. In the "Ramble among the Musicians of Germany," a most interesting volume, written by Mr. Edward Holmes, and published in 1828, the author, in describing these instruments, observes -" In glancing over the list of contents, the musical reader may please his imagination by fancying with what effect a piece of florid and artful counterpoint comes out of a German Organ, where the player sits with a flood of sound ready to the touch of his fingers, and store of thunder lying harmless at his The thickness, depth, and independence of the Pedals, here vindicate supremely the poetical ascendancy of the fugue over every other class of musical composition; and in slow subjects, when the bass rolls in its ponderousness-there is no disputing it—it is like the *fiat* of the Omnipotent. As a matter of science, it is worthy consideration how far the structure of our Organs might be improved by uniting the sweet Cathedral quality of tone for which those of the Temple, Westminster Abbey, &c. are noted, with the magnificence of Silbermann. If there lived now in England a mechanic capable of associating the best points of the two, a perfect specimen of the kind would be the result." Since the above excellent observations on the effect of the Dresden Organs were written, a considerable advance has been made in the art of Organ-building in England.

The largest of Silbermann's four Dresden Organs stands in the Royal Catholic Church.

#### 79. Dresden.

The fine Organ in the Royal Catholic Church is esteemed Silbermann's master-piece. Gottfried Silbermann died during its progress, and it was finished by his nephew, John Daniel Silbermann, of Strasbourg, who had assisted him in the work; and was completed and erected in the year 1754. It has 48 Stops, distributed in the following manner:

Great, 16 Stops. 1—Principal . . . . . . 16 feet. 2 feet. 2—Bourdon . . . . . . . . . . . . 10—Tertia..... 16 feet tone. 13 foot. 11-Mixtur .. IV ranks. 3—Principal . . . . . . . 8 feet. 4—Viola di Gamba . . . . 8 feet. 12-Cymbel.. III ranks. 8 feet tone. 13—Cornet . . . . V ranks. 5—Rohrflote . . . . . . 4 feet. 14—Fagott . . . . . . . . 16 feet. 7—Spitzflote . . . . . . 4 feet. 15—Trompete . . . . . . 8 feet. 8—Quinta . . . . . . . . . . . . 2<sup>2</sup> feet. 16—Clarin . . . . . . . . . . . . . 4 feet. Echo, 14 Stops. 24—Nassat..... 17—Quintaton . . . . . . 16 feet tone.  $2\frac{2}{3}$  feet. 18—Principal ..... 8 feet. 2 feet. 8 feet tone. 26—Tertia . . . . . . . . . . . . . 15 foot. 27—Flageolet . . . . . . . 20—Quintaton .... 8 feet tone. 1 foot. 21—Unda Maris ..... 28—Mixtur..IV ranks. 8 feet tone. 22—Octava ...... 4 feet. 29—Echo . . . V ranks. 30-Vox humana..... 23—Rohrflote ..... 4 feet tone. 8 feet tone.

01 1		α.	
Choir,	10	Sto	ns

21011, 10 210 201		
31—Gedact       8 feet tone.         32—Principal       4 feet.         33—Rohrflote       4 feet tone.         34—Nassat       2 \(\frac{2}{3}\) feet.         35—Octave       2 feet.	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
Pedal, 8 Stops.		
41—Untersatz	45—MixturVI ranks. 46—Pausan 16 feet. 47—Trompete 8 feet. 48—Clarin 4 feet.	
Accessory Stops, &c.		
1—Echo to Great. 2—Great to Pedal.	3—Tremulant Echo. 4—Tremulant Great.	
Compass.		

#### 80. Dresden.

Pedal, CCC to tenor c.

Manuals, CC to d3 in alt.

The Organ in the Royal Church of the Evangelists, at Dresden, was completed and erected by Silbermann in the year 1720. It has 32 Sounding Stops, distributed among 2 Manuals and Pedal, in the following manner:

### Great, 14 Stops.

1—Bordun 16 feet tone.	8—Octave
2—Principal 8 feet.	9—Tertia 2 feet.
3—Spitzflote 8 feet.	10—Mixtur, IV ranks.
4—Rohrflote 8 feet tone.	11—Cymbal, III ranks.
5—Octave 4 feet.	12—Cornett, IV ranks.
6—Gemshorn 4 feet.	13—Trompete 8 feet.
7—Quinte $2\frac{2}{3}$ feet.	14—Clarin 4 feet.
Choir, 1	3 Stops.
15—Quintaton       16 feet tone.         16—Principal       8 feet.         17—Gedact       8 feet tone.         18—Quintaton       8 feet tone.         19—Unda Maris       8 feet tone.         20—Octave       4 feet.	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
21—Rohrflote 4 feet tone.	
Pedal,	5 Stops.
28—Principal-bass       16 feet.         29—Sub-bass       16 feet tone.         30—Violone       8 feet.	31—Pausan

#### 81. Dresden.

The Organ in St. Mary's Church was completed in the year 1736. It has 43 Stops, 3 Manuals, and Pedal of 8 Stops, including a Covered Stop of 32-feet tone. The distribution of the Stops is as follows:

### Great, 14 Stops.

1—Principal 16 fect. 2—Octave	8—Octava	
Echo, 1	1 Stops.	
15—Quintadena 16 feet tone. 16—Principal 8 feet. 17—Gedact 8 feet tone. 18—Quintaton 8 feet tonc. 19—Octava 4 feet. 20—Rohrflote 4 feet tone.	21—Nassat	
Choir, 1	o Stops.	
26—Gedact	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	
Pedal, 8 Stops.		
36—Untersatz       32 feet tone.         37—Principal-bass       16 feet.         38—Octave-bass       8 feet.         39—Octave       4 feet.	40—Mixtur, VI ranks.   41—Pausan	
Neben-Register.		
1—Tremulant. 2—Schwebung. 3—Bass Veutil.	4—Coppel. 5—Klingel.	

### 82. Dresden.

The Organ in the Church of St. Sophia at Dresden was built by Silbermann, about the year 1750, and is a very fine Instrument. It contains 33 Stops, which are distributed among 2 Manuals and Pedal in the following manner:

### Great, 15 Stops.

1—Bourdon 16 feet tone.	9—Octave
2—Quintaton 16 feet tone.	$10$ —Terz $1\frac{3}{5}$ foot.
3—Principal 8 feet.	11—Mixtur, V ranks.
4—Spitzflote 8 feet.	12—Cymbel, III ranks.
5—Rohrflote 8 feet tone.	
6—Octave 4 feet.	14 { Trompet discant } 8 feet.
8—Quint	15 Clarin 4 feet.

### Choir, 12 Stops.

Onon, i	2 Ctops.
16—Quintaton       16 feet tone.         17—Principal       8 feet.         18—Gedact       8 feet tone.         19—Quintaton       8 feet tone.         20—Unda Maris       8 feet tone.         21—Octave       4 feet.	22—Rohrflote
Pedal,	6 Stops.
28—Principal       16 feet         29—Bourdon       16 feet tone         30—Sub-bass       16 feet	31—Cornet, VIII ranks.   32—Posaune 16 feet.   33—Trompet 8 feet.
Accessory Stops, &c.	Compass.
1—Coupler, Choir to Great. 2—Coupler, Great to Pedal. 3—Tremulant to Choir.	Manuals, CC to d <sup>5</sup> in alt. Pedal, CCC to tenor c.

#### 83. DRESDEN.

The Organ in the Church of the Holy Cross, built by Jagermann of Dresden, is altogether a very fine Instrument. It is the largest in the City, and contains 56 Sounding Stops, 3 Manuals, and Pedal of 32 feet. The following is a list of its contents:

Great, 16 Stops.		
1—Principal       16 feet         2—Bourdon       16 feet tone         3—Gross Octave       8 feet         4—Gamba       8 feet         5—Gemshorn       8 feet         6—Rohrflote       8 feet tone         7—Octave       4 feet         8—Gemshorn       4 feet	9—Quinte	
Choir, 10 Stops.		
17—Leiblich Gedact       8 feet tone.         18—Rohrflote       8 feet tone.         19—Principal       4 feet.         20—Rohrflote       4 feet tone.         21—Nasat       2 % feet.	22—Octave 2 feet. 23—Quinta 1 foot. 24—Sifflote 1 foot. 25—Mixtur, IV ranks. 26—Krum-horn 8 feet tone.	
Echo, 14 Stops.		
27—Quintaton       16 feet tone.         28—Principal       8 feet.         29—Schwiegel       8 feet.         30—Gedact       8 feet tone.	34—Quinta	

38—Cymbel, IV ranks.

39—Cornet, V ranks.

40—Vox Humana.....

8 feet tone.

8 feet tone. 4 feet.

4 feet tone.

31—Quintaton....

32—Octave.....

33—Rohrflote....

### Pedal, 16 Stops.

41—Gross Principal Bass 32 feet.	49—Koppel 8 feet.
42—Principal Bass 16 feet.	50—Quinta Bass
43—Violone Bass 16 feet.	51—Octave Bass 4 feet.
44—Sub-bass 16 feet tone.	52—Octave Bass 2 feet.
45—Gedact Quint Bass 103 feet tone.	53—Mixtur Bass, VI ranks.
46—Principal Bass 8 feet.	54—Posaune Bass 16 feet.
47—Quintaton Bass 8 feet tone.	55—Trompete Bass 8 feet.
48—Violon Bass 8 feet.	56—Clarin Bass 4 feet.

### Accessory Stops, &c.

1—Coupler, Great to Pedal.	3—Tremulant Echo.
2—Coupler, Echo to Great.	3—Tremulant Echo. 4, 5, 6, Three Trunk-valves.

### Compass.

Manuals, CC to d<sup>3</sup> in alt.

Pedal, CCC to Tenor d.

### 84. FREIBERG IN SAXONY.

The Cathedral at Freiberg, in Saxony, contains one of Silbermann's largest and finest Organs; comprising 45 Stops, 3 Manuals, and a Pedal of 10 Stops. The following is a list of the several Stops contained therein:

### Great, 13 Stops.

1—Bourdon . wood in the	7—Superoctave tin	2 feet.
Bass 16 feet tone.	8—Tierce	$1\frac{3}{5}$ foot.
2—PrincipalEng. tin. 8 feet.	9—FurnitureIV ranks	Eng. tin.
3—Viola da Gambatin 8 feet.	10—CymbaleIII ranks	Eng. tin.
4—Rohrflotetin 8 feet tone.	11—CornetV ranks	Eng. tin.
5—Octavetin 4 feet.	12—Trompete Eng. tin	8 feet.
6—Quintetin $2\frac{2}{3}$ feet.	13—ClaironEng. tin	

### Choir, 13 Stops.

14—Quintaton . Eng. tin 16 feet tone. 15—Principal Eng. tin 8 feet. 16—Bourdon, metal treble, wood bass 8 feet tone. 17—Octave Eng. tin 4 feet. 18—Flute Eng. tin 4 feet. 19—Nazard metal 2 % feet. 20—Super-octave Eng. tin 2 feet.	21—TierceEng.tin, 22—Fourniture, III ranks 23—CymbaleIII ranks 24—Echo Cornet, V ranks 25—CromorneEng.tin 26—Voix Humaine, Eng.	Eng. tin. Eng. tin. metal. 8 feet tone.	

### Echo, 9 Stops.

28—PrincipalEng. tin 29—RohrfloteEng. tin	4 feet. 4 feet tone.	32—Tiercemetal 33—QuinteEng. tin 34—SiffletEng. tin 35—Fourniture III ranks	1 foot.
30—Nasard metal		35—Fourniture, III ranks,	
31—Octave Eng. tin	2 feet.		

### Pedal, 10 Stops.

36—Untersatzwood 32 feet tone.	41—Super-octavetin 4 feet.
37—Principal bass. Eng.	42—Fourniture, VI ranks, tin.
tin 16 feet.	43—Bombardetin 16 feet.
38—Sous-basswood 16 feet tone.	44—Trompettin 8 feet.
39—Octave wood 16 feet.	45—Clairontin 4 feet.
40—Octave-basstin 8 feet.	

### Accessory Stops, &c.

Coupler, Great to Pedal. Wind-trunk Valves.

6—Octave....

7—Blockflote.....

8—Querflote.....

9—Quint.....

Two Tremulants. Six Bellows.

e.

#### 85. PRAGUE.

The Organ in the Church of St. Dominico, at Prague, is a very large and most interesting Instrument. It has 4 Manuals and Pedal, and 71 Stops, distributed in the following manner:

0 1 1 0			
Great, 14 Stops.			
	1—Principal	8—Super-octave	
Echo, 12 Stops.			
	1—Quintaton       16 feet tone.         2—Surdun       16 feet tone.         3—Principal       8 feet.         4—Genishorn       8 feet.         5—Hohlflote       8 feet.         6—Octave       4 feet.	7—Nachthorn	
Inside Choir, 9 Stops.			
	1—Gedact	6—Sedecima 1 foot. 7—Cymbel, III ranks. 8—Jungfernregal 16 feet. 9—Regal 8 feet.	
Front Choir, 18 Stops.			
	1—Principal	10—Super-octave       2 feet         11—Gemshorn       2 feet         12—Waldflote       2 feet         13—Sexte       1 5/2 foot         14—Sifflote       1 foot	

4 feet.

4 feet.

4 feet.

23 feet.

15—Mixtur...V ranks.

16—Cornett.III ranks.

18—Trompete.....

17—Dulcian..of wood .. 16 feet.

8 feet.

#### Pedal, 18 Stops.

1—Principal. 32 feet. 2—Octave. 16 feet. 3—Principal. 16 feet. 4—Salicional. 16 feet. 5—Octave. 8 feet. 6—Gross-Quinte. 5\frac{1}{3} feet. 7—Super-octave. 4 feet. 8—Nachthorn 4 feet. 9—Spitzflote. 2 feet. 10—Koppel. 2 feet.	Quinte. III ranks.
11—Bauerflote 1 foot.	

### 86. GOERLITZ.

The Organ in the Church of St. Peter and St. Paul, at Goerlitz, in Upper Lusatia, was built by Eugenius Casparini, and his son, Adam Horatius, in six years; and was consecrated, by a solemn service, August 19th, 1703. It has 82 Stops, 55 of which are whole Stops; and 3270 Pipes, 522 of which are of metal. The front of the Organ case shows above 280 Pipes of polished Tin, the largest of which is the FFFF in the Pedal, 24 feet long. The Organ has 3 Manuals, and 12 pairs of Bellows. The following is an enumeration of the whole Stops:

### Great, 16 Stops.

1—Principalin front. 16 feet. 2—Octave Principal 8 feet. 3—Viol di Gamba 8 feet. 4—Quintadena 8 feet tone. 5—Gedact 8 feet tone. 6—Flote Quinte 5  feet. 7—Super-octave 4 feet. 8—Salicional 4 feet.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		
Echo, 8 Stops.			
17—Gedact       8 feet tone.         18—Principal       4 feet.         19—Octave       2 feet.         20—Flageolet       2 feet.	21—Nason		
Choir, 1	2 Stops.		
25—Quintadena . cypress-	30—Quinte		

## Pedal, 19 Stops.

The state of the s			
37—Gross Principaltin.       32 feet.         38—Violon-bass       16 feet.         39—Bourdon       16 feet tone.         40—Tubalflote       3 feet.         41—Quintadena       3 feet tone.         42—Quinte       5 \frac{1}{3} feet.         43—Super-octave       4 feet.         44—Virgin royal       4 feet.	50—Cymbel . II ranks.         51—Posaune 16 feet.         52—Fagott 16 feet.         53—Trompete 8 feet.         54—Chalmey-bass 8 feet tone.		
	54—Chalmey-bass 8 feet tone. 55—Corno 8 feet.		

Compass of Pedals... 2 Octaves, from CCC to Tenor c.

#### 87. GOERLITZ.

The Organ in St. Mary's Church, at Goerlitz, has 15 Sounding Stops, and was built by Buckow, in 1838.

### Great, 8 Stops.

16 feet tone.	6—Super-octave . 12 loth.		
	Eng. tin	2 feet.	
8 feet.	7—Mixtur . 12 loth. Eng.		
8 feet.	tinIV ranks	2 feet.	
	8—Cornetti to fiddle G		
	III ranks	8 feet.	
4 feet.	9—Slider for a Trom-		
	pete	8 feet.	
2\frac{2}{3} feet.			
Choir, 4	4 Stops.		
	12—Dolcianowood	8 feet.	
8 feet.	13—Flût d'amour . wood .	4 feet tone	
8 feet tone.			
Pedal, 3 Stops.			
16 feet.	16—Posaune	16 feet.	
Accessory Stops.			
at.	2—Coupler, Great to Pedal	l.	
	8 feet.  4 feet.  2 g feet. Choir, 4  8 feet. 8 feet tone. Pedal, 5  16 feet. Accessor	\$ feet.   \$ feet.   \$ 7—Mixtur . 12 loth. Eng. tin . IV ranks   8—Cornetti to fiddle G   III ranks   9—Slider for a Trompete   12—Dolciano wood   13—Flût d'amour . wood   13—Flût d'amour . wood   16 feet.   16—Posaune   16—Posaune .   16—Posaune   16—Posaune   16—Posaune   16—Posaune .   16—Posaune   16—Posaune .   16—Posaune   16—Posaune .   16—Posaune	

# 88. Liegnitz.

The Organ in the Church of St. Peter and St. Paul, at Liegnitz, was erected by Buckow, in the year 1839. It has 3 Manuals and Pedal, and 42 Sounding Stops, the names and distribution of which are as follow:

#### Great, 13 Stops

Great, 15 Stops.			
1—Bourdonwood 16 feet tone.	9—Quintmetal 2  feet.		
2—Principal $\frac{3}{4}$ tin 8 feet.	10—Super-octave . metal . 2 feet.		
3—Gemshorntin 8 feet.	11—Flautinometal 2 feet.		
4—Viola d'amourtin. 8 feet.	12—Progressio III, IV,		
5—Flauto grave 8 feet.	and V ranks 2 feet.		
6—Flaut doucewood 8 feet.	13—CornetIII ranks		
7—Octavetin 4 feet.	$5\frac{1}{3}$ , 4, and $3\frac{1}{3}$ feet.		
8—Flauto dolcemetal. 4 feet.			

### Choir, 8 Stops.

/	1	
14—Quintatontin; the	18—Piffaro Eng. tin 4 feet.	
great octave of wood. 16 feet tone.	19—Flautino 4 Eng. tin . 2 feet.	
15—Salicional . Eng. tin . 8 feet.	20—Cornet III ranks,	
16—Pyramid-flote . wood . 8 feet.	Eng. tin $2\frac{2}{3}$ , 2, and $1\frac{2}{3}$ foot.	
17—Prestant . ½ Eng. tin . 4 feet.	21—Oboe 8 feet.	
Echo, 9 Stops.		
22—Prestant 8 feet.	26—Flauto amoroso metal 4 feet.	
23—Viola di Gamba . $\frac{7}{8}$ tin. 8 feet.	27—Spitzflotequint, tin. 23 feet.	
24—Flaut amabile metal,	28—Octave tin . 2 feet.	
the bass octave of	29—Flauto Piccolo tin . 1 foot.	
wood 8 feet.	30—Mixtur. III ranks 1\frac{1}{3} foot.	
25—Principal. <sup>7</sup> / <sub>8</sub> Eng. tin. 4 feet.	oo maada saaa miina saa aa a	
Pedal, 12 Stops.		
31—Principal polished	37—Bass-flote wood 8 feet tone.	
tin, in front 16 feet.	$38$ —Quint . tin and wood . $5\frac{1}{3}$ feet.	
32—Violon oak 16 feet.	39—Super-octave 4 feet.	
33—Prestant oak 16 feet.	40—Octave	
34—Sub-bassoak 16 feet tone.	41—Posaune 16 feet.	
35—Principal 8 feet.	42—Trompete 8 feet.	
36—Violoncello wood 8 feet.		
Accessory Stops.		
1—Coupler, Choir to Great.	3—Coupler, Great to Pedal.	
2—Coupler, Echo to Great.	4, 5, 6, 7—Four Wind-trunk Valves.	

### 89. Breslau.

The Cathedral Church of St. John, at Breslau, contains no less than 3 distinct Organs; one in the Nave, a second in the Choir, and the third in one of the small Chapels. The Great Organ has 60 Sounding Stops, 3 Manuals, and a Pedal of 18 Stops; 4,700 Pipes, and 12 Bellows. The following are the details of the largest Organ:

#### Great, 16 Stops.

1—Principal.in front, tin. 16 feet.	9—Super-octave . metal . 4 feet.
2—Quintaton metal 16 feet tone.	10—Rohrflote metal 4 feet tone.
3—Octavein front, tin. 8 feet.	11—Gemshornmetal 4 feet.
4—Gemshornmetal 8 feet.	$12$ —Quinta metal $2\frac{2}{3}$ feet.
5—Salicet metal 8 feet.	13—Sedecima . metal 2 feet.
6—Quintaton metal 8 feet tone.	14—Scharfmetal, IV ranks.
7—Flaut major . wood 8 feet.	15—Mixtur.metal,VII ranks.
8—Quinta metal $5\frac{1}{3}$ feet.	16—Trompete tin 8 feet.
Echo, 14 Stops.	
17—Bourdon.maple-wood. 16 feet tone.	24—Spitzflote metal . 4 feet.
18—Principal tin 8 feet.	25—Doppel Rohrflote
19—Salicet 8 feet.	maple 4 feet tone.
20—Flaut allemande	26—Nassat metal $2\frac{2}{3}$ feet.
metal 8 feet.	27—Super-octavemetal. 2 feet.
21—Doppel Rohrflote	28—Cymbel . metal . III ranks.
maple 8 feet tone.	29—Mixtur , metal , VI ranks.
22—Octave 4 feet.	30—Clarinett tin 8 feet tone.
23—Salicet 4 feet.	

390 APPENI	DIX.	
Choir, 12 Stops.		
32—Gamba metal 8 feet.       8 feet.         33—Flaut traverse 8 feet.       34—Quintaton 8 feet tone.         35—Flaut douce 8 feet.       8 feet.         36—Flaut major 8 feet.       8 feet.	37—Octave metal 4 feet.  38—Flaut minor . wood 4 feet.  39—Quinta metal 2 ½ feet.  40—Super octave . metal 2 feet.  41—Mixtur . metal . IV ranks.  42—Obois metal 8 feet.	
Pedal, 18 Stops. 43—Principal.of tinto FFFF   51—Gemshorn metal 8 feet.		
sharp, 23 feet, and in front; the lower Pipes of wood 32 feet.  44—Octave metal 16 feet. 45—Violon wood 16 feet. 46—Gamba wood 16 feet. 47—Subbass of oak 16 feet tone. 48—Quintaton of oak 16 feet tone. 49—Gemshornquint metal . 103 feet. 50—Principal tin 8 feet.	52—Violoncello. wood . 8 feet. 53—Doppelflote of oak . 8 feet tone. 54—Quinta metal . 5½ feet. 55—Sedecima metal . 4 feet. 56—Nachthorn . of oak . 4 feet. 57—Posaun wood . 32 feet. 58—Posaun wood . 16 feet. 59—Fagott wood . 16 feet. 60—Trompete tin . 8 feet.	
Accessory Stops, &c.		
1—Echo to Great. 2—Choir to Great. 3—Great to Pedal. 4—Wind-valve to Great. 5—Wind-valve to Choir.	<ul> <li>6—Wind-valve to Echo.</li> <li>7—Wind-valve to great Pedal Sound-board.</li> <li>8—Wind-valve to Pedal Reed-work and 32 feet Principal.</li> </ul>	
Compass.  Manuals, CC to f <sup>3</sup> in alt.   Pedal, CCC to Tenor c.		
90. Breslau.		
The Choir	Organ:	
Manual, 9	Stops.	
1—Principal 8 feet. 2—Gamba 8 feet. 3—Flaut allemande . 8 feet. 4—Flaut major 8 feet tone. 5—Octave 4 feet.	6—Doppel Rohrflote 4 feet tone. 7—Nasat quint 2½ feet. 8—Super octave 2 feet. 9—MixturIV ranks.	
Pedal, 3 Stops.  10—Subbass 4 feet.		
11—Octaven bass 8 feet.	-	
Manual, CC to f <sup>3</sup> in alt. Pedal, CCC to tenor c.	ass. Coupler, Manual to Pedal.	
90—a. Breslau.		
The little Organ in one of the Chapels:		
1—Salicet	5—Flaut allemande 4 feet. 6—Quint 2 feet. 7—Super octave 2 feet. 8—Mixtur . III ranks.	

#### 91. Breslau.

The old part of the large Organ in the Church of St. Mary Magdalen, at Breslau, is the work of Joh. Roder, of Berlin, who constructed it in 1725; to whose work additions were made by Engler, in 1821. The Organ has now 55 Sounding Stops, 3 Manuals, and Pedal of 16 Stops; 3415 Pipes, and 10 pairs of Bellows. There is, besides the large Organ, a small one in the Choir, of 12 Stops. Contents of the large Organ:

```
Great, 14 Stops.
  1-Contra-Principal . . of
                                            7—Octave .... metal...
                                                                       4 feet.
                                            8—Rohrflote .. metal..
        tin, in front.....
                           16 feet.
                                                                       4 feet tone.
                                            9—Quinte .. metal.. 23 feet.
 2-Quintaton.. metal..
                           16 feet tone.
                            8 feet.
 3-Principal .. metal ..
                                           10—Super octave . metal .
                                                                       2 feet.
 4—Salicet .... tin ...
                                           11—Scharf ... IV ranks
                             8 feet.
                                           12-Mixtur. VIII ranks 1\frac{1}{3} foot.
 5-Flaut allemande ma-
       jor..wood .....
                            8 feet tone.
                                           13—Rauschquint. II ranks 2\frac{2}{3} feet.
                                          14—Trompete .. metal..
 6—Quintaton . . metal . .
                            8 feet tone.
                                 Echo, 13 Stops.
15-Principal.. of tin, in
                                          22—Quinte ... metal. 2\frac{2}{3} feet.
        front .....
                            8 feet.
                                          23—Super octave . metal .
16—Gemshorn .. metal ..
                            8 feet.
                                          24—Waldflote . . . metal .
                                          25-Mixtur ..VI ranks .
17—Salicet to tenor f. tin.
                            8 feet.
18-Flaut major .. wood .
                            8 feet tone.
                                                  metal . . . . . . 1\frac{1}{3} foot.
19—Octava .... metal..
                            4 feet.
                                          26—Cymbel. III ranks,
20—Doppel Spitzflote ...
                                                  metal . . . . . . . 1\frac{1}{5} foot.
                            4 feet.
                                          27—Vox humana . wood .
                                                                     8 feet tone.
       wood .....
21—Fugara ... metal..
                            4 feet.
                                 Choir, 12 Stops.
28-Principal . . of tin, in
                                          33—Spitzflote .. metal ..
                                                                      4 feet.
       front .....
                                          34—Doppelflaut..wood..
                            8 feet.
                                                                      4 feet tone.
29—Salicet . . to fiddle g .
                                          35—Quint ... metal.. 2\frac{2}{3} feet.
                            8 feet.
                                          36—Super octave..metal.
       wood .....
                                                                      2 feet.
30-Flaut allemande . . .
                                          37—Cymbel. II ranks. 1½ foot.
                                          38-Mixtur..IV ranks...
       metal .....
                            8 feet.
                                                                      1 foot.
                                          39—Oboe... .. metal..
31-Flaut amabile..wood
                            8 feet.
                                                                      8 feet.
32-Octave . . . metal . .
                            4 feet.
                                 Pedal, 16 Stops.
                                          48—Flautenbass .. wood .
40—Principal . . . . . . . 32 feet.
41—Octave . . . metal . . 16 feet.
                                          49—Quinte.....metal. 5\frac{1}{3} feet.
                                          50—Super octave . metal .
42-Violon . . . . wood . . 16 feet.
                                                                      4 feet.
43—Salicet . . . . wood . . 16 feet.
                                          51-Mixtur...V ranks ...
44—Subbass . . . wood . . 16 feet tone.
                                                 metal . . . . . . . . .
                                                                      4 feet.
45-Octavenbass . wood . .
                                          52-Posaune .... wood .. 32 feet.
                            8 feet.
46-Violoncello.. wood ...
                            8 feet.
                                          53—Posaune .... wood.. 16 feet.
47—Doppelflotenbass . . .
                                          54—Fagott ... metal . 16 feet.
       wood .....
                            8 feet tone.
                                          55—Trompete . . . tin . . .
                              Accessory Stops, &c.
 1—Choir to Great.
                                           6-Wind-valve to Pedal Flue-work.
 2—Echo to Great.
                                           7-Wind-valve to Pedal Reed-work.
3—Wind-valve to Great.
                                           8—Glockenspiel to Great.
 4 - Wind-valve to Choir.
                                           9—Glockenspiel to Pedal.
```

5-Wind-valve to Echo

### Compass.

Manuals, CC to c<sup>3</sup> in alt, without CC sharp.

Pedal, CCC to tenor d, without CCC sharp.

#### 92. Breslau.

The large Organ in St. Elisabeth's Church, Breslau, was built by Michael Engler, in 1750, and has since been enlarged (1830) by Müller. It has 54 Sounding Stops, 3 Manuals, and Pedal of 14 Stops; and 8 large pairs of Bellows. In the Choir there is a smaller Organ, containing 17 Stops. The details of the chief Organ are as follow:

# Great, 16 Stops

Great, 16 Stops.				
1—Salicet	10—Quinte			
Echo, 14	4 Stons.			
17—Bourdon	24—Rohrflote . wood . 4 feet tone. 25—Quinte metal . $2\frac{2}{3}$ feet. 26—Super octave 2 feet. 27—Terz $1\frac{5}{3}$ foot. 28—Rauschquinte $2\frac{2}{3}$ feet. 29—Mixtur . IV ranks. 30—Schalmey . metal . 8 feet tone.			
Choir, 1	0 Stons			
31—Principal 8 feet. 32—Flaut allemande . tin . 8 feet. 33—Flaut amabile . wood . 8 feet. 34—Quintaton wood . 8 feet tone. 35—Octave 4 feet.	36 — Portunal wood . 4 feet. 37 — Quinte metal . 2 ½ feet. 38 — Super octave 2 feet. 39 — Mixtur — III ranks. 40 — Oboe metal . 8 feet.			
D 1-1 1	4 Chann			
Pedal, 1  1—Major bass wood . 32 feet tone.  2—Principal . of tin, in front	8—Bassflote wood . 8 feet tone. 9—Gemshornquint			
Accessory Stops, &c.				
3 Ch C	7 Wind replace to Chain			

- 1—Choir to Great.
- 2-Echo to Great.
- 3-Wind-valve to Great.
- 4-Wind-valve to Echo.

- 5—Wind-valve to Choir.
- 6-Wind-valve to Pedal Flue-work.
- 7—Wind-valve to Pedal Reed-work.

### Compass.

Manuals, CC to c <sup>3</sup> in alt, without CC	Pedal, CCC to tenor c, without CCC
sharp.	sharp.

### 93. Breslau.

### Contents of the small Organ in Choir:

### Manual, 12 Stops.

1—Principalin front	8 feet.	7—Flauta minor	4 fect.
2—Quintaton	8 fcet tone.	8—Quinte	2\frac{2}{3} fcet.
3—Salicet	8 feet.	9—Super octave	2 fcet.
4—Flaut major	8 feet.	10—Cymbel II ranks.	
5—Principal	4 feet.	11—Mixture IV ranks.	
6—Octave	4 feet.	12—Vox Humana	8 feet tone.
Pedal, 5 Stops.			
1—Violon	16 feet.	4—Doppelflote	8 fcet.
2—Subbass	16 feet tone.		
3—Octav bass	8 feet.	•	
Compass.			

Manual, CC to c<sup>3</sup> in alt, 4 octaves. Pedal, CCC to tenor c, 2 octaves.

### 94. Breslau.

The Organ in the Church of St. Bernhardin was built by Caspirini in 1705, and enlarged by Hartig in 1831. It has 34 Sounding Stops, 2 Manuals, and Pedal of 12 Stops. Besides the large Organ, there is a small one in the Church, which has 14 Stops. The Specifications are as follow:

#### LARGE ORGAN.

### Great, 13 Stops.

dicat, 15 ctops.				
1—Bordun	8—Doppelflöte			
Choir, 1	0 Stops.			
	1			
14—Principal, in front 8 feet.	19—Quinta $2\frac{2}{3}$ feet.			
15—Salicet 8 feet.	20—Super-octave 2 feet.			
16—Flaut amabile 8 feet.	21-MixtureIV ranks.			
17—Octave 4 feet.	22—CymbelII ranks.			
18—Flaut minor 4 feet.	23—Oboe 8 feet.			
	1			
Pedal, 12 Stops.				
24—Major 32 feet.	30—Doppelflöte 8 feet.			
25—Principal, in front 16 feet.	31—Quintaton 8 feet tone.			
26—Violon	0			
	32—Super-octave 4 feet.			
27—Sub-bass 16 feet tone.	33—Posaune 32 feet.			
28—Major-Quinta10\(\frac{2}{3}\) feet.	34—Posaune 16 feet.			
29—Violin 8 feet.	35—Trompete 8 feet.			

### Accessory Stops, &c.

4-Wind-valve to Choir. 5—Wind-valve to Pedal Flue Stops. 6—Wind-valve to Pedal Reed Stops. 2—Great to Pedal.

3-Wind-valve to Great.

### 95. SMALL ORGAN.

### Manual, 10 Stops.

		1	
1—Principal 2—Gamba 3—Quintatön 4—Portunal 5—Octave	8 feet. 8 feet tone. 8 feet.	6—Flaut Traverse 7—Quinte	$2\frac{2}{3}$ feet.
Pedal, 4 Stops.			

11—Violon	16 feet.	13—Octave	8 feet.
12—Sub-bass	16 feet tone.	14—Super-octave	4 feet.

#### 96. Breslau.

The Organ in the Church of St. Vincent at Breslau, has the very unusual proportion of half as many Pedal Stops as there are Manual Stops; that is to say, 15 of the former to 30 of the latter. The Specification is as follows:

## Great, 15 Stops.

1—Quintaton	16 feet tone.	9—Gemshorn	4 feet.
2—Principal	8 feet.	10—Octave	2 feet.
3—Gemshorn	3 feet.	11—Rauschquint-bass.	
4—Salcional	8 feet.	12—Mixtur. VI ranks.	
5—Portunal	8 feet.	13—Cymbel . III ranks.	
6—Flaut	8 feet tone.	14—Cornet IV ranks.	
7—Unda maris	8 feet.	15—Trompete	8 feet.
8—Octave	4 feet.	l s ziomposov vivi	0 10000
0 0000000000000000000000000000000000000		1 - G	
	Choir, 1	5 Stops.	
16—Prastant	8 feet.	24—Flaut	4 feet.
17—Gamba	8 feet.	25—Flaut travers	4 feet.
18—Fugara	8 feet.	26—Octave-bass	
19—Trinona	8 feet.	27—QuinteIII ranks.	
20—Flaut	8 feet.	28—Mixture . IV ranks.	
21—Quintaton	8 feet tone.	29—Cymbel . III ranks.	
22—Principal	4 feet.	30—Clarinett	8 feet tone.
23—Trinona	4 feet.		5 2000 001101
29 Immidia	1 1000	i	
	Pedal, 1	15 Stops.	

31—Major	32 feet tone.	39—Violon	8 feet.
32—Principal	16 feet.	40—Violoncello	
33—Gamba,		41—Flaut	8 feet.
34—Violon	16 feet.	42—Gemshorn quint	$5\frac{1}{3}$ feet.
35—Sub-bass	16 feet tone.	43—Octave	4 feet.
36—Quintaton	16 feet tone.	44—Posaune	16 feet.
37—Octave	8 feet.	45—Trompete	8 feet.
38—Gamba	8 feet.		

### Accessory Stops, Couplers, &c.

1—Choir to Great.

3, 4, 5, Three wind trunk valves. Five Bellows.

#### 97. Breslau.

The Organ in the Church of St. Ethelbert, in Breslau, was built by the elder Müller, and completed in 1837. It has 24 Sounding Stops, 2 Manuals, and Pedal of 5 Stops. The following is a list of the Stops:

### Great, 12 Stops.

1—Bordun	7—Octave			
Choir,	7 Stops.			
13—Salicet	17—Portunal 4 feet. 18—Super-octave 2 feet. 19—CymbelII ranks.			
Pedal,	5 Stops.			
20—Principal	23—Octave			
Accessory Stops, &c.				
<ul><li>1—Choir to Great.</li><li>2—Great to Pedal.</li><li>3—Wind-valve to Great.</li></ul>	4—Wind-valve to Choir. 5—Wind-valve to Pedal.			
Cor	npass.			

#### 98.—Breslau.

Pedal, CCC to tenor c.

Manuals, CC to d3 in alt.

The Organ in the Church of the Eleven Thousand Virgins, at Breslau, was built by Müller, sen. in 1826; and has 27 Sounding Stops, 2 Manuals, and Pedal. The following is a list of its contents:

### Great, 11 Stops.

1—Bordun	16 feet tone.	7—Rohrflote 4 feet tone.
2—Principal	8 feet.	8—Quinta 2 <sup>2</sup> / <sub>3</sub> feet.
3—Gamba		9—Super-octave 2 feet
4—Portunal	8 feet.	10—MixturV ranks.
5—Doppel-flote	8 feet.	11—Clarinett 8 feet tone.
6—Octave	4 feet.	

6—Octave	4 feet.	
	Choir,	9 Stops.
12—Salicet	8 feet.	17—Nasat quint 2 <sup>2</sup> / <sub>3</sub> feet.
13—Quintaton	8 feet tone.	18—Super-octave 2 feet.
14—Flaut major	8 feet.	19—Mixtur, III ranks.
15—Principal	4 feet.	20—Vox Humana, labiel . 8 feet.
16—Flaut traverso		

### Pedal, 7 Stops.

21—Violon		25—Doppel-flote 26—Octave	8 feet tone. 4 feet.
23—Sub-bass 24—Octave	16 feet tone.	27—Posaune	16 feet.

### Accessory Stops, &c.

1—Choir	to	Gr	ea	t.	
-		2000	_	_	

2—Great to Pedal.

3—Wind-valve to Great.

4—Wind-valve to Choir.

5-Wind-valve to Pedal.

Compass of Manuals, CC to f 3 in alt.

#### 99. Breslau

The Organ in the Church of St. Salvator in Breslau has 19 Stops, of which number 8 are on the Pedal. The following shows the disposition:

### Manual, 11 Stops.

### Pedal, 8 Stops.

12—Violon	16 feet.	16—Quint	eet.
13—Sub-bass	16 feet tone.	17—Super-octave 4 f	eet.
14—Octaven-bass	8 feet.	18—MixturIII ranks.	
15—Floten-bass	8 feet tone.	19—Posaune 16 f	eet.

#### 100. Breslau.

The Organ in the Cemetery Church at Breslau has 12 Stops, as follows:

### Great, 6 Stops.

1—Principal 2—Salicet 3—Quintaton	8 feet.	4—Flaut-major 5—Octave 6—Spitzflote	
	Choir,	3 Stops.	
7—Dulcian (Labial) 8—Flaut amabile	8 feet. 8 feet.	9—Doppel-flote	4 feet.
	Pedal,	3 Stops.	

10—Sub-bass	16 feet tone.	12—Octaven-bass	8 feet.
11—Quintaton	16 feet tone.		

### Couplers, &c.

1—Great to Pedal.	Compass of Pedal, CCC to tenor es
Compass of Manuals, CC to c <sup>3</sup> in alt.	

### 101. Breslau.

The Organ in the Church of St. Mauritius, in Breslau, has 9 Stops, of which the following is a list:

### Manual, 7 Stops.

1—Principal	8 feet.	5—Gemshorn 4	feet.
2—Hohlflote	8 feet.	6—Quinte 28	feet.
3—Gedact	8 feet tone.	7—Super octave	feet.
4—Octave	4 feet.		

### Pedal, 2 Stops.

8—Sub-bass 16 feet tone. 9 —Octaven-bass 8 fe	8—Sub-bass	16 feet tone.	9 —Octaven-bass	8 feet.
---	------------	---------------	-----------------	---------

#### 102. Breslau.

The Organ in the Church of St. Barbara, at Breslau, has 21 Sounding Stops, of which the following is a list:

### Great, 8 Stops.

1—Quintaton	16 feet tone.	5—Octave	4 feet.
2—Principal	8 feet.	6—Quint	$2\frac{2}{3}$ feet.
3—Salicet	8 feet.	7—Super octave	2 feet.
4—Flote	8 feet tone.	8—MixtureV ranks.	

### Upper Manual, Choir, 7 Stops.

9—Salicet	8 feet.	13—Quinte 2 <sup>2</sup> / <sub>3</sub> feet.
10—Flote	8 feet tone.	14—Super octave 2 feet.
11—Principal	4 feet.	15—MixturII ranks.
12—Doppel-flote	4 feet tone.	

### Pedal, 6 Stops.

		-	
16—Sub-bass	16 feet tone.	19—Quinten-bass	$5\frac{1}{3}$ feet.
17—Octaven-bass	8 feet.	20—Gemshorn	4 feet.
18—Floten-bass	8 feet tone.	21—Fagott	16 feet.

#### 103. Breslau.

The Organ in the Music-room of the University at Breslau has 14 Stops, distributed in the following manner:

### First Manual, 6 Stops.

1—Principal2—Portunal	8 feet.	4—Doppelrohrflote 4 feet tone.
3—Octave	4 feet.	5—Quint
	Honor Mone	al 4 Stone

#### Upper Manual, 4 Stops.

7—Salcional	8 feet.	9—Rohrflotemetal	4 feet tone.
8—Gedactmetal treble	8 feet tone.	10—Waldflote metal	2 feet.

### Compass, &c.

Manuals, CC to f<sup>3</sup> in alt. Pedals, CCC to tenor e.

3 Bellows, 8 feet by 4.

### Pedal, 4 Stops.

11—Violon	16 feet.	13—Violon	8 feet.
12—Sub-bass	16 feet tone.	14—Principal	4 feet.

### 104. CRACOW.

The Organ in the Evangelists Church at Cracow has 15 Stops, of which the following is a list:

### Great, 9 Stops.

1—Bordun wood 2—Principaltin 3—Gambatin 4—Flotewood 5—Octavetin	8 feet. 8 feet. 8 feet.	6—Hohlflotewood 7—Quintetin 8—Super octavetin 9—MixturIII ranks	$2\frac{2}{3}$ feet. 2 feet.

### Choir, 3 Stops.

10—Salicet	8 feet.	12—Portunal	4 feet.
11—Portunal	8 feet.		

# Pedal, 3 Stops.

13—Violon	16 feet.	15—Violon	8 feet.
14—Sub-bass	16 feet tone.	15—Violon	

### 105. Warsaw.

The Organ in the Lutheran Church at Warsaw has 27 Sounding Stops. It was built in 1827-9, by Robert Müller, jun. of Breslau; and has 6 Bellows, 10 feet long by 5 in breadth. The following is an enumeration of the Stops:

### Great, 10 Stops.

1—Principal, tin, in front 16 feet.	6—Octavetin 4 feet.
2—Principal. tin 8 feet.	7—Doppel-rohrflote, wood 4 feet tone.
3—Gemshorn.tin 8 feet.	8—Quinttin $2\frac{2}{3}$ feet.
4—Portunal. wood 8 feet.	9—Octavetin 2 feet.
5—Doppel-flote, wood 8 feet to	ne.   10—Mixtur, tinVI ranks.

5—Doppel-flote, wood	8 feet tone.	10-Mixtur, tinVI ranks	
	Choir, 8	Stops.	
11—Salicettin 12—Flautowood 13—Flaut traversewood 14—Quintatontin	8 feet. 8 feet.	15—Principal tin 16—Salicet tin 17—Violini tin 18—Clarinett	4 feet 2 feet.
Pedal, 9 Stops.			
19-Major wood	32 fact tone	24—Quint wood	51 feet

15—hajorwood 52 leet tolle.	21 -Quint wood og reet
20—Violonwood 16 feet.	25—Octavetin 4 feet
	26—Posaunewood 16 feet

#### 106. VIENNA.

The Organ in the Cathedral Church of St. Stephen at Vienna is a very old one. It has 41 Stops, distributed among 2 Manuals and Pedal in the following manner:

### Great, 18 Stops.

		*
1—Major Flute	16 feet. 16 feet tone. 8 feet. 8 feet tone. 8 feet. 8 feet. 4 feet. 4 feet. 4 feet.	10—Fugara
	Chain 1	O Stone
	Choir, 1	o stops.
19—Coppel	<ul><li>8 feet.</li><li>8 feet tone.</li><li>8 feet.</li><li>8 feet tone.</li><li>4 feet.</li></ul>	24—Flote
Pedal, 13 Stops.		
29—Principal       metal         30—Sub-bass       wood         31—Bourdon       metal         32—Principal       metal         33—Octave       wood         34—Violoncello          35—Quinte	16 feet. 16 feet tone.	36—Octave
Accessory Stops,	&c.	Compass.
1—Choir to Great. 2—Great to Pedal. 3—Tremulant.		Manuals, CC to d <sup>3</sup> in alt. Pedal, CCC to tenor c.

### 107. VIENNA.

4, 5, 6, Three Wind-trunk Valves.

The Organ in St. Michael's Church at Vienna is a very old Instrument. It has 3 Manuals, Pedal, and 40 Stops, the distribution and name of which are as follow:

### Great, 16 Stops.

1—Bourdon 1	6 feet tone.	9—Nachthorn 4 feet.
2 — Principal	8 feet.	10—Feldflote 4 feet.
3—Piffaro		11—Quint 2½ feet.
4—Quintadon	8 feet tone.	12—Tierce $1\frac{5}{5}$ foot.
5—Salicional	8 feet.	13—MixturII ranks.
	4 feet.	14—SesquialteraIII ranks.
7—Fugara	4 feet.	15—CymbelV ranks.
8—Spitzflote		16—Super octave 1 foot.

## Choir, 10 Stops.

Choir, 10	o stops.	
17—Coppel       8 feet.         18—Flote major       8 feet.         19—Principal       4 feet.         20—Octave       4 feet.         21—Coppel       4 feet.	22—Flaut minor	
Echo, 4 Stops.		
27—Copel	29—Flote	
Pedal, 1	0 Stops.	
31—Principalmetal 16 feet. 32—Sub-basswood 16 feet. 33—Bourdonwood 16 feet tone. 34—Octavemetal 3 feet. 35—Octavewood 8 feet.	36—Coppel       8 feet.         37—Octave       4 feet.         38—Cornet       III ranks.         39—Posaune       16 feet.         40—Trompete       8 feet.	
Accessory Stops.	Compass.	
1—Choir to Great. 2—Echo to Great.	Manuals CC to c <sup>3</sup> in alt, short octaves. Pedal, CCC, short, to A.	

### 108. VIENNA.

The Organ in the Lutheran Church at Vienna was built by Deutschmann, of that city; and has 2 Manuals and Pedal, and 23 Stops, of which the following is a list:

#### Great. 9 Stops.

Great, 5 Stops.		
1—Principal	6—Quint	<ul> <li>2<sup>2</sup>/<sub>3</sub> feet.</li> <li>2 feet.</li> <li>8 feet.</li> </ul>
Choir, 6 Stops.		
10—Coppel	13—Octave 14—Super octave 15—Vox Humana	<ul><li>2 feet.</li><li>1 foot.</li><li>8 feet tone.</li></ul>
Pedal, 8 Stops.		
16—Bordonopen       16 feet.         17—Sub-bass       16 feet tone.         18—Principal       8 feet.         19—Violoncello       8 feet.	20—Octave	8 feet. 4 feet. 16 feet. 8 feet.

# Accessory Stops, &c.

Compass.

1—Choir	to Gr	eat.
2—Tremu	lant	Choir.

Manuals, CC to d<sup>3</sup> in alt. Pedal, CCC to A.

#### 109. VIENNA.

The Organ in the Church of the Minorites at Vienna, which is a very old one, has lately been renovated by Deutschmann, of that city. It has 2 Manuals and Pedal, and 24 Stops, of which the following is a list:

### Great, 10 Stops.

3.2011)		
1—Principal 2—Quintadon 3—Waldflote 4—Octave 5—Rohrflote	8 feet. 8 feet tone. 9 feet. 4 feet. 4 feet tone.	6—Nachthorn
Choir, 8 Stops.		
11—Principal 12—Coppel 13—Salicional 14—Principal	8 feet. 8 feet. 8 feet. 4 feet.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
Pedal, 6 Stops.		
19—Coppel		22—Octave
Accessory Stops.		Compass.
1—Choir to Great. 2—Great to Pedal.		Manuals, CC short to f <sup>3</sup> in alt. Pedal, CCC short to A.

#### 110. VIENNA.

The Organ in St. Peter's Church is a very old instrument. It has 30 Stops, 3 Manuals, and Pedal of 6 Stops. There are no Reeds in the Organ, and the Mixtures are harsh; but the 16, 8, and 4 feet Stops are good. The following is a Specification of the Stops:

### Great, 12 Stops.

1—Principal	8 feet. 8 feet. 8 feet. 8 feet. 4 feet.	7—Gemshorn	4 feet. 4 feet. 4 feet. 2 feet. 2 feet. 2 feet.
Echo, 8 Stops.			
13 — Coppel	<ul><li>8 feet.</li><li>4 feet.</li><li>4 feet.</li><li>2 feet.</li></ul>	17—Flagiolet	2 feet. 1 ½ foot. 1 foot.
Choir, 4 Stops.			
21—Coppel 22—Principal	8 feet. 4 feet.	23—Flote	4 feet. 2 feet.

### Pedal, 6 Stops.

25—Coppel	16 feet.	28—Octave	8 feet.
26—Sub-bass	16 feet tone.	29—Octave	4 feet.
27—Principal	8 feet.	30—CornetIV ranks.	

### Compass.

Compass of Manuals CC short, to c3 in alt. | Compass of Pedal, CCC short to A.

#### 111. FREIBURG IN SWITZERLAND.

In the Cathedral Church of St. Nicholas, at Freiburg, in Switzerland, is a particularly fine Organ, built by Aloise Moser in 1834. It has 4 Manuals, 2 Pedals, 61 Stops, and 4165 Pipes. The Draw Stops do not operate in the usual way, forwards, but they slide to the right and left. The Case is of dark walnut-tree wood, very elaborately ornamented with carved work, gilded. The Voix Humaine in the Echo is described as being a singularly successful Stop. The following is a list of the contents of this admirable Instrument:

## Great, 16 Stops.

1—Montre.       16 feet.         2—Bourdon.       16 feet tone.         3—Octave.       8 feet.         4—Principal.       8 feet.         5—Bourdon.       8 feet tone.         6—Gamba.       8 feet.         7—Prestant.       4 feet.         8—Dulciana.       4 feet.         9—Doublette.       2 feet.	10—FournitureVI and VII ranks 2 feet.  11—Cymbale III ranks 2 feet.  12—Scharf VIII ranks 2 feet.  13—Petit Cornet III ranks.  14—Grand Cornet, a Reed 16 feet.  15—Trombone	
Choir, 14 Stops.		
17—Quintadena       16 feet tone.         18—Principal       8 feet.         19—Principal       8 feet.         20—Gamba       8 feet.         21—Flute douce       8 feet.         22—Octave       4 feet.         23—Flute       4 feet.         24—Flute a chiminee       4 feet tone.	25—Nazard	
Positif, 12 Stops.		
31—Montre	37—Flute bouchee 4 feet. 38—Dulciana 4 feet. 39—Quint Flute 2½ feet. 40—Flageolet 2 feet. 41—Cornet V ranks. 42—Cromorne 8 feet tone.	
	•	

46—Prestant....

48—Trombone.....

47—Bombarde..... 16 feet.

4 feet.

43—Bass-Bourdon . . . . 32 feet tone.

44—Sons-bass..... 16 feet.

45—Octave..... 8 feet.

#### Choir Pedal, 5 Stops.

49—Montre	16 feet. 8 feet. 8 feet.	52—Prestant	4 feet. 8 feet.
Accessory Stops, &c.			
1—Choir to Great.		3—Tremulant Great. 4—Tremulant Echo.	
2—Great to Pedal.		4—Tremulant Echo.	
Compass.			
Manuals, CC to f <sup>3</sup>	in alt.	Pedals, CCC to tenor	· c.

This Organ had neither Composition Pedals nor Swell in 1851; but both were going to be added, and also a Seraphine appendage.

#### 112. GERSAU.

The Organ in the Cathedral Church at Gersau, in Switzerland, was made by Moser, the builder of the famous instrument at Freibourg; and though but a small one in comparison with many in Germany, yet it shows that, even in instruments of inferior size, the foreign builders still preserve inviolate the same magnificent features which characterize their larger ones; namely, a full and powerful Pedale; a good foundation of Unisons and Doubles upon the Manuals; and a brilliant superstructure of Mixtures and Chorus Stops amply sufficient to correspond thereto. The full Organ is therefore, as may be supposed, exceedingly fine. This Organ has 30 Sounding Stops, of which the following is a list:

### Great 14 Stons

Great, 14 Dups.		
1—Principal	16 feet. 8 feet. 8 feet. 4 feet. 4 feet. 4 feet.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
Choir, 8 Stops.		
15—Gamba	8 feet. 8 feet tone. 8 feet. 4 feet.	19—Quint
Pedal, 8 Stops.		
23—Sub-bass	32 feet tone. 16 feet. 8 feet. 5 \frac{1}{3} feet.	27—Octave
Coupler, Choir to Great.		

#### Compass.

Manuals, CC to f3 in alt.

Pedal, CCC to tenor c.

#### 113. SOLEURE.

The Organ in the Cathedral at Soleure, in Switzerland, was made by Bossart de Zug in 1790, and is remarkable for being without "Double" Stops on the Manuals. It has 3 Manuals and Pedal, and 39 Sounding Stops, of which the following is a list:

1100		
Great, 16 Stops.		
1—Principal       8 feet.         2—Bourdun       8 feet tone.         3—Gamba       8 feet.         4—Copel       8 feet.         5—Flauta       8 feet.         6—Octava       4 feet.         7—Flauttons       4 feet.         8—Quinta       2 feet.	9—Super octave 2 feet.  10—Tertia	
Choir, 8 Stops.		
17—Principal 8 feet. 18—Copel 8 feet. 19—Octaya 4 feet.	21—Super octava 2 feet. 22—Mixtur. 23—Cornet.	
20—Quinta 2½ feet.	24—Vox Humana 8 feet tone	
Echo, 7 Stops.		
25—Principal       8 feet.         26—Copel       8 feet.         27—Flaut       4 feet.         28—Nassat       2 \frac{3}{3} feet.	29—Mixtur. 30—Cornet. 31—Fagott 8 feet.	
Pedal, 8 Stops.		
32—Sub-bass	36—Octava	
Accessory Stops, &c.	Compass.	
<ul><li>1—Coupler Choir to Great.</li><li>2—Tremulant to Choir.</li></ul>	Manuals, CC to d <sup>3</sup> in alt. Pedal, CCC to gamut A.	

#### 114. Lucerne.

The Organ in the Cathedral at Lucerne, in Switzerland, was built by Geissler of Salzbourg, in the year 1651. It has 48 Stops, 3 Manuals, and Pedal of 13 Stops, among which is a particularly fine Sub-bass of 32 feet in metal. It is proposed to rebuild this Organ very shortly.

Over the Manuals is the following quaint account of the Organ:

"Organ in the Collegiate Church at Lucerne."

"This Organ is the master-piece of John Geissler, native of Salzbourg. It was commenced and finished in the space of 17 years. The first use made of it dates

from 1651, when the son of this famous artist, elected Chaplain of this College, was celebrating his first Mass. The whole work consists of 3 Manuals; of a Pedal with 2 octaves; and 2826 Pipes, composed, for the most part of them, of English pewter. The largest of these measures 2 feet in diameter (qy.), 37 feet in length, and should contain very easily 1308 French pints of any liquor. The Mixtures of this admirable work may be varied 7 times, and besides this advantage, there are several registers whereby one may make use of the three Manuals together, or one or two of them separately. This masterpiece was first tried and approved of by 4 Organists belonging to foreign princes, and cost about 12,000 Rhenish Florins, a sum which is esteemed very valuable for that time."

The following is a list of the Stops in the Lucerne Organ:

# Great, 12 Stops.

1—Nachthorn	7—Nazard	
Choir, 1	1 Stops.	
1—Principal       8 feet.         2—Hohlflote       8 feet.         3—Quint $5\frac{1}{3}$ feet.         4—Octave       4 feet.         5—Quint-flote $2\frac{2}{3}$ feet tone.         6—Terz-flote $1\frac{3}{5}$ feet tone.	7—MixturIII ranks. 8—CimbelIII ranks. 9—Cornet V ranks. 10—Schalmei 8 feet tone. 11—Hornlein, a small reed 8 feet.	
Echo, 1	2 Stops.	
1—Principal	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	
Pedal, 1	3 Stops.	
1—Sub-bassmetal 32 feet. 2—Bassmetal 16 feet. 3—Principalmetal 16 feet. 4—Holz-bass.wood 16 feet. 5—Bourdon.wood 16 feet tone. 6—Octave 8 feet. 7—Klein-octave 8 feet.	3—Super octave	
Aceessory Stops, &c.		
1—Echo to Great. 2—Choir to Great.	3—Great to Pedal. 4—Echo to Choir.	

Compass.

Manuals, CC to e<sup>3</sup> in alt. short octaves. | Pedal, CCC to tenor e, short octaves.

#### 114 a. WINTERTHUR.

The Organ in the principal Church at Winterthur, near Zurich, was built partly by Hasse and partly by Moser, of Freiburg. It contains 44 Sounding Stops, 3 Manuals, and a Pedal of 9 Stops. Among the latter is a very fine 32-feet Sub-Bass, of wood. The following is a list of the Stops in the above-mentioned Organ:

-5		
Great, 14 Stops.		
1—Principal 16 feet.	8—Octav 4 feet.	
2—Bourdon 16 feet tone.	9—Fugara 4 feet.	
3—Octav 8 feet.	10—Quinte 2 <sup>2</sup> feet.	
4—Bourdon 8 feet tone.	11—Wald Flote 2 feet.	
5—Viol de Gamba 8 feet.	12—Mixture V ranks.	
6—Flote, dopp. lab 8 feet.	13—Cornet V ranks.	
7—Quint Flote $5\frac{1}{3}$ feet tone.	14—Trompete 8 feet.	
Choir, 1	1 Stops.	
15—Bourdon 16 feet tone.	21—Rohrflote 4 feet tone.	
16—Principal 8 feet.	22—Flauto Traverso 4 feet.	
17—Viol de Gamba 8 feet.	23 — Octave 2 feet.	
18—Bourdon 8 feet tone.	24—MixtureIV ranks.	
19—Dolce 8 feet.		
20—Gemshorn 4 feet.	25 { Clarinet Treble } 8 feet.	
'		
Swell, 1	*	
26—Principal 8 feet.	32—Flauto d'amore 4 feet.	
27—Lieblich Gedact 8 feet tone.	33—Flautino 2 feet.	
28—Harmonica 8 feet.	34—Physarmonica free	
29—Salicional 8 feet.	reeds 8 feet.	
30—Lieblich Flote 8 feet tone.	35—Vox Humana 8 feet tone.	
31—Spitz Flote 4 feet.		
Pedal,	9 Stops.	
36—Sub-Basswood 32 feet.	41—Violoncello 8 feet.	
37—Octav Basswood 16 feet.	42—Octav 4 feet.	
38—Sub-Bass wood 16 feet tone.	43—Posaune 16 feet.	
39—Octav Bassmetal 8 feet.	44—Trompete 8 feet.	
40—Flote Basswood 8 feet tone.		
Accessory Stops, Movements, &c.		
1—Coupler, Choir to Great.	5, 6, 7—Three Wind-trunk Valves.	
2—Ditto Swell to Choir.	8—Tremulant to Swell.	
3—Ditto Great to Pedal.	9, 10—Two Composition Pedals.	
4—Ditto . Choir to Pedal.	, as a surpression a surpression as a su	
·		
Compass.		

#### Compass.

Manuals, CC to f3 in alt, 54 notes. | Pedal, CCC to tenor c, 25 notes.

#### 115. CONSTANCE.

The Organ in the Cathedral of Constance, in Switzerland, was originally built in the year 1518, which date appears on the Case of the Instrument. It stands at the west end of the nave, and has the front Pipes richly decorated with diaper and scrollwork. The Organ has 2 Manuals and Pedal, and 27 Sounding-stops, of which the following is a list:

Great, 11 Stops.		
1—Bourdon       16 feet tone.         2—Principal       8 feet.         3—Viola di Gamba       8 feet.         4—Gedact       8 feet tone.         5—Octave       4 feet.         6—Flote Gedact       4 feet tone.	7—Quinte	
Choir,	8 Stops.	
12—Principal       8 feet         13—Gemshorn       8 feet         14—Bourdon       8 feet tone         15—Salicional       8 feet	16—Octave 4 feet .   17—Rohrflote 4 feet tone.   18—Quinte 2 \( \frac{2}{3} \) feet .   19—Mixtur . III ranks . 2 feet .	
Pedal,	8 Stops.	
20—Principal-bass       16 feet.         21—Nassat-major       12 feet tone.         22—Octave-bass       8 feet.         23—Prestant-bass       4 feet.	24—Rausch-quint.II ranks. 2\frac{2}{3} feet.   25—MixturIV ranks. 2 feet.   26—Posaune16 feet.   27—Trompet8 feet.	
Accessory Stops.  1—Choir to Great.  2—Great to Pedal.	Compass.  Manuals, CC to f <sup>5</sup> in alt.  Pedal, CCC to Gamut G.	

#### 115 a. STUTGARD.

The Organ in the Stiftskirche, at Stutgard, was built in the year 1737, by Martin, of Hayengen, partner of the celebrated Organ-builder, Gabler, for the Benedictine Abbey of Zwiefalten. It has been repaired and enlarged by Walker, of Ludwigsburg, and is a particularly fine instrument. It has 4 Manuals and 2 Pedals, and contains 68 Sounding-stops, of which the following is a list:

Great Organ	n, 16 Stops.		
1—Bourdon 32 feet tone.	9—Octav		
2—Principal 16 feet.	10—Dolce 4 feet.		
3—Bourdon 16 feet tone.	11—Fugara 4 feet.		
4—Octav 8 feet.	12—Octav		
5—Gamba 8 feet.	13—MixturIV ranks.		
6—Viola 8 feet.	14—Cornet V ranks.		
7—PiffaraII ranks8 & 4 feet.	15—Tuba 16 feet.		
8—Quint $5\frac{1}{3}$ feet.	16—Trompete 8 feet.		
Second Manual, 13 Stops.			
17—Bourdon 16 feet tone.	24—Flote 4 feet.		
18—Principal 8 feet.	25—Rohrflote 4 feet tone.		
19—Gedackt 8 feet tone.	26—Nazard		
20—Viola 8 feet.	27—Octav 2 feet.		
21—Salicional 8 feet.	28—MixturII ranks.		
22—Piffara 8 feet.	29—Clarinet 8 feet tone.		
23—Octav 4 feet			

### Choir, or 3rd Organ, 11 Stops.

30—Salicional       16 fee         31—Principal       3 fee         32—Gedackt       8 fee         33—Viola       8 fee         34—Harmonica       8 fee         35—Flote       8 fee	t. 37—Travers Flote 4 feet. t tone. 38—Flageolet 2 feet. t. 39—MixturII ranks. t. 40—Physharmonica 8 feet.		
Ec	ho Organ, 8 Stops.		
41—Principal       8 fee         42—Gedackt       8 fee         43—Viola       8 fee         44—Dolce       8 fee	t tone.   46—Flote 4 feet. t.   47—Salicional 4 feet		
First Pedal, 14 Stops.			
53—Quint	5t.       57—Octav		
Second Pedal, 7 Stops.			
63—Bourdon	et tone.   67—Flautino		
Accessory Stops.			

]	l J	First	Peda.	l to	Second	Pedal	
---	-----	-------	-------	------	--------	-------	--

<sup>2—</sup>First and Second Manual.

# 4-Second Manual to Second Pedal.

5—Second and Third Manual.

6—Third and Fourth Manual.

#### Compass.

Four Manuals, CC to d3 in alt.

Two Pedals, CCC to Tenor d.

#### 116. WEINGARTEN.

The Benedictine Monastery at Weingarten, in Upper Suabia, possesses an Organ of great magnitude and power. It was built by Gabelaar, of Ravensbourg, and was finished on the 24th of June, 1750. It has 4 Manuals and 2 Pedals; 64 Stops, among which are 2 of 32 feet, and 8 of 16 feet; 6666 Pipes; and an unprecedented number of ranks in the Mixture-work. It is said that Gabelaar's Organ gave so much satisfaction, that the monks, who were very rich, presented him with 6666 florins above his charge, being an additional florin for each Pipe.

There are accounts of this fine Organ in Dom Bedos' Facteur d'Orgues, accompanied by an elaborate engraving of it; in Knecht's Orgelschule, and in Martini's School for the Organ, all of which differ from one another; and as it is uncertain

<sup>3—</sup>First Manual to First Pedal.

which account, if either, correctly describes the Organ in its present state, the original list of Stops is here subjoined, as being in such case the most interesting:

Great, 12 Stops.			
1—Principal       16 feet.         2—Octave       8 feet.         3—Rohrflote       8 feet tone.         4—Piffaro       8 feet.         5—Octave       4 feet.         6—Doublette       2 feet.	7—Hohlflote 2 feet. 8—Sesquialtera.VIII rks. 2 feet. 9—Fourniture XX rks. 2 feet. 10—Cymbale VIII rks. 1 foot. 11—Trompete 8 feet. 12—Carillon.		
Choir, 1	2 Stops.		
13—Bourdon       16 feet tone.         14—Montre       8 feet.         15—Salicional       8 feet.         16—Violoncello       8 feet.         17—Bourdon       8 feet tone.         18—Flute creuse       8 feet.	19—Unda-maris       8 feet tone.         20—Prestant       4 feet.         21—Viola       4 feet.         22—Nasard       2 feet.         23—Fourniture       XXI rks       2 feet.         24—Cymbale       II rks       2 feet.		
Positif, 1	2 Stops.		
25—Principal, in front       8 feet.         26—Violoncello       8 feet.         27—Quintaton       8 feet tone.         28—Flute douce       8 feet.         29—Piffaro       4 feet.         30—Flute Traversiere       4 feet.	31—Flute a chiminee       4 feet tone.         32—Quer Flute       4 feet.         33—Flageolet       2 feet.         34—Cornet       XII ranks       2 feet.         35—Hautbois       3 feet.         36—Voix Humaine       3 feet tone.		
Echo, 1	2 Stops.		
37—Bourdon       16 feet tone.         38—Montre       8 feet.         39—Violoncello       8 feet.         40—Quintaton       8 feet tone.         41—Flute       8 feet.         42—Octave       4 feet.	43—Piffaro       4 feet.         44—Hohl-flute       4 feet.         45—Superoctave       2 feet.         46—Fourniture       XII rks.       2 feet.         47—Cornet       IV rks.       1 foot.         48—Hautbois       3 feet.		
First Peda	l. 9 Stops.		
49—Contre bass, in front . 32 feet. 50—Sous bass 32 feet tone. 51—Octave bass 16 feet. 52—Violon bass 16 feet. 53—Bombarde bass 16 feet. 54—Fourniture . V ranks . 8 feet.	55—Scharf 4 feet. 56—Carillon en cloches . 4 feet. 57—Bombarde 16 feet. Timpano. Concon. Cymbales.		
Second Peda	al, 9 Stops.		
58—Quintaton       16 feet tone.         59—Superoctave, in front       8 feet.         60—Violoncello       8 feet.         61—Flute douce       8 feet.         62—Flute creuse       4 feet.         63—Cornet       V ranks       4 feet.	64—Sesquialtera . II and III ranks 2 feet. 65—Trompet 8 feet. 66—Fagot 8 feet. Rossignol. Tremblant.		

## 117. Munich.

The Organ in the Odeon Concert-Room at Munich is a little gem. It was built in 1851, by Walker, of Ludwigsburg, and contains 20 Stops, distributed among 2

410 APPENDIX.

Manuals and Pedal. The Phys-armonica is on a separate wind, and is managed by a new pedal contrivance so as to produce the most exquisite effects of delicate crescendo and diminuendo. The following is the Specification of the above-named Organ:

-5	
Great, 1	O Stops.
1—Bourdonwood 16 feet tone. 2—Principalmetal 8 feet. 3—Gambawood 8 feet. 4—Rohrflotemetal 8 feet tone. 5—Gedactwood 8 feet tone.	6—Octave metal . 4 feet. 7—Flote wood . 4 feet. 8—Octave metal . 2 feet. 9—Cornet VII ranks . 16 feet tone 10—Trompete 8 feet.
Echo, 6	Stops.
11—Salicionalmetal 8 feet. 12—Flotewood 8 feet. 13—Gedactwood 8 feet tone.	14—Spitzflote metal 4 feet. 15—Dolce metal 4 feet. 16—Phys-armonica 8 feet.
Pedal,	4 Stops.
17—Subbass.wood, open . 16 feet. 18—Viol de Gamba.metal. 16 feet.	19—Violoncellometal. 8 feet. 20—Fagotto 16 feet.
Accessory Stops.	Compass.
1—Echo to Great. 2—Great to Pedal.	Manuals, CC to f <sup>3</sup> in alt.  Pedal, CCC to tenor d.

### 118. RATISBON.

The Organ in the Church of St. Emmeran, at Ratisbon, was built about 250 years ago. It has 28 Stops, distributed among 2 Manuals and Pedal in the following manner:

ing manner:		
	Great, 1	o Stops.
1—Principal	8 feet.	6—Flote 4 feet.
2—Bourdon	8 feet tone.	7—Quint $2\frac{2}{3}$ feet.
3—Gamba	8 feet.	8—Super-octave 2 feet.
4—Copel	8 feet.	9—Mixtur, major . III ranks.
5—Octave	4 feet.	10—Mixtur, minorII ranks.
	Choir, 8	3 Stons
11—Copel	8 feet.	15—Octave 4 feet.
12—Salicional	8 feet.	16—Flote 4 feet.
13—Allemande	8 feet.	17—Spitzflote 4 feet.
14—Principal	4 feet.	18—Super-octave 2 feet.
	Pedal,	8 Stops.
19—Grossbass	16 feet.	23—Quint
20—Violone	16 feet.	24—Octave 4 feet.
21—Principal	8 feet.	25—Super-octave 2 feet.
22—Violoncello	8 feet.	26—Mixtur. V ranks.
Accessory Stops		Compass.
1—Choir to Great.		Manuals, CC to c <sup>3</sup> in alt.
2—Great to Pedal.		Pedal, CCC to A.

#### 119. BOTZEN.


The Organ in the Parish Church at Botzen, Tyrol, was built by Hess, and repaired by Carlo Mauracher. It has 2 Manuals and Pedal, and 30 Stops, of which the following is a list:

```
Great, 12 Stops.
                                    7-Flauto duodecimo .. 22 fect.
 1—Coppel.....
                      16 feet.
                                    8—Super-octave .....
 8 feet.
 3-Flaut amabile ....
                       8 feet.
                                    9-Mixtur.
                                    10-Cornet.
                       8 feet tone.
 4—Flauto stoppo . . . . . .
                                   11—Trombe . . . . .
                       8 fect tone.
                                                           8 feet.
 5—Quintadena .....
                                   12-Vox Humana....
 4 feet.
                                                           8 feet tone.
                           Choir, 10 Stops.
13—Copel.....
                       8 fect.
                                   18—Sesquialtera . II rks.
                                                          24 fect.
                       8 feet.
                                                           2 feet.
19—Flageolet . . . . . . .
15—Salicional . . . . . .
                       8 feet.
                                   20—Tibea Silvest .....
                                                           2 feet.
4 feet.
                                   21—Cymbal . . . . . . 1\frac{3}{5} foot.
17—Flauto.....
                       4 feet.
                                   8 feet.
                            Pedal, 8 Stops.
23—Principal-bass . . . . 16 feet.
                                   27—Octave-bass . . . . . .
                                                            8 feet.
24—Violon-bass . . . . .
                                   28—Mixtur-bass....
                                                            4 feet.
                      16 feet.
25—Sub-bass..... 16 feet tone.
                                   29—Posaune . . . . . . . . . .
                                                            8 feet.
26—Principal . . . . . . . . .
                       8 feet.
                                   30—Clairon .....
                                                            4 feet.
                              Compass.
    Manuals, CC to f^3 in alt.
                                        Pedal, CCC to FF.
```

### 120. St. Peter's, at Rome.

So little is generally known in England concerning the Organs of Italy, that it is presumed the following accounts of some of the large Cathedral and celebrated Church Organs of that country will be perused with much interest. It will be perceived, from the particulars relating to the subject, appended to the Specifications in question, that the compass most usually adopted by the Italian Organ-builders for the Manuals of their instruments is that descending to the CCC or 16-feet key. Occasionally this range is met with "complete," as in the Organ at St. Alessandro, at Milan, No. 124; and therefore corresponding almost exactly with the downward compass of the Great Organ Manuals at St. Paul's Cathedral; Westminster Abbey; Christ's Hospital; St. Mary, Redcliffe; &c. The Stops of a Manual of such range are just double the size of the usually quoted lengths; that is to say, the Principale (Open Diapason) is 16 feet actual measurement, and not 8; the Ottava (Principal) is 8 feet, and not 4; and so on (see Nos. 124, 127, 128, &c.); and the Pedal Organ of such instruments usually consists of but a very few Stops, as the deeper tones of the Manual serve as a sort of substitute for it in general effects. Sometimes the Manuals are of the compass denominated "CCC short;" that is, they have the 16-feet key for the lowest note, but with certain tones omitted from the scale, and

such an arrangement of the remaining keys, that the Dominant and Tonic notes of F, G, and A, lie side by side, as shown in the following scheme:



Sometimes the Italian Manuals descend to FFF, as in the two large Organs at Milan Cathedral; corresponding with the compass adopted by Green for his Organs at St. George's Chapel, Windsor; Salisbury Cathedral, Greenwich Hospital, &c. The length of the Stops in all such FFF Manuals is half as large again as the corresponding Stops of CC Organs; thus the Manual and Pedal Diapasons are not simply 8 and 16 feet in length, but 12 and 24 feet respectively; see No. 122. In a few instances, CC Manuals are met with; as in two of the Geneva Organs, Nos. 136 and 137; with, of course, a somewhat larger proportionate Pedal Organ, by way of "Bass."

Among other peculiarities in the Italian system of Organ-building, will be noticed that of placing one more Open Diapason (Principale) in the Treble of the Manual than in the Bass, evidently with the view of preserving an equal strength between the upper and lower tones of the gamut, as in the Organs at St. Peter's, at Rome, Milan Cathedral, &c. See Nos. 120, 121, 122, 127, &c. In some instances, this plan for strengthening the acute sounds will be found extended to the Principal (Ottava), as in Organs at Milan, Como, &c. See Nos. 122, 128, 133, &c. Another feature in connection with the Italian schemes is the plan of making a greater number of the small ranks of Pipes draw separately than is the custom in any other country. Thus we find not only the 19th and 22nd frequently appearing as separate Stops, but also the 26th, 29th, and even the 33rd and 36th, disposed in a similar manner. See No. 123, &c. Among the most striking features in the Italian Organs, however, is the constant presence of the Octave and Sub-octave couplers, which so materially increase the number of distinct combinations, as well as augment the general power of instruments possessing them.

In the Church of St. Peter, at Rome, there are *four* Organs; all of which, however, are small for so spacious an edifice. The largest one of the number was originally built about 150 years since, but has recently been reconstructed and enlarged by Priori, an Organ-builder in Rome. It has 2 Manuals and Pedal, and 27 Stops, of which the following are the names. As, however, many of the names are probably new to many English readers, a list of equivalent terms is placed in parallel columns therewith, which will serve to elucidate their meaning:

### Great, 17 Stops.

1—Principale doppio, Soprano e Basso	Double Diapason, Treble and Bass.
Principale 1mo Soprano	First Open Diapason, Treble.
	First Open Diapason, Bass.
Frincipale 2ndo Soprano	Second Open Diapason, Treble.
3 Principale 2ndo Basso	Second Open Diapason, Bass.

4—Principale 3zo, Soprano  5—Flauto Traverso, Soprano e Bass  6—Flauto Tedesca, Soprano  7 { Ottava Soprano	Third Open Diapason, Treble. German Flute, Treble and Bass. A kind of Clarabella. Octave or Principal Treble. Octave or Principal Bass. Twelfth. Fifteenth. Piccolo, Bass and Treble. Nineteenth or Larigot. Twenty-second or Octave Fifteenth. Twenty-ninth or Super-octave Fifteenth. Chorus or Mixture, IV ranks. Cornet, Treble, V ranks. Trumpet, Treble. Trombone, Bass. English Horn, Treble. Bassoon, Bass.
Swell, 6  18 { Principale, Soprano     Principale, Basso  19—Ottava  20—Decima-quinta  21—Ripieur di cinque  22—Oboe, Soprano  23 { Tromba, Soprano     Corno, Basso	Stops.  Open Diapason, Treble. Open Diapason, Bass. Octave or Principal. Fifteenth. Mixture, V ranks. Hautboy, Treble. Trumpet, Treble. Horn, Bass.
Pedal, 4 24—Contra-Basso, di 16 25—Principale, di 16 26—Principale, di 8. 27—Reinforza a lingue.	Stops.  Open Diapason, wood 16 feet. Diapason 16 feet. Principal 8 feet. Free Reed, without tubes . 16 feet tone.
Accessory Stops,  1—Coupler, Swell to Great.  2—Coupler, Great to Pedal.  3—Coupler, Swell to Pedal.  4, 5—Octave and Sub-octave on Great Manual.	6, 7, 8—Three Composition Pedals. 9—Drum Pedal.
Comp Manual, CCC, short, to f <sup>3</sup> in alt.	Pedal, CCC, short, to Tenor c.

### 121. ROME.

The Organ that ranks as second in point of size in St. Peter's, at Rome, was built by Priori, of that city, and has 1 Manual and Pedal, and 21 Stops, of which the following is a list:

### Manual, 17 Stops.

1-Contra-Bassi, Soprano e Basso. 2 { Principale, 1mo Soprano. Principale, Basso.

3—Principale, 2ndo Soprano.

4—Flauto Traverso, Soprano e Basso. 5—Flauto Tedesco, Soprano.

6 Ottava, Soprano. Ottava, Basso. 7 — Duodecima. 8 — Decima-Quinta. 9 — Ottavini ne Basso. 10 — Decima Nona. 11 — Vigesima Seconda.	13—Ripieno di cinque. 14—Cornetto di quattro, Soprano. 15—Voce Umana (not a reed). 16 { Tromba, Soprano.
12—Vigesima Nona.	
Pedal,	4 Stops.
18—Contra-Basso di 16. 19—Principale di 8.	20—Ottava di 4. 21—Bombarde di 16.
	op . Drum.

The Church of St. John of Lateran, at Rome, has an Organ of 36 Stops. It was first built in 1549, and is the largest instrument in the city.

#### 122. MILAN CATHEDRAL.

In Milan Cathedral there are two Organs, one on each side the Choir; both of which are exceedingly effective, and suit admirably the noble building in which they are placed. Neither of them contain any Reed Stops: Stops of that nature being expressly forbidden by the Ambrosian rite. Both instruments were made by the brothers Serassi, of Bergamo. That which stands on the north-side of the Choir was completed in 1842, has one Manual and Pedal, and the following Stops:

#### Manual, 28 Stops. (Doppio nè Soprani, di 24 Piedi. 12—Flauto Traverso..(German Flute.) (Double Treble.) Contra-Basso, di 24 Piedi. 14—Decima Quinta, 1mo. . . . . (15th.) 15—Decima Quinta, 2ndo . . . . (15th.) (Double Bass.) Principale 1mo Soprano. 16—Flautino....(Piccolo.) 17 { Decima nona, e . . . } (1mo. Vigecima Seconda . . . } (19 & 22.) 18 { Decima nona, e . . . . } 2ndo. Vigesima Seconda . . . } (19 & 22.) (Open Treble.) Principale 1mo Basso. (Open Bass.) Principale 2ndo Soprano. Vigesima sesta, e... $\{(26 \& 29.)\}$ (Open Treble.) 19 d Vigesima nona..... Principale 2ndo Basso. 20 Vigesima Quarto, e... (24 & 17.) (Open Bass.) Principale 3zo. Soprano. 21 Trigesima Terza, e... (33 & 36.) (Open Treble.) Violone-Soprano.....(Violin.) 22 Trigesima prima, e.. (31 & 36.) Trigesima sesta.... Violono-Basso.....(Base.) 6 S Flautone, Soprano. (Met. St. Dn.) 23-Ripieno di quatro (Mixture IV rks.) Flautone, Basso. (Stopped Bass.) 24—Ripieno di tre (Mixture III ranks.) 7—Flauto Tedesca . . . . (Clarabella.) 8 Ottava 1mo. Soprano. (Prin. Tre.) 25—Cornetto-Soprano, a cinque Ottava 1mo. Basso . . (Prin. Bass.) (Cornet V ranks.) 9 Ottava 2ndo Soprano. (Prin. Tre.) 26-Cornettino-Sop: a quattro (small Ottava 2ndo Basso . . (Prin. Bass.) Cornet IV ranks.) 10-Ottava 3zo Soprano . . . (Prin. Tre.) 27—Corno dolce, Soprano.. (Soft Horn.) 11 \ Viola-Soprano . . . (Octave Gamba.) 28—Voce Humana, Sop... (not a reed.)

Violoncello-Basso..(Gamba Bass.)

### Pedal, 4 Stops.

29—Contra Basso..... 24 feet. 31—Ottava...... 12 feet. 32—Principale...... 12 feet.

### Accessory Stops, Movements, &c.

1—Terzo Mano (third-hand, octave Coupler.)
2—Pedali armonichi (Pedal Coupler.)
3—Tremblant.
4, 5—Two Composition Pedals.

#### Compass.

Manual, FFF to f3 in alt, complete. | Pedal, FFF to Tenor c, complete.

### 123. MILAN CATHEDRAL.

The Organ on the South side of the Choir has 2 Manuals and 29 Stops, of which the following is a list:

### Great, 21 Stops.

10—Decima nona. 1—Contra-bassi. 2 { Principale 1mo Soprano. 11—Vigesima seconda. Principale 1mo Basso. 12—Vigesima sesta. 3 Principale 2ndo Soprano. 13-Vigesima nona. Principale 2ndo Basso. 14—Vigesima sesta e nona. 15—Trigesima terza. 4-Flauto Traverso. 5 S Ottava Soprano. 16—Trigesima sesta. 17—Trigesima terza e sesta. Ottava Bassi. 18 \ Quadragesima, e 6 Ottava Soprano.
Ottava Bassi. 🛾 Quadragesima terza. 19—Cornetta Primo. 7—Flauto in Ottava. 8—Duodecima. 20-Cornetta Secunda. 21-Voce Umana. 9—Quinta decima.

### Positif, 8 Stops.

22 { Principale Soprani. | 25—Quinta decima. | 26—Decima nona. | 27—Vigesima secunda. | 24 { Ottava Soprani. | 28—Vigesima sesta. | 29—Vigesima nona. | 29—Vigesima nona. | 29—Vigesima nona.

#### Accessory Stops, Movement, &c.

1—Bassi armonici ne Pedali.
2—Terzo Mano.

3—Sub-octave Coupler.
4—Piano and Forte movement.

### Compass.

Manuals, FFF to g 3 in altissimo. | Pedal Clavier, FFF to Tenor b.

#### 124. MILAN.

The Organ in the Church of St. Alessandro, at Milan, has 49 Stops, 2 Manuals, and a Pedal of 10 Stops. The following is its specification:

### Great, 24 Stops.

Principale Soprano 1mo. 32 feet. Principale Basso 1mo. 32 feet. Principale Sop. e Basso 32 feet.  Note and a seet. Principale Sop. e Basso 32 feet. Principale Soprano 1mo. 16 feet. Principale Basso 1mo. 16 feet. Principale Basso 2mdo. 16 feet. Principale Basso 2mdo. 16 feet. Viola Soprano. 16 feet. Viola Soprano. 16 feet. Ottava Soprano 1mo. 3 feet. Ottava Basso 1mo. 3 feet. Pottava Sop. e Basso. 3 feet. Flauto Soprano. 3 feet. Flauto Basso. 3 feet.	11 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
Flauto Basso 8 feet.	24—Tromba Armoniche 8 feet.	
Swell, 15	Stops.	
Principale, Soprano	31—Flauto Traverso, Soprano8 feet.32—Viola Basso8 feet.33—Decima quinta4 feet.34—Decima nona3 feet.35—Vigesima seconda2 feet.36—Vigesima sesta e nona37—Clarinetto, Soprano16 feet.38—Fagottone, Basso32 feet.39—Claroone, Basso8 feet.	
Pedal, 10 Stops.		
40—Violone profondo 32 feet. 41—Contrabassi e rinforzi 16 feet. 42—Violoncello a lingur in la 16 feet. 43—Bassi armonichi e duodecima. 44—Principali e ottava 8 & 4 feet.	45—Ripieno a tre 8, 6, & 4 feet- 46—Bombardi 16 feet- 47—Tromboni 8 feet- 48—Corni da caccia 4 feet- 49—Timpani .	

### Accessory Stops, Movements, &c.

- 1-Coupler, Swell to Great.
- 2-Coupler, Great to Pedal.
- 3—Seraphine, or Fisarmonica, on a separate wind.
- 4—Thunder Pedal.
- 5—Drums.
- 6, 7, 8, Three Composition Pedals.

### Compass.

Great, CCC to c<sup>4</sup> in altissimo, six complete octaves. Swell, CC to c<sup>4</sup> in altissimo, five complete octaves. Pedal, CCC to Tenor c, two complete octaves.

#### 125. MILAN.

The Organ in the Church of St. Maria Della Grazia, at Milan, stands on the north side of the Choir. It contains 18 Stops, I Manual, and a Pedal Clavier, but no Pedal Stops. The instrument was made by Maroni, of Varasi, in 1832. The following is a list of its contents:

## Manual, 13 Stops.

in curious,	10 500/3.
1—Contra Bassi.	10—Decima nona.
2 Principale Soprano 1mo. 2 Principale Basso 1mo.	11—Vigesima seconda.
Principale Basso 1mo.	12—Vigesima sesta e nona.
3 Principale Soprano 2ndo. 2 Principale Basso 2ndo.	13—Trigesima terza e sesta.
"7 Principale Basso 2ndo.	Quadragesima e
4—Flauto Traverso.	14 \int \text{Quadragesima e} \text{Quadragesima terza.}
5—Violoncello Basso.	15—Cornetta.
C S Ottava Soprano.	16 Trombe Soprano. Tromboni Basso.
6 S Ottava Soprano. Ottava Basso.	Tromboni Basso.
7—Flauto in ottava.	17—Voce Umana, Soprano.
8—Flauto in XII, Soprano.	18—Fagotto Basso.
9—Quinta decima.	

### Compass.

Manual, FFF to g<sup>3</sup> in altissimo.

Pedal Clavier, FFF to Gamut A.

Accessory Stops, Movements, &c.

1—Terzo Mano. 2—Bassi D'Armonica. 3, 4—Two Composition Pedals.

### 126. MILAN.

The Organ in the Church of St. Raphael, in Milan, was built by Fratelli and Prestinari, in Magenta. It contains 16 Sounding Stops, of which the following is a list:

## Manual, 15 Stops

mandai, 19 bups.		
, Principale Soprani 16 feet.	7—Duodecima.	
Principale Soprani 16 feet. Principale Bassi 16 feet.	8—Quinta decima.	
2 Principale Soprani, 2nda.	Decima nona, e.	
Principale Bassi, 2nda.	9 Decima nona, e. Vegesima seconda.	
3—Principale, 3zo.	10—Vigesima sesta e nona.	
4—Fluta spiegala.	11—Trigesima terza e sesta.	
Soprani.	12—Cornetto a tre voce.	
5 Ottava Soprani.  Ottave Bassi.	13—Trombe de ottava soprano ne Basso.	
Flauto in 8 ne Soprani.	14—Voce Umana.	
6 Flauto in 8 ne Soprani. Flauto in 8 ne Bassi.	15—Fagotto Bassi.	
•		

# Pedal, 1 Stop.

Contra Bassi, ed Ottava.

Accessory Stops, Movements, &c.

1—Movemento che raddopia l'armonica. | 3, 4—Two Composition Pedals. 2—Bassi armonica ne Pedali.

#### Compass.

Manual, CCC short, to a<sup>3</sup> in altissimo. | Pedal, CCC short, to Tenor c.

### 127. Сомо.

There are two Organs in the Cathedral at Como. The oldest was built in 1596, and was afterwards much improved, but is now unplayable. The other was erected in 1650, by Hermann, a Jesuit, and is of exquisite tone. It has 3 Manuals and Pedal, and 48 Stops, of which the following is a list:

	Great Organ, 20 Stops.		
1—Principale Soprano	32 feet.	11—Duodecima	6 feet.
2—Principale Soprano e		12 S Quinta decima Soprano	4 feet.
Basso	32 feet.	Quinta decima Basso	4 feet.
3   Principale Soprano, 1 mo.	16 feet.	13—Ottavius Soprano	4 feet.
( I Imerpale basso, Imo.	16 feet.	14—Decima nona	3 feet.
4 { Principale Soprano, 2ndo. Principale Basso, 2ndo.	16 feet.	15—Vigesima seconda	2 feet.
Principale Basso, 2ndo.		16-Ripieno di quattro.	
5—Principale Soprano, 3zo.	16 feet.	17—Ripieno di quattro.	1 C foot
6—Flauto Soprano 7—Viola, Basso profonda.	16 feet. 16 feet.	18 { Tromba Soprano Tromba Basso	16 feet. 16 feet.
Ottava Soprano, 1mo.	8 feet.	Trombe di caccia So-	TO leet.
8 Ottava Basso, 1mo	8 feet.	prano	16 feet.
9—Ottava Soprano e Basso	8 feet.	Fagotto Basso	16 feet.
10—Flauto in ottava, So-			_
prano e Basso	8 feet.	20—Voce Umana, Soprano.	16 feet.
•	Choir Orga	n, 17 Stops.	
( Principale Soprano	16 feet.	28—Flagioletta Soprano	4 feet.
21 { Principale Soprano Principale Basso	16 feet.	29—Decima nona	3 feet.
22—Principale Soprano	16 feet.	30—Vigesima seconda	2 feet.
23—Flauto allemanno, Sop.	16 feet.	31—Vigesima sesta e nona.	
24 \ Violino Soprano	16 feet.	32—Trigesima terza e sesta.	
Violone Basso	16 feet.	33—Cornetto Soprano, di cinqu	ıe.
25 Ottava Soprano	8 feet.	34—Corno Inglese Soprano.	32 feet.
Ottava Basso	8 feet.	35 { Oboe Soprano Violoncello Basso (a Reed)	16 feet.
Flauto in ottava, Sop	8 feet.	(Violoncello Basso (a Reed)	
(Flauto Basso	8 feet.	36—Voce Umana, Soprano.	16 feet.
27—Quinta-decima	4 feet.	37—Tromba armoniche, Basso	8 feet.
	Swell Orga	an, 7 Stops.	
38 { Principale Soprano Principale Basso	16 feet.	41—Corno dolce, Soprano .	32 feet.
Principale Basso	16 feet.	42—Corno Bassetto, Soprano	32 feet.
39—Flauto in ottava	8 feet.	43—Voce Umana, Soprano.	16 feet.
40—Ripieno di cinque.		44—Fagottone. Basso	16 feet.
P	Pedal Orga	an, 4 Stops.	
45—Contra Bassi con rin-		47—Bombardone	16 feet.
forzi 3:	$2\ \&\ 16\ \mathrm{feet}$	48—Tromboni	8 feet.
46—Contra Bassi dolci			
(stopped) 16 feet.			
Accessory Stops, Movements, &c.			
1—Coupler, Choir to Great.		4, 5—Octave and Double Co	
2—Coupler, Swell to Great.		6, 7, 8—Three Composition	Pedals.
3—Coupler, Great to Pedal.		9—Drums.	
Compass.			
Manuals, CCC short, to i	3 in alt.	Pedal, CCC short, to Tenor of	l.

#### 128. Сомо.

The Organ in the Church of the Santissimo Crocifisso, at Como, was built by the brothers Scrassi, of Bergamo. It has 2 Manuals, a Pedal of 8 Stops, and 39 Stops, of which latter the following is a list:

### Great, 24 Stops.

Principale Soprano . 32 ft Principale Basso 32 ft 2—Principale Soprano . 32 ft 3—Corno dolce 32 ft 4 { Principale Soprano, 1mo. 16 ft Principale Basso, 1mo. 16 ft 5—Principale Soprano, 2ndo. 16 ft 6—Principale Soprano, 3zo. 16 ft 7—Flauto Traverso Soprano 16 ft 8—Violone Basso 16 ft 9—Ottava Soprano e Basso 8 ft 10—Ottava Soprano 8 ft 11—Viola Basso 8 ft 12 { Flauto ottava, Soprano 8 ft Flauto ottava, Basso 8 ft	et. et. 24 Quinta Decima, Soprano 4 feet. et. 25 — Decima nona 3 feet. et. 16—Vigesima Seconda 2 feet. et. 17—Ripieno di quattro. et. 18—Ripieno di quattro. et. 19—Cornetto di cinque. et. 20—Corno Inglese, Soprano 16 feet. et. 22—Fagotti Basso 16 feet. et. 23—Voce Umana, Soprano 16 feet. et. 24—Clarone, Basso 8 feet.
	ll Organ, 8 Stops.
25 { Principale Soprano       16 f         Principale Basso       16 f         26—Corna Musa       16 f         27 { Ottava Soprano       8 f         Ottava Basso       8 f	teet. 28—Flauto in ottava 8 feet. 29—Decima quinta e nona. seet. 30—Ripieno di tre. 31—Cornettino di tre, Soprano.
Ped	al Organ, 8 Stops.
33—Contra-bassi, al sol (GGG) 32 f 34—Contra-bassi con rin- forzi 16 f 35—Ottava 8 f	38—Tromboni

# Accessory Stops, Movements, &c.

1—Coupler, Swell to Great. 2—Coupler, Great to Pedal.	6—Timpani. 7—Bells.
3—Coupler, Swell to Pedal.	8—Thunder.
4—Octave Coupler.	9, 10—Two Composition Pedals.
5—Sub-octave Coupler.	

### Compass.

Manuals, CCC short, to f3 in alt. | Pedal, CCC short, to Tenor c.

#### 129. FLORENCE.

The Organ at the Church of the Badia, at Florence, is about 200 years old.

It has only one Manual, and no Pedal Stops; yet it is very effective, though so small. The following is a list of its Stops:

### Manual, 8 Stops.

1—Principale.
2—Flauto (remarkably good).
3—Ottava.

4—Decima quinta.

5 Principale.
6—Cornetto.
7 Tromba Soprano
7 Tromba Basso.
8—Fis-armonica or Seraphine, on

5 { Decima nona, e separate wind.

Accessory Stops, Movements, &c.

1, 2—Octave and Sub-octave Couplers. 5—Bells. 3, 4—Two Composition Pedals.

Compass.

Manual, CCC short, to c3 in alt. Pedal Clavier, CCC short, to DD.

### 130. FLORENCE.

The Organ in the Church of St. Marco, at Florence, is, like the one last mentioned, a most effective instrument, though small. It has but one Manual, and no separate Pedal Stops. The following is a list of its contents:

### Manual, 9 Stops.

1 { Principale, Soprano. }
2 — Flauto, Soprano e Basso. 3—Ottava. }
4 — Decima quinta. }
5 { Decima nona, e }
Vigesima second. }
6 — Cornetto. 7 { Tromba, Soprano. 2 }
7 { Tromba, Basso. 3 — Voce Umana. 3 — Fis-armonica, on separate wind. 4 — Fis-armonica, on separate wind.

Accessory Stops, Movements, &c.

1, 2—Octave and Sub-octave Couplers. | 3, 4, 5—Three Composition Pedals.

#### Compass.

Manual, CCC short, to g3 in altissimo. | Pedal Clavier, CCC short, to FF.

#### 131. FLORENCE.

The Organ in the Church of St. Gætano, at Florence, has 3 Manuals, embracing 33 Stops, and a very good Contra-basso on the Pedal. The following is a list of the Stops:

Great, 14 Stops.

, ( Principale, Soprano	8 feet.	8—Vigesima seconda	1 foot.
Principale, Soprano	8 feet.	9—Ripieno di tre.	
2_Ottava	4 feet.	10—Cornetto di tre.	
3—Flauto	4 feet.	11—Cornettino di tre.	
4—Nasardo	3 feet.	12 Tromba, Soprano Tromba, Basso	8 feet.
5—Decima quinta	2 feet.	Tromba, Basso	8 feet.
6-Flautino, Soprano e		13—Voce Umana	8 feet.
Basso	2 feet.	14—Clarone	4 feet.
7—Decima nona	$1\frac{1}{2}$ foot.		

#### Choir, 11 Stops.

	,	<u>k</u>	
15—Corno dolce, Soprano.	16 feet.	21—Flautino	2 feet.
Principale, Soprano	8 feet.	22—Corno Inglese, Soprano	16 feet.
Principale, Soprano	8 feet.	23—Tromba, Basso e So-	
17—Voce Angelica	8 feet.	prano	8 feet.
18—Flautone (metal)	8 feet.	24—Oboe, Soprano	8 feet.
19—Ottava	4 feet.	25—Voce Umana, Soprano	8 feet.
20—Flanto	4 feet.	*	
	Echo, 8	Stops.	
26—Principale	8 feet.	30—Decima quinta	2 feet.
27—Ottava	4 feet.	31—Ripieno di quattro.	
28—Flauto	4 feet.	32—Cornettino di tre.	
29—Nasardo	3 feet.	33—Tromba	8 feet.
	72 1 1	- Q.	

### Pedal, 1 Stop.

34-Rinforza de Contra-bassi (wood, open) . . 16 feet.

### Accessory Stops, Movements, &c.

1—Coupler, Choir to Great. 2—Coupler, Echo to Great. 3—Great Octave Coupler.	4—Great Sub-octave Coupler. 5—Great to Pedal. 6, 7, 8—Three Composition Pedals.		
Compaga			

Compass.

Manuals, CC short, to c<sup>3</sup> in alt. Pedal, CCC short, to Tenor c.

There are very excellent Organs in the Churches of S. Spirito and Santa Croce, at Florence; the particulars of which, however, are not at hand. That in the Church of S. Spirito was lately rebuilt by Ducie, of Florence, and contains some remarkably fine Reeds, and a very effective 16-fect Principale on the Pedal. The Santa Croce Organ is very similar to the last in general effect, but appears to be rather a smaller instrument.

### 132. GENOA.

The Organ in the Church of Santa Maria des Vignes, at Genoa, was built by the Brothers Serassi, of Bergamo. It has 28 Stops, of which the following is a list:

### Manual, 25 Stops.

, (Soprano Doppio.	13—Decima nona.
1 { Soprano Doppio. Contra-basso.	14—Vigesima seconda.
Duin single 1 mes Connone	15—Vigesima sesta.
Principale 1mo Basso.	16—Vigesima nona.
Principale 2ndo Soprano.	17—Flagioletti ne Bassi.
3 { Principale 2ndo Soprano. Principale 2ndo Basso.	18—Trigesima sesta.
4—Flauto Tedesco.	19—Ripieno di quattro.
5—Flauto Francese, Soprano.	20—Ripieno di tre.
	21—Cornetto di cinque.
6 { Ottava, Soprano. Ottava, Basso.	22—Cornetto di tre.
7—Traverso ottava.	23 Tromba, Soprano. Trombone, Basso.
8—Viola Basso.	Trombone, Basso.
9—Duodecima.	24—Cor Anglais, Soprano.
10—Decima Quinta 1mo.	25—Fagotti, Basso.
11—Decima Quinta 2ndo.	26—Timpani.
12—Ottavini.	27—Bells.

# Pedal, 1 Stop. 28—Rinforzo de Contra-bassi (open wood) . . 16 feet.

Accessory Stops, Movements, &c.

1—Octave Coupler. | 3 to 8—Six C

3 to 8—Six Composition Pedals.

2—Sub-octave Coupler.

Compass.

Manual, CCC short, to c4 in altissimo. Pedal, CCC short, to Tenor c.

#### 133. GENOA.

The Organ in the Church of S. Ambrogio, at Genoa, was built about 200 years since, by Hermann, the Jesuit; and has lately been enlarged by Giuliani, a Piedmontese builder.

### Great, 23 Stops.

	*
1—Contra-basso, Soprano e Basso.	11—Duodecima.
Principale Soprano, 1mo.	12—Ottavini.
Principale Basso, 1mo.	13—Decima nona.
Principale Soprano, 2ndo.	14—Vigesima seconda.
3 Principale Soprano, 2ndo. Principale Basso, 2ndo.	15—Vigesima nona.
4—Principale Soprano, 3zo.	16-Ripieno di quattro.
5—Rinforza nel Basso.	17—Ripieno di quattro.
6—Traverso, all unisono, Sop. e Basso.	18—Cornetto di cinque.
	19—Cornetto di quattro.
7 { Viola Soprano. Violoncello Basso.	20—Usignuolo (to imitate a bird).
Ottava Soprano, 1mo.	
8 Ottava Basso.	21 { Tromba, Soprano. Trombone, Basso.
9—Ottava Soprano, 2ndo.	22—Voce Umana.
Traverso, all ottava, Sop. e Basso.	23—Fagotti, Basso.
, ,	1

#### Swell 10 Stops

Swen, 10 stops.		
24—Corno dolce (large double open,	29—Decima Quinta.	
treble).	30—Flauto alla Decima Quinta.	
25—Principale.	31—Ripieno di quattro.	
26—Flauto Traverso.	32 { Oboe Soprano. Corno Basso.	
27—Ottava.	Corno Basso.	
28—Flauto alla Duodecima.	33—Rosignuolo (a bird stop).	

### Accessory Stops, Movements, &c.

1, 2, 3—Three Composition Pedals. | 4—Drum, worked by a Pedal.

#### Compass.

Great, CCC short, to  $c^3$  in alt.

Swell, CC to  $c^3$  in alt.

Pedal, CCC short, to Tenor c.

#### 134. GENOA.

The Organ in the Carigrana Church, at Genoa, was built by Hermann. It contains 3 Manuals and 42 Stops, of which the following is a list:

#### Great, 25 Stops. 1—Contra-basso, Soprano e Basso. 13—Ottavini, Soprano e Basso. 2-Contra-basso, Soprano. 14—Decima nona. 3 Principale Soprano 1mo. 15-Vigesima seconda. Principale Basso 1mo. Principale Soprano 2mo 16-Vigesima nona. Principale Soprano 2ndo. 17—Trigesima sesta. 4 Principale Basso 2ndo. 18—Sesquialtera di quattro. 5—Principale Soprano 320. 19—Ripieno di cinque. 6—Flauto Traverso, Sop. c Basso. 20—Cornetto di quattro. 7—Flauto Tedesco, Sop. e Basso. 21—Cornetto di tre. 22 \ Tromba Soprano. 8 Ottava Soprano 1mo. Trombone Basso. ) Ottava Basso. 23 { Tromba Real, Soprano. Fagotto Basso. 9-Ottava Soprano 2ndo. 10—Flautino. 24—Vocc Umana (a Reed). 11—Duodecima. 12—Decima quinta. 25—Corna Musa, Soprano. Choir, 5 Stops. 26-Principale. 29—Ripieno di cinque. 30 { Vox Pueri, Soprano. Vox Tauri, Basso. 27—Flautone. 28-Ottava. Echo, 6 Stops. 31—Principale. 34-Ripieno, di quattro. 35—Oboe, Soprano. 32—Corno dolce, Soprano. 36-Tromba, Soprano. 33-Ottava. Pedal, 6 Stops. 37—Contra Basso, al La(to A A A) 32 feet. | 40—Principale ...... Accessory Stops, Movements, &c. 1—Coupler, uniting all the Manuals. 7, 8—Two Bird Stops, on Echo Manual. 2-Coupler, Great to Pedal. 9—Thunder, by means of a Pedal. 3, 4, 5—Three Composition Pedals. 10—Drum, by means of a Pedal. 6—Bells, on Choir Manual.

## 135. Genoa.

Compass.

Swell, CC, to c<sup>3</sup> in alt.

Pedal, CCC short, to Tenor d.

Great, CCC short, to c<sup>3</sup> in alt.

Choir, CCC short, to c<sup>3</sup> in alt.

The Organ in the Church of St. Felipo Neri, at Genoa, has 21 Stops; of which the following is a list:

### Manual, 20 Stops.

	Doppio Soprano. Contra Basso.		Principale 2ndo Soprano Principale 2ndo Basso.
$2 \left. \left\{ \right. \right. \right.$	Principale 11110 Soprano. Principale 11110 Basso.	4 {	Traverso Soprano. Flautone Basso.

5—Ottavi.	14—Cornetto 1mo.
6— Flautino.	15—Cornetto 2ndo.
7—Duodecima.	16 Tromba Soprano. Tromba Basso.
8—Decima quinta.	Tromba Basso.
9—Ottavini, Soprano.	17—Cor Anglais, Soprano.
10—Vigesima seconda.	18—Fagotto, Basso.
11—Flagioletta Basso (29).	19—Voce Umana, Sop. (not a Reed.)
12—Ripieno di quattro.	20—Timpani.
13—Ripieno di quattro.	*

Pedal, 1 Stop. 21—Rinforzo de Contra Bassi . . 16 feet.

Accessory Stops, Movements, &c. 1, 2, 3—Three Composition Pedals.

### Compass.

Manual, CCC short, to e3 in alt.

Pedal, one octave only.

### 136. GENEVA.

The Organ in the Cathedral Church of St. Pierre, at Geneva, was built by Gerger, about 150 years since. It has 4 Manuals, a Pedal of 2 octaves, and 45 Steps, of which the following is a list:

Great, 17 Stops.				
1—Montre	_	10—Doublette	2 feet.	
2—Grand Bourdon	16 feet tone.	11—Tierce		
3—Huit Pieds ouverte	8 feet.	12—Cymballe.	3	
4—Principal	8 feet.	13—Fourniture.		
5—Flute	8 feet.	14—Cornette, V ranks.		
6—Bourdon	8 feet tone.	Trompette des dessus.	8 feet.	
7—Prestant	4 feet.	Trompette des dessus.  Trompette des bassus.	8 feet.	
8—Nazard	3 feet.	16—Clairon	4 feet.	
9—Quarte de nazard	2 feet.	17—Voix Humaine	8 feet tone	
	Choir, 1	o Stops.		
18—Bourdon	8 feet tone.	23—Cymballe.		
19—Prestant	4 feet.	24—Fourniture.		
20—Flute	4 feet.	25—Cornette.		
21—Doublette	2 feet.	26—Trompette	8 feet.	
22—Tierce	15 foot.	27—Crom Horn		
Echo, 6 Stops.				
28—Bourdon	8 feet tone.	31—Cornette, III ranks.		
29—Prestant	4 feet.	32—Trompette	8 feet.	
30—Flute	4 feet.	33—Crom Horn	8 feet tone.	
Orgue de Recit. 6 St				
34—Bourdon		37—Doublette	2 feet.	
35—Flute Allemande	8 feet.	38—Cornette, IV ranks.	_ 10000	
36—Prestant		39—Trompette	8 feet.	

# Pedal, 6 Stops.

40-16 Picds ouverte, to	43—Bombarde	16 feet.
GG 16 feet.	44—Trompette	8 feet.
GG 16 feet. 41—Bourdon 16 feet tone.	45—Clairon	4 feet.
42—Huit Pieds ouverte 8 feet.		

### Accessory Stops, Movements, &c.

1-Coupler, Positif to Great.

2-Coupler, Great to Pedal.

#### Compass.

Great, CC to d3 in alt. Positif, CC to d3 in alt. Echo, Middle c1 to d3 in alt. Pedal, CCC to Tenor c.

Orgue de Recit. Fiddle g to d3 in alt.

#### 137. GENEVA.

The Organ in another Church at Geneva was built by Mooser, of Freibourg-It has 2 Manuals and Pedal, and the following 22 Stops:

### Great Organ, 12 Stops.

1—Montre	16 feet.	7—Quart de Nazard	2 feet.
2—Bourdon	16 feet tone.	8—Doublette	2 feet.
3—Principal	8 feet.	9—Tierce	$1\frac{3}{5}$ foot.
4—Flute	8 feet.	10—Cymballe III ranks.	Ü
5—Prestant	4 feet.	11—Fourniture V ranks.	
6—Nazard	3 feet.	12—Cornet V ranks.	
Choir Organ, 6 Stops.			
13—Bourdon	8 feet tone.	16—Flute	4 feet.
14—Gamba		17—Flageolet	2 feet.
15—Prestant	4 feet.	18—Chalumeaux	4 feet.
Pedal Organ, 4 Stops.			
19-Grand Bourdon, ouvert.	. 16 feet.	21-Huit Pieds, ouvert	8 feet.

# 20—Bourdon bouchè .... 16 feet tone. 22—Trombone ..... 16 feet.

Accessory Stops, Movements, &c. 1-Choir to Great.

2-Great to Pedal.

#### Compass.

Manuals, CC to f<sup>3</sup> in alt, 54 notes. | Pedal, CCC to Tenor f, 30 notes.

#### 138. SIENA.

The Organ in the Cathedral is very small, yet a very effective instrument. It has but 1 Manual and 14 Stops, of which the following is a list:

## Manual, 11 Stops.

Principale, Soprano. Principale, Basso.	6—Vigesima Seconda.
Principale, Basso.	7—Ripieno di quattro.
2—Flauto Traverso.	8—Cornetto di cinque.
3—Ottava.	9—Tromba, Soprano e Basso.
4—Decima Quinta.	10 - Corno Inglese.
5—Decima nona.	11—Voce Umana (not a Reed).

Pedal, 3 Stops.

12—Contra Bassi, al La (AAA)...... 32 feet.

13—Contra Bassi, al La (AA) . . . . . . 16 feet.

14—Rinforza de Contra-Bassi (Trombone) 16 feet.

Compass.

Manual, CCC short, to d3 in alt.

Pedal, CCC short, to FF.

Accessory Stops, Movement, &c.

1, 2—Manual Couplers, octave above and below.

3—Manual to Pedal.

#### 139. SIENA.

The Organ in the Conventual Church at Siena was originally built in 1738; but was rebuilt and enlarged by the Brothers Serassi, of Bergamo, in 1845. It has 1 Manual and Pedal, and 27 Stops, of which latter the following is a list:

## Manual, 24 Stops.

2.24114441, 2.3 000005		
1-Contra Basso e doppio	10—Duodecima 6 feet.	
ne Soprani 32 feet.	11—Decima-quinta 4 feet.	
2—Viola Soprano 32 feet.	12—Ottavini, Soprano e Basso 4 feet.	
Principale 1mo Soprano . 16 feet.	13—Decima nona 3 feet.	
Principale 1mo Basso 16 feet.	14—Vigesima seconda 2 feet.	
Principale 2ndo Soprano . 16 feet.	15—Vigesima sesta $1\frac{1}{2}$ foot.	
Principale 2ndo Basso 16 feet.	16—Vigesima nona 1 foot.	
Violino Soprano 16 feet.	17—Trigesima sesta $\frac{1}{2}$ foot.	
Violoncello Basso 16 feet	18—Ripieno di quattro.	
Flautino Soprano 16 feet.	19—Ripieno di tre.	
Flautone Basso 16 feet.	20—Cornetto di cinque.	
Ottava Soprano 1 mo 8 feet.	21—Corno Inglese, Soprano 32 feet.	
Ottava Basso 1mo 8 feet.	Tromba Soprano 16 feet.	
Ottava Soprano 2ndo 8 feet.	Tromba Basso 16 feet.	
Viola Basso 8 feet.	Oboe Soprano 16 feet.	
(Flouting Soprang 8 feet	$\begin{array}{c} 23 \left\{ \begin{array}{c} \text{Oboe Soprano} & \dots & 16 \text{ feet.} \\ \text{Fagotto Basso} & \dots & 16 \text{ feet.} \end{array} \right. \end{array}$	
9 Flauto Basso 8 feet.	24—Clarone, Sop. e Basso 8 feet.	

### Pedal Organ, 4 Stops.

25—Contra Basso, al La—	27—Principale	8 feet
(AAA) 32 feet.	28—Bombardone	16 feet
26—Contra Basso 16 feet.		

### Accessory Stops, Movements, &c.

1, 2—Octave Manual, above and below.	6—Cymbals.
3—Coupler, Manual to Pedal.	7—Drums.
4—Bells.	8—Thunder.

5—Glasses.

Compass.

Manuals, CCC short, to g3 in altissimo. | Pedal, CCC short, to Tenor c.

### 140. SEVILLE.

The large Organ in Seville Cathedral has frequently been extolled by tourists for its magnitude and great power. There are several Organs in the Cathedral, the two principal of which stand, sideways, one on each side the Choir, and opposite each other. Each of these has a complete and beautifully adorned front, both behind as well as before; and also a handsome "Choir Organ in front," not only towards the Choir, but also another towards the Aisle. The Reed Stops, which are unexampled for their number, are placed outside the Organs, and project horizontally from the several fronts in 2, 3, and 4 tiers. The largest Pipes are uppermost, and are supported by iron bars. The Mouths of the tubes are Trumpet-shaped.

The older of the two chief Organs is the largest. According to most accounts, this has 110 Stops and 5300 Pipes. It is evident, however, that many of the Stops are, like those in the Italian Organs, just described, only "Half Stops." By no other means could such an aggregation of Stops be accounted to comprise a number of Pipes inferior to that contained in the Rotterdam, Weingarten, and some other Organs which have at the same time 30 or 40 Stops less than the Scville Organ. Still less could it otherwise be explained how there can be two "first" Mixtures, two "second" Mixtures, and so forth. The following account and translation of the large Seville Organ have been prepared from memorandums made from the Draw-Stop handles by J. W. Fraser, Esq. of Manchester, and forwarded to Mr. Hill, the eminent Organbuilder, who kindly furnished them to the writer. The figures 13, 26, and 52, attached to certain Stops, seem to correspond with the signs 8, 16, and 32, in the German tablature, in marking the size of the large Foundation Stops.

Great, 42 Stops;	62 Draw-Stops.
, ( Flauto de 26	Double Diapason. (Treb.)
$1 \begin{cases} Flauto de 26 \dots \\ Flauto de 26 \dots \end{cases}$	Double Diapason. (Bass.)
2—Flauto de 26	Double Diapason. (Treb.)
	Gamba Major, or Double Gamba. (Treb.)
3 { Violon de 26	Gamba Major, or Double Gamba. (Bass.)
Tolosana de 26	
$ \begin{array}{c} 4 & \text{Tolosana de } 26 \dots \\ \text{Tolosana de } 26 \dots \\ \end{array} $	first made at Tolouse, and hence named
	after that place.
Baxoncillo	Open Diapason. (T.) "Baxon" is a Bassoon,
5 { Baxoncillo	Open Diapason (B) and "illo" implies dimi-
Baxoncillo	Open Diapason. (T.) nution; but the Baxon- cillo Stop is known to
6 Baxoncillo Baxoncillo	Open Diapason. (B.) be the equivalent to the
	English Open Diapason.
7—Baxoncillo	Open Diapason. (Treb.)
(Tanadilla	Stopped Diapason. (Treb.)
8 Tapadillo Tapadillo Tapadillo	Stopped Diapason. (Bass.)
9—Tapadillo	Stopped Diapason. (Treb.)
	Unison Flute. (Treb.)
10 { Flauta de 13	Unison Flute. (Bass.)
11—Flauta de 13	Unison Flute. (Treb.)
12—Flauta Traversa	German Flute. (Treb.)
	Gamba. (Treb.)
13 { Violon de 13	Gamba. (Bass.)
14 Violon de 13	Gamba (Treb)

15—Tolosana 16—Docena de 26  17 { Octava	Fifth to the 13-feet Stops. Quint. Octave or Principal. (Treb.) Principal. (Bass.) Principal. Twelfth and 26th (Octave Larigot). Fifteenth. First Mixture. (Bass.) Second Mixture. (Bass.) Second Mixture. (Bass.) Mixture. Cornet. Cornet. Double Trumpet. (Bass.) Boyal or Grand Trumpet. (Treb.) Royal or Grand Trumpet. (Bass.) Royal or Grand Trumpet. (Bass.) Battle Trumpet. (Bass.) Great Trumpet. (Bass.) Cotave Trumpet. (Bass.) Octave Trumpet, probably. Hautboy. Bassoon. Cremona. Vox Humana. "Viejos," the eyebrows. This Stop takes its name from the shape of the cover or plug at the top of the Pipe. Royal or Grand Clarion. (Treb.) Royal or Grand Clarion. (Bass.) Royal or Grand Clarion. (Bass.) Cotave Trumpet. (Bass.) Cotave Clarion. (Bass.) Cotave Clarion. (Bass.) Cotave Clarion. (Bass.) Cotave Clarion. (Bass.) Octave Clarion. (Bass.) Octave Clarion. (Treb.) Octave Clarion. (Bass.) Octave Clarion. (Bass.) Octave Clarion. (Treb.) Octave Clarion. (Treb.) Octave Clarion. (Bass.) Octave Clarion. (Treb.) Octave Clarion. (Treb.) Octave Clarion. (Treb.) Octave Clarion. (Treb.)
	man saying, "in Heaven the Angels only play Fiddles and Shawms."
Forto do Foho 10	Stone 19 Draw Stone

## Forte de Echo, 10 Stops, 12 Draw-Stops.

43—Baxoncello	Open Diapason.
44—Tapadillo	 Stopped Diapason.
45—Flauta Traverso	German Flute.
46—Flauta	Flute.
47—Corneta	Cornet.
	Grand Trumpet.
48 { Trompa Real	 Great Trumpet.
( 110mpa magna	 Great arampea

51 { Oboe
Echo, 12 Stops, 14 Draw-Stops.
53—Baxoncello         Open Diapason.           54—Tapadillo         Stopped Diapason.           55—Violon de 13         Gamba.           56—Tolosana         Unison Stop.           57—Flauta Traversa         German Flute.           58—Flauta de 13e 8va         Flute, of Octave as well as Unison pitch.           59—Docena         Twelfth.           60—Quincena         Fifteenth.           61—Lleno         Mixture.           62—Corneta         Cornet.           63 { Trompa Real         Royal Trumpet.           Trompa Magna         Great Trumpet.           Vox de 13         Vox Humana.           Contralto Voice.         Contralto Voice.
Contra Pedale, 7 Stops.
65—Trompa de 26       Trumpet of 26 feet.         66—Trompa de 26       Trumpet of 26 feet.         67—Trompa de 13       Trumpet of 13 feet.         68—Trompa de Octave       Octave Trumpet (6½ feet).         69—Trompa de 12       Twelfth Trumpet (4⅓ feet).         70—Trompa en 15       Fifteenth Trumpet (3¼ feet).         71—Trompa en 17       Tierce Trumpet.

### Compass.

Manuals, CC to g3 in altissimo. Pedal, One Octave.

The above Organ has several more Stops, the names of which are not on the Stop-handles. These are probably Couplers, Wind-valves, and other Accessory Stops.

Great	42 Stops.	62 Draw-	Stops.
Forte de Echo	10	12	
Echo	12	14	
Pedal	7	7	
Couplers, wind-valves, &c.		15	
	_		
	71	110	

The mode of blowing the bellows of the above Organ is peculiar. Instead of working with his hands, a man walks backwards and forwards along an inclined plane of about 15 feet in length, which is balanced in the middle on its axis. Under each end is a pair of bellows, of about 6 feet by  $3\frac{1}{2}$  feet. These communicate with

430 APPENDIX.

five other pair, united by a bar; and the latter are so contrived that, when they are in danger of being overstrained, a valve is lifted up and gives them relief.

Passing ten times along the inclined plane fills all these vessels; which are so ample that, when stretched, they supply the full Organ fifteen minutes.

### 141. SEVILLE.

The second Organ in Seville Cathedral has 71 Draw-Stops, 3 Manuals, and Pedal. The contents of the several Manual Organs were not placed separately in the memorandum from which the following account was prepared:

### Manual Stops.

Manual	Stops.
1—Violata	Small Viol, or Gambette.
2—Baxoncello	Open Diapason.
3—Trompeta de Batalla	Battle Trumpet.
4—Viejos	See 35 in No. 140.
5—Orlo	Cink. A small Reed.
6—Clarin en 22 <sup>a</sup>	Super octave Clarion.
7—Clarin en 15 <sup>a</sup> · · · · · · · · · · · · · · · · · · ·	Octave Clarion.
8—Clarin Claro	Clear Clarion.
9—Clarin de Campana	Hunting Horn.
10—Chirimia	Clarion.
11—Violata suave · · · · · · · · · · · · · · · · · · ·	Soft Viola.
12—Baxoncello	Open Diapason.
	Octave Clarion.
13—Trompeta en 15 · · · · · · · · · · · · · · · · · ·	Clarion.
14—Trompeta en 8	Double Trumpet.
15—Trompeta en 26	Mute. Wind-valve?
16—Mudo	Twelfth.
17—Nasardo	Double Reed 26 feet.
18—Corneta de 26	
19—Octava de Nasardo	Nineteenth, or Larigot.
20—Quincena Tapada	Stopped Fifteenth. Stopped Piccolo
21—Octava Tapada	Stopped Octave. Stopped Flute.
22—Violon de 13	Gamba.
23—Lleno de 8	Mixture.
24—Diezmonovena	Nineteenth, or Larigot.
25—Quincena	Fifteenth.
26—Docena	Twelfth.
27—Octava	Octave, or Principal.
28—Flauta de 13	Unison Flute.
29—Flautada de 13	Large Unison Flute.
30—Flautada de 26 · · · · · · · · · · · · · · · · · ·	Double Diapason.
31—Violon.	
32—Contra-baxo	Double Bass.
33—Clarin en 15 <sup>a</sup> · · · · · · · · · · · · · · · · · · ·	Octave Clarion.
34—Baxoncello	Open Diapason.
35—Trompeta Real	Grand Trumpet.
36—Trompeta Real	Grand Trumpet.
37—Tolosana	Unison Stop.
38—Lleno	Mixture.
39—Diezmonovena	Nineteenth, or Larigot.
40—Quincena	Fifteenth.

41—Docena 42—Octava 43—Flautada de 13 44—Preparacion  45—Trompa 46—Serpenton 47—Vox Humana 48—Clarin en 15 49—Clarin de sordino 50—Clarinete 51—Fagot 52—Nasardo en 19 <sup>a</sup> 53—Nasardo en 17 <sup>a</sup> 54—Nasardo en 15 <sup>a</sup> 55—Lleno 56—Diezmonovena 57—Quincena 58—Octava 59—Violon de 13	Twelfth. Octave. Large Unison Flute. Preparation. Probably a wind-valve; or a bell to give notice to the blower. Trumpet. Great Serpent. Double Reed. Vox Humana. Octave Clarion. Soft Clarion. Clarinet. Bassoon. Twelfth and Larigot. Twelfth and Tieree. Sesquialtera. Twelfth and Fifteenth. Rausch-quint. Mixture. Larigot. Fifteenth. Principal. Gamba.
Pedal, 9	9 Stops.
60—Flautada de 26 61—Contra de 26 62—Contra 8 63—Contra 15 64—Contra 22 65—Contra 29 66—Bombarda de 26 67—Bombarda de 13 68—Contra de Clarin 69, 70, 71—Three Stops without names.	Great Flute or Diapason of . 26 feet.         Double, of

### Compass.

### Manuals, AA to c4 in altissimo, 5\frac{1}{3} octaves.

A very large Organ has lately been completed in the Great Church at Berne, in Switzerland, which is described as being a particularly fine instrument.

Another and still larger Organ, to contain, it is said, 100 Stops, is now in course of completion in the Cathedral at Ulm. It is being constructed by the celebrated builder, Walker, of Ludwigsburg.

### AMERICA.

The following particulars concerning a few recently constructed American Organs will convey some idea of what has lately been going on in the matter of Organ-building in the United States.

### 142. NEW YORK.

The new Organ in Trinity Church, New York, was built by Mr. Henry Erben, from a Specification prepared by Dr. Hodges. It has 31 Sounding Stops and 11

Couplers; 3 Manual Organs, of 16, 8, and 4 feet compass respectively; a Swell Bass of 2 Stops, and a 32-feet Pedal Stop. The instrument, which stands at the west end of the Church, is enclosed in a bold Gothic case, designed by Richard Upjohn, Esq. the architect of the Church. The Choir Organ is in front, and has an 8-feet speaking front; while the Great Organ has a 16-feet speaking front. The following is a list of the Stops in the above-named instrument:

```
Great, 12 Stops.
 1-Open Diapason.
                                          7—Twelfth.
                                          8-Fifteenth.
 2—Open Diapason.
 3-Stopped Diapason.
                                          9—Sesqui-altera..III ranks.
 4-Principal.
                                         10—Mixture ....III ranks.
                                         11—Trumpet.
 5-Principal.
 6—Large Flute.
                                         12—Clarion.
                                 Choir, 7 Stops.
                                         17—Fifteentlı.
13—Dulciana.
                                         18—Clarionet..(half Stop).
14—Stopped Diapason.
                                         19—Bassoon . . . (half Stop.)
15—Principal.
16-Flute.
                                 Swell, 9 Stops.
20-Double Stopped Diapason.
                                          25-Cornet, V ranks.
                                          26-Hautboy.
21—Open Diapason.
                                          27—Trumpet.
22-Stopped Diapason.
23—Dulciana.
                                          28—Clarion.
24-Principal.
                              Swell Bass, 2 Stops.
       29-Dulciana.
                                                30-Serpent.
                                 Pedal, 1 Stop.
                      31—Double Open Diapason, 32 feet.
                                   Couplers.
 1-Swell to Great.
                                           7-Great to Pedal, 8-feet pitch.
 2-Swell and Great at octaves.
                                           8—Choir to Pedal.
 3-Swell to Choir.
                                           9-Swell Bass to Pedal.
 4-Choir to Great.
                                          10-Pedal Pipes in 32-feet pitch.
 5-Choir and Swell at octaves.
                                          11—Pedal Pipes in 16-feet pitch.
 6-Great to Pedal, 16-feet pitch.
                                    Compass.
            Great, CCC to f3 in alt, 66 keys, 16-feet compass.
            Choir, CC to f<sup>3</sup> in alt, 54 keys, 8-feet compass.
            Swell, tenor c to f4 in altissimo, 54 keys, 4-feet compass.
            Swell Bass, two octaves.
```

### 143. NEW YORK.

Pedal Stop, CCCC to tenor c, 37 Pipes, 32-feet compass.

Pedal Clavier, CCC to tenor c, 25 keys.

The Organ in the Church of the Annunciation, New York, United States, was built by George Jardine, of New York, in 1853. It contains 3 Manual Organs, of 8-feet compass, and a separate Pedal, and also 30 Sounding Stops. The following is a list of its contents:

### Great, 9 Stops.

1—Double Diapason . 16 feet. 2—Open Diapason 8 feet. 3—Stopped Diapason . 8 feet tone. 4—Melodia 8 feet. 5—Principal 4 feet.	6—Twelfth 2 f feet. 7—Fifteenth 2 feet. 8—Sesquialtera, IV ranks. 9—Trumpet 8 feet.		
Choir,	8 Stops.		
10—Open Diapason 8 feet. 11—Viola di Gamba 8 feet. 12—Stopped Diapason 8 feet tone. 13—Principal 4 feet.	14—Flute		
Swell, 1	10 Stops.		
18—Bourdon	23—Fifteenth       2 feet.         24—Mixture, III ranks.       8 feet.         25—Trumpet       8 feet.         26—Oboe       8 feet.         27—Clarion       4 feet.		
Pedal,	3 Stops.		
28—Open Diapason 16 feet. 29—Bourdon 16 feet tone.	30—Octave 8 feet.		
Couplers.			
<ul> <li>1—Swell to Great.</li> <li>2—Swell Octave to Great.</li> <li>3—Swell to Choir.</li> <li>4—Choir to Great.</li> </ul>	6—Great to Pedal. 7—Choir to Pedal. 8—Swell to Pedal. 9—Pedal Organ Octave.		

Great,	CC	to	f3	in	alt.	

5-Choir Sub-octave to Great.

Choir, CC to f<sup>3</sup> in alt.

Swell, CC to f<sup>3</sup> in alt. Pedal, CCC to tenor e.

By means of Mr. G. Jardine's Pallet, the touch is relieved from all disagreeable stiffness, although there are 5 Manual Couplers, upwards and downwards as well as in the unison.

Compass.

### 144. NEW YORK.

The Organ in the first Presbyterian Church, New York, was built by George Jardine, of that city. It has 36 Sounding Stops, 3 Manuals, and Pedal. The following is a list of the Stops:

### Great, 12 Stops.

		-
1-Double Open Diapason	16 feet.	7—Hohl-flute 4 feet.
2—Open Diapason		8—Twelfth $\dots 2\frac{2}{3}$ feet.
3—Open Diapason	8 feet.	9—Fifteenth 2 feet.
4—Stopped Diapason		10—Sesqui-altera, III ranks 2 feet.
5—Melodia (open wood)		11—Mixture III ranks 1 foot.
6—Principal	4 feet.	12—Trumpet 8 feet.

### Choir, 9 Stops.

e.

13—Open Diapason 8 feet. 14—Dulciana, through . 8 feet. 15—Viol d'amour 8 feet. 16—Stopped Diapason . 8 feet tone. 17—Principal 4 feet.	18—Rohr-flote4 feet tone19—Twelfth $2\frac{2}{3}$ feet.20—Fifteenth2 feet.21—Cremona to Tenor c8 feet tone
Swell, 1	0 Stops.
22—Bourdon	27—Principal       4 feet         28—Fifteenth       2 feet         29—Mixture, III ranks       2 feet         30—Cornopean       3 feet         31—Hautboy       3 feet
Pedal,	5 Stops.
32—Open Diapason 16 feet. 33—Stopped Diapason 16 feet tone. 34—Octave 8 feet.	35—Violoncello 8 feet. 36—Contra Fagotto 16 feet.

# Accessory Stops. Six Manual and Pedal Couplers.

### Compass.

Great, CC to  $g^3$  in altissimo. Swell, CC to  $g^3$  in altissimo. Pedal, CCC to Tenor f.

A very large Organ, of which the writer has not the list of Stops, was built by Messrs. E. and G. G. Hook, for the Tremont Temple, Boston, United States, in 1854. It has 56 Stops, 4 Manuals, a Pedal with double Bourdon, 32 feet tone, and about 3,500 Pipes. It has been described by an organist, who has heard and tried it, as a most successful instrument.

### A TABLE OF FOREIGN AND ENGLISH EQUIVALENT TERMS.

As many of the names which appear in the foregoing accounts of Continental Organs may not be familiar to some readers, the following table of the chief Foreign Stops, with their English equivalents, when they exist, and a brief notice of them when they do not, has been prepared; which, it is hoped, may assist those who may not be able to decipher the foreign nomenclature. After each name, one reference is given to some Organ which contains that particular Stop or term; having traced which, the reader will find little difficulty in recognising the same Stop, even if its name be somewhat differently spelt, in other Specifications.

### Manual Stops.

Grosse Principal (No. 16, p. 331, Gt.) 32	Double Open Dia- pason	32 feet.
Montre (No. 19, p. 334, Gt.)	The same, "mounted," or in "front."	
Sub-Bourdon (No. 16, p. 331, Gt.) 32	Double Double Stopped Diapason	32 feet tone.

Manual Untargets (No	The same.
Manual-Untersatz (No. 40, p. 349, Gt.) 32 feet tone.	The same.
Bourdon, or Bordun (Nos.	The same.
51 and 64, pp. 357 and 366, Gt.) 32 feet tone.	
Principal (No. 57, p. 361,	Double Open Diapason 16 feet.
Gt.) 16 feet.	
Montre (Nos. 13 and 13B, pp. 328 and 329, Gt.) 16 feet.	The same, "mounted," or
Prestant (No. 1, p. 315,	"in front."
Gt.)	The same.
p. 349, Gt.) 16 feet.	Great, or Double Gamba. 16 feet.
Salicional (No. 49, p. 356, Echo)	Reedy Double Dulciana . 16 feet.
Bourdon, or Bordun (Nos.	
2 and 23, pp. 316 and 338, Gt.) 16 feet tone.	Double Stopped Diapason. 16 feet tone.
Tibia Major (No. 40,	-
p. 349, Gt.) 16 feet tone. Gross-Gedact (No. 33,	The same.
p. 344, Gt.) 16 feet tone. Leiblich Gedact (No. 63,	The same.
p. 365, Cr.) 16 feet tone.	Double Stopped Diapason, of slender scale and
Rohr-Flote (No. 50, p. 356,	sweet intonation.  Double Stopped Diapason,
Gt.)	of metal Pipes with
Quintaton (No. 44, p. 354,	chimneys. Double Stopped Diapason,
Gt.) 16 fcet tone.	of rather small scale,
	producing the Twelfth of the fundamental sound,
	as well as the ground-
	tone itself, i. e. sounding the 16 and $5\frac{1}{3}$ ft. tones. 16 fcet tone.
Octave (No. 57, p. 361,	Octave to the "Principal"
Gt.)	or Double Open Dia-
	pason of 16 feet, and therefore identical with
D. ' 1 (3) 44 070	the Unison Open Dia-
Principal (No. 44, p. 352, Gt.) 8 feet.	pason 8 feet. Open Diapason 8 feet.
Montre (No. 12, p. 325,	
Gt.)	The same.
Gt.)	The same. Violin or crisp-toned Dia-
p. 354, Ec.) 8 feet.	pason 8 feet.
Gamba, or Viol da Gamba (Nos. 44 & 47, pp. 352	Bass Viol. Unison Stop, of smaller scale and thinner
& 354, Gt.) 8 feet.	but more pungent tone
	than the Violin Dia- pason 8 feet.
	F F 2

Fugara (No. 58, p. 362, Cr.)	8 feet.	A species of small-scale Gamba, of bright and cutting tone, and slow	
Salicional (No.35, p.344, Gt.) Flauto Traverso (No. 42,	8 feet.	speech	8 feet. 8 feet.
p. 351, Cr.)	8 feet.	lindrical Pipes, of Pear- tree wood, and sounding their octave in the Treble	8 feet.
Hohl-Flote (No. 25, p. 339,		Hollow-Flute, a kind of	0 10000
Gt.)	8 feet.	Clarabella Step	8 feet.
Harmonica (No. 42, p. 351, Gt.)	8 feet.	A unison open wood Stop, sometimes smaller in the Treble and larger in the Bass than the Hohl-Flote	8 feet.
Spitz-Flote (No. 80, p. 382,		Spire or Taper Flute, a	o icci.
Gt.)	8 feet.	unison open metal Stop, formed of Pipes with conical bodies	8 feet.
Gemshorn (No.78, p. 380,		Goat-Horn, a unison open	O ICCL.
Gt.)	8 feet.	metal Stop; more coni-	
G. 1/N. 22 244 G()	0.6.4	cal than the Spitz-Flote.	8 feet.
Coppel (No. 33, p. 344, Gt.)	8 feet.	Coupling-flute—a kind of Stopped Diapason or Cla-	
		rabella, intended to be	
		used chiefly in combina-	
		tion with some other Stop	
		—as the Stopped Dia-	
		pason is used with the Clarinet in England—	
		hence its name	8 feet.
Portunal-flaut (No. 53,		An open wood Stop, of the	
p. 358, Gt.)	8 feet.	Clarabella species, the	
		Pipes of which are larger	
		at top than at bottom, and producing a tone of	
		Clarinet quality	8 feet.
Bifara (No. 39, p. 348, Gt.)	3 feet.	A unison open Stop, formed	
		of Pipes having two	
		mouths, the speech of	
		which is accompanied by a pleasing undulation	8 feet.
Unda Maris (No. 96, p.394,		Wave of the Sea. A unison	O Iccu
Gt.)	8 feet.	open Stop, tuned rather	
		sharper than the other	
		Stops, and producing an undulating or waving	
		effect, when drawn in	
		conjunction with another	
77.1 1 (27. mm.)		Stop	3 feet.
Voix-celeste (No. 12 A,	O foot	A Stop of II ranks, resem-	
p. 327, Sw.)	8 feet.	bling Dulcianas, one of which is tuned sharper	
		than the other, producing	
		an undulating effect like	
		that of the Unda Maris.	3 feet.

Block-flote (No.68, p. 372, Brustwerk) 8 feet.	Common or ordinary Flute, formed of Pipes larger
Portunal (No. 94, p. 393, Gt.) 8 feet.	than Diapason scale 8 feet.  An open wood Stop, of the Clarabella species, but with the Pipes larger at top than at bottom, and producing a tone like that of the Clarinet 8 feet.
Flauto Dolce 8 feet.	A unison Flute-Stop, of tranquil and agreeable tone; well adapted for cantabile music, for which an Open Diapason would be both too strong and too full
Gedact (No. 58, p. 362, Gt.) 8 feet tone	
Lieblich Gedact (No. 60,	Diapason 8 feet tone. Stopped Diapason, of slen-
p. 364, Ch.) 8 feet tone	der scale and sweet intonation 8 feet tone.
Still Gedact (No. 44, p. 352, Ch.) 8 feet tone	Stopped Diapason, of quiet tone 8 feet tone.
Rohr-Flote (No. 65, p. 367, Gt.) 8 feet tone	Reed-Flute. Metal Stop-
	tubes, or chimneys 8 feet tone.
Quintaton (No. 46, p. 353, Gt.)	well as the ground-tone, i. e. sounding the 3 and
Nacht-Horn (No. 46, p. 353, Cr.)	2\frac{2}{3}\text{ feet tones 8 feet tone.}  Night-Horn. Nearly identical with the foregoing; but of larger scale, and more horn-like in tone . 8 feet tone.
Quint (No. 2, p. 316, Gt.) 5\frac{1}{3} feet.	Fifth Sounding Stop. In
	this case producing the Fifth above the Diapa-
Grosse Nazard, Nasard,	son
Nassat, Nasat $5\frac{1}{3}$ feet.	pason $\dots 5\frac{1}{3}$ feet.
Gemshorn-quint (No. 59, p. 363, Gt.) 5\frac{1}{3} feet.	Fifth, composed of Gems- horn Pipes $\dots 5\frac{1}{3}$ feet.
Quint-gedact (No. 6, p. 320, Gt.)	Stopped Fifth $5\frac{1}{3}$ feet tone.
Roer-quint (No. 1, p. 315, Gt.) $5\frac{1}{3}$ feet tone	Stopped Fifth, formed of
Super-octave (No. 57, p. 361, Gt.) 4 feet.	The second octave or Fifteenth above the "Principal" or Double Open Diapason of 16 feet, identical with the English Principal 4 feet.

English Principal   4 feet	Octave (No. 44, p. 352, Gt.)	4 feet.	The Octave to the Open Diapason of 8 feet. The	
Prestant	Principal (No. 108, p. 400,		English Principal	
Seeder   A   A   C	Prestant			4 feet.
Getycn Principal (No. 63, p. 365, Cr.)	Gt.) ,	4 feet.	nical Pipes	4 feet.
P. 365, Cr.)	Gt.)	4 feet.	Conical Pipes	
Salicional-octave (No. 39, p. 348, Cr.)	p. 365, Cr.)	4 feet.		1 1000
P. 348, Cr.)	Gt.)	4 feet.	Gamba	
Pipes sounding their harmonic, or octave	p. 348, Cr.)	4 feet.		
A kind of octave Clarabella   4 feet.		4 feet.	Pipes sounding their har-	4 feet.
Flaut a becq (No. 6, p. 320, Cr.)	Hohl-flote (No. 42, p. 351, Gt.)	4 feet.		_
No. 10   A   Set.	Flaut a becq (No. 6, p. 320,			
P. 355, Cr.)	EL: C-1 4 (N- 40		old English Flute	4 feet.
Grosse Tierce (No. 20, p. 335, Gt.)	p. 355, Cr.)	4 feet tone.	ped Flute	4 feet tone.
p. 335, Gt.)		4 feet tone.		4 feet tone.
of this size, producing the Fifth above the Principal. Twelfth, or Duodecimo. 2\frac{2}{3} feet.  Twelfth, or Duodecimo. 2\frac{2}{3} feet.  Twelfth, formed of Gemshorn Pipes		$3\frac{5}{5}$ feet.	In this case producing the Third above the Princi-	3§ feet.
Gemshorn-quint (No. 53, p. 358, Gt.)       Twelfth, formed of Gemshorn Pipes       2\frac{2}{3} feet.         Nazard (No. 37, p. 347, Gt.)       2\frac{2}{3} feet.       Twelfth, formed of Gemshorn Pipes       2\frac{2}{3} feet.         Sedecima (No. 89, p. 389, Gt.)       2 feet.       The third octave, Octave Fifteenth, or Twenty-second, above the "Principal" or Double Open Diapason of 16 feet. Identical with the English "Fifteenth"       2 feet.         Super-Octave (No. 44, p. 352, Gt.)       2 feet.       The second octave above the unison "Principal." The Fifteenth       2 feet.         Octave (No. 108, p. 400, Cr.)       2 feet.       Octave to the Principal of 4 feet       2 feet.         Doublette (No. 14, p. 330,       2 feet.       2 feet.	Quinte (No. 57, p. 361,Gt.)	2 <sup>2</sup> / <sub>3</sub> feet.	of this size, producing the Fifth above the Principal.	2.% feet
Nazard (No. 37, p. 347, Gt.)       2 feet.       Twelfth	Gemshorn-quint (No. 53,	2.2 foot	Twelfth, formed of Gems-	
Gt.)			Twelfth.	2 <sup>3</sup> / <sub>3</sub> feet.
Super-Octave (No. 44,       The second octave above the unison "Principal."         p. 352, Gt.)		2 feet.	Fifteenth, or Twenty-second, above the "Principal" or <i>Double</i> Open Diapason of 16 feet.  Identical with the Eng-	9 Foot
Octave (No. 108, p. 400, Cr.)		2.6	The second octave above	z reet.
Cr.)		2 leet.	The Fifteenth	2 feet.
Gt.)	Cr.)	2 feet.		2 feet.
		2 feet.	The same	2 feet.

Quarte de Nazard (No. 20,	
p. 335, Gt.) 2 feet.	The same.
Quinta-decima (No. 47,	The Fifth above the Tenth;
p. 354, Gt.) 2 feet.	i. e. the Fifteenth 2 feet.
Gemshorn (No. 10, p. 323,	Compleme Effectile
Gt.)	Gemshorn Fifteenth 2 feet.
p. 347, Gt.) 2 feet.	Forest-flute 2 feet.
Hohl-Flote (No. 46,	Hollow-flute, of Fifteenth
p. 354, Gt.) 2 feet.	pitch 2 feet.
Rausch-pfeif (No. 65,	Twelfth and Fifteenth on
p. 367, Gt.) 2 <sup>2</sup> / <sub>3</sub> feet.	one slider 2 \frac{2}{3} feet.
Rausch-quint (No. 71,	
p. 375, Gt.) $2\frac{2}{3}$ feet.	The same.
Flageolet (No. 110, p. 401,	
Ec.) 2 feet.	Flageolet 2 feet.
Terz (No. 82, p. 383, Gt.) $1\frac{5}{5}$ foot.	Tierce; when of this size,
	sounding the Third above
	the Fifteenth $1\frac{3}{5}$ foot.
Sexte (No. 49, p. 355, Gt.) 23 feet.	Sixth. A II rank mutation
	stop, sounding the inter-
	val of a major sixth. A Twelfth and Tierce on
	one slider
Sesquialtera (No. 71,	Sesquialtera, II ranks; the
p. 375, Cr.) $2\frac{2}{3}$ feet.	same $\dots 2^{\frac{2}{3}}$ feet.
Quinta (No. 81, p. 383,	Fifth sounding Stop, pro-
Cr.) $1\frac{1}{3}$ foot.	ducing the Fifth above
	the Fifteenth. The Nine-
Tertian $1\frac{5}{5}$ foot.	teenth or Larigot 1½ foot.  A II rank Mutation Stop,
101110111	sounding the interval of
	a minor third. A Tierce
	and Larigot on one slider $1\frac{3}{5}$ foot.
Sedecima (No. 85, p. 386,	Twenty-second or Octave
Cr.) 1 foot.	Fifteenth
Mixture (No. 57, p. 361, Gt.) 2 feet.	A mixed Stop, i.e. consist- ing of Foundation and
Gt.) 2 feet.	Mutation ranks of Pipes,
	compounded together;
	the largest rank being
	usually a Fifteenth 2 feet.
Scharf (No. 57, p. 361,	Sharp, also a mixed Stop,
Gt.) $1\frac{1}{3}$ foot.	composed of smaller Pipes than the Mixture, or on
	a smaller scale; and
	sometimes containing a
	Tierce, particularly if the
	Mixture has not one $1\frac{1}{3}$ foot.
Cymbel (No. 57, p. 361,	The most acute of the bright
Gt.) 1 foot.	Stops, being very small in scale, and high in pitch.
	It is sometimes formed
	exclusively of octave
	ranks 1 foot.

Cornet.		Cornet, frequently a Compound Stop, formed of Pipesseveral scales larger than Diapason measure, and producing a "horny" tone; hence its name. Sometimes the Cornet is a large Manual Reed, as at Freiburg and Seville; in other examples it is a small Pedal Reed, as at Muhlhausen, Merseburg, &c.	
Contra-fagott (No. 56,		Double Double Bassoon	32 feet
p. 360, Gt.)	32 foot	Double Double Education	02 1000.
	02 leet.	D11. T	700
Tromba (No. 57, p. 361,	700	Double Trumpet	16 feet.
Gt.)	16 feet.	(F)	
Tuba (No. 40, p. 349, Gt.)		The same.	
Trompet (No. 1, p. 315, Gt.)		The same.	
Dulcian(No. 2, p. 316, Gt.)	16 feet.	Dulcian means, literally, a small Bassoon. In this case, a Double Bassoon.	16 fact
Fagotto(No. 4, p. 319, Ec.)	1.6 foot	Double Bassoon	
	To leet.	Double Dassoon	10 feet.
Bombarde (No. 14, p. 330,	1 C foot	Double Pood	1 C foot
Gt.)	16 feet.	Double Reed	16 feet.
Euphone (No. 15B, p. 329,	10 C 1	Double Dead	10 C 1
Gt.)	16 feet.	Double Reed	16 feet.
Phisarmonica (No. 70, p. 374, Gt.)	16 feet.	Double Reed, with Free Reeds, and Tubes of half length	16 feet tone
Grand Cornet (No. 111,		Double Reed	16 feet.
p, 402, Gt.)	16 foot	Double Recet.	10 1000.
	10 1001.	Double Reed	
Corneta (No. 141, p. 430,		Double Reed	
No. 18)		m .	. 0
Trompette (No. 13B,	0	Trumpet	8 feet.
p. 329, Gt.)	8 feet.		
Trompette Harmonique		Harmonic Trumpet	8 feet.
(No. 12, p. 328, Clavier			
de Bombardes)	8 feet.	TT	
Hauthois (No. 13B, p. 329,		Hautboy	8 feet.
Pos.)	8 feet.		
Cor Anglais (No. 12A,		English Horn	8 feet.
p. 327, Sw.)	8 feet.		
Dulcian (No. 9, p. 323, Cr.)	8 feet.	Bassoon	8 feet.
Fagotto (No. 2, p. 317, Cr.)	8 feet.	The same.	
Krum-Horn (No. 33,		Clarinet	8 feet tone.
p. 344, Cr.)	8 feet tone.		
Crom-Horn (No. 34,		The same.	
p. 345, Cr.)	8 feet tone.		
Schalmay (No. 2, p. 317,		The same.	
Cr.)	8 feet tone.		
Vox Humana (No. 76,		Human Voice	8 feet tone.
p. 378, Cr.)	8 feet tone.		
Clarin (No. 79, p. 381,Gt.)	4 feet.	Clarion	4 feet.
Olarin (110. 13, p. 361, Gt.)	£ 100 to	CIGUITA CA A A A A A A A A A A A A A	T leet.

-Pec	lal	Sto	ps
------	-----	-----	----

Sub-Principal (No. 1, p. 316) 32 feet.	"Under Principal," i. e. below the Pedal Diapa- son pitch. Double Open
Green Principal (No. 70	Bass 32 feet. Great or Double Diapason
Gross Principal (No. 70, p. 374)	Bass
Prestant (No. 2, p. 317) 32 feet.	The same.
Flute ouverte (No. 12, p. 326)	The same.
Untersatz (No. 81, p. 383) 32 feet tone.	"Below position," i. e. un-
Ontersalz (10. 61, p. 606) 62 feet tolle.	der the Pedal unison pitch. Double Stopped Bass
Sub-bass (No. 50, p. 357) 32 feet tone.	"Under Bass," or Double Stopped Bass 32 feet tone.
Quintaton (No. 13, p. 328) 32 feet tone.	Double Stopped Bass,
	sounding the Twelfth as
	well as the ground tone; in this case producing
	the 32 and $10\frac{2}{3}$ feet
G 1D 1 /N 104	tones.
Grand Bourdon (No. 12A, p. 327) 32 feet tone.	Great or Double Bourdon 32 feet tone.
Gross-Quinten-Bass (No. 64, p. 366) $21\frac{1}{3}$ feet tone.	Fifth to the Great Bass of $32 \text{ feet} \cdot \dots \cdot 21\frac{1}{3} \text{ feet tone.}$
Principal Bass (No. 80,	Open Diapason Bass 16 feet.
p. 382) 16 feet.	The game
Octave (No. 91, p. 391) 16 feet. Prestant (No. 2, p. 317) 16 feet.	The same. The same. Where there is a
(* ** /1	Metal " Principal" of 16
	feet on the same Pedal,
	the name Prestant is applied to a <i>wood</i> Open Bass
	of the same size, as at
	Liegnitz, No. 88, p. 388.
Flute ouverte (No. 20, p. 336) 16 feet. Violone (No. 42, p. 351) 16 feet.	The same.
Violone (No. 42, p. 351) 16 feet.	Double Bass. A unison
, ,	open wood Stop, of much
	smaller scale than the
	Diapason, and formed of Pipes that are a little
	wider at the top than at
	the bottom, and furnish-
	ed with ears and beard at the mouth. The tone
	of the Violone is crisp,
	and resonant, like that
	of the orchestral Double Bass; and its speech
	being a little slow, it has
	the Stopped Bass always
	drawn with it 16 feet.

Gamba (No. 59, p. 363) 16 feet. Salicet (No. 59, p. 363) 16 feet. Sub-Bass (No. 33, p. 344) 16 feet tone.	Gamba Bass 16 feet.  Dulciana Bass 16 feet.  Stopped Bass, usually, but sometimes Open wood,
Bourdon (No. 37, p. 347) 16 feet tonc.	16 feet, as at Haarlem, (No. 1, p. 316) 16 feet tone.  This name is very rarely applied to a Pedal Stop. When it is so, it is ge-
Quintaton (No. 46, p. 354) 16 feet tone.	nerally to a Stopped Bass, though occasion- ally to a wood open Bass, 16 feet, as at Strasbourg (No. 36, p. 347) 16 feet tone.  A small scale unison Co- vered Stop, sounding the Twelfth as well as the ground-tone, i. e. pro- ducing the 16 feet and 5\frac{1}{3} feet tones
Grosse Quint, Stopped —	Great Fifth, Stopped $10\frac{2}{3}$ feet tone.
(No. 71, p. 375) $\dots 10^{\frac{2}{3}}$ feet.	The state of the s
Roer-quint (No. 1, p. 316) 10 <sup>2</sup> / <sub>3</sub> feet tone.	Stopped Fifth, formed of Pipes with reeds, tubes, or chimneys $10\frac{2}{3}$ feet tone.
Cctave—(No. 85, p. 387) 8 feet.	Octave, or Principal to the
Violoncello (No. 54, p. 359) 8 feet.	Diapason of 16 feet 8 feet.  Crisp-toned Open Stop, of small scale. The "Octave" to the Violone of 16 feet 8 feet.
Bass-Flute 8 feet tone.	Flute Bass. The Stopped Octave to the Stopped Bass of 16 feet tone 8 feet tone.
Tertia (No. 74, p. 377) $6\frac{2}{5}$ feet.	Tenth, or Great Tierce 62 feet.
Quint (No. 20, p. 336) $5\frac{1}{3}$ feet.	Twelfth $\dots 5\frac{1}{3}$ feet.
Rohr-quint (No.69, p.373) 5\frac{1}{3} feet tone.	Stopped Twelfth $5\frac{1}{3}$ feet tone.
Super-octave(No.25, p.340) 4 feet.	Fifteenth 4 feet.
Mixture, V ranks (No. 91,	Mixture, V ranks 4 feet.
p. 391) 4 feet. Cornet, VIII ranks (No. 82, p. 384)	Pedal Cornet.
Contra Posaune (No. 77, p. 379) 32 feet.	Double Trombone 32 feet.
Posaune (No. 77, p. 379) 16 feet. Bombarde (No. 13B, p. 329) Fagotto (No. 65, p. 367) 16 feet. Dulcian (No. 66, p. 369). 16 feet.	Trombone
Trompet (No. 82, p. 384) 8 feet. Trombone (No. 2, p. 317) 8 feet Basson (No. 13 B, p. 329) 8 feet.	Trumpet
Krummhorn (No.49, p.356) 8 feet.	Cremona 8 feet tone.

Clairon (No. 84, p. 386) .	4 fect.	Clarion	4 fect
Cornet (No. 50, p. 357)	4 feet.	Cornet—a small Reed, Cla-	
, , ,		rion	4 fcet
Cinq (No. 1, p. 316)	2 feet.	Octave Clarion	2 feet
Cornet (No. 49, p. 356)	2 feet.	Octave Clarion	2 feet

### BRITISH ORGANS.

### LONDON AND ITS ENVIRONS.

### 145. PANOPTICON.

The largest and by far the most complete Organ in London is that in the Royal Panopticon of Science and Art, Leicester Square. It was built by Messrs. Hill & Co. in 1853. It comprises not only all the usual modern improvements, but several new inventions in mechanism; among which are an entirely new method of drawing the Stops, by Pneumatic agency; an improved system of Composition Pedals; and a Pedal for first drawing out the Stops one by one, in gradual succession, and afterwards of reducing them in a similar manner, so as to produce a perfect Crescendo and Diminuendo; desiderata which have hitherto been considered unattainable by mechanical means, except by the aid of a Swell-box.

The Organ contains 60 sounding Stops, all of which are complete or whole Stops, excepting the Vox Angelica in the Solo Organ, which only goes to Tenor c. It has 4 Manual Organs, all of the CC or 8-feet compass; a separate Pedal of 10 Stops; 6 Bellows, at different pressures, worked by steam power; and is furnished with duplicate Manuals to the Swell, Choir, and Solo Organs, ranged to the right and left of the chief tiers of Manuals, and acting on separate pallets in the corresponding Sound-boards. The auxiliary Manuals are designed to allow of several performers playing on the instrument at the same time, if ever thought desirable.

All the musical scales have alike been rendered available to the performer on this instrument, by the adoption of the admirable system of equal temperament.

The following is a list of the Stops in the Panopticon Organ:

### Great Organ, 16 Stops.

1—Double Open Diapa-	9—Super Octave metal 2 feet.
son, metal and wood 16 feet.	10—Sesquialtera, III ranks,
2—Open Diapason, metal 8 feet.	metal
3—Open Diapason, No. 2,	11—Mixture, III ranks, met.
metal 8 feet.	12—Furniture, III rks. met.
4—Stopped Diapason, wood 8 feet tone.	13—Trumpet metal 16 feet.
5—Quintmetal 6 feet.	14—Posaune metal 8 feet.
6—Octave metal 4 feet.	15—Trumpetmetal 8 feet.
7—Wald Flute wood 4 feet.	16—Clarion metal 4 feet.
8—Octave Quintmetal 3 feet.	

### Choir Organ, 12 Stops.

Choir Organ	i, 12 Stops.
17—Double Stopped Dia- pasonwood 16 feet tone.	23—Super Octavemetal 2 feet. 24—Cymbal, II ranks, met.
18—Gamba metal 8 feet.	25—Stopped Flute, metal 4 feet tone
19—Dulcianametal 8 feet. 20—Stopped Diapason,	26—Piccolo wood 2 feet.  Bassoon, Bass wood 2 oc.
metal and wood 8 feet tone.	27 Bassoon, Bass wood 8 feet.
21—Gemshornmetal 4 feet. 22—Octave Quintmetal 3 feet.	28—Trumpet metal 8 feet.
Solo Organ	n, 9 Stops.
	34—Doublette, II ranks
29 g g { 1. Grand Tuba Mi- rabilismetal 8 feet.	metal 2 feet.
30 5 2. Do Clarion, met. 4 feet.	35—Vox Angelica, II rks.
31—Claribel wood 8 feet. 32—Harmonic Flute, metal 4 feet.	metal 8 feet. 36—Krum Hornmetal 8 feet tone
33—Flageolet metal 2 feet.	37—Vox Humanametal 8 feet tone
Swell Organ	n, 13 Stops.
38—Bourdon and Double	44—Super Octave . metal 2 feet.
Diapason, wood and	45—Sesquialtera, V & IV
metal 16 feet.	ranksmetal
39—Open Diapason, metal 3 feet. 40—Salcional metal 3 feet.	46—Suabe Flutewood 4 feet. 47—Cornopeanmetal 8 feet.
41—Stopped Diapason,	48—Trumpet metal 8 feet.
wood 8 feet.	49—Hautboy metal 8 feet.
42—Octave metal 4 feet.	50—Clarion metal 4 feet.
43—Octave Quint metal 3 feet.	
Pedal Organ	1, 10 Stops.
51—Double Open Diapa-	57—Super Octavemetal 4 feet.
sonwood 32 feet. 52—Open Diapason, wood 16 feet.	58—Sesquialtera, V ranks, metal 3 feet.
53—Open Diapason, metal 16 feet.	59—Trombone metal 16 feet.
54—Bourdonwood 16 feet tone.	60—Octave Trombone, met. 8 feet.
55—Octave metal 8 feet.	61—Drums CC—C.
56—Octave Quintmetal 6 feet.	
	Movements, &c.
1—Coupler, Swell to Great.	7—Pedal to Solo.
2—Choir to Great. 3—Solo to Great.	8 to 16—Nine Composition Pedals.
4—Pedal to Great.	17, 18—Two Tremulants.   19—Pneumatic Lever attachment.
5—Pedal to Choir.	20—Crescendo and Diminuendo Pedal.
6—Pedal to Swell.	
Number of Sounding Stops.	Number of Pipes.
Great Organ 16	Great Organ 1276
Choir 12	Choir
Swell	Swell
Pedal	Pedal
60	Total 4004

### 146. St. Paul's Cathedral.

The Organ in St. Paul's Cathedral was built by Father Smith in 1697. It originally consisted of a "Great and Chair Organ," the former ranging from CCC (16 feet compass) to c3 in alt; the latter descending to FFF (the 12 feet compass). Towards the latter part of the last century, a Swell of Seven Stops, to Tenor e (4 feet compass) was added by Crang; but being the first made by that builder, it proved less successful than that subsequently added by him to the Organ at St. Clement Danes. At the beginning of the present century, the pitch of the Organ, which had till then been very high, was lowered, by the whole of the Pipes being transposed upwards a semitone, and an entirely new series of Pipes introduced for the CCC key. This change was effected by the Messrs. Orchman and Nutt. In 1826, considerable alterations were made in the instrument by the late Mr. Bishop, who extended the Manuals up to f3 in alt; introduced a Clarion into the Great Organ in place of the Nason; put in a Clarabella in lieu of the Stopped Diapason Treble; placed a second Trumpet Treble on the Cornet slider; and also put new Trebles to the Chorus Stops. In the Choir Organ, he substituted a Dulciana and an Open Diapason for the Vox Humana and III rank Mixture; and added an octave of large Pedal Pipes, as well as Horizontal Bellows in place of the 4 Diagonal Bellows, 8 feet by 4, by which the Organ had previously been supplied. He also first introduced the Concussion Bellows into this Organ at this period. In 1849, Mr. Bishop put in a new Swell to Gamut G (51 feet compass), the available room within the Case unfortunately neither allowing of the adoption of the more complete compass, nor of the introduction of any Double Stops. At the same time he substituted a Viol da Gamba for the Metal Flute in the Choir Organ, and a Clarabella for the Stopped Diapason; and also put in new Keys and Pedals. The following is a list of the Stops at St. Paul's:

### Great, 13 Stops, CCC or 16 fect compass.

```
1—West Front Open Diapason.
                                         8—Tierce.
 2—East Front Open Diapason.
                                        9—Sesquialtera, II ranks.
 3—Stopped Diapason, Clarabella Treble.
                                        10—Mixture.... II ranks.
 4—Principal.
                                         11—Trumpet.
 5—Twelfth,
                                         12—Trumpet to middle e<sup>1</sup>, in place of
 6-Fifteenth.
                                                Cornet.
 7—Block Flute, labelled large Fifteenth. 13—Clarion.
                Choir, in front, 8 Stops, FFF or 12 feet compass.
                                        18—Principal.
14—Open Diapason.
15—Stopped Diapason.
                                        19—Twelfth.
                                        20—Fifteenth.
16—Duleiana.
17-Viol di Gamba.
                                        21—Cremona to Tenor e.
```

Swell, 7 Stops, Gamut G or 5\frac{1}{3} feet compass.

```
22—Open Diapason.
23—Stopped Diapason.
24—Principal.
25—Sesquialtera, III ranks.
```

### Pedal, CCC or 16 feet compass.

29—One Octave of Open Wood Pipes to CCC,—16 feet length.

Accessory Stops, Movements, &c.

1—Great to Pedal.

2—Choir to Pedal.
3—Swell to Great.

4—Swell to Choir.
5, 6, 7, 8—Four Composition Pedals.

Compass.

Great, CCC to f<sup>3</sup> in alt. Choir, FFF to f<sup>3</sup> in alt.

Swell, Gamut G to f<sup>3</sup> in alt. Pedal, CCC to Tenor c.

### 147. Westminster Abbey.

The present Organ in Westminster Abbey was originally built, in 1730, by Schreider and Jordan. It then consisted of Great and Choir, ranging from GG (10\frac{2}{3} feet compass), up to d<sup>3</sup> in Alt, and a Swell with 4 Unison Stops to Fiddle g (23 feet compass). A Pedal-board from GG to Gamut A, with an octave of Unison Open Pipes, were added by Avery during the time Dr. Cooke was Organist. In 1828, an Octave of GGG Pedal Pipes, and a new (soft) Trumpet and Clarion, in place of the old Reeds, were introduced by Elliott. Subsequently a new Swell to Tenor c, with 8 Stops, was added by Hill; and a Dulciana and Open Diapason put into the Choir Organ in place of the Fifteenth and Cremona. In 1848, the Organ was entirely reconstructed by Mr. Hill, and divided; the Great Organ, with new and larger sound-boards, movements, &c. being placed on the south side of the screen, and the Swell on the North; leaving the centre unoccupied, so that an uninterrupted view of the upper part of the Minster may be obtained from one end to the other. The Cheir Organ remains in its old place over the doorway leading from the Nave into the Choir, and the 32-feet Pedal Diapasons are laid horizontally along the screen. The Claviers are placed, crossways, behind the Choir Organ.

The alterations in 1848 comprised an extension of the Great Organ down to CCC (the 16-feet compass), with the addition of a new Open Diapason; the conversion of one of the old Diapasons into a Double; the insertion of a Quint; a Posaune, and III additional ranks of Mixture. The compass was also extended up to f³ in alt. An entirely new Swell to CC (8-feet compass) was introduced; a Hohl Flute and Cromorne added to the Choir, and two Open Diapasons, 16 and 32 feet, appropriated to the Pedal;—such of the old Pedal Pipes as were available being used in the latter.

The Organ now contains 32 Sounding Stops, of which the following is a list:

### Great CCC (16 feet compass), 14 Stops.

1—Double Diapason, to CC key.

2—Open Diapason, through. 3—Open Diapason to CC.

4—Stopped Diapason.

5—Quint, to CC key.

6—Principal, through.
7—Stopped Flute to CC key.

8—Twelfth.

9—Fifteenth.

10—Sesquialtera, V ranks. 11—Mixture....III ranks.

12—Double Trumpet to Tenor c key.

13—Posaune, through.

14—Clarion.

### Swell, CC (8 feet compass), 10 Stops.

	20—Sesquialtera, III ranks.
16—Open Diapason.	21—Contra Fagotto, to Tenor c key.
17—Stopped Diapason.	22—Cornopean.
18—Principal.	23—Hautboy.
19—Fifteenth.	24—Clarion.
Choir, GG (10% feet	compass), 6 Stops.

25—Open Diapason to Gamut G.	28—Principal.
26—Hohl Flute.	29—Flute.
27—Stopped Diapason.	30—Cromorne.

### Pedal, CCC (16 feet compass), 2 Stops.

31—Great Open Diapason, 32 feet. 32—Open Diapason, 16 feet.

Accessory Stops, Movements, &c.

3—Great to Pedal, 8-feet pitch. 6, 7, 8—Three Composition Pedals	2—Great to Pedal, 16-feet pitch.	4—Choir to Pedal, 16-feet pitch. 5—Swell to Pedal, 8-feet pitch. 6, 7, 8—Three Composition Pedals.
--	----------------------------------	--

### BUCKINGHAM PALACE. 148.

The Organ in the Chapel at Buckingham Palace is on the left side of the altar, about nine feet from the floor; the keys are so placed that the organist sits beneath it, and no apparent connection exists between them and the instrument. are beneath the Chapel. The Organ contains the following 8 Stops:

### Manual, 8 Stons.

1—Open Diapason.		5—Twelfth.
2—Dulciana.		6—Fifteenth.
3—Stopped Diapason.		7—Sesquialtera, III ranks.
4—Principal.		8—Trumpets.
•	Compage GG	to f3 in alt

Compass, GG to 13 m alt.

### 149. Buckingham Palace.

His Royal Highness the Prince Albert's Organ.

This instrument was built by Messrs. Gray and Davison, in 1841, for His Royal Highness. It stands in a handsome room, in the Prince's private apartments, in the left wing of the Palace; it is divided, and in appearance resembles two beautiful cabinets, standing on each side of the fire-place, at one end of the room. There is no apparent communication between the two parts, the connection being ingeniously eontrived behind the pier glass, over the fire-place. The bellows is not in the room, but is placed in an adjoining passage, where it appears like a table. The Organ eontains the following 7 Sounding Stops:

Ma	unual, 6 Stops.
1—Open Diapason. 2—Dulciana. 3—Stopped Diapason. 4—Principal.	5—Fifteenth. 6—Hautboy Enclosed in a Swell Box.
1 I I I I I I I I I I I I I I I I I I I	

Pedal, 1 Stop—Bourdon, 16 feet tone.

Compass.	Accessory Stops.
Manual to CC. Pedal to CCC.	1, 2, 3, 4, Four Composition Pedals.

448 APPENDIX.

### 150. TEMPLE CHURCH.

The fine Organ in the Temple Church was built by Father Smith, in 1687. It presents a great peculiarity in regard to the number of sounds which it contains in the octave. Most Organs have only twelve in that compass, but this has fourteen: that is, in addition to the common number of semitones, it possesses an "A flat" and a "D sharp," quite distinct from the notes G sharp and E flat. The general temperament of the instrument is the same as that of most English instruments—unequal;—but the real beauty of the quarter tones is discoverable by playing in the key of E and A flat, where, in consequence of the thirds being so true, we have that perfection that cannot be met with in common Organs. It gives a peculiar brilliancy also to the key of A and E in three or four sharps\*. These quarter tones are produced by the ordinary G sharp and E flat keys being divided, crossways, in the middle; the back halves of which rise as much above the front portions, as do the latter above the naturals.

The memorable trial which took place between Smith and Harris, when the Organ was built, has been duly described in the "Historical Introduction." It only remains therefore to enter into matters of detail here. Originally the Temple Organ consisted of Great and Choir Organs, ranging from FFF (12 feet) to d3 in alt, --omitting FFF#, GG#, AAb, and DD# in the Bass;—and an Echo to Middle c1; the whole being supplied with wind from three diagonal bellows. About the middle of the last century, Byfield added a Swell of 6 Stops to Fiddle g; the Horn going to Tenor f. In 1843, on the occasion of the complete restoration of the Church, the Organ was, by the late Mr. Bishop, placed in a spacious Organ-chamber, built expressly for its reception; and was re-erected on a new building-frame; the sound-boards were new palleted, where necessary; a Dulciana was added to the Choir Organ in place of the Vox Humana; the swell was continued down as far as Tenor c, and the quarter tones added; the DD sharp was introduced into the Great and Choir Organs; the compass of their Manuals extended upwards from d3 to f3 in alt; an octave and a half of FFF Pedals were laid down, and an octave of CCC return Pedal Pipes applied to them; two Pedal Couplers, and one Manual Coupler, Swell to Great, were also added, and three Composition Pedals.

Subsequently the FFF Pedals were removed, and a Pedal Clavier of the proper range—CCC to Tenor f—supplied by Robson, together with three independent Pedal Stops, as well as preparation being made for a fourth; the necessary Coupling movements also were introduced for uniting "Manuals to Pedal" correctly. The old Manuals, with black naturals and white short keys, were at the same time removed, and new ones applied.

The Organ contains 26 Sounding Stops, of which the following is a list:

### Great, 10 Stops.

1—Open Diapason  2—Stopped Diapason, metal to Tenor c, oak to the bottom  3—Principal  4—Nason, oak throughout	8 feet tone. 4 feet tone. 4 feet tone.	5—Twelfth		
	Choir,	6 Stops.		
11—Stopped Diapason, oak throughout 12—Duleiana to Gamut G. 13—Gamba to CC	8 feet tone. 8 feet. 8 feet.	14—Spitzflute Principal . 4 feet. 15—Stopped Flute, metal throughout 4 feet tone. 16—Gemshorn Fifteenth . 2 feet.		
	Swell,	7 Stops.		
17—Open Diapason 18—Stopped Diapason,metal to Fiddle g, new Pipes below of deal 19—Principal	8 feet. 8 feet tone. 4 feet.	20—Cornet. III ranks       23/3 feet.         21—Horn       8 feet.         22—Hautboy       8 feet.         23—Clarion       4 feet.		
	Pedal,	3 Stops.		
24—Double Stopped Bass to FFFF	32 feet tone. 16 feet.	26—Stopped Bass 16 feet tone. 27—Preparation for Trombone 16 feet.		
Compass.				
Great, FFF to f <sup>3</sup> in alt. Choir, FFF to f <sup>3</sup> in alt.		Swell, Tenor c to f <sup>3</sup> in alt. Pedal, CCC to Tenor f.		
Acc	essory Stops,	Movements, &c.		
1—Coupler Great to Pedal. 2—Coupler Choir to Pedal. 3—Coupler Swell to Great.		5—Pedal Register 8 feet. 6—Pedal Register 16 feet. 7, 8, 9—Three Composition Pedals.		

"Smith's diapasons have ever been celebrated. Those in this Organ are very excellent, particularly the Bass of the Open Diapason. The Stopped Diapason in the Great Organ is made of metal to c in the Tenor, and is a most delightful Solo Stop. The Stopped Diapason and Flute in the Choir are both excellent as Solo Stops. The Open Diapason and Stopped Diapason in the Swell, both of metal, are purity itself; and the Reed Stops are excellent, both as Solo and Chorus Stops.\*"

4—Coupler Choir Sub-octave to Great. 10—Tremulant Swell.

### 151. CHRIST CHURCH, NEWGATE STREET.

The fine Organ in Christ Church, Newgate Street, was originally built by Harris, in 1690. After receiving various additions, it was entirely remodelled by Mr. Hill, about the year 1835, when all the Manual Organs were reconstructed to the CC

compass. The instrument now justly ranks as one of the largest and finest in London, and contains the following Stops:

Great, 1	3 Stops.			
1—Double Open Diapason       16 feet.         2—Open Diapason       3 feet.         3—Open Diapason       3 feet.         4—Stopped Diapason       8 feet tone.         5—Principal       4 feet.         6—Twelfth       2½ feet.         7—Fifteenth       2 feet.	8—Sesquialtera. V ranks 2 feet. 9—Mixture V ranks 1⅓ foot. 10—Doublette II ranks 2 feet. 11—Double Trumpet 16 feet. 12—Posaune 8 feet. 13—Clarion 4 feet.			
Swell, 1	1 Stops.			
14—Double Diapason	20—Mixture . V ranks . 1 \( \frac{1}{5} \) foot.   21—Horn 8 feet.   22—Trumpet 8 feet.   23—Oboe 8 feet.   24—Clarion 4 feet.			
Choir, 5 Stops.				
25—Open Diapason 8 feet. 26—Stopped Diapason 3 feet tone. 27—Principal 4 feet.	28—Stopped Flute 4 feet tone. 29—Fifteenth 2 feet.			
Pedal, 1	10 Stops.			
30—Great wood Diapason. 16 feet.         31—Wood open Diapason. 16 feet.         32—Metal open Diapason. 16 feet.         33—Principal	35—Fifteenth 4 feet. 36—Sesquialtera, VI ranks. 37—Mixture V ranks. 38—Posaune 16 feet. 39—Clarion 8 feet.			
Accessory Stops, Movements, &c.				
1 to 8—Eight Couplers.   9—Shifting Movement to Swell.				
Great, CC to $f^3$ in alt. Swell, CC to $f^3$ in alt. Choir, CC to $f^3$ in alt.	Pedal Organ, CCC to CC, one octave. Pedal Clavier, CCC to Fiddle g, two octaves and a half.			

### 152. St. Sepulchre's.

The Organ in St. Sepulchre's Church, Snowhill, was originally built by Renatus Harris, in 1670, and is supposed to be the oldest instrument of his make now existing in London. It consisted, at first, of a Great and Choir Organ only; the compass being from GG, short octaves, to d³ in alt. On the instrument undergoing an extensive repair by the elder Byfield, about the year 1730, a small Tenor f swell was added; and a new Trumpet, Clarion, and Open Diapason Bass put to the Great Organ. In 1817, the Compass was carried up to e³ in alt, and made "long octaves" in the Bass, by Mr. Hancock; another Open Diapason was added throughout the Great Organ; a Dulciana put in the Choir Organ, in place of the Vox Humana; and an octave of GG Pedals and Unison Pedal Pipes applied. In 1827, the Swell was extended in compass down to Gamut G, by Mr. Gray, and two octaves of CCC Pedals laid down; also two Couplers, Great and Choir to Pedal, introduced. In 1835, Mr. Gray made a further extension of the Swell, and added the Great Pedal Diapason, which is the identical one that was used in the Organ erected for the Fes-

tival in Westminster Abbey, in 1834. A new sound-board was also made to the Great Organ, for facilitating the tuning, and for improving and preserving the instrument. The Organ has recently been considerably enlarged and improved by Gray and Davison, through the liberality of the parish and the munificence of a private gentleman. The new work consists of an independent Pedal Organ of 10 Stops; the Keraulophon and Clarinet Stops in the Choir Organ; an extension of the Swell Double Diapason; new Manuals, &c.; and "it now requires only a Double Diapason and new Open Diapason in the Great Organ, the Double Diapason in the Swell to be completed, and a Contra Fagotto or Double Reed throughout the same Manual, with new Draw-Stop Action, Composition Pedals, &c. to make this truly magnificent instrument complete."\* It contains 41 Sounding Stops, of which the following is a list:

```
Great Organ, 15 Stops.
 1—Open Diapason, No. 1.
                             8 feet.
                                            9—Tieree \dots 1^{\frac{3}{5}} foot.
 2—Open Diapason, No. 2.
                             8 feet.
                                           10—Larigot . . . . . . . 1\frac{1}{3} foot.
 3—Stopped Diapason ...
                                           11—Sesquialtera, III ranks 1\frac{1}{3} foot.
                             8 feet.
                            8 feet.
 4—Clarabella Treble . . .
                                          12—Mixture.... II ranks \frac{2}{3} foot.
 5—Principal, No. 1....
                            4 feet.
                                          13—Furniture.. III ranks 1\frac{3}{5} foot.
 6—Principal, No. 2....
                            4 feet.
                                          14—Trumpet . . . . . . . . .
 7—Twelfth .....
                            3 feet.
                                          15—Charion ....
 8—Fifteenth....
                            2 feet.
                             Swell Organ, 10 Stops.
                                          21—Sesquialtera, III ranks 1, foot
16—Double Diapason, Bass 16 feet.
17—Open Diapason . . . .
                                          22—Horn .....
                            8 feet.
                                                                       8 feet.
18—Stopped Diapason ...
                                          8 feet.
                            8 feet.
19—Principal . . . . . . .
                                          24—Hautboy .....
                            4 feet.
                                                                       8 feet.
20—Fifteenth . . . . . . .
                                          2 feet.
                                                                       4 feet.
                              Choir Organ, 7 Stops.
26—Stopped Diapason ...
                            8 feet.
                                          30—Flute.......
                                                                       4 feet.
27—Duleiana .....
                            8 feet.
                                          31—Fifteenth . . . . . . . .
                                                                       2 feet.
28—Keraulophon . . . . .
                                          32—Clarionet .....
                            8 feet.
                                                                       8 feet.
29—Principal . . . . . . . . . .
                            4 feet.
                             Pedal Organ, 10 Stops.
33—Grand Open Diapason,
                                          38—Grand Fifteenth....
                                                                      4 feet.
       wood...... 16 feet.
                                          39—Grand Mixture, Vranks.
34-Grand Violon, metal. 16 feet.
                                          40—Grand Posaune . . . . 16 feet.
35—Grand Bourdon .... 16 feet.
                                          41—Grand Trumpet....
                                                                      8 feet.
36—Grand Principal . . . .
                                          42—Grand Clarion . . . . .
37—Grand Twelfth.....
                            6 feet.
                        Accessory Stops, Movements, &c.
 1—Coupler, Great to Pedal, 16 ft. pitch.
                                           7—Choir, Sub-octave to Great.
 2—Coupler, Great to Pedal, 8 ft. pitch. 3—Coupler, Choir to Pedal, 8 ft. pitch.
                                           8—Sforzando Coupler, Great to Swell.
                                           9 to 15—Seven Composition Pedals.
 4—Coupler, Swell to Pedal, 16 ft. pitch.
                                          16—Pneumatic Lever attachment.
 5-Coupler, Swell to Great.
                                          17—Tremulant Swell.
 6—Coupler, Swell to Choir.
                                              Two Horizontal Bellows.
                                    Compass.
    Great, GG to e<sup>3</sup> in alt.
                                              Swell, GG to e<sup>3</sup> in alt.
    Choir, GG to e3 in alt.
                                              Pedal, CCC to Tenor f.
```

<sup>\*</sup> Advertisement to Mr. Cooper's "Organist's Manual."

### 153. St. Andrew's, Holborn. .

The Organ in St. Andrew's, Holborn, was originally built by Renatus Harris, in 1699, and consisted of Great and Choir Organs, comprising 22 Stops. A Swell of 8 Stops to Fiddle g was afterwards added by Byfield. A new inside was put to the instrument, soon after the commencement of the present century, by Russell; and, in 1841, the whole was entirely remodelled, revoiced, and a new Swell added, by Hill. The Organ now contains 27 Stops, of which the following is a list:

```
Great, 10 Stops.
                                        5—Twelfth .....
 1—Double Open Diapason 16 feet.
                                                                2 feet.
                                        6—Fifteenth . . . . . . . . .
 2—Open Diapason . . . .
                          8 feet.
 3—Clarabella Treble and
                                        7—Sesquialtera, III rks. 13 foot.
                                                                \frac{2}{3} \text{ foot.}
                                        8—Mixture . . . II rks.
       Stopped Diapason
                                        9—Trumpet . . . . . . . .
                                                                 8 feet.
                          8 feet.
       Bass . . . . . . . . . .
                                                                  4 feet.
4-Principal . . . . . . .
                          4 feet.
                                       10—Clarion ....
                               Choir, 6 Stops.
                                                                 4 feet tone.
                                       14—Flute.....
11—Open Diapason to
                                       15—Fifteenth .....
                                                                 2 feet.
                          8 feet.
      Gamut G .....
                                       16—Cremona to Tenor c.
                          8 feet tone.
                                                                  8 feet tone.
12—Stopped Diapason ...
13—Principal . . . . . . .
                          4 feet.
                              Swell, 10 Stops.
17—Double Dulciana . . . 16 feet.
                                       22-Doublette, II ranks...
                                                                  2 feet.
                                       8 feet.
18—Open Diapason . . . .
                          8 feet.
19-Stopped Diapason ...
                          8 feet tone.
                                       8 feet.
                                       25—Cornopean .....
20—Principal .....
                          4 feet.
                                                                  8 feet.
                                      4 feet.
                          4 feet.
21—Flageolet . . . . . . .
                               Pedal, 1 Stop.
           27-Open Diapason (CCC to Gamut G) .. 16 feet length.
                       Accessory Stops, Movements, &c.
 1-Coupler, Great to Pedal.
                                         3, 4, 5—Three Composition Pedals.
 2—Coupler, Swell to Great.
                                 Couplers.
     Great and Choir, GG to f<sup>3</sup> in alt.
                                            Pedal Clavier, two octaves.
     Swell, Tenor c to f3 in alt.
```

### 154. St. Peter's, Cornhill.

The Organ in St. Peter's Church, Cornhill, was originally built by Father Smith, in 1681, at a cost of £210, inclusive of painting and gilding. It then contained the following 13 Stops; compass, GG, short octaves, to d in alt; viz.

```
Great, 9 Stops.

1—Open Diapason.

2—Stopped Diapason.

3—Principal.

4—Twelfth.

5—Fifteenth.

Choir, 4 Stops.

Great, 9 Stops.

6—Sesquialtera. .III ranks.

7—Mixture..... II ranks.

8—Trumpet.

9—Cornet to Middle c¹♯, V ranks.

Choir, 4 Stops.

12—Fifteenth.

13—Cremona.
```

To which Crang added a Tenor f Swell of 6 Stops. The "Chorus" of Smith's Organ was originally a very fine one, but had been in bad hands. A new inside was put to the Organ, and the Case widened, by the insertion of a centre tower, by Mr. Hill, about the year 1840. On removing the old instrument, it was found to contain many wooden Pipes of Smith's construction, which the mellowing hand of time had rendered of more than ordinary value; which were accordingly incorporated with the new work. The present Organ, which is considered one of the finest in London, contains the following Stops:

Great, 20 Draw Stops.				
1—Tenoroon Diapason, to Tenor c key 16 feet.  2—Bourdon,to meet No.1. 16 feet tone.  3—Principal Diapason . 3 feet.  4—Stopped Diapason, Treble 8 feet tone.  5—Stopped Diapason, Bass 8 feet tone.  6—Dulciana, to Tenor c . 8 feet.  7—Claribel Flute, to Tenor c 8 feet.  8—Principal Octave 4 feet.	9—Wald Flute 4 feet.  10—Oboe Flute 4 feet.  11—Stopped Flute 4 feet tone  12—Twelfth 2 feet.  13—Fifteenth 2 feet.  14—Tierce 1 foot.  15—Sesquialtera, II ranks 1 foot.  16—Mixture II ranks 2 feet.  17—Doublette II ranks 2 feet.  18—Corno Trombone 8 feet.  19—Corno Clarion 4 feet.  20—Cremorne, to Tenor c 8 feet tone.			
	Draw Stops.			
21—Tenoroon Dulciana, to Tenor c key 16 feet.  22—Bourdon, to meet No. 21 16 feet tone.  23—Principal Diapason . 8 feet.  24—Stopped Diapason, Treble 8 feet tone.  25—Stopped Diapason, Bass 8 feet tone.  26—Principal Octave 4 feet.  27—Suabe Flute, to Tenor c 4 feet.  28—Flageolet, to Tenor c . 4 feet.	29—Twelfth			
Pedal, 2 Draw Stops.				
39—Great Diapason 16 feet.	40—Contra Posaune 16 feet.			
Accessory Stops, Movements, &c.  1—Coupler, Swell to Great.  2—Coupler, Great to Pedal.  3—Coupler, Swell to Pedal.  5, 6, 7, 8—Four Composition Pedals.				
Compass.				
Great Organ, CC to f <sup>3</sup> in alt, 54 notes. Swell Organ, CC to f <sup>3</sup> in alt, 54 notes.	Pedal Organ, CCC to BB, 12 notes. Pedal Clavier, CCC to Tenor a, 27 keys.			

### 155. St. Michael's, Cornhill.

The Organ in St. Michael's Church, Cornhill, was originally built by Renatus Harris, A.D. 1684. In the year 1789, a Swell was added, and other improvements made, by Green; and, in 1849, the Organ was entirely reconstructed by

Messrs. Robson, under the direction of Mr. Limpus, the present Organist, and now ranks as one of the finest instruments in the metropolis.

	Great Organ	n, 12 Stops.			
	Feet, Pipes.		Feet.	Pipes.	
1—Double Open Diapason,		7—Twelfth	3	56	
metal	16 56	8—Fifteenth	2	56	
2—Large Open Diapason	8 56	9—Sesquialtera, IV ranks.	2	224	
3—Open Diapason	8 56	10—Mixture IV ranks.	1 8	$\begin{array}{c} 224 \\ 56 \end{array}$	
4—Stopped Diapason	$\begin{array}{ccc} 8 & 56 \\ 4 & 56 \end{array}$	11—Trumpet	4	56	
5—Principal 6—Wald Flute	4 56	12—Clarion	-1		
o water interest in the second	1 00			1008	
	Choir Orga	an, 8 Stops.			
	Feet. Pipes.		Feet.	Pipes.	
13—Dulciana	8 56	18—Fifteenth	2	56	
14—Viol di Gamba	8 44	19—Bassoon	8	56	
15—Stopped Diapason	8tone. 56	20—Clarionet	8 to	ne. <b>44</b>	
16—Principal	4 56	6		101	
17—Flute, metal	4 tone. 56			424	
	Swell Organ	n, 12 Stops.			
	Feet. Pipes.		Feet.	Pipes.	
21—Double Diapason	16 tone. 56	28—Sesquialtera, III ranks.	$1\frac{3}{5}$	168	
22—Open Diapason	8 56	29—Mixture II ranks.	$\frac{2}{3}$	112	
23—Dulciana	8 54	30—Oboe	8	56	
24—Stopped Diapason	8 tone. 56	31—Horn	8	56	
25—Principal	4 56	32—Clarion	4	85	
26—Fifteenth	2 56			828	
27—Piccolo	2 56			848	
	Pedal, 3	3 Stops.			
	Feet. Pipes.		Feet.	Pipes.	
33—Open Diapason		35—Trombone, metal	16	30	
34—Stopped Diapason	16 tone. 30				
Accessory Stops, Movements, &c.					
1—Swell to Great.		5—Swell to Pedal.			
2—Swell to Choir.		5—Swell to Pedal. 6—Octave Pedal. 7, 8, 9, 10—Four Composit			
3—Great to Pedal.		7, 8, 9, 10—Four Composit	tion F	edals.	
4—Choir to Pedal.					
	Com	ipass.			
All the Manuel COL 2:		D. J. J. COO to Town f			

All the Manuals, CC to g3 in altissimo. | Pedal, CCC to Tenor f.

## Summary of Stops.

Swell Organ	$\frac{12}{12}$	828	Pedal Organ		Pipes.
Choir Organ	8	424			
9			•	41	2350

### 156. St. Stephen's, Walbrook.

The Organ in St. Stephen's Church, Walbrook, was built by George England, about the year 1760; and was paid for out of funds raised by subscription. The quality of tone of the instrument is very good throughout. The touch, however, is disagreeable. England's Organs, like Schmidt's, were always remarkable for the brightness and brilliancy of their Chorus. This was one of the distinguishing attributes of the Organ under consideration,—esteemed the best of England's make in London;—consequently, when the Organ was repaired, in 1825, by Mr. Gray, a second Open Diapason was added to the Great Organ, on the Cornet slider, and an octave of Unison Pedal Pipes introduced, which additions considerably enriched the Chorus of the Great Organ. The Organ now contains 26 Stops, of which the following is a list:

```
Great, 11 Stops.
 1—Open Diapason
                                          7—Fifteenth.
 2-Open Diapason.
                                          8—Furniture, III ranks.
                                         9—Mixture, . . II ranks.
10—Trumpet.
11—Clarion.
 3-Stopped Diapason.
 4-Principal.
 5-Nason.
 6-Twelfth.
                                 Choir, 6 Stops.
                                         15-Fifteenth.
12—Stopped Diapason.
13—Principal.
                                          16-French Horn.
14—Flute.
                                         | 17—Vox Humana.
                                 Swell, 8 Stops.
18—Open Diapason.
                                        22—Cornet, III ranks.
19—Stopped Diapason.
                                         23—Hautboy.
20-Principal.
                                         24—Trumpet.
21-German Flute.
                                         25—Clarion.
                                  Pedal, 1 Stop.
         26—Open Pipes GG to Gamut G, one octave, .. 10\frac{2}{3} feet length.
                                    Compass.
 1—Great, GG to e<sup>3</sup> in alt.
                                           4—Pedal Stop, one octave.
```

Accessory Stop.

5-Pedal Clavier, GG to Tenor c,

octave and a half.

Coupler Great to Pedal.

2-Choir, GG to e3 in alt.

3—Swell, Fiddle g to e3 in alt.

## 157. St. Edmund the King, Lombard Steeet.

The Organ in the Church of St. Edmund the King, Lombard Street, said to have been originally built by Harris, was entirely reconstructed by Bishop, in 1833. It is the first instrument that had a Swell descending so low as EE; the deepest compass previously adopted being to FF, in Green's Organ at Greenwich. The following is a list of the Stops in the above-named instrument:

```
Great, 7 Stops.

1—Open Diapason.

2—Stopped Diapason, Clarabella Treble
3—Principal.

4—Twelfth.

Great, 7 Stops.

5—Fifteenth.

6—Sesquialtera, III ranks.

7—Trumpet.
```

Choir, 5 Stops. 8-Dulciana to FF. 11—Flute. 12—Cremona to Tenor e. 9—Stopped Diapason. 10—Principal. Swell, 7 Stops. 13—Open Diapson 17—Fifteenth. 18—Hautboy. 19—Trumpet. 14—Stopped Diapason 15-Principal. 16—Twelfth.

### Pedal, 1 Stop.

20—Open Wood Pipes, GGG to CC,..211/3 feet length.

### Accessory Stops, Movements, &c.

1-Coupler, Swell to Great. 5—Coupler, Choir to Pedal. 6, 7, 8, 9—Four Composition Pedals. 10—Shifting Movement to Swell. 2-Coupler, Swell to Choir. 3-Coupler, Choir to Great. 4—Coupler, Great to Pedal. Compass. Great GG to f<sup>3</sup> in alt.

Choir, GG to f<sup>3</sup> in alt.

Swell, EE to f<sup>3</sup> in alt. Pedal, GG to Tenor c.

This Organ has a fourth Manual, which acts either on the Pedal Pipes, or on the Great or Choir Organs.

### 158. ST. MARY-AT-HILL.

The Organ at St. Mary-at-Hill is a very fine instrument, and was built in 1849, by Messrs. Hill and Co. It contains 30 Sounding Stops, distributed among 2 Manuals and Pedal, in the following manner:

### Great, 15 Stops.—Every Stop throughout.

210th, 20 20ps,	mining stop unioughous.			
1—Bourdon and Open Dia-	8—Super Octave	2 feet.		
pason 16 feet.	9—Walde Flute	4 feet.		
2—Open Diapason 8 feet.	10—Flageolet	2 feet.		
3—Gamba	11—SesquialteraIII ranks.			
4—Stopped Diapason 8 feet.	12—Mixture III ranks.			
5—Quint	13—Posaune	8 feet.		
6—Octave	14—Clarion	4 feet.		
7—Octave, Quint 3 feet.	15—Krum Horn	8 feet.		
Swell 12 Stops.				
16—Bourdon and Open Dia-	21—Suabe Flute	4 feet.		
pason 16 feet.	22—Octave Quint	3 feet.		
17—Open Diapason 8 feet.	23—Super Octave	2 feet.		
(Stonned Dianagen haca	24—Sesquialtera	3 ranks.		
18 Stopped Diapason, bass { 8 feet.	25—Cornopean	8 feet.		
19—Hohl Flute 8 feet.	26—Hautboy	8 feet.		
20—Octave 4 feet.	27—Clarion	4 feet.		
Pedal.	3 Stops.			

28—Open Diapason..... 16 feet. 30—Trombone. 8 feet.

### Accessory Stops, Movements, &c.

1—Coupler, Swell to Great.

2—Coupler, Great to Pedal.

3-Coupler, Swell to Pedal.

4, 5, 6—Three Composition Pedals.

### Compass.

Great, CC to f<sup>3</sup> in alt. Swell, CC to f<sup>3</sup> in alt.

Pedal, CCC to Tenor e.

### 159. St. Stephen, Coleman Street.

The Church of St. Stephen, Coleman Street, contains a very good Organ, built by Avery, in the year 1775. It has 21 sounding Stops, of which the following is a list:

### Great, 10 Stops.

1—Open Diapason.

2—Stopped Diapason.

3—Principal.

4-Twelfth. 5—Fifteenth

6-Sesquialtera, III ranks.

7—Mixture.... II ranks.

8—Trumpet. 9—Clarion.

10—Cornet to middle c1, V ranks. These Stops are all throughout, except the Cornet.

### Choir, 5 Stops.

11—Stopped Diapason.

12-Principal.

13-Flute.

14—Fifteenth.

15—Cremona to Tenor c.

### Swell, 6 Stops.

Compass.

16—Open Diapason.

17—Stopped Diapason.

18—Principal.

19—Cornet III ranks.

20—Trumpet.

21—Hautboy.

# Great, GG to e<sup>3</sup> in alt, no GG+.

Choir, GG to e<sup>3</sup> in alt, no GG.

Swell, Fiddle g to e<sup>3</sup> in alt. Pedal Clavier, GG to Tenor c.

### 160. ST. BOTOLPH, ALDGATE.

There is a fine Organ in St. Botolph's Church, Aldgate. The Great Organ was made by Smith in 1676: the rest is by Byfield. The IV-rank Sesquialtera in the Great Organ commences with a Fifteenth. The following is a list of the Stops:

### Great, 8 Stops.

1—Open Diapason.

2-Stopped Diapason, metal Treble.

3—Principal.

4-Twelfth.

5—Fifteenth.

6-Sesquialtera, IV ranks. 7—Mixture.... II ranks.

8—Trumpet.

### Choir, 5 Stops.

9—Stopped Diapason, wood.

10—Dulciana to Tenor c, in place of Vox Humana.

11—Principal.

12—Flute, metal

13—Bassoon, to Tenor c; used to go through.

## Swell, 5 Stops.

14—Open Diapason.

15—Stopped Diapason.

16—Principal.

# 17—Fifteenth.

18—Hautboy.

### Compass.

Great, GG, short octaves, up to d3 in alt. | Swell, Tenor e to d3 in alt. Choir, GG, short octaves, up to d3 in alt. Pedal Clavier, octave and a half.

### 161. St. Ann's, Limehouse.

The new Organ in St. Ann's, Limehouse, was made by Gray and Davison, and is the same which those builders erected in the Great Exhibition building in 1851. It contains 34 Stops, of which the following is a list:

### Great, 13 Stops.

1—Double Open Diapason 2—Open Diapason 3—Open Diapason 4—Stopped Diapason 5—Octave 6—Stopped Flute 7—Twelfth	16 feet. 8 feet. 8 feet. 8 ft. tone. 4 feet. 4 ft. tone. 2 g feet.	8—Fifteenth       2 feet.         9—Flageolet, Open       2 feet.         10—Sesquialtera, III ranks $1\frac{5}{3}$ foot.         11—Mixture       II ranks $\frac{2}{3}$ foot.         12—Posaune       8 feet.         13—Clarion       4 feet.	
Choir, 8 Stops.			
14—Dulciana:	8 feet. 8 feet. 8 ft. tone. 8 ft. tone.	13—Octave 4 feet. 19—Flute, Open 4 feet. 20—Fifteenth 2 feet. 21—Clarinet 8 ft. tone.	
Swell, 9 Stops.			
22—Bourdon	16 ft. tone. 8 feet. 8 ft. tone. 4 feet. 2 feet.	27—Sesquialtera, III ranks.         28—Cornopean	
Pedal, 4 Stops.			

31—Grand Open Diapason	16 feet.	33—Grand Octave	8 feet.
32—Grand Bourdon	16 ft. tone.	34—Grand Bombarde	16 feet.

### Accessory Stops, Movements, &c.

1-Swell to Great.

2-Swell to Choir.

3-Great to Pedal. 4-Choir to Pedal. 5-Swell to Pedal. 6—Sforzando Pedal.

7 to 12—Stx Composition Pedals.

### Compass.

Great, CC to f<sup>3</sup> in alt. Choir, CC to f3 in alt. Swell Organ, Tenor c (4-ft. compass) to f<sup>3</sup> in alt. Swell Clavier down to CC, acting on Choir Organ below Tenor c. Pedal, CCC to Tenor e.

### 162. WESLEYAN CHAPEL, POPLAR.

There is a very fine Organ in the Wesleyan Chapel, Poplar. It was made by Hill, in 1847, and contains 3 Manuals, all of complete CC compass, a Pedal of 6 Stops, and 46 Sounding Stops, of which latter the following is a list:

Great	Organ,	1.5	Stons.

	O	, 1	
1—Double Open Diapason, to Tenor c	16 feet. 16 feet. 8 feet. 8 feet. 9 feet. 4 feet.	8—Octave Quint 9—Super-octave 10—Sesquialtera, III ranks. 11—Mixture II ranks. 12—Fourniture, III ranks. 13—Contra Trumpet 14—Posaune 15—Clarion	3 feet. 2 feet. 16 feet. 8 feet. 4 feet.
	Swell Organ	, 14 Stops.	
16—Double Open Diapason to Tenor c 17—Bourdon, to meet No. 1. 18—Open Diapason 19—Stopped Diapason Treble 20—Stopped Diapason, Bass 21—Dulciana to Tenor c	16 feet. 16 ft. tone. 8 feet. 8 ft. tone. 8 ft. tone. 8 feet.	22—Octave	4 feet. 4 feet. 5 feet. 7 feet. 1 feet. 8 feet. 8 feet. 4 feet.
	o icci.	25—0111101100000000000000000000000000000	T 1000,
Choir Organ, 10 Stops.			
30—Viol di Gamba 31—Hohl Flute, to Tenor c 32—Stopped Diapason, metal Treble to Tenor c, 33—Claribel 34—Gemshorn	<ul><li>8 feet.</li><li>8 feet.</li><li>8 ft.tone.</li><li>8 feet.</li><li>4 feet.</li></ul>	35—Wald Flute	4 feet. 2 feet. 2 feet. 8 ft. tone. 8 feet.
Pedal, 6 Stops.			
40—Open wood Bass 41—Metal Open Bass 42—Octave, metal	16 feet. 16 feet. 8 feet.	43—Octave Quint	6 feet. 4 feet. 16 feet.
A CONTRACTOR OF THE PROPERTY O	α.	78.77	

### Accessory Stops, Movements, &c.

	·
1—Coupler, Swell to Great.	5—Sforzando Pedal, uniting Great to
2—Coupler, Great to Pedal.	Swell.
3—Coupler, Swell to Pedal,	6, 7, 8—Three Composition Pedals.
4—Coupler, Choir to Pedal.	•

### Compass.

Great, CCC to  $6^3$  in alt, 54 notes. Swell, the same. Choir, the same. Pedal, CCC to Tenor d, 27 notes.

### 163. CHRIST CHURCH, SPITALFIELDS.

The Organ in this fine Church is one of the largest and best in the metropolis. It was originally built by Bridge in 1730, for the sum of £600, scarcely half its

real value. In 1822, it was repaired by Mr. Bishop, who introduced the Dulciana into the Choir Organ, in place of the III-rank Mixture. The instrument afterwards suffered materially from water, during the fire that occurred in the steeple, and was subsequently repaired and enlarged by Lincoln, in 1837, who added the Pedal Pipes to GGG, and extended the Swell to Tenor c, besides adding several new Stops. In 1852, the Organ underwent further enlargement, owing to the spirit and musical taste of the Rev. Mr. Stone, the Rector, which amplification was effected by Messrs. Gray and Dayison, under the direction of Mr. J. S. Noble, the Organist to the Church. The Spitalfields Organ now contains 45 Sounding Stops, distributed among 3 Manuals and Pedal, in the following manner:

### Great Organ, 16 Stops.

h. ltera, V ranks. e, II ranks. re, . III ranks. e.

### Swell Organ, 14 Stops.

17—Double Diapason.	24—Fifteenth.
18—Bourdon.	25—Sesquialtera, III ranks.
19—Open Diapason.	26—Mixture II ranks.
20—Open Diapason, to Tenor c.	27—Contra Fagotto.
21—Stopped Diapason, to Tenor c.	28—Cornopean.
22—Stopped Diapason Bass.	29—Oboe.
	30—Clarion.

### Choir Organ, 11 Stops.

31—Open Diapson.	37—Flageolet.
32—Stopped Diapason.	38—French Horn, to Tenor c.
33—Dulciana.	39—Trumpet, to Tenor c.
34—Principal.	40—Cremona.
35—Flute.	41—Bassoon.
36—Fifteenth.	

### Pedal Organ, 4 Stops.

Accessory Stops,	Movements, &c.
1—Coupler, Swell to Great.	7—Great Sub-octave to Pedal.
2—Coupler, Choir to Great.	8—Choir to Pedal.
3—Coupler, Swell to Choir.	9—Swell to Pedal.
4—Coupler, Great to Swell (Sforzando).	10—Octave Pedal Coupler.
5—Coupler, Choir Sub-octave to Great.	11 to 17—Seven Composition Pedals.
6—Coupler, Great to Pedal.	•

Compass.	Summary of Stops and Pipes.
Great, GG to f <sup>3</sup> in alt 59 n Choir, GG to f <sup>3</sup> in alt 59 n Swell, CC to f <sup>3</sup> in alt 54 n Pedal, partly GG to middle e . 34 n	cs. Choir 11 Stops 551 pipes. Swell 14 Stops 798 pipes.

### 164. St. Luke's Church, Old Street Road.

The Organ in St. Luke's Church, Old Street Road, was originally built by Bridge, but has been remodelled and almost entirely reconstructed by Gray and Davison. It now consists of 3 Manual Organs of complete compass; an independent Pedal; and 32 Stops, of which the following is a list:

Great, 14 Stops.

### 1-Sub-octave, Stopped ... 16 ft. tone. 3—Fifteenth . . . . . . . . . . . 2 feet. 9—Ottavina . . . . . . . . . . . . 2 feet. 2—Principal, Open . . . . . 3 fcet. 3—Principal, Open . . . . . 8 feet. 10—Seventeenth..... 1 5 foot. 4—Stopped Principal.... 8 ft.tone. 11—Sesquialtera, II ranks 1 ± foot. 4 feet. 12-Mixture . . . . II ranks ₹ foot. 5—Octave..... 6—Piccolo Flute . . . . . . 4 feet. 13—Trumpet ..... 8 feet. 7—Twelfth..... 3 feet. 14—Clarion..... 4 feet. Choir, 7 Stops. 15—Stopped Flute, Treble. 8 ft.tone. 29—Flageolet ...... 4 feet. 16—Stopped Bass..... 8 ft.tone. 20—Fifteenth.... 2 feet. 21—Clarinet..... 17—Dulciana ..... 8 feet. 8 ft. tone. 4 feet. Swell, 9 Stops. 22—Sub-octave, Stopped... 16 ft. tone. 27—Sesquialtera, III ranks $1\frac{3}{4}$ foot. 23—Principal ..... 8 feet. 28—Hautboy ..... 8 feet. 29—Cornopean.... 24—Concert Flute . . . . . 8 feet. 8 feet. 25—Octave . . . . . . . . . . . . 4 feet. 30—Clarion.... 4 feet. 26—Fifteenth. ..... 2 feet. Pedal, 2 Stops. 31—Grand Principal . . . . . 16 feet. 32—Grand Octave ..... 8 feet. Accessory Stops, Movements, &c. 1—Coupler, Swell to Great. 5—Coupler, Choir to Pedal. 2—Coupler, Swell to Great, Sub-octave. 6—Coupler, Swell to Pedal. 3—Coupler, Swell to Great, Super-7, 8, 9, 10—Four Composition Pedals.

### Compass.

Great, CC to f<sup>3</sup> in alt. Choir, CC to f in alt.

4—Coupler, Great to Pedal.

octave.

Swell, CC to f<sup>3</sup> in alt. Pedal, CCC to Tenor e.

11 Tremulant Swell.

### 165. St. Leonard's, Shoreditch.

This Organ was built by Bridge, in 1757, and contains the following Stops:

```
Great, 13 Stops.
 1-Open Diapason.
                                         7—Fifteenth.
 2—Open Diapason.
                                          8-Tierce.
                                          9—Sesquialtera, III ranks.
 3—Stopped Diapason.
 4—Principal.
                                         10—Furniture .. II ranks.
 5-Principal to middle c1, in place of
                                         11—Trumpet.
       V-rank Cornet.
                                         12—Trumpet.
 6—Twelfth.
                                         13—Clarion.
                                Choir, 6 Stops.
14-Open Diapason.
                                        17—Flute.
                                         18—Fifteenth.
15—Stopped Diapason.
16—Principal.
                                        19—Cremona to g.
                                Swell, 6 Stops.
                                         23-Fifteenth in place of III-rank Cornet.
20—Open Diapason.
21—Stopped Diapason.
                                         24—Hautboy.
22-Principal.
                                         25—Trumpet.
                                   Compass.
    Great, GG to e3 in alt.
                                              Pedal Clavier, octave and a half;
    Choir, GG to e³ in alt.
Swell, Fiddle g to e³ in alt.
                                                   GG to Tenor c.
```

### 166. HACKNEY.

There is a fine Organ in St. John's Church, Hackney, built by Snetzler. It was. originally made for the old Church, in which edifice it was first erected; but, on the completion of the new Church, it was removed thither, and underwent an extensive repair by Mr. England, in 1797. The compass of the instrument was extended, by being made "long octaves;" a second Open Diapason was introduced into the Great Organ; also a Tierce; the Great and Choir Organs were both provided with new and larger Sound-boards; and the entire instrument was completely remodelled and enclosed in a new Case of mahogany. When the Church was beautified in 1828, the Organ underwent further enlargement and improvement at the hands of the late Mr. Gray, who added an octave of Double Open Pedal Pipes to CCC; a Dulciana to the Choir Organ, in place of the Vox Humana; extended the Swell from Tenor f as far as Tenor c; introduced two Manual Couplers to unite the Swell and Choir to the Great Organ; applied three Composition Pedals to the Great Organ; laid down an Octave and a half of Pedals; and provided the instrument with a new pair of Horizontal Bellows. The Organ now contains 25 Sounding Stops, of which the following is a list:

```
Great, 12 Stops.

1—Open Diapason.
2—Open Diapason.
3—Stopped Diapason, metal to Middle c¹.
4—Principal.
5—Twelfth.
6—Fifteenth.

Great, 12 Stops.
7—Tierce.
8—Sesquialtera, III ranks.
9—Mixture... II ranks.
10—Cornet, to Middle c¹, V ranks.
11—Trumpet.
12—Clarion.
```

```
Choir, 6 Stops.
                                        16—Flute, metal.
13—Stopped Diapason, wood.
                                        17—Fifteenth.
14—Dulciana.
                                       18—Bassoon throughout.
15-Principal.
                               Swell, 6 Stops.
19—Open Diapason.
                                        22—Cornet, III ranks.
20-Stopped Diapason, metal to Mid-
                                        23-Hauthoy.
                                        24—Trumpet.
       dle e1.
21—Principal.
                                Pedal, 1 Stop.
            25—Open Pipes, one octave, CC to CCC, 16 feet length.
```

Accessory Stops, Movements, &c.

```
1—Coupler, Swell to Great.
2—Coupler, Choir to Great.
3—Coupler, Great to Pedal.

Compass.

Great, GG to f³ in alt.
Choir, GG to f³ in alt.
Pedal Clavier, GG to Tenor c.
```

The quality of tone of the instrument is excellent throughout. The old Open Diapason, by Snetzler, is of very superior tone; the second one, added by England, is also a very good Stop, and mixes well with the rest of the instrument. The metal Stopped Diapasons in the Great and Swell are very clear and pure in quality. The instrument possesses the advantages of standing in a good situation, and being placed in a Church that is favorable to sound.

# 167. St. Mary's Catholic Chapel, Moorfields.

The Organ in St. Mary's Catholie Chapel, Moorfields, was built by Bevington and Son. It contains 31 Sounding Stops, of which the following is a list:

```
Great, 13 Stops.
                                        8—Twelfth.
 1—Open Diapason, metal, No. 1.
 2—Open Diapason, ditto, No. 2.
                                        9—Fifteenth.
                                       10—Sesquialtera, IV ranks.
 3—Open Diapason, small, No. 3.
                                       11—Mixture... III ranks.
 4—Stopped Diapason, No. 1.
                                       12—Trumpet.
 5—Stopped Diapason, No. 2.
                                       13-Clarion.
 6—Principal, large, No. 1.
 7—Principal.....No. 2.
                               Choir, 8 Stops.
                                      18—Flute.
14—Open Diapason.
15—Stopped Diapason.
                                       19—Fifteenth.
                                       20-Mixture, III ranks.
16—Dulciana.
                                      21—Cremorne.
17—Principal.
                               Swell, 9 Stops.
                                       27—Cornet, III ranks.
22—Double Diapason.
                                       28—Trumpet.
23—Open Diapason.
                                       29—Clarion.
24—Stopped Diapason.
25—Claribel.
                                       30-Oboe.
26—Principal.
```

# Pedal, 1 Stop.

31—Open Pipes from CC down to FFFF. . 24 feet length.

Accessory Stops, Movements, &c.

1, 2, 3—Three Couplers.

4 to 12—Nine Composition Pedals.

Compass.

Great, FFF to f<sup>3</sup> in alt. Choir, FFF to f3 in alt.

Swell, FF to f3 in alt. Pedal, FFF to Tenor c.

#### 168. ST. MARK'S, PENTONVILLE.

A fine Organ, built by Gray. It contains 26 Sounding Stops, of which the following is a list: Great, 10 Stops.

1—Open Diapason.

2—Open Diapason.

3-Stopped Diapason.

4—Principal.

5—Twelfth.

11—Open Diapason.

12—Stopped Diapason.

13—Dulciana.

14-Principal.

19—Double Dulciana.

20—Open Diapason.

21—Stopped Diapason.

22—Principal.

6—Fifteenth.

7—Sesquialtera, III ranks.

8—Mixture.... II ranks.

9—Trumpet. 10—Clarion.

Choir, 8 Stops.

15—Flute.

16—Fifteenth.

17—Bassoon.

18—Cromorne.

Swell, 7 Stops.

23—Dulciana.

24—Hautboy.

25-Trumpet.

Pedal, 1 Stop.

26—Open Pipes to CCC, 16 feet length.

# ST. DUNSTAN'S IN THE WEST, FLEET STREET.

The Organ in St. Dunstan's Church, Fleet Street, was built by T. R. Robson, in It contains 24 Sounding Stops, of which the following is a list: 1834.

Great, 9 Stops.

1—Open Diapason, large.

2—Open Diapason, small.

3—Stopped Diapason. 4—Principal.

5—Twelfth.

10 - Dulciana, all through.

11—Stopped Diapason.

12—Principal.

13—Flute.

17—Double Diapason.

18—Open Diapason.

19—Stopped Diapason.

20—Principal.

6-Fifteenth.

7—Sesquialtera, III ranks.

8—Mixture.... II ranks. 9—Trumpet.

Choir, 7 Stops.

14—Fifteenth.

15—Cremona.

16—Bassoon.

Swell, 7 Stops.

21—Flute.22—Trumpet.23—Oboe.

# Pedal, 1 Stop. 24—Open Pipes, CC down to GGG.. $21\frac{1}{3}$ feet.

Accessory Stops,	Movements, &c.		
1—Coupler, Swell to Great.	4—Choir to Great, Sub-octave.		
2—Coupler, Great to Pedal.	5, 6, 7—Three Composition Pedals.		
3—Coupler, Choir to Pedal.			
Compass.			
Great, GG with GG# to f <sup>3</sup> in alt.	Swell, Tenor f to f <sup>3</sup> in alt.		
Choir, the same.	Pedal, GG to Tenor c.		

# 170. FOUNDLING HOSPITAL.

The new Organ for the Foundling Hospital is being built by Bevington, from a Specification prepared by Mr. Willing, the Organist to the Chapel. It is to consist of 49 Sounding Stops, 3 Manuals, and Pedal. The following is a list of the Stops which it is to contain:

Great, 18 Stops.		
Pipes. Feet.	Pipes. Feet.	
1—Double Open Diapa-	9—Principal, No. 2 61 4	
son to the Tenor c	10—Wald Flute, to Te-	
key 4916	nor c 49 4	
2—Bourdon, CCC to BB. 1216 tone.	11—Twelfth	
3—Open Diapason, No. 1, 61 8	12—Fifteenth 61 2	
4—Open Diapason, No. 2, 61 8	13—Sesquialtera 244 IV rks.	
5—Open Diapason, No. 3,	14—Mixture 183 III rks.	
large scale 61 8	15—Furniture 183 III rks.	
6—Stopped Diapason,	16—Trumpet 61 8	
through 61 8 tone.	17—Tromba, Solo Stop 49 8	
7—Clarabella, to Fiddle g 42 8	18—Clarion 61 4	
8—Principal, No.1 61 4		
Choir, 1	1 Stops.	
Pipes. Feet.	Pipes. Feet.	
19—Dulciana Treble 49 8	25—Suabe Flute, Tenor c. 494	
20—Dulciana Bass 12 8	26—Fifteenth 61 2	
21—Viol da Gamba, Te-	27—Piccolo, Tenor c 49 2	
nor c 49 8	28—Double Bassoon, Te-	
22—Stopped Diapason 61 8 tone.	nor e	
23—Principal 61 4	29 Clarionette, Tenor e 49 8 tone.	
24—Wald Flute, Tenor c. 49 4		
Swell, 1	5 Stops.	
Pipes. Feet.	Pipes. Feet.	
30—Double Open Diapa-	36—Viol da Gamba, Te-	
son, to Fiddle G key 4216	nor c 49 8	
31—Bourdon Bass, CCC	37—Principal 61 4	
to FF# 1916 tone.	38—Open Flute, Tenor c. 49 4	
32—Open Diapason 61 8	39—Triplet183 III rks.	
33—Stopped Diapason,	40—Doublette122 II rks.	
Treble 49 8 tone.	41—Trombone 6116	
34—Stopped Diapason,	42—Cornopean 61 8	
Bass 12 8 tone.	43—Oboe 61 8	
35—Dulciana, Tenor c 49 8	44—Clarion 61 4	
Pedal, 5 Stops.		
Pipes. Feet.	Pipes. Feet.	
45—Open Diapason, wood 3016	48—Principal metal 30 8	
46—Open Diapason, metal 3016	49—Trombonemetal 3016	
47—Bourdon wood 3016 tone.		

```
Also, by means of an octave coupler, and an additional octave of Pipes above Tenor f,
                                                            Pipes. Feet.
                      Pipes. Feet.
 a—Octave . . . . wood . . 12.. 8
                                      d—Fiftcenth . . metal . . 12 . . 4
 b—Principal .. metal . 12.. 8
                                       e—Trumpet .. metal.. 12.. 8
 c—Bass Flute.. wood . 12.. 8 tone.
                      Accessory Stops, Movements, &c.
 1-Swell to Great.
                                       5-Pedal to Choir.
 2-Swell to Choir.
                                       6—Octave up to Great.
 3-Pedal to Great.
                                       7 to 15—Nine Composition Pedals.
 4-Pedal to Swell.
                                Compass.
  Great, CC to c4 in altissimo, 5 com-
                                        Pedal Organ, CCC to Middle f1,
       plete octaves.
                                             3 doctaves.
  Choir, CC to c4 in altissimo, ditto.
                                        Pedal Clavier, CCC to Tenor f,
  Swell, CC to c4 in altissimo, ditto.
                                             2\frac{1}{2} octaves.
                   171. St. Clement Dane's, Strand.
   A good Organ, built by Schmidt, and altered by Hill.
                             Great—GG to D.
 1—Open Diapason.
                                       6-Twelfth.
 2—Open Diapason, Gamut G.
                                       7—Fifteenth.
                                       8—Sesquialtera, IV ranks.
 3—Stopped Diapason.
 4-Principal.
                                       9—Mixture . . . III ranks.
                                      10—Trumpet.
 5-Flute.
                             Choir—GG to D.
11—Stopped Diapason.
                                      14-Fifteenth.
12—Principal.
                                      15—Cremona.
13-Flute.
                           Swell—Tenor F to D.
16—Open Diapason.
                                      20—Trumpet.
17—Stopped Diapason.
                                      21—Oboe.
18—Principal.
                                      22—Clarion.
19—Cornet, IV ranks.
                               Pedal, 1 Stop.
                 23-1\frac{1}{2} octave of Pedal Pipes, GG (unisons).
                        172.
                              ST. MARTIN'S HALL.
    The new Organ for St. Martin's Hall is being built by Messrs. Hill and Co.
When completed, it will contain the 40 Sounding Stops mentioned below:
                               Great, 14 Stops.
  1-Double Open Diapason,
                                       4 feet.
                                        9—Octave Quint . . . . .
       metal and wood .. 16 feet.
                                                              2 ₹ feet.
  2—Open Diapason . . . .
                          8 feet.
                                       10—Fifteenth . . . . . . . . .
                                                                2 feet.
                                       11—Sesquialtera, III ranks. 2 feet.
  8 feet.
                                       12—Mixture.... II ranks.
  4—Stopped Diapason ...
                          8 feet tone.
                                       8 feet.
  6—Principal . . . . . . . . .
                          4 feet.
                                       4 feet.
                          4 feet.
  7—Gemshorn .....
                              Choir, 11 Stops.
                                                                2 feet.
 15—Bourdon, throughout . 16 feet tone.
                                       21—Fifteenth.....
 16—Dulciana . . . . . . . .
                          8 feet.
                                       2 feet.
                                       23—Cymbal, II ranks.
 8 feet.
 18—Stopped Diapason ...
                          8 feet tone.
                                       24—Double Bassoon . . . . 16 feet.
                                       25—Clarinet . . . . . . . . .
 4 feet.
                                                                8 feet tone.
 4 feet tone.
```

#### Swell, 10 Stops. 31-Mixture, III ranks. 26—Double Stopped Diapason...... 16 feet tone. 32—Hautboy.... 8 feet. 27—Open Diapason . . . . 8 feet. 33—Cornopean.... 8 feet. 34—Clarion.... 4 feet. 8 feet tone. 28—Stopped Diapason . . . 4 feet. 35—Vox Humana.... 8 feet tone. 29—Principal . . . . . . . . 2 feet. 30—Fifteenth.... Pedal, 5 Stops. 36—Open Diapason . . . . 16 feet. 39—Principal ..... 37—Violone . . . . . . . 16 feet. 40—Posaune . . . . . . . 16 feet. 38—Bourdon . . . . . . 16 feet tone. Accessory Stops, Movements, &c. 1-Swell to Great. 3-Choir to Pedal. 2-Great to Pedal. 4, 5, 6—Three Composition Pedals. Compass. Swell, Tenor c to a3 in altissimo. Great, CC to a<sup>3</sup> in altissimo. Choir, CC to a<sup>3</sup> in altissimo. Pedal, CCC to Tenor f.

### 173. GERMAN LUTHERAN CHURCH, SAVOY, STRAND.

The Organ in the German Lutheran Church in the Savoy, Strand, was built by Snetzler. It contains 18 Stops, of which the following is a list:

Swell, 4 Stops.			
Accessory Stops, Movements, &c.			
3			
Compass.			
c.			
s			

#### 174. EXETER HALL.

The large Organ in Exeter Hall was built expressly for the Sacred Harmonic Society, in the year 1839, by Mr. Joseph William Walker, of Francis Street, Tottenham Court Road. The exterior, which corresponds with the architecture of the Hall, was designed by Mr. Robert R. Banks. The width of the instrument is thirty feet, and the height forty; the depth in the lower part is four feet six inches only, the Directors of the Hall having limited the builder to these dimen-

sions, to prevent a loss of space on the platform when public meetings are held. Within this lower part, the bellows, four in number, are placed; while above, at the height of twelve feet from the floor, comes the main body of the Organ, carried out on projecting cantilions or consoles. Over each console rises a circular turret of gilt pipes, surmounted by an ornament imitative of that beautiful ancient specimen, the choragic monument of Lysicrates. The two centre towers are considerably higher than the outer ones, and project five feet each beyond the body of the instrument; the longest pipes in these towers measure twenty feet from the base and sixteen from the body (C and C sharp); the circumference is fortyfive inches, the diameter fifteen inches, and the weight of each four cwt. whole front of the organ, including the circular ends (which are novel features in the design), is divided into eleven compartments of gilt pipes. The keys are so arranged that the organist, when playing, faces the conductor and the audience, instead of sitting with his back towards them. In 1849, the Pneumatic action for lightening the touch was added to the Organ, this being the first instance of its employment by any of the London builders. Larger and more powerful Reed Stops were at the same time introduced into the Great Organ and Swell. Still more recently, the instrument was enlarged and partly remodelled, under the direction of Mr. Brownsmith, Organist to the Society for which it was built. Two Reeds on a heavy pressure of wind were added to the Swell, and the Double Diapason turned into a Second Unison Open; the compass of the Swell was extended from FF down to CC; a third Open Diapason and a Second Principal were introduced into the Great Organ, and the system of equal temperament adopted for the tuning; the latter improvement at the suggestion of Mr. Costa.

The Organ now contains 41 Sounding Stops, of which the following is a list:

```
Great, 13 Stops.
 1—Open Diapason.
                                          8—Fifteenth.
 2—Open Diapason, large.
                                          9-Sesquialtera, III ranks.
 3—Open Diapason, small.
                                         10—Mixture, .. II ranks.
11—Furniture, .. II ranks.
 4—Stopped Diapason.
 5—Principal, large.
                                         12—Trumpet.
 6-Principal.
                                         13—Clarion.
 7-Twelfth.
                                 Choir, 7 Stops.
14—Open Diapason.
                                         18-Metal Flute.
15—Stopped Diapason.
                                         19—Fifteenth.
16—Dulciana to FF.
                                         20—Cremona to Fiddle g.
17-Principal.
                                Swell, 13 Stops.
21—Open Diapason.
                                         28—Sesquialtera, III ranks.
22—Open Diapason, large.
                                         29—Horn.
23—Stopped Diapason.
                                         30—Oboe.
24—Dulciana.
                                         31-Clarion.
25-Principal.
                                         32-Ophicleide, 8 feet, )
26—Metal Flute.
                                         33—Ophicleide, 4 feet, \( \) heavy wind.
27-Fifteenth.
```

# Pedal, 8 Stops.

36 - Open Diapason, metal. 16 feet.	38—Fifteenth		
Accessory Stops, Movements, &c.			
1—Swell to Great. 2—Choir to Great. 3—Great to Pedal. 4—Choir to Pedal.	6 to 12—Seven Composition Pedals; viz. 3 to Great, 2 to Swell, and 2 to Pedal. 13—Pneumatic attachment.		

# Compass.

Great and Choir, FFF to  $g^3$  in altissimo. Pedal, CCC to Tenor e. Swell, CC to  $g^3$  in altissimo.

#### 175. St. Martin-in-the-Fields.

This Organ, built by Messrs. Bevington, for the Parish Church of St. Martin-in-the-Fields, erected by voluntary subscription, 1854, contains three Manuals, from CC to G in alt (56 keys), and Pedal Organ,  $2\frac{1}{2}$  Octaves (30 keys); Two Pairs of double-action Bellows, with inverted rib, 10 feet long by 7 feet wide, and 59 Register Stops.

The whole is enclosed in two richly carved cases of solid Wainscoat Oak, from the designs of Thomas Allom, Architect, M. I. B. A. The large case, 29 feet in height by 19 feet in width, contains the Great, the Swell, and the Pedal Organs, all the gilt front Pipes, forming the lower notes of the Diapasons, the centre Pipe, CCC, being 18 feet in length. The smaller Case in front of the lower Gallery, 10 feet wide by 12 feet in height, contains the Choir Organ, the front gilt Pipes also forming a portion of the interior Stops.

# Great Organ, CC to G, 18 Stops.

	Great organ, od to G, To Stops.	
Stops.		Pipes.
1—Double Diapason,	metal CCC. 16 ft. )	12
2—Ditto, ditto	ditto	44
3—Open Diapason,	ditto, large seale, No. 1 8 ft	56
4—Ditto, ditto	ditto	56
5—Hohl Diapason	ditto	44
6—Stop Diapason,	wood	12
7—Claribel	ditto	44
8 - Principal	No. 1 4 ft.	56
	fth 6 ft	56
	3 ft.6 in	56
	3 ft	56
	2 ft.	56
13—Sesquialtera, IV	anks	224
	ranks	168
	ranks	168
		44
		56
	4 ft.	56
10 0	**********************	90

Swell Organ, CC to G.		
Stops.	Pipes.	
19—Bourdon, Double Diapason, wood 16 ft. tone. 20—Double Diapason, metal	56	
21—Open Diapason, metal CC. 8 ft	56	
22—Dulciana, small scale metal, Tenor C 8 ft	44	
23—Stop Diapason		
24—Ditto, ditto	56	
25—Flute	56	
26—Principal	56	
27—Twelfth	56	
28—Fifteenth	56	
29—Sesquialtra, IV ranks	280	
30—Trombone, double reed CCC. 16 ft.	56	
31—Cornopean	56	
32—Oboe	56	
• 33—Clarion	56	
Oldifoli.		
	940	
Choir Organ, CC to G.	010	
34—Bourdon Double Diapason, wood 16 ft. tone.		
35—Double Diapason, ditto, Tenor C. 16 ft.	56	
36—Open Diapasonmetal CC 8 ft	56	
37—Viol de Gamba	44	
38—DulcianaTenor C. 8 ft.	44	
39—Claribel	)	
40—Stop Diapason Bass. \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	56	
41—Principal	56	
42—Flute	56	
43—Mixture, III ranks	168	
44—ClarionetTenor C. 8 ft.	44	
45—Bassoon, double reed Tenor C. 16 ft.	44	
10 Bussoon, double feed		
	624	
Pedal Organ, CCC to F.—30 Notes.		
46—Great Open Diapason, wood	30	
47—Bourdon	30	
48—Unison Open Diapason . metal 8 ft	30	
49—Unison Stop Diapasonwood	30	
50—Principal	30	
51—Great Trombone metal 16 ft.	30	
52—Trumpetmetal	30	
53—Quint and Decima metal	60	
54—Twelfth and Fifteenth . metal	60	
or anomal third introduction and the second		
Movements.	330	
	000	
Nine Composition Pedals—Three to each Organ.		
3 to Great Organ		
3 to Choir Organ to shift the Stops.		
3 to Swell Organ		

# Five Couplers; viz.

1—Pedals	to	Great	Organ	Keys.
2—Pedals	to	Choir	Organ	Keys.

<sup>4—</sup>Swell Manual to Great Manual. 5—Swell Manual to Choir Manual.

<sup>3—</sup>Pedals to Swell Organ Keys.

The Stops belonging to the Great Organ have their names engraved in white letters on a blue ground. Those of the Swell, white letters on a red ground. The Choir Organ, black letters on Mother-of-Pearl. The Pedal Organ, red letters on plain Ivory.

Total.		
Draw Stops	4	Pipes.
Great Organ 18		1264
		940
D 110		330
Choir Organ 12		624
Couplers 5		
A street		
59		3158

# 176. CHAPEL ROYAL, WHITEHALL.

This Organ was originally built by Father Schmidt The Case and some of the original Wood Pipes remain to this day. It is in oak, of noble design, with four towers, and most elaborately carved, about 24 feet high by 10 feet in breadth, surmounted with the Royal Arms. It was rebuilt in 1814, by Elliott; it then had 20 Stops. In 1844, Messrs. Hill and Son added an entire new Swell, of large dimensions, and other improvements, at the suggestion of the officiating Organist, Mr. Massey. The Organ now contains 4 Manuals and 33 Sounding Stops. Compass, from GG to F in alt. Pedal Pipes from FFF up, twenty-one notes to D, with Choir Organ in front of the Gallery.

```
Great, 8 Stops.
                                          5—Fifteenth.
 1—Open Diapason.
                                         6—Sesquialtera, III ranks. 7—Mixture,...II ranks.
 2—Stopped Diapason.
 3—Principal.
 4—Twelfth.
                                         8—Trumpet.
                                Choir, 6 Stops.
                                        12—Viol da Gamba.
 9—Open Diapason.
                                        13—Principal.
10—Stopped ditto (Treble)
11—Ditto ditto (Bass)
                                        14—Bassoon.
                         Swell, 14 Stops.—Down to FF.
15-Bourdon.
                                        22-Fifteenth.
16 -Tenoroon.
                                         23—Sesquialtera,
17—Open Diapason
                                         24-Mixture.
18 - Claribella.
                                        25—Corno (Basso).
19—Stopped Diapason (Bass).
                                        26-Cornopean.
                                        27—Clarion.
20—Flageolet.
                                        28-Hautboy.
21—Principal.
                                Solo, 4 Stops.
                                       | 31-Flute.
29—Open Diapason.
30-Stopped Diapason.
                                        32—Cromorne.
                                 Pedal, 1 Stop.
                          Open Pipes to FFF, 12 feet.
                                    Couplers.
                                          3—Swell to Great.
 1—Pedals to Great.
                                          4-Swell to Choir (octave below).
 2-Ditto to Choir.
```

# 177. St. Margaret's, Westminster.

The fine Organ in St. Margaret's Church, Westminster, was built by Avery, in 1804, and cost eight hundred guineas and the old Organ by Father Smith, for which Avery allowed two hundred pounds. The present instrument contains the following Stops:

```
Great, 11 Stops.
 1-Open Diapason.
                                           7—Fifteenth.
                                           8-Tierce.
 2—Stopped Diapason.
 3-Clarabella, in place of Cornet.
                                           9—Sesquialtera, III ranks.
                                          10-Mixture, .. II ranks.
 4—Principal.
 5-Nason.
                                          11-Trumpet.
 6-Twelfth.
                                 Choir, 7 Stops.
12—Stopped Diapason.
                                         16—Fifteenth.
13—Dulciana.
                                          17-Furniture, II ranks.
14-Principal.
                                          18—Cremona.
15—Flute.
                                 Swell, 6 Stops.
19—Open Diapason.
                                         22-Cornet, III ranks.
                                          23—Trumpet.
20—Stopped Diapason.
                                        24—Hautboy.
21—Principal.
                                 Pedal, 1 Stop.
      25—Open Pipes, one Octave, Gamut G down to GG, 10<sup>2</sup>/<sub>3</sub> feet length.
                                    Couplers.
 1—Swell to Great.
                                           3-Choir to Pedal.
 2-Great to Pedal.
                                    Compass.
    Great, GG to f3 in alt.
                                              Swell, Fiddle g to f3 in alt.
    Choir, GG to f<sup>3</sup> in alt.
                                             Pedal, GG to Gamut G, one octave.
```

### 178. St. Philip's, Waterloo Place.

The Organ in St. Philip's Chapel, Waterloo Place, is a very good instrument, built by Davis. It consists of the following Stops:

19—Open Pipes to CCC.

```
Great, 8 Stops.
 1—Open Diapason.
                                          5—Fifteenth.
 2—Stopped Diapason.
                                          6—Sesquialtera, III ranks.
 3-Principal.
                                          7—Mixture, . . . II ranks.
 4—Twelfth.
                                         8—Trumpet.
                                 Choir, 4 Stops.
 9—Stopped Diapason.
                                         11—Principal.
                                        12—Flute.
10—Dulciana.
                                 Swell, 6 Stops.
                                         16—Cornet, III ranks.
17—Trumpet.
13—Open Diapason.
14—Stopped Diapason.
15-Principal.
                                        18—Hautboy.
                                 Pedal, 1 Stop.
```

# 179. St. James's, Piccadilly.

The Organ, by Harris, that was placed in this Church immediately after its erection, was given by Queen Mary, in 1691; having been before "in ye Greate Chappell at Whitehall, which heretofore ye Papist possessed." In 1852, an entirely new inside was put to the instrument, with the exception of a fine Metal Stopped Diapason and the front Open Diapason, which are retained. The handsome old Case is also preserved; the new Choir Organ being enclosed in a new and separate Case, placed in front of the Gallery. The present instrument contains 36 Sounding Stops, distributed among 3 Manuals and Pedal in the following manner:

# Great, 12 Stops.

Great, 12 Stops.			
1—Open Diapason 8 feet. 2—Open Diapason 8 feet. 3—Stopped Diapason,—	7—Twelfth 2 feet.  8—Fifteenth 2 feet.  9—Sesquialtera, III rnks. 15 foot.  10—Mixture, III rnks. 4 foot.  11—Posaune 8 feet.  12—Clarion 4 feet.		
Swell, 1	1 Stops.		
13—Bourdon       16 feet tone.         14—Open Diapason       8 feet.         15—Stopped Diapason       8 feet tone.         16—Principal       4 feet.         17—Fifteenth       2 feet.         18—Sesquialtera, III rnks       1 \( \frac{3}{5} \) foot.	19.—Mixture, III ranks. $\frac{4}{5}$ foot.20.—Contra Fagotto16 feet.21.—Cornopean8 feet.22.—Hautboy8 feet.23.—Clarion4 feet.		
Choir, 10 Stops.			
24—Open Diapason       8 feet.         25 { Clarabella Treble       8 feet.         26—Dulciana       8 feet.         27—Viol de Gamba       8 feet.         28—Principal       4 feet.	29—Flute 4 feet.   30—Fifteenth 2 feet.   31—Piccolo, 2 feet.   32 { Cremona Treble } 8 feet.   32 { Bassoon Bass } 8 feet.		
Pedal, 4 Stops.			
33—Open Diapason 16 feet. 34—Bourdon 16 feet tone.	35—Principal		
Accessory Stops, Movements, &c.			
1—Coupler, Swell to Great. 2—Coupler, Choir to Great. 3—Coupler, Swell to Choir. 4—Coupler, Great to Pedal.	5—Coupler, Swell to Pedal. 6—Coupler, Choir to Pedal. 7 to 15—Nine Composition Pedals.		
Compage			

Compass.

# 180. St. George's, Hanover Square.

The Organ in St. George's Church, Hanover Square, was built by Gerard Smith, and has been repaired by Bishop.

and has been repaired by Bishop.			
Great,	9 Stops.		
1—Open Diapason. 2—Open Diapason. 3—Stopped Diapason.	6—Fifteenth. 7—Sesquialtera, III ranks. 8—Trumpet.		
4—Principal. 5—Twelfth.	9—Clarion.		
	6 Stops.		
10—Stopped Diapason Bass, Claribella	13—Flute.		
Treble	14—Fifteentlı.		
11—Dulciana. 12—Principal.	15—Cremona.		
*	a Change		
	6 Stops.		
16—Open Diapason. 17—Stopped Diapason.	20—Hautboy.		
18—Principal.	19—Trumpet. 20—Hautboy. 21—Octave Hautboy.		
Pedal, one l	Pipe, viz. GG#.		
Accessory Stops	, Movements, &c.		
<ul><li>1—Coupler, Swell to Great.</li><li>2—Coupler, Great to Pedals.</li></ul>	3—Coupler, Choir to Pedals. 4, 5, 6—Three Composition Pedals.		
Con	apass.		
Great, GG to $e^3$ in alt. Choir, GG to $e^3$ in alt. Swell, Tenor c to $e^3$ in alt.	Swell Clavier, down to GG, acting on Choir Organ below Tenor c. Pedal Clavier, GG to Tenor c.		
131. HANOVER SQUARE ROOMS.			
The new Organ in the Concert Room, Hanover Square, was built by Gray and			
Davison. It contains 17 Stops, of which	and the second s		
Great,	10 Stops.		
1—Open Diapason 8 feet.	6—Flute 4 feet.		
2—Clarinet Flute to Tenor	7—Twelfth		
3—Dulciana, to Tenor c 8 feet.	8—Fifteenth 2 feet. 9—Sesquialtera, III rnks. 13 foot.		
4—Stopped Diapason, Bass 8 feet tone	10—Trumpet 8 feet.		
5—Octave 4 feet.			
Swell, 6 Stops.			
11—Double Stopped Dia-	14—Octave 4 feet.		
pason 16 feet tone. 12—Open Diapason 8 feet.	15—Fifteenth 2 feet.   16—Cornopean 8 feet.		
13—Stopped Diapason, 8 feet tone.	1		
T. 1.1	4 0		

Accessory Stops, Movements, &c.

17—Grand Open Diapason .....

Pedal, 1 Stop.

1—Swell to Great.

2-Great to Pedal.

3, 4, 5—Three Composition Pedals.

16

#### Compass.

Great, CC to  $f^3$  in alt. Swell Organ, Tenor c to  $f^3$  in alt. Swell Clavier, to CC, acting on Great below Tenor c. Pedal, CCC to Tenor e.

#### 182. THE CYCLORAMA.

The new Apollonicon Organ in the Colosseum, Regent's Park, was erected by Bevington and Sons, to accompany the Diorama of Lisbon. It contains 3 Manuals, a Pedal Organ, and 47 Sounding Stops.

# Great, 16 Stops.

Great, 16 Stops.			
1—Tenoroon.	9—Super Octave.		
2—Bourdon.	10—Doublette II ranks. 11—Sesquialtera,IV ranks.		
3—Unison, metal.	11—Sesquialtera, IV ranks.		
4—Unison, wood.	12—Furniture, III ranks.		
5—Claribella.	13—Trumpet.		
6—Contra Bass.	14—Trombone. 15—Clarion.		
7—Octave.	15—Clarion.		
8—Twelfth.	16—Octave Clarion.		
Solo, 13	Stops.		
17—Double Stopped Diapason, 16 ft. tone.	23—Suabe Flute.		
18—Salcional.	24—Piccolo.		
19—Viol da Gamba.	25—Bassoon.		
20—Claribella.	25—Bassoon. 26—Clarionet. 27—Oboe.		
21—Unison, Bass.	27—Oboe.		
22—Wald Flute.			
Swell, 15 Stops.			
28—Tenoroon.	36—Flageolet.		
29—Flauto Unisone, metal.	37—Triplette.		
30—Flauto Unisone, wood.	38—Posaune.		
31—Quint.	39—Cornopean.		
32—Octave	40—French Horn.		
33—Wald Flute.	41—Clarion.		
34—Octave Quint.	42—Octave Clarion.		
35—Doublette.			
Pedal, 5 Stops.			
	1		
	46—Great Ophicleide 16 feet. 47—Trombone 8 feet.		
	47—Trombone		
*			
	1 1 1100 : 0 :1 0:		

A set of Kettle Drums, Triangle, Cymbals, and Effects for the Storm, worked by the one performer.

The roll of the drum is done by machinery, set in motion by the performer. The kettle-drums are those used at the great Commemoration of Handel, about seventy years since, and are very large.

### 183. St. Katherine's, Regent's Park.

The Organ in St. Katherine's Church, Regent's Park, removed from the demolished Collegiate Church of the same name near the Tower, is one of Green's finest instruments. It was built in 1778, under the direction of Joah Bates; and comprises Great and Choir Organs from GG (103 feet compass) up to e3 in alt.;

and a Swell down to Gamut G ( $5\frac{1}{2}$  feet compass), a most extensive and excellent range for the period. Below G, the Swell-keys act on the Choir Organ. The following is a list of the Stops in the above-mentioned instrument:

#### Great, 10 Stops 1—Open Diapason. 6--Fifteenth. 7—Sesquialtera, III ranks. 2—Open Diapason. 8—Mixture..... II ranks. 9—Trumpet. 3—Stopped Diapason. 4—Principal. 5—Twelfth. 10—Cornet, ....IV ranks. Choir, 5 Stops. 11—Stopped Diapason. 14—Fifteenth. 12-Principal. 15—Bassoon. 13-Flute. Swell, 6 Stops. 19—Cornet, III ranks. 20—Trumpet. 21—Hautboy. 16—Open Diapason. 17—Stopped Diapason. 18—Principal. Pedal, 1 Stop. 22—An Octave of Open Pipes to CCC, 16 feet length. Pedal Clavier to GG.

contains 22 Sounding Stops, of which the following is a list:

```
CHRIST CHURCH, MARYLEBONE.
   The Organ in Christ Church, Marylebone, was made by Bishop, in 1825.
                                  Great, 9 Stops.
                                             6—Fifteenth.
 1 - Open Diapason.
                                             7—Sesquialtera, III ranks.
8—Mixture . . . II ranks.
 2—Open Diapason.
 3—Stopped Diapason.
                                             9—Trumpet.
 4-Principal.
 5—Twelfth.
                                   Choir, 6 Stops.
                                            13—Flute.
10—Dulciana
11—Stopped Diapason (Claribella treble).
                                            14—Fifteenth.
                                           15—Cremona.
12—Principal.
                                  Swell, 6 Stops.
                                            19—Horn.
20—Trumpet.
21—Hautboy.
16—Open Diapason.
17—Stopped Diapason.
18—Principal.
                                   Pedal, 1 Stop.
                           22-Open Diapason..16 feet.
                         Accessory Stops, Movements, &c.
                                             3—Coupler, Choir to Pedal.
 1—Coupler, Swell to Great.
 2—Coupler, Great to Pedal.
                                             4, 5, 6—Three Composition Pedals.
                                      Compass.
                                                 Swell, Tenor c to f<sup>3</sup> in alt.
     Great, GG to f<sup>3</sup> in alt.
```

Pedal, CCC to Fiddle g. Choir, GG to f<sup>3</sup> in alt.

# 185. CHAPEL ROYAL, ST. JAMES'S.

The Organ in the Chapel Royal, St. James's, was a present from His late Majesty William the Fourth; and was built by Hill and Davison, in 1837. It contains 30 Sounding Stops, of which the following is a list:

#### Great, 11 Stops. 1—Open Diapason, No. 1. 7—Fifteenth (wood). 2-Open Diapason, No. 2. 8—Fifteenth (metal). 9—Sesquialtera, IV ranks. 10—Trumpet. 11—Octave Trumpet or Clarion. 3—Stopped Diapason. 4—Principal (metal). 5—Principal (wood). 6—Twelfth (metal). Choir, 8 Stops. 12—Open Diapason. 16—Principal. 17—Fifteenth. 18—Cromorne. 19—Bassoon. 13—Dulciana. 14—Stopped Diapason. 15—Flute. Swell, 10 Stops. 20-Open Diapason. 25—Fifteenth. 26—French Horn. 27—Oboe. 28—Trumpet. 29—Clarion. 21—Dulciana. 22—Claribella. 23—Stopped Diapason. 24-Principal.

Pedal, 1 Stop. 30—Unison Open Pipes to GG .. 102 feet.

Accessory Stops, Movements, &c.

5 to 7—Three Composition Pedals. 1 to 4—Four Couplers. Compass. Great, GG to f<sup>3</sup> in alt. Swell, Gamut G to f<sup>3</sup> in alt. Choir, GG to f3 in alt. Pedal, from GG, an octave and a half.

### 186. St. Paul's, Wilton Place, Knightsbridge.

This fine Organ, built by Gray and Davison, is one of the largest and best instruments in the metropolis. It consists of four rows of keys, 43 Sounding Stops, and has an independent Pedal Organ, an octave lower than the Manuals, of two octaves and three notes in compass, CCC, 16 feet, to E, with nine ranks of pipes throughout. The following is a list of the Stops:

#### Great, 13 Stops.

,	1
1—Double Diapason, bass 16 feet.	8—Fifteenth 2 feet.
2—Double Diapason, treb. 16 feet.	9—Sesquialtera, IV ranks.
3—Open Diapason 8 feet.	10—Mixture II ranks.
4—Open Diapason 8 feet.	11—Furniture II ranks.
5—Stopped Diapason 8 feet.	12—Trumpet 8 feet.
6—Principal 4 feet.	13—Clarion 4 feet.
7—Twelfth	- 1000,

Choir, 11 Stops.		
14—Dulciana       8 feet.         15—Keraulophon (new stop)       8 feet.         16—Stopped Diapason, Bass       8 feet.         17—Stopped Diapason, Treble       8 feet.         18—Claribella Flute       8 feet.	19—Flute       4 feet.         20—Principal       4 feet.         21—Piccolo       2 feet.         22—Fifteenth       2 feet.         23—Mixture, II ranks       1½ foot.         24—Clarionet       8 feet.	
Swell, 13 Stops.		
25—Double Diapason, Bass 16 feet. 26—Double Diapason,	31—Fifteenth       2 feet.         32—Sesquialtera, III ranks.         33—Mixture       II ranks.         34—Hautboy       3 feet.         35—Cornopean       3 feet.         36—Trumpet       3 feet.         37—Clarion       4 feet.	
Pedal, 6 Stops.		
38—Open Diapason 16 feet. 39—Stopped Diapason 16 feet. 40—Principal 8 feet.	41—Fifteenth 4 feet. $42$ —Sesquialtera, IV ranks. $43$ —Trombone 16 feet.	
Copulæ.		
1—Swell to Great Manual. 2—Swell to Choir Manual. 3—Swell Manual to Pedals.	4—Great Manual to Pedals. 5—Choir Manual to Pedals.	

The Swell Organ is of the same compass as the Great and Choir Organs—CC, 8 feet—and is of an improved construction. The four reed stops, Hautboy, Cornopean, Trumpet, and Clarion, as well as the Double Diapason of 16 feet, are throughout the whole compass of this part of the instrument. In the Choir Organ are five solo stops; amongst them, one of quite a new description, which was introduced for the first time in this instrument. There are eight Composition Pedals, to change the stops in the various organs.

# 187. St. Michael's, Chester Square.

This instrument, built by T. J. Robson, in 1847, is designed upon the German principle, with especial reference to the requirements of an Organ intended for the accompaniment and support of congregational singing. It consists of three Manual Organs, viz. Swell, Great, and Choir, together with an independent Pedal Organ. The Manuals are of the orthodox range, from CC, ascending from thence to g³ in altissimo, 56 notes. The pedal board, with the pedal Organ running throughout, extends from CCC to tenor F, 30 notes, being the first pedal Organ erected in London of this complete compass.

Great, 12 Stops.

1-Double Stopped Dia-7—Fifteenth . . . . . . . 2 feet. pason . . . . . . 16 feet tone. 8—Piccolo (wood, open). 2 feet. 9—Sesquialtera, III ranks 13 foot. 2—Open Diapason . . . . 8 feet. 3—Stopped Diapason ... 8 feet tone. 10—Mixture.... Hranks \frac{2}{3} foot. 4 feet. 8 feet. 

5—Flute (open, wood). 4 feet. 12—Clarion . . . . . 4 feet. 6—Twelfth . . . . . . . 2 % feet.

Choir, 1	0 Stops.	
13—Dulciana 8 feet.	18—Flute 4 feet.	
14—Viol di Gamba 8 feet.	19—Fifteenth 2 feet.	
15—Stopped Diapason,	20—Furniture, II ranks · 1\frac{1}{3} foot.	
Treble 8 feet tone.	21—Bassoon throughout 8 feet.	
16-Stopped Diapason, Bass 8 feet tone.	22—Clariouet and Corno	
17—Principal 4 feet.	di Bassetto 8 feet tone.	
Swell, 1	2 Stops.	
23—Double Dulciana 16 feet.	29—Fifteenth 2 feet.	
24—Open Diapason 8 feet.	30—Mixture, III ranks 1\frac{3}{5} foot.	
25 - Stopped Diapason 8 feet tone.	31—Double Bassoon 16 feet.	
26—Principal 4 feet.	32—Horn 8 feet.	
27—Celestina 4 feet.	33—Hautboy 8 feet.	
$28$ —Twelfth $2\frac{2}{3}$ feet.	34—Clarion 4 feet.	
Pedal, 3 Stops.		
35—Open Diapason 16 feet.	37—Trombone (metal) 16 feet.	
36—Stopped Diapason 16 feet tone.		
-	Movements, &c.	
1—Swell to Great.	4—Choir to Pedal.	
2—Swell to Choir.	5—Pedal Octave.	
3—Great to Pedal.	6, 7, 8—Three Composition Pedals.	
	1	

# 188. St. Gabriel's Church, Pimlico.

The Organ recently erected in St. Gabriel's Church, Pimlico, was built by Bevington, from a Specification prepared by Mr. Brownsmith, Organist to the Church. It contains 32 Draw Stops, commanding the Sounding Stops, and 6 Couplers. The following is a list of its contents:

	C	11 04	
	59 59 59 59 59 59	7 — Fifteenth 8 — Sesquialtera 9 — Mixture 10 — Trumpet 11 — Clarion	Pipes, 59 177 118 59 59 826
5	Swell, 1	1 Stops.	
12—Double Diapason, Bass } 13—Double Diapason, Treble . } 14—Open Diapason	47 47 47 47 47 47	18—Flute	$   \begin{array}{r}     47 \\     94 \\     47 \\     47 \\     \hline     517   \end{array} $
Choir, 8 Stops.			
23—Dulciana	59 59 59	28—Fifteenth	59 - 59
27—Flute, Treble	99		342
	Pedal, 2	2 Stops. 32 —Trombone to CCC, 16 feet length	20
	ı		40

# Accessory Stops, Movements, &c.

1-Swell to Great.

2-Octave down, Choir to Great.

3—Octave up, Great.

4-Octave down, Choir.

5-Pedals to Great.

6 -Pedals to Choir.

7 to 11—Five Composition Pedals.

Compass.

Great, GG, with GG#, up to f3 in alt. Choir, GG, with GG\$, up to f3 in alt. Swell Organ, Gamut G, up to f<sup>3</sup> in alt. Swell Clavier, down to GG, acting on Choir Organ below Gamut G.

Pedal Organ, Gamut G down to CCC, 16 feet length, then repeating. Pedal Clavier, GG to Fiddle g, two octaves.

The Organ is enclosed in a Gothic Screen Case of solid oak, with gilt Speaking Pipes, designed by Thomas Cundy, Esq. the architect of the Church.

# 189. HOLY TRINITY, BROMPTON.

This Organ was built by Messrs. Flight and Robson, in 1829; since then, Mr. Robson has considerably enlarged the Swell Organ, by adding new Stops, &c. The instrument now contains 23 Stops.

Great, 8 Stops.

1-Open Diapason.

2—Great Open Diapason.

3—Stopped Diapason.

4—Principal.

9—Stopped Diapason.

10—Dulciana.

13—Double Open Diapason. 14—Open Diapason.

15—Stopped Diapason.

16-Claribel-Flute. 17-Echo Dulciana. Choir, 4 Stops.

11—Principal. 12—Cremona.

5 -Twelfth.

6-Fifteenth. 7—Sesquialtera.

8-Trumpet.

Swell, 10 Stops.

18—Principal.

19—Fifteenth.

20—Sesquialtera. 21—Oboe.

22-Horn.

Pedal, 1 Stop.

23—An Octave of Pedals and Pedal Pipes.

Couplers, &c.

1-Swell to Great.

2-Swell and Choir to Great.

3—Octave Coupler to Swell.

4-Pedals to Great.

5—Pedals to Choir.6, 7, 8—Three Composition Pedals.

#### 190. ST. LUKE'S, CHELSEA.

The Organ in St. Luke's, Chelsea, was built by Nichols, but completed and erected by Gray. It contains 34 Sounding Stops, of which the following is a list:

#### Great, 14 Stops.

1—Open Diapason.

2—Open Diapason

3-Open Diapason.

4—Stopped Diapason.

5—Clarabella.

6—Principal.

7—Principal

8—Twelfth.

9—Fifteenth.

10-Fifteenth.

11—Tierce.

12—Sesquialtera 13—Trumpet.

14-Clarion.

#### Swell, 12 Stops. 21—Principal. 15—Open Diapason. 22—Flute. 16-Open Diapason. 23—Cornet. 17—Stopped Diapason. 24 -Trumpet. 18—Dulciana. 25- Hautboy. 19—Dulciana. 20-Principal. 26-Clarion. Choir, 6 Stops. 27 — Dulciana. 30—Flute. 28 Stopped Diapason. 31—Fifteenth. 32 - Cremona. 29 - Principal. Pedal, 1 Stop. 33—Open Pedal Pipes from Gamut G down to CCC, 16 feet length; then repeating below. Accessory Stops, Movements, &c. 1-Swell to Great. 3—Choir to Pedal. 4, 5, 6—Three Composition Pedals. 2-Great to Pedal. Compass. Great, GG to f3 in alt. Swell, to Fiddle g only, 2\frac{2}{3} feet compass. Choir, GG to f3 in alt. Pedal Clavier, GG to Fiddle g, two octaves. 191. St. John's, Waterloo Road. This Organ was built by Bishop, and presented to the Church by Thomas Lett, Esq. in 1824. It has 3 Manuals and Pedal, and 26 Sounding Stops. Compass of Great and Choir, GG to f3 in alt; Swell, to Gamut G. Great, 10 Stops. 1—Open Diapason. 6—Fifteenth. 7-Sesquialtera, III ranks. 2—Open Diapason. 8-Mixture, .. II ranks. 3—Stopped Diapason. 9—Trumpet. 4—Principal. 10-Clarion. 5—Twelfth. Choir, 7 Stops. 15-Flute. 11-Dulciana. 12—Stopped Diapason. 16—Cremona, Treble. 13-Principal. 17-Bassoon, Bass. 14—Fifteenth. Swell, 7 Stops. 22-French Horn. 18—Open Diapason. 23—Trumpet. 19—Stopped Diapason. 20—Dulciana. 24-Hautboy. 21—Principal. Pedal, 2 Stops. 26—Trombone, 7 Pipes FFF# to CCC. 25—Double Open Pipes to CCC, then Unisons to the bottom.

Accessory Stops, Movements, &c.

1—Great to Swell.


2-Great to Pedal.

4 to 7—Four Composition Pedals.

3—Choir to Pedal.

# 192. St. Peter's, Walworth.

A fine Organ, built by Lincoln about 1826, containing 27 Stops.



### 193. St. George's, Camberwell.

This Church has a fine Organ, built by Lincoln, containing 25 Stops.

```
Great, 11 Stops.
 1—Double Diapason.
                                         7—Fifteenth.
                                         8-Scsquialtera, V ranks.
 2-Open Diapason.
                                         9—Mixture, ... IV ranks.
10—Trumpet.
11—Clarion.
 3-Open Diapason.
 4—Stopped Diapason.
 5-Principal.
 6-Twelfth.
                                Choir, 6 Stops.
                                       15—Flute.
12—Dulciana.
                                        16—Fifteenth.
13—Stopped Diapason.
14—Principal.
                                       17—Cromorne and Bassoon.
                                Swell, 7 Stops.
                                        22-Cornet.
18—Dulciana.
                                        23—Trumpet.
19—Stopped Diapason.
20-Open Diapason.
                                        24-Hautboy.
21-Principal.
                                 Pedal, 1 Stop.
                            25—Open Pipes to CCC.
```

# 194. St. Giles, Camberwell.

The Organ at this Church was built by Mr. J. C. Bishop, in 1844, from a specification prepared by Dr. S. S. Wesley. It contains 41 Sounding Stops.

```
Great, 14 Stops.
                         8 feet.
                                      8—Fifteenth . . . . . . .
                                                               2 feet.
 1—Open Diapason ....
                                      9-Sesquialtera, III rnks.
 2—Open Diapason . . . .
                         8 feet.
                                     10-Mixture, .. III rnks.
 3—Open Diapason, wood,
                                     11—Furniture, .. II rnks.
      large .....
                         8 feet.
 4—Claribella .. ....
                                     12-Doublette, .. II rnks.
                         8 feet.
                         4 feet.
                                     13—Trumpet.....
                                                              8 feet.
 5—Principal .....
                                     4 feet.
                                                              4 feet.
 7—Twelfth .....
                        23 feet.
                             Choir, 10 Stops.
                                     19—Principal . . . . . . .
15—Open Diapason, metal
                                                              4 feet.
                                     throughout .....
                         8 feet.
                                                              4 feet.
                                     16-Dulciana, metal
                                                              2 feet.
      throughout .....
                         8 feet.
                                     22—Mixture, II ranks...
                                                             1\frac{1}{3} feet.
17—Stopped Diapason ...
                                     23—Cremona.....
                                                              8 feet tone.
                         8 feet tone.
18—Claribella.....
                                     24—Bassoon.....
                                                              8 feet.
                         8 feet.
                              Swell, 14 Stops.
25—Bourdon . . . . . . 16 feet tone.
                                     32—Sesquialtera, III rnks, 13 foot.
                                     33—Mixture, .. II rnks.
26 - Double Diapason . . . .
                                                              \frac{2}{3} foot.
                        16 feet.
27—Open Diapason . . . .
                         8 feet.
                                     34—Doublette, . . II rnks.
                                                              2 feet.
28—Open Diapason . . . .
                         8 feet.
                                     35—Horn .....
                                                              8 feet.
29—Stopped Diapason ...
                                     36—Trumpet.....
                         8 feet tone.
                                                              8 feet.
30—Principal.....
                         4 feet.
                                     37—Hautboy.....
                                                              8 feet.
31—Fifteenth ....
                         2 feet.
                                     38—Clarion.....
                                                              4 feet.
                             Pedal, 3 Stops.
                            16 feet. | 41—Double Trumpet.....
39—Double Diapason . . . . .
                                                               16 feet.
40—Open Diapason (large scale,
      metal) .....
                             8 feet.
                     Accessory Stops, Movements, &c.
 1—Swell to Pedals.
                                     4—Swell to Great.
 2—Great to Pedals.
                                     5—Wood open to Pedals separately.
 3-Choir to Pedals.
```

6 to 13—Eight Composition Pedals.

#### 195. St. Saviour's, Southwark.

The Organ in St. Saviour's Church, Southwark, possesses a fine bold tone, and, until recently, was enclosed in a splendid case, with the 16-feet metal Double Diapason in front. The instrument was built in the year 1703, and has been attributed to Schrider and to Schwarbrook; but the work appears more like that of Harris. The Great and Choir Organs were originally "short Octave, GG," and ascended to e<sup>3</sup> in alt; the Swell to Fiddle g was a subsequent addition, having been made by Byfield. In 1818, the Organ was considerably enlarged by Davis, who made the Great and Choir Organs "long Octaves," and added the f<sup>3</sup> in alt above. The Swell was extended to Tenor c; an Octave and a half of G Pedals were laid down; a similar compass of GGG Pedal Pipes applied; a Swell and two Pedal Couplers were also introduced.

Subsequently, Mr. Bishop put in a Cremona in place of the Vox Humana in the Choir Organ; a Clarabella in the room of the 5-rank Cornet in the Great Organ; a new Twelfth and Fifteenth; and a Pedal Octave Coupler. In 1841, the Organ was removed from its previous position between the Transepts, to the west end of the new Nave, just then rebuilt on the site of the old one. The Swell was then extended down to Gamut G, by Bishop, and two Horizontal Bellows provided. At

the same time the magnificent old Case was superseded by the present one, designed and provided by the Architect of the building; and the largest Pipes of the original front were placed inside. The Organ now contains 28 Sounding Stops, of which the following is a list:

```
Great, 13 Stops.
                                         8—Twelfth.
 1—Double Open Diapason.
                                         9-Fifteenth.
 2-Open Diapason.
 3-Open Diapason.
                                        10—Sesquialtera, IV ranks.
                                        11—Furniture, . . III ranks.
 4 - Stopped Diapason.
 5—Clarabella.
                                        12—Trumpet.
 6-Principal.
                                        13-Clarion.
 7—Stopped Flute.
                                Choir, 7 Stops.
                                        18-Fifteenth.
14—Open Diapason.
15—Stopped Diapason.
                                        19-Mixture, III ranks.
16—Principal.
                                       20-Cremona.
17—Stopped Flute.
                                Swell, 7 Stops.
21—Open Diapason.
                                       25—Trumpet.
                                       26—Oboe.
22—Stopped Diapason.
23—Principal.
                                       27—Clarion.
24—Sesquialtera, III ranks.
                                Pedal, 1 Stop.
         28—Open Wood Pipes, CC to Gamut GGG...211 feet length.
                                   Compass.
  Great, GG to f3 in alt.
                                          Swell Gamut G to f3 in alt.
  Choir, GG to f3 in alt.
                                          Pedal, GG to Tenor c.
                       Accessory Stops, Movements, &c.
 1-Swell to Great.
                                        3—Great to Pedal.
 2-Choir to Great.
                                        4—Choir to Pedal.
```

#### 196. St. Olave's, Southwark.

"This Organ, of a 32-feet Manual Gamut, was designed by H. J. Gauntlett, commenced by Mr. Lincoln, 1844, and perfected by Mr. William Hill, 1846." The foregoing inscription appears on a brass plate between the Manuals. The Organ at St. Olave's contains 40 Sounding Stops, of which the following is a list:

Great, 27 Stops.		
1—Sub Bourdon, to Tenor	13—Decima	3⅓ feet.
c key 32 feet.	14—Duo Decima	3 feet.
2—Tenoroon, to Tenor c	15—Super Octave	2 feet.
key 16 feet.	16—Piccolo, to Tenor c	2 feet.
3—Bourdon 16 feet tone.	17—Octave Decima	1¾ foot.
4—Unison, open 8 feet.	18—Sesquialtera, III ranks.	
5—Unison Treble, closed. 8 feet tone.	19—Mixture, II ranks.	
6—Unison Bass, closed 8 feet tone.	20—Furniture,III ranks.	
7-Viol di Gamba, to	21—Doublette, II ranks.	
Tenor c 8 feet.	22—Glockenspiel, II ranks.	
8—Salcional, to Tenor c 8 feet.	23—Posaune	8 feet.
9—Clarabella, to Tenor c. 8 feet.	24—Clarion	4 feet.
10—Quint 6 feet.	25—Octave Clarion	2 feet.
11—Octave 4 feet.	26—Cromhorn to Tenor c	8 feet tone
12-Wald Flute, to Tenor	27—Corno Flute to Tenor c.	8 feet.
c 4 feet.		

# Swell, 10 Stops.

28—Tenoroon 16 feet.	33—Super-octave 2 feet.	
29—Unison Open 8 feet.	34—Flageolet 2 feet.	
	35—Octave Fifteenth 1 foot.	
31—Oetave	36—Cornopean 8 feet.	
	37—Hautbois 8 feet.	
Pedal, 3 Stops.		
38—Contra Bourdon 32 feet tone.	40—Bass Trombone 16 feet.	
39—Principal Contra Bass. 16 feet.		
Couplers, &c.		
1—Grand Organ combined.	3—Grand to Pedal.	
2—Swell to Grand.	3—Grand to Pedal. 4—Swell to Pedal.	
Compass.		
Great, CC to f <sup>3</sup> in alt.	Pedal, CCC to Tenor d.	
Swell, Tenor e to f <sup>3</sup> in alt.		

The Great Organ has two separate sound-boards, which accounts for the Coupler denominated "Grand Organ combined."

# 197. St. John's, Southwark.

This Organ was built by Cranz and Haneock in 1770, and enlarged by J. Walker in 1844. It has 27 Sounding Stops, of which the following is a list:

Great,	11 Stops.	
1—Large Open Diapason. 2—Small Open Diapason.	7—Fifteenth 8—Sesquialtera. 9—Mixture.	
3—Open Diapason, treble.	9—Mixture	
4—Stopped Diapason.	10—Trumpet	
5—Principal.	10—Trumpet. 11—Clarion.	
6—Twelfth.	11 Ottilon.	
Choir,	5 Stops.	
12—Stopped Diapason.	15—Fifteenth.	
13—Principal.	15—Fifteenth. 16—Cremona.	
14—Flute.		
Swell, 10 Stops.		
17—Double Diapason.	22—Fifteenth. 23—Sesquialtera. 24—Horn. 25—Hautboy. 26—Clarion.	
18—Open Diapason.	23—Sesquialtera.	
19—Stopped Diapason.	24—Horn.	
20—Duleiana.	25—Hautboy.	
21—Principal.	26—Clarion.	
Pedal, 1 Stop.		
27—Open wood Pipes to CCC16 feet length.		
Cou	plers.	
Pedals to Choir Organ.	Great Organ to Swell.	
Pedals to Great Organ.		
Compass.		
Great, GG to e <sup>3</sup> in alt.	Swell, Gamut G to e <sup>3</sup> in alt.	
Choir, GG to e <sup>3</sup> in alt.	Pedal Clavier to GG.	

486 APPENDIX.

#### ST. JAMES'S, BERMONDSEY. 198.

This Organ was built by Bishop, in 1829, and contains the following 29 Stops:

Great, 10 Stops. 59 Notes, from GG to F.

6-Fifteenth. 1—Open Diapason. 7—Sesquialtera, III ranks.
8—Mixture, .. II ranks.
9—Trumpet.
10—Clarion. 2—Open Diapason. 3—Stopped Diapason. 4—Principal. 5—Twelfth.

### Choir, 8 Stops.

59 Notes, from GG to F.

15-Flute. 11—Open Diapson. 12—Stopped Diapason. 16—Fifteenth. 17—Cremona, treble. 13—Dulciana, from Gamut G. 18—Bassoon, bass. 14—Principal.

# Swell, 8 Stops.

47 Notes, from Gamut G to F, with keys continued to GG, acting on the Choir Organ.

19—Open Diapason. 20—Open Diapason. 21—Stopped Diapason. 22-Principal.

23—Cornet (originally 12th, 15th, and Sesquialtera; now unfortunately only 12th and 15th).
24—French Horn,
25—Trumpet.
26—Hautboy.

# Pedal, 3 Stops.

27—Double Diapason, 25 Notes, from GGG—21 feet length. 28—Unison..... Ditto ..... GG-103 feet length. Ditto ..... 29—Trombone.....  $GG-10\frac{2}{3}$  feet length.

# Copulas.

1-Swell to Great. 2—Swell to Choir. 3—Great to Choir. 4-Pedals to Great. 5-Pedals to Choir.

# Composition Pedals, &c.

1—Full. 2—Full, without Reeds.

3—Diapasons.

4—Shifting Movement for shutting off all the Swell but the Diapasons. 5—Pedal for coupling Swell to Great.

There is a Key-board at the side, by means of which a second performer can play the Pedals.

#### ST. MARY'S, ROTHERHITHE. 199.

This Organ was built by Byfield, in 1764. It then contained two rows of keys, from GG to E, short octaves, and a Swell from Fiddle G to E. It has been since altered by Russell, of Gray's Inn Lane, who removed the Nason and Cornet from the Great Organ, and introduced an Open Diapason. He also added an Open Diapason to the Swell, and substituted a Cremona for the Vox Humana in the Choir Organ, with long Octaves, and an Octave and a half of Pedals, but without separate Pedal Pipes. The Organ now contains 20 Stops, of which the following is a list:

AN ACCOUNT OF BRITISH ORGANS. 487		
Great, 9 Stops	s—GG to F.	
1—Open Diapason       58 pipes         2—Open Diapason       58 pipes         3—Stopped Diapason       58 pipes         4—Principal       58 pipes         5—Twelfth       58 pipes	6—Fifteenth	
Choir, 5 Stops		
10—Stopped Diapason       58 pipes.         11—Principal       58 pipes.         12—Flute       58 pipes.	13—Fifteenth	
Swell, 9 Stops—Fiddle G to E.	Total number of Pipes.	
15—Open Diapason       34 pipes.         16—Open Diapason       34 pipes.         17—Stopped Diapason       34 pipes.         18—Principal.       34 pipes.         19—Hautboy       34 pipes.         20—Trumpet       34 pipes.	Swell Organ       204 pipes.         Choir Organ       274 pipes.         Great Organ       638 pipes.         1116	
200. Gr	FENNICH	
200. GREENWICH.  The Organ in the Chapel of the Royal Hospital, at Greenwich, is a most admirable specimen of Green's work. It cost £1,000, exclusive of the case, and contains the following 26 Stops:		
Great, 1	2 Stops.	
1—Open Diapson 2—Open Diapason. 3—Stopped Diapason. 4—Clarabella, in lieu of IV-rank Cornet. 5—Principal. 6—Metal Flute. 7—Twelfth.	8—Fifteenth. 9—Sesquialtera, III ranks. 10—Mixture III ranks. 11 { Trumpet, Treble.     Trumpet, Bass. 12—Clarion.	
Choir,	5 Stops.	
13—Stopped Diapason. 14—Principal. 15—Flute.	16—Fifteenth. 17—Cremona.	
Swell, 8 Stops.		
18—Open Diapason. 19—Dulciana. 20—Stopped Diapason. 21—Principal.	22—Dulciana Principal.   23—Cornet, HI ranks, 12, 15, 17.   24—Hautboy.   25—Trumpet.   1 Stop.	
26—Open Diapason, CC down to		
Accessory Stops, Movements, &c.		
1—Coupler, Swell to Great. 2—Coupler, Choir to Great.	3—Coupler, Great to Pedal. 4—Coupler, Choir to Pedal.	
	pass.	
Great, FFF to e <sup>3</sup> in alt; no FFF#.  Choir, FFF to e <sup>3</sup> in alt; no FFF#.	Swell, FF to e 3 in alt; keys below FF acting.	
Pedal Clavier, FFF to Tenor c.		

# 201. LEE CHURCH, KENT.

This fine Organ was built by Bishop, in 1850. It has 29 Sounding Stops, of which the following is a list:

Great, 9 Stops.		
1—Open Diapason 8 feet.	6—Fifteenth 2 feet.	
2—Stopped Diapason 8 feet tone.	7—Sesquialtera, III ranks.	
3—German Flute 8 feet.	8—Mixture II ranks.	
4—Principal 4 feet.	9—Trumpet 8 feet.	
5—Twelfth $\dots 2^{\frac{2}{3}}$ feet.		
Choir, a	3 Stops.	
10—Open Diapason 8 feet.	14—Principal 4 feet.	
11—Dulciana 8 feet.	15—Flute 4 feet.	
12—Stopped Diapason 8 feet tone.		
13—Viol di Gamba 8 feet.	17—Cremona 8 feet tone.	
Swell, 1	0 Stops.	
18—Bourdon, bass 16 feet tone.	23—Twelfth	
19—Tenoroon 16 feet.	24—Fifteenth 2 feet.	
20—Open Diapason 8 feet.	25—Sesquialtera, III ranks.	
21—Stopped Diapason 8 feet tone.	26—Horn 8 feet.	
22—Principal 4 feet.	27—Hautboy 8 feet.	
Pedal,	2 Stops.	
28—Open Diapason 16 feet.	29—Stopped Diapason 16 feet tone.	
Couplers, &c.		
1—Pedals to Choir Organ.	5—Swell to Great.	
2—Ditto to Great Organ.	6—Choir to Great.	
3—Ditto to Swell.	7 to 13—Seven Composition Pedals, viz.	
. 4—Swell to Choir.	3 to Great Organ, 4 to Swell.	
Compass.		
All the Manuals, CC to f <sup>3</sup> in alt.	Pedal, CCC to Tenor c.	
·		

### 202. St. Mary's, Clapham.

This Organ was built by Mr. J. C. Bishop, in 1845. It has three complete rows of keys, from CC to F, and 28 Sounding Stops.

#### Great, 8 Stops. 8 feet. 6—Twelfth $\dots$ $2\frac{2}{3}$ feet. 1—Open Diapason . . . . 2—Stopped Diapason ... 8 feet tone. 6—Fifteenth . . . . . . . 2 feet. 3—German Flute ..... 8 feet. 7—Sesquialtera, III ranks. 4—Principal ..... 4 feet. 8—Trumpet ..... 8 feet. Choir, 9 Stops. 8 feet. 4 feet. 9—Open Diapason . . . . 10—Dulciana ..... 8 feet. 2 feet. 11—Stopped Diapason ... 8 feet tone. 16—Clarionet . . . . . . . . . 8 feet tone. 17—Double Diapason, bass 16 feet tone. 12—Claribella . . . . . . . 8 feet. 4 feet. Swell, 10 Stops. 23—Sesquialtera, III ranks. 18—Open Diapason.... 8 feet. 24—Mixture.... II ranks. 19—Stopped Diapason ... 8 feet tone. 20—Principal . . . . . . . 4 feet. 8 feet. $2\frac{2}{3}$ feet. 26—Hautboy ..... 8 feet. 22—Fifteenth.... 2 feet. 27—Clarion.... 4 feet.

# Pedal, 1 Stop. 28—Open Diapason . . . . . . 16 feet.

Accessory Stops, Movements, &c.

1—Swell to Pedal.
2—Great to Pedal.
3—Choir to Pedal.
4—Swell to Great.
5—Choir to Great.

6—Swell to Choir.
7—Swell to Great, octave higher.
8, 9, 10—Three Composition Pedals to Great.
Great.
11, 12, 13—Three Ditto Ditto to Choir.
Compass.

Great, CC to f<sup>3</sup> in alt. Choir, CC to f<sup>3</sup> in alt. Swell, CC to f<sup>3</sup> in alt. Pedal, CCC to Tenor c.

#### 203. CROYDON CHURCH.

This Organ was built in 1794, by Avery, and enlarged and improved by Messrs. Elliott and Hill, in 1819. One of the Open Diapasons originally acted to Gamut G only upon the keys, the last octave being upon the Pedals; but Elliott attached the whole Stop to the Great Organ, and added a regular set of an octave and a half of Pedal Pipes in place of the other Pipes of shorter compass. He likewise put in a Coupler to unite the Choir to Great Manual. The Organ now contains 24 Stops, of which the following is a list:

```
Great, 11 Stops—GG to F in alt.
 1—Open Diapason, front.
                                        7—Fifteenth.
 2—Open Diapason.
                                        8-Sesquialtera, III ranks.
                                        9—Mixture .... II ranks.
 3—Stopped Diapason.
                                       10-Cornet ..... V ranks.
 4-Principal.
 5-Flute.
                                       11—Trumpet.
 6-Twelfth.
                               Choir, 6 Stops.
12-Dulciana to Gamut G.
                                       15—Flute.
13—Stopped Diapason.
                                       16—Fifteenth.
14—Principal.
                                       17—Furniture, II ranks.
                         Swell, 6 Stops—3 Octaves.
                                       21-Cornet, III ranks.
18—Open Diapason.
                                       22—Trumpet.
19—Stopped Diapason.
20—Principal.
                                      23—Hauthoy.
                               Pedal, 1 Stop.
                        24—Diapason .... 10<sup>2</sup> feet.
                                  Couplers.
                        2—Pedals to Choir.
 1—Pedals to Great.
                                                   3—Great to Choir.
```

#### 204. HAMPTON COURT PALAGE.

The Organ in the Chapel Royal, Hampton Court Palace, is a most excellent and interesting little instrument, built by Father Smith. It has been enlarged and much improved by Hill, who added the Pedal Pipes, and also a Cremona to the Choir Organ. The Organ now contains 20 Sounding Stops, of which the following is a list:

Great, 9 Stops. 6—Fifteenth. 1—Open Diapason. 2—Stopped Diapason. 7—Sesquialtera, III ranks. 3-Principal. 8—Cornet .... III ranks. 4-Flute (Quintaton). 9-Trumpet. 5—Twelfth. Choir, 5 Stops. 10—Stopped Diapason. 13—Fifteenth. 11-Principal. 14-Cremona. 12—Flute. Swell, 5 Stops. 15-Open Diapason. 18-Hautboy. 16—Stopped Diapason. 19-Trumpet. 17—Principal. Pedal, 1 Stop. 20-Open Pipes, Gamut G down to CCC, 16 feet length; repeating on lowest 1 octave of Pedal. Couplers. 1-Swell to Great. 2—Great to Pedal. 3—Choir to Pedal. Compass. Great, GG to e<sup>3</sup> in alt. Pedal Stop, CCC to Gamut G. Choir, GG to e3 in alt. Pedal Clavier, GG to Fiddle g. Swell, Tenor f to f3 in alt.

#### COUNTRY ORGANS.

#### 205. Windsor.

The Organ that was built by Father Smith, in the reign of Charles the First, for St. George's Chapel, Windsor, was, on the completion of the present instrument by Green, presented to Windsor Church by King George the Third. Green's Organ was opened on Sunday, October 17, 1790. It was originally enclosed in a "general Swell;" but this was removed many years ago. Considerable additions have been made to the instrument by Gray and Davison, within the last twenty years; among the most important of which may be mentioned the extension of the Swell to FF, together with the introduction of six new Stops; the application of Open Pedal Pipes to FFFF; the substitution of a Mixture and a Clarabella in place of the Furniture and a IV-rank Cornet in the Great Organ, and of a Keraulophon in lieu of the Fifteenth in the Choir. The Organ now contains 33 Sounding Stops, of which the following is a list:

Great, 12 Stops.

1—Open Diapason—Nave Front.
2—Ditto Diapason—Choir Front.
3—Stopped Diapason.
4—Claribella Flute.
5—Principal.
6—Twelfth.
7—Fifteenth.
8—Sesquialtera, III ranks.
9—Mixture... II ranks.
10—Trumpet (Treble).
11—Ditto...(Bass).
12—Clarion.

Choir, 7 Stops.		
13—Dulciana to FF.	17—Keraulophon. 18—Bassoon. 19—Clarionet.	
14—Stopped Diapason.	18—Bassoon.	
15—Principal.	19—Clarionet.	
16—Octave Flute.		
Swell, J	2 Stops.	
20—Double Diapason.	26—Fifteenth.	
21—Open Diapason.	27—Sesquialtera, III ranks.	
22—Stopped Diapason.	28—Cornopean.	
23—Dulciana.	29—Hautboy.	
24—Dulciana Principal.	30—Trumpet.	
25—Principal.	31—Clarion.	
Swell, 12 Stops.  20—Double Diapason. 21—Open Diapason. 22—Stopped Diapason. 23—Dulciana. 24—Dulciana Principal. 25—Principal.  Pedal, 2 Stops.  Swell, 12 Stops.  26—Fifteenth. 27—Sesquialtera, III ranks. 28—Cornopean. 29—Hautboy. 30—Trumpet. 31—Clarion.  Pedal, 2 Stops.		
32—Double Open Diapason	33—Open Diapason to	
to FFFF 24 ft. length.	33—Open Diapason to FFF 12 ft. length.	
Couplers.		
Swell to Great.	Choir to Pedals. Swell to Pedals.	
Great to Pedals.	Swell to Pedals.	

#### 206. WINDSOR.

The Organ in St. George's Hall, Windsor Castle, was built by Messrs. Hill and Co. It contains 29 Sounding Stops, 2 complete Manuals, and an independent Pedal of 3 Stops. It is also furnished with two sets of Movements, Draw-stops, Claviers, &c. so that it can be used in the Chapel as well as the Hall. The following is a list of the Stops:

```
Great, 12 Stops.
 1—Double Open and
                                        4 feet.
                                        8—Twelfth .....
                        16 feet.
       Bourdon.....
                                                               24 feet.
 2—Open Diapason . . . .
                          8 feet.
                                        9—Fifteenth .....
                                                                2 feet.
 3—Cone Gamba .....
                          8 feet.
                                      10—Sesquialtera, III ranks.
 4—Stopped Diapason ...
                          8 feet tone.
                                      8 feet.
                                      12—Clarion .....
 5—Quint.....
                                                                4 feet.
                        5\frac{1}{3} feet.
 6—Principal .....
                          4 feet.
                              Choir, 6 Stops.
                                      15-Salicional, to Tenor c .
13—Open Diapason, through-
                                                                8 feet.
      out......
                                      4 feet.
                          8 feet.
14-Clarabella and Stop-
                                      4 feet.
      ped Bass .....
                         8 feet.
                                      18—Cromorne . . . . . . . . .
                                                                8 feet tone.
                              Swell, 8 Stops.
                                      23—Fifteenth . . . . . . . . . . . . .
19—Double Diapason.... 16 feet.
                                                                2 feet.
20—Open Diapason . . . .
                                      24—Sesquialtera, II ranks.
                         8 feet.
21—Stopped Diapason ...
                         8 feet tone.
                                      25—Cornopean .....
                                                                8 fcet.
22—Principal . . . . . . .
                         4 feet.
                                      26—Oboe .....
                                                                8 feet.
                              Pedal, 3 Stops.
27—Open Diapason . . . . 16 feet.
                                      29—Trombone . . . . . . 16 feet.
28—Principal . . . . . . .
                         8 feet.
                      Accessory Stops, Movements, &c.
 1-Swell to Great.
                           2—Great to Pedal.
                                                 3—Swell to Pedal.
                                 Compass.
    Great, CC to f<sup>3</sup> in alt.
                                          Pedal, CCC to Tenor d.
    Swell, CC to f<sup>3</sup> in alt.
```

### 207. ETON COLLEGE.

The present Organ in Eton College was built by Gray and Davison, in the year 1852. It stands on the floor, and sideways, with its back against the south wall, in nearly the centre of the length of the building. The Case, designed by Mr. Deason, is of oak, and is very handsome. The Pipes, which appear in the front of the case are of polished tin. There are altogether 29 Sounding Stops, of which the following is a list:

Great, 10 Stops—Compass, GG to F in alt.		
1—Open Diapason 8 feet. 2—Open Diapason 8 feet. 3—Stopped Diapason . 8 feet. 4—Principal 4 feet. 5—Twelfth 3 feet.	6—Fifteenth	<ul><li>2 feet.</li><li>8 feet.</li><li>4 feet.</li></ul>
Choir, 9 Stops—Compass, GG to F in alt.		
11—Dulciana       8 feet.         12—Keraulophon       8 feet.         13—Clarionette Flute       8 feet.         14—Stopped Diapason, Bass       8 feet.         15—Principal       4 feet.	16—Flute	4 feet. 2 feet. 2 feet. 8 feet.
Swell, 9 Stops—Compass, Tenor C to F in alt.         20—Bourdon		
Pedal, 1 Stop.		

29-Grand Pedal Open Diapason, to CCC..16 feet length. The Pedal Clavier descends to GG.

# Couplers.

1—Swell to Great. 2—Swell to Choir.	4—Great to Pedal. 5—Choir to Pedal.
3—Choir Sub-octave to Great.	o Choir to redui

#### 208. OXFORD.

The Organ in Christ Church Cathedral, Oxford, was built by Father Schmidt, in the year 1680, and originally consisted of Great and Choir Organs only. It was enlarged and much improved by Messrs. Gray and Davison, in 1848; who made the Manuals "long octaves," added the Pedal Pipes, &c.

### Great, 9 Stops.

<ul> <li>1—Open Diapason.</li> <li>2—Claribella, in place of IV-rank Cornet.</li> <li>3—Stopped Diapason.</li> <li>4—Principal.</li> <li>5—Twelfth.</li> </ul>	6—Fifteenth. 7—Sesquialtera, III ranks. 8—Mixture,II ranks. 9—Trumpet.
Choir, 5	Stops.
0—Dulciana. 1—Stopped Diapason.	13—Flute. 14—Cremona.

Swell, 6 Stops. 18-Principal. 15—Double Diapason. 19-Trumpet. 16—Open Diapason. 20—Hautboy. 17—Stopped Diapason. Pedal, 1 Stop. 21-Open Diapason.. 16 feet. Couplers. 1-Coupler, Swell to Great. 3—Coupler, Choir to Pedals. 4—Coupler, Great to Pedals. 2—Coupler, Choir to Great. MAGDALEN COLLEGE. 209. The new Organ in Magdalen College Chapel, Oxford, was built by Gray and Davison, and completed in the early part of the present year (1855). It contains 35 Sounding Stops, distributed among 4 Manuals and Pedal in the following manner: Pedal, 4 Stops. 1—Grand Open Diapason 16 feet. 3—Grand Octave..... 2—Grand Bourdon . . . . 16 feet. 4—Grand Trombone .. 16 feet. Solo, 2 Stops. 5-Flute Harmonique ... 8 feet. 6—Tromba . . . . . . . . . . . . 8 feet. Great, 10 Stops. 8 feet. 3 feet. 7—Open Diapason. . . . . 8—Open Diapason. . . . . 8 feet. 13—Super-octave ..... 2 feet. 14—Sesquialtera, III rks. 9—Stopped Diapason.... 8 feet. 4 feet. 15—Mixture . . . . II rks. 10—Octave..... 11—Flute.... 4 feet. 8 feet. Choir, 8 Stops. 4 feet. 17—Salcional..... 8 feet. 22-Flute d'Amour.... 8 feet. 4 feet. 19—Stopped Diapason, 23—Piccolo.... 2 feet. 24-Corno di Bassetto. . . Bass . . . . . . . . . . . . 8 feet. 8 feet. 20—Concert Flute..... 8 feet. Swell, 11 Stops. 25—Bourdon...... 16 feet. 30-Octave..... 4 feet. 31—Super Octave . . . . . 26—Open Diapason . . . . 8 feet. 2 feet. 27—Stopped Diapason, 32—Sesquialtera, III ranks 8 feet. Bass . . . . . . . . . 33—Cornopean. . . . . . . 8 feet. 28-Clarionet Flute . . . . 8 feet. 34—Oboe.... 8 feet. 35—Clarion. ..... 29—Keraulophon . . . . . . 8 feet. 4 feet. Accessory Stops, Movements, &c. 1—Swell to Great Manual. 8—Swell to Great Super-octave. 2—Swell to Choir Manual. 9-Solo to Swell Manual. 3-Swell Manual to Pedals. 10—Tremulant Swell. 4—Great Manual to Pedals. 11 to 16—Six Composition Pedals. 5—Choir Manual to Pedals. 17 and 18—Two Pedals for taking on and

There are several reservoirs, producing different weights of wind; and the increasing pressure system has been applied to the Great Organ. The Solo Organ

off the Coupling Stops.

19—Pneumatic Lever attachment.

6—Choir Sub-octave to Great Manual.

7—Swell to Great Sub-octave.

is also voiced to a heavy weight of wind. To prevent the numerous Couplers disagreeably affecting the touch, the Pneumatic Apparatus is applied to the Great Organ Manual and all that it affects.

#### 210. RADLEY.

The Organ in St. Peter's College, Radley, near Oxford, was built by the Messrs. Telford, of Dublin. It consists of 3 complete Manuals, an independent Pedal of 10 Stops, and 47 Sounding Stops, of which the following is a list:

# Great, 16 Stops.

Officat, 1	o bups.	
1—Double Open Diapason,  metal 16 feet.  2—Open Diapason (Great)  metal 8 feet.  3—Open Diapason (Small)  metal 8 feet.  4—Stopped Diapason, wood 8 feet tone.  5—Quint metal 5 feet.  6—Principal (Great) metal 4 feet.  7—Principal (Small) metal 4 feet.	8—Tenth metal 3 feet. 9—Twelfth metal 2 feet. 10—Fifteenth metal 2 feet. 11—Octave Flute wood 2 feet. 12—Sesquialtera metal IV ranks. 13—Mixture metal III ranks. 14—Double Trumpet, metal . 16 feet. 15—Trumpet metal 8 feet. 16—Clarion metal 4 feet.	
Choir,	8 Stops.	
17—Stopped Diapason, wood 8 feet tone. 18—Dulcianametal 8 feet. 19—Viol di Gamba.metal 8 feet. 20—Principalmetal 4 feet.	21—Wald Flutewood 4 feet. 22—Fifteenthmetal 2 feet. 23—Mixturemetal $1\frac{1}{3}$ foot. 24—Cremonametal 8 feet.	
Swell, 1	3 Stops.	
25—Double Diapason, metal and wood 16 feet. 26—Open Diapason metal 8 feet. 27—Dulciana metal 8 feet. 28—Stopped Diapason, wood 8 feet tone. 29—Principal metal 4 feet. 30—Principal (Small) metal 4 feet.	31—Twelfth metal 2½ feet. 32—Fifteenth metal 2 feet. 33—Twenty-second metal 1 foot. 34—Sesquialtera metal .III ranks. 35—Cornet (Dulciana) metal .III ranks. 36—Trumpet metal 8 feet. 37—Oboe metal 8 feet.	
Pedal, 1	•	
38—Double Double Open Diapasonwood 32 feet. 39—Double Open Diapason, wood 16 feet. 40—Double Open Diapason, metal 16 feet. 41—Open Diapason.metal 8 feet.	42—Principal metal 4 feet. 43—Twelfth metal 2 \(^2\) feet. 44—Fifteenth metal 2 feet. 45—Sesquialtera . metal . IV ranks. 46—Double Trumpet, metal 16 feet. 47—Trumpet metal 8 feet	
Accessory Stops, Movements, &c.		
	4 0 1 0 4 1 1 1 1	

1—Coupler, Swell to Great. 2-Coupler, Swell to Choir. 4—Coupler, Great to Pedal. 5 to 10—Six Composition Pedals.

3—Coupler, Swell to Pedal.

# Compass.

Great, CC to g³ in altissimo. Choir, CC to g<sup>3</sup> in altissimo.

Swell, CC to g<sup>3</sup> in altissimo. Pedal, CCC to Fiddle g.

#### 211. GLOUCESTER.

The Organ in Gloucester Cathedral was originally built by the elder Harris, in conjunction with his son Renatus, in the year 1670. In 1847, the instrument was considerably enlarged by Henry Willis, of London, who added a Swell of Twelve Stops, all of which are entirely new (with its movement), excepting some old Pipes which were derived from the old Twelfth in the Great Organ and the old Swell. The continuation of the Great Organ from GG to CCC, and the entire re-arrangement of the Pedals and mechanism, including new Couplers, &c. and the addition of a Mixture and Clarion to the Great Organ, are also by Willis. The instrument now contains 29 Sounding Stops, of which the following is a list:

```
Great, 11 Stops.
                                          7—Fiftcenth.
 1—Open Diapason.
                                          8-Sesquialtera, IV ranks.
 2—Open Diapason.
 3-Stopped Diapason.
                                          9—Mixture, .. II ranks.
                                         10-Trumpet.
 4—Clarabella.
 5—Principal.
                                         11—Clarion.
 6-Twelfth.
                                Choir, 5 Stops.
12—Dulciana.
                                         15—Flute (metal).
13-Stopped Diapason.
                                         16—Fifteenth.
14-Principal.
                                Swell, 12 Stops.
17—Open Diapason.
                                        23—Fifteenth.
18—Open Diapason.
                                         24—Sesquialtera.
                                        25—Trumpet.
26—Hautboy.
19—Stopped Diapason.
20-Dulciana.
21-Principal.
                                        27—Cremona.
22—Flute.
                                        28-Clarion.
                                 Pedal, 1 Stop.
                             29—Open Diapason.
                       Accessory Stops, Movements, &c.
 1-Coupler, Swell to Great.
                                         4—Coupler, Pedals to Great.
 2—Coupler, Choir to Great.
                                          5-Coupler, Pedals to Choir.
 3-Coupler, Swell to Choir.
                                          6—Coupler, Pedal to Great.
                                   Compass.
  Great, CCC to f3 in alt.
                                           Swell, CC to f3 in alt.
  Choir, GG to f3 in alt.
                                           Pedal, CCC to Tenor e.
```

#### 212. GLOUCESTER.

The Organ in the Shire Hall, at Gloucester, was built by Nicholson of Worcester, in the year 1849. It contains 36 Sounding Stops, of which the following is a list:

The state of the s	0	* '	O
Great,	13 St	ops.	
1—Double Open Diapa-		-Stopped Diapason, Bas	
son, metal all		-Viol di Gamba	
through 16 feet.	7-	-Principal	. 4 feet.
2—Open Diapason, large	8-	-Wald Flute	. 4 feet.
scale, all metal 8 feet.	9-	-Twelfth	. 23 feet.
3—Open Diapason, small	10-	—Fifteenth	. 2 feet.
scale, all metal 8 feet.	11-	–Mixture, II ranks.	
4—Stopped Diapason,	12-	-Trombone	. 8 feet.
Treble 8 feet tone.	13-	-Clarion	. 4 feet.

AFPENDIA.			
Choir, 7 Stops.			
14—Dulciana, throughout 8 feet.	17—Keraulophon, to Tenor		
15—Stopped Diapason,	c 8 feet.		
Treble 8 feet tone.	18—Principal 4 feet.		
16—Stopped Diapason, Bass 8 feet tone.	19—Fifteenth 2 feet.		
	20—Cremona to Tenor c. 8 feet tone.		
Swell, 1	•		
21—Bourdon 16 feet tone.	26—Sesquialtera, III rnks.		
22—Open Diapason 8 feet.	27—Cornopean 8 feet.		
23—Stopped Diapason 8 feet tone.	28—Hautboy 8 feet.		
24—Principal 4 feet.	29—Clarion 4 feet.		
25—Fifteenth 2 feet.	30—Cromorne, throughout 8 feet tone.		
Pedal,	6 Stops.		
31—Open Diapason, large 16 feet.	34—Fifteenth 4 feet.		
32—Open Diapason, small 16 feet.	35—Sesquialtera, V ranks.		
33—Principal 8 feet.	36—Posaune 16 feet.		
Accessory Stops, Movements, &c.			
1—Coupler, Great to Swell.	4—Coupler, Pedal to Great.		
2—Coupler, Great to Choir.	5—Coupler, Pedal to Choir.		
3—Coupler, Choir to Swell.	5—Coupler, Pedal to Choir. 6—Coupler, Pedal to Swell.		
Compass.			
Great, CC to g 3 in altissimo.	Swell, CC to g <sup>3</sup> in altissimo.		
Choir, GG to g 3 in altissimo.	Pedal, CCC to Tenor f.		
-			
213 Tewkesbury			

#### 213. Tewkesbury.

Part of the Organ now standing in the Abbey Church of Tewkesbury formed a portion of that which originally stood in Magdalen College, Oxford; whence it was removed to its present locality in 1740, on the completion of Schwarbrook's Organ for the College just mentioned. The Tewkesbury Organ, however, has been entirely remodelled and greatly enlarged by Willis. But little of the original work remains, except a few Diapasons and the Principal, together with the East or Choir front, which, although thin, are valuable, as they are made of tin, alloyed with about eight pounds of lead to the cwt. The Organ contains 22 Stops.

Great, 13 Stops—Compass from CC to F. 1—Open Diapason .... 8 feet. 8—Fifteenth .... 4 feet. 2—Open Diapason . . . . 8 feet. 9—Sesquialtera. 10—Mixture. 3—Stopped Diapason ... 8 feet tone. 4—Clarabella · · · · · · · · 8 feet. 11—Trumpet ..... 8 feet. 8 feet. 4 feet. 5—Dulciana · · · · · · · · 4 feet. 13—Cremona . . . . . . . 8 feet tone. 6—Principal..... 7—Twelfth  $\dots 2^{\frac{2}{3}}$  feet. Swell, 7 Stops—from CC to F. 14—Open Diapason . . . . 8 feet. 18—Sesquialtera, III rnks. 1를 foot. 15—Stopped Diapason ... 19—Trumpet (only pre-8 feet tone. 16—Principal . . . . . . 4 feet. pared for). 20—Hautboy..... 17—Fifteenth .... 2 feet. Pedal, 2 Stops—Two octaves and a major third, from CCC to E. 22—Double Trumpet.... 16 feet. 21—Double Open Diapason 16. feet.

Couplers.

1—Swell to Great

2—Swell to Pedals.

#### 214. HEREFORD.

The Organ in Hereford Cathedral, originally built by Father Smith, in 1636, was a present from King Charles the Second. Byfield afterwards added the Choir Organ; and the instrument has since been successively repaired by Snetzler, Green, Avery, Lincoln, Elliott, who in 1806 put Pedals and Pedal Pipes; and, lastly, by Bishop, who introduced the present Swell and Pedal Pipes. The instrument has now 24 Sounding Stops, of which the following is a list:

#### Great, 12 Stops. 1—Open Diapason. 7—Twelfth. 8-Fifteenth. 2—Open Diapason. 3—Stopped Diapason. 9—Tierce. 4-Clarabella, in place of V-rank Cornet. 10-Larigot. 5—Principal. 11—Sesquialtera, III ranks. 6—Principal. 12—Trumpet. Choir, 6 Stops. 16—Flute. 13—Stopped Diapason. 14—Dulciana. 17-Fifteenth. 15-Principal. 18—Cremona. Swell, 5 Stops, to Tenor c. 22—Trumpet. 19—Open Diapason. 20-Stopped Diapason. 23-Hautboy. 21—Principal. Pedal, 1 Stop, CCC to Tenor d. 24—Open Diapason, wood..16 feet.

Accessory Stops, Movements, &c.

1—Coupler, Swell to Great.
2—Coupler, Great to Pedal.
3—Choir to Pedal.
4, 5, 6—Three Composition Pedals.

#### 215. Worcester.

The present Organ in Worcester Cathedral was built by Messrs. Hill and Co. in the year 1842, and is one of the largest Cathedral Organs in England, except that at York Minster. It contains 39 Sounding Stops, of which the following is a list:

# Great, 14 Stops.

1—Tenoroon 16 feet.	8—Wald-Flöte	4 feet.	
2-Bourdon, to meet No. 1 16 feet tone.	9—Twelfth	2⅓ feet.	
3—Open Diapason, Back 8 feet.	10—Fifteenth	2 feet.	
4—Open Diapason, Front 8 feet.	11—Sesquialtera, III rnks.	$1\frac{3}{5}$ foot.	
5—Stopped Diapason 8 feet tone.	12—Mixture, II ranks		
6—Quint	13—Doublette, II ranks	2 feet.	
7—Principal 4 feet.	14—Posaune		
Choir, 8 Stops.			
15—Dulciana 8 feet.	19—Stopped Flute	4 feet tone.	
16—Clarabella 8 feet.	20—Oboe Flute	4 feet.	
	21—Fifteenth	2 feet.	
18—Principal 4 feet.	22—Cremona	8 feet tone.	

# Swell, 11 Stops.

•	1		
23—Double Dulciana 16 feet.	29—Flageolet 4 fect.		
24—Open Diapason 8 feet.	30—Doublette, II ranks 2 feet.		
25—Stopped Diapason 8 feet tone.	31—Echo Cornet.		
26—Dulciana 8 feet.	32—Oboe		
27—Principal 4 feet.	33—Cornopean 8 feet.		
28—Suabe-Flute 4 feet.			
Pedal, 6 Stops.			
34—Open Diapason 16 feet.	37—Fifteenth 4 feet.		
35—Stopped Diapason 16 feet tone.	38—Sesquialtera, V ranks.		
35—Stopped Diapason 16 feet tone. 36—Principal 8 feet.	39—Trombone 16 feet.		
Accessory Stops, Movements, &c.			
1—Coupler, Swell to Great.	4—Coupler, Pedals to Choir.		
2—Coupler, Swell to Choir.	4—Coupler, Pedals to Choir. 5 to 9—Five Composition Pedals.		
3—Coupler, Pedals to Great.	F		
Compass.			
Great, CC to f 3 in alt.	Swell, Tenor c to f <sup>3</sup> in alt.		
Choir, CC to f <sup>3</sup> in alt.	Pedal, CCC to Tenor e.		
Citeri, CO to 1 III tale.	1 20000, 00000 101101 0.		

# 216. Worcester.

The Organ in the Shire Hall at Worcester was built in 1844, by Nicholson of that City. It contains 53 Sounding Stops, of which the following is a list:

# Great, 15 Stops.

9—Wald Flute..... 4 feet.

1-Great Diapason, metal

1 Grette Diaption, motal	o wand i later to the later to	
throughout 16 feet.	10—Twelfth	
2—Open Diapason 8 feet.	11—Fifteenth 2 fect.	
3—Open Diapason, small 8 feet.	12—Tierce	
4—Gamba 8 feet.	13—Mixture V ranks. 2 feet.	
5—Bourdon	14—Posaune 8 feet.	
$6$ —Quint $5\frac{1}{3}$ feet.	15—Clarion 4 feet.	
7—Octave 4 feet.	16 a—Spare Slider.	
8—Gemshorn 4 fcet.	To a sparo shaor.	
Swell,	15 Stops.	
16—Great Diapason, open	24—Super-octave 2 feet.	
throughout 16 feet.	25—Mixture, V ranks.	
17—Open Diapason 8 feet.	26—Trombone 16 fect.	
18—Gamba	27—Cornopcan 8 feet.	
19—Stopped Diapason 8 feet tone.		
20—Keraulophon 8 feet.	29—Clarionette 8 feet ton	ie.
21—Octave 4 feet.	30—Clarion 4 fect.	
22—Gambette 4 feet.	31a—Spare Slider.	
23—Wald Flute 4 feet.	ora spare sheer.	
	1	
Choir,	11 Stops.	
31—Open Diapason 8 feet.	37—Dulcet 4 feet.	
32—Viol di Gamba 8 feet.	38—Suabe Flute 4 feet.	
33—Dulciana 8 feet.	39—Octave Flute 2 feet.	
34—Clarabella 3 feet.	40—Echo Cornet, V ranks.	
35—Stopped Diapason 8 feet tone.		
36—Harmonic Flute 4 feet.	42 a—Spare Slider.	
Jo II all morne I lace I leet.	12 a - Tare place.	

# Pedal, 11 Stops.

•	
42—Great Diapason, open,	47—Bourdon 16 feet tone.
wood 32 feet.	48—Quint, Stopped103 feet tone.
43—Open Diapason 16 feet.	49—Principal 8 feet.
44—Open Diapason, small,	50—Bass Flute 8 feet tone.
wood 16 feet.	51—Fifteenth 4 feet.
45—Dulciana, metal 16 feet.	52—Mixture, III ranks.
46—Violon 16 feet.	53—Posaune 16 fcet.
Accessory Stops,	Movements, &c.
1—Coupler, Swell to Great.	8—Coupler, Swell Octave.
2—Coupler, Swell to Choir.	9—Pedal Organ off or on.
3—Coupler, Choir to Great.	10—Sforzando Pedal.
4—Coupler, Great to Pedal.	11—Tremulant Swell.
5—Coupler, Choir to Pedal.	12—Pneumatic Lever Attachment.
6—Coupler, Swell to Pedal.	13 to 22—Ten Composition Pedals.
7—Coupler, Pedal Octave.	A
1	

# 217. STRATFORD-ON-AVON.

The Organ in the Parish Church at Stratford-on-Avon was built by Hill in 1841, from a Specification prepared by Mr. F. Marshall, of Learnington. It contains 36 Sounding Stops, of which the following is a list:

# Great, 18 Stops.

1—Tenoroon Diapason, . 16 feet. 2—Bourdon, to meet No.1 16 feet tone. 3—Principal Diapason . 8 feet. 4—Stopped Diapason, Treble	$     \begin{array}{ccccccccccccccccccccccccccccccccc$
5—Stopped Diapason, Bass 8 feet tone. 6—Dulciana 8 feet.	15—Mixture
6—Dulciana	17 — Corno Clarion 4 feet.
8—Principal Octave 4 feet.	18—Cromorne 8 feet tone.
9—Wald Flute 4 feet.	
Swell, 15	2 Stops.
19—Tenoroon Diapason 16 feet. 20—Bourdon, to meet No.1. 16 feet tone. 21—Principal Diapason 8 feet. 22—Stopped Diapason, Treble 8 feet tone. 23—Stopped Diapason, Bass 8 feet tone. 24—Principal Octave 4 feet.	
Pedal, 6	Stops.
31—Open Diapason       16 feet.         32—Bourdon       16 feet tone.         33—Principal       8 feet	34—Fifteenth
Accessory Stops,	Movements, &c.
<ul><li>1—Coupler, Swell to Great.</li><li>2—Great to Pedal.</li><li>3—Swell to Pedal.</li></ul>	4—Octave Pedal. 5 to 7—Three Composition Pedals.
Comp	pass.
Creat and Creat CO to City alt	Podel CCC to Tomon d

Great and Swell, CC to f3 in alt. | Pedal, CCC to Tenor d.

# 218. KIDDERMINSTER.

The new Organ for the Town Hall at Kidderminster is being built by Messrs. Hill and Co. It is to contain 28 Sounding Stops, of which the following is a list:

Great, 10 Stops.		
1—Double Open and Bourdon	6—Wald Flute 4 feet. 7—Twelfth 2 feet. 8—Fifteenth 2 feet. 9—Sesquialtera, III rnks. 10—Posaune 8 feet.	
Choir, 6	Stops.	
11—Dulciana       8 feet.         12—Stopped Diapason       8 feet tone.         13—Gemshorn       4 feet.	14—Flute ,	
Swell, 8	Stops.	
17—Double Diapason       16 feet.         18—Open Diapason       8 feet.         19—Gamba       8 feet.         20—Stopped Diapason       8 feet tone.	21—Principal 4 feet.   22—Fifteenth 2 feet.   23—Cornopean 8 feet.   24—Oboe 8 feet.	
Pedal, 4 Stops.		
25—Open Diapason 16 feet. 26—Violone 16 feet.	27—Principal       8 feet.         28—Posaune       16 feet.	
Accessory Stops, Movements, &c.		
1—Coupler, Swell to Great. 2—Coupler, Great to Pedal. 3—Coupler, Choir to Pedal.	4—Coupler, Swell to Pedal. 5, 6, 7—Three Composition Pedals.	

### Compass.

All the Manuals, CC to g3 in altissimo. | Pedal, CCC to Tenor d.

#### 219. BIRMINGHAM.

The splendid Organ in the Town Hall, Birmingham, was built by Mr. William Hill, of London, and cost about £3,000. The height of the case is forty-feet; it is thirty-five feet wide, and fifteen feet deep. The bellows contains 300 square feet of surface, and upwards of three tons weight upon the bellows are required to give the necessary pressure. The trackers, if laid out in a straight line, would reach above five miles. The principal metal pipe, standing in front of the Organ, is thirty-five feet three inches long, and five feet eight inches in circumference. The largest wood-pipe, CCCC, 32 feet, is twelve feet in circumference, and its interior measurement is two hundred and twenty-four cubic feet. Originally the Great and Choir Organs were of 16-feet compass; but on the occasion of the instrument being remodelled, they were altered to the CC or 8-feet range; the Great being at the same time converted into a "16-feet Manual," in the German acceptation of the term. The Pedal Stops were also increased in number, from four to fifteen. The Organ has a fourth Manual, in connection with a Combination or Solo Organ, upon which, by an ingenious contrivance, can be played any Stop or Stops out of the Swell or Choir Organs, without interfering with their previous arrangement on their separate Manuals. There are two Octaves and five Notes of l'edals. The timber alone used

in this instrument weighs between twenty and thirty tons; and the metal and other materials employed in its formation raise it to a total weight of at least forty tons.

The Birmingham Organ has 53 Sounding Stops, of which the following is a list:

#### Great, 19 Stops. 12-Sesquialtera, V ranks 1—Double Open Diapason 16 feet. 13-Mixture .. V ranks 2—Open Diapason . . . . 8 feet. 14-Fourniture, .V ranks 3—Open Diapason .... 8 feet. 4—Open Diapason . . . .. 15—Contra or Double 8 feet. 5—Stopped Diapason ... 16 feet. 8 feet tone. Trumpet ..... 16—Posaune..... 51 feet tone. 8 feet. 4 feet. 7--Principal. ..... 4 feet. 8—Principal..... 4 feet. 18—Octave Clarion . . . . 2 feet. 9—Twelftli.... $2\frac{2}{3}$ feet. 19—Great Ophicleide, on 10—Fifteenth .... 2 feet. a heavy pressure of 11—Doublette, II ranks . 2 feet. 8 feet. Swell, 10 Stops. 25—Sesquialtera, V ranks $1\frac{3}{5}$ foot. 20—Double Diapason . . . 16 feet. 21—Open Diapason .... 8 feet. 26—Horn..... 8 feet. 22—Stop Diapason . . . . . 8 feet. 8 feet tone. 23—Principal..... 4 feet. 28—Hautboy ...... 8 feet. 24—Fifteenth .... 4 feet. 2 feet. 29—Clarion..... Choir, 9 Stops. 30—Open Diapason . . . . 4 feet. 8 feet. 35—Oboe Flute . . . . . 31—Dulciana .... 8 feet. 36—Wald Flute ..... 4 feet. 32—Stopped Diapason . . 8 feet tone. 37—Fifteenth . . . . . . 2 feet. 33 - Principal ...... 4 feet. 38—Cornopean ..... 8 feet. 34—Flute ..... 4 feet. Pedal, 15 Stops. 39—Contra-Open Diapa-45—Principal ..... 8 feet. son (metal) ..... 40—Contra-Open Diapa-32 feet. 46—Twelfth ..... 6 feet. 47—Fifteenth..... 4 feet. pason (wood) .... 32 feet. 48—Sesquialtera, Vrnks. 41—Open Diapason 49-Mixture, .. V rnks. 50—Contra Posaune.... (metal) . . . . . . 16 feet. 32 feet. 51—Posaune..... 42—Open Diapason 16 feet. (metal) . . . . . . 16 feet. 8 feet. 43—Open Diapason(wood) 16 feet. 53—Clarion ..... 4 feet. 44—Stopped Diapason .. 16 feet tone. Combination or Solo Organ. Choir, 8 Stops. 1—Open Diapason. 5-Harmonica. 2—Cornopean. 6—Flute. 3—Dulciana. 7—Cremona. 4—Stopped Diapason. 8—Bells. Swell, 9 Stops. 9—Hautboy. 14—Claribella. 10—Clarion. 15—Principal. 11—Trumpet. 16—Stopped Diapason.

17—Open Diapason.

12—Horn.

13—Fifteenth.

## Accessory Stops, Movements, &c.

1-Swell to Great.

2-Choir to Great.

3-Pedals to Great.

4-Pedals to Choir.

5-Pedals only.

6-Combination Choir.

7—Combination Swell.

8 to 14—Seven Composition Pedals.

## Compass.

All four Manuals, CC to f3 in alt.

Pedal, CCC to Tenor f.

#### 220. LICHFIELD.

Schwarbrook's Organ that stood in Lichfield Cathedral was removed in 1789, to make way for the present instrument, by Green, which has 23 Sounding Stops.

# Great, 11 Stops.

# Compass from GG, including GG#, to E in alt.

1—Open	Diapason.	
2—Open	Diapason.	
3—Stopp	ed Diapason.	

4-Principal.

5—Twelfth. 6-Fifteenth. 7—Tierce.

8-Furniture.... II ranks.

9—Sesquialtera..III ranks. 10—Trumpet. 11—Cornet to middle  $c^1$ , IV ranks.

# Choir, 5 Stops.

Swell, 7 Stops—down to Fiddle g.

12-Stopped Diapason.

13-Dulciana to Gamut G.

14-Principal.

15-Flute. 16—Fifteenth.

17—Open Diapason.

18—Stopped Diapason.

19-Dulciana. 20-Principal. 21-Cornet. . III ranks.

22—Trumpet. 23-Hautboy.

N. B. No Pedal Pipes.

#### SHREWSBURY. 221.

The Organ in St. Mary's, Shrewsbury, is a fine instrument, and was built by Harris and Byfield, in 1729. In 1847, it was enlarged and improved by Gray and Davison, and now contains 23 Sounding Stops.

# Great, 8 Stops—From CC to E, 53 Notes.

1—Open Diapason 2—Stopped Diapason 3—Principal	53	6—Sesquialtera, III ranks 147 7—Mixture II ranks 65 8—Trumpet 53
4—Twelfth 5—Fifteenth	53	530

	Choir, a	5 Stops.	
9—Stopped Diapason	Pipes. 53 41	12—Flute	Pipes. 53 53
			753

AN ACCOUNT OF COUNTRY	organs. 503	
15—Open Diapason	ripes. 123 nutboy	
222 Cuprwapring	7	
The Organ in St. Chad's, Shrewsbury, was built by Gray, in 1794; and enlarged and improved by Gray and Davison, in 1848.		
2—Open Diapason 54 3—Open Diapason to Tenor c, in place of II-rank Mix-  54 6—Tw 7—Fif 8—Ses	7, 54 Notes.  Pipes.  1, 54 Pi	
Choir, 8 Stops.		
10—Stopped Diapason, treble 11—Ditto Ditto, bass 15—Flu 16—Cre	te	
Swell, 9 Stops—From Ter	nor C.	
19—Stopped Diapason 42 25—Cor	utboy	
Pedal, 1 Stop.		
27—Open Diapason, from CCC to E		
	Total number of Pipes1325	
Couplers, &c.		
1—Swell to Great. 2—Pedals to Great. 3—Pedals to Choir.	-Five Composition Pedals; viz. 3 to the Great Organ, 2 to the Swell.	

# 223. Chester Cathedral.

This Organ was built by Messrs. Gray and Davison, in 1844, and is a very fine one. It contains 36 Sounding Stops, of which the following is a list:

```
Great, 14 Stops—CC to F.
 1—Double Diapason.
                                       8-Twelfth.
                                       9—Fifteenth.
 2—Open Diapason.
                                       10—Sesquialtera, III ranks.
 3—Open Diapason.
                                      11—Furniture .. II ranks.
 4—Stopped Diapason.
 5-Fifth, stopped.
                                      12-Mixture.... II ranks.
                                      13—Trumpet.
 6-Principal.
 7-Flute.
                                      14—Clarion.
                         Choir, 7 Stops—GG to F.
                                       19-Flute.
15—Open Diapason.
16-Dulciana.
                                       20—Fifteenth.
17—Stopped Diapason.
                                       21—Clarionet.
18—Principal.
                          Swell, 9 Stops—FF to F.
                                       27—Sesquialtera, III ranks.
22-Double Diapason.
23—Open Diapason.
                                       28—Hautboy.
                                       29-Cornopean.
24—Stopped Diapason.
25—Principal.
                                       30—Clarion.
26-Fifteenth.
                         Pedal, 6 Stops—CCC to D.
31—Open Diapason ..... 16 feet.
                                       4 feet.
32—Stopped Diapason . . . . 16 feet.
                                       35—Tierce . . . . . . . 3\frac{1}{4} feet.
                                     36—Sesquialtera, II ranks.
33—Principal . . . . . . . . . .
                            8 feet.
                                 Couplers.
 1-Swell to Great.
                                        4—Great to Pedals.
 2—Swell to Choir.
                                        5—Choir to Pedals.
 3-Choir to Great.
```

#### 224. CHESTER.

The Organ in St. John's, Chester, built by Hill, has three rows of keys, from CC, the 8-feet pipe, to F in alt, and a small Pedal Organ of two octaves, from CCC, 16 feet, to C, 4 feet.

Although the Pedal Organ consists of only three Stops, the upper octave, by means of a copula, is connected to the lower octave, thus doubling its power; for instance, the foot being placed on the lowest pedal key, a double Open Diapason pipe of 16 feet, a double Stopped Diapason of 8 feet, a double Trumpet of 16 feet (similar to the one in the Birmingham Organ), and a Trumpet of 8 feet, speak together. Also an Open Diapason of 8 feet, and a Stopped Diapason of 4 feet.

```
Great, 9 Stops.

1—Open Diapason.

2—Open Diapason.

3—Stopped Diapason.

4—Principal.

5—Twelfth.

Great, 9 Stops.

6—Fifteenth.

7—Sesquialtera, IV ranks, bass.

8—Cornet .... IV ranks, treble.

9—Trumpet.
```

```
Choir, 8 Stops.
                                       14—Claribella.
10—Double Stopped Diapason, bass.
11—Open Diapason.
                                       15—Principal.
12—Dulciana.
                                       16-Fifteenth.
13—Stopped Diapason, bass.
                                       17—Cremona.
                     Swell, 8 Stops—From Tenor C to F.
                                       22-Fifteenth.
18—Double Stopped Diapason.
                                       23—Sesquialtera, III ranks.
19 — Open Diapason.
                                       24—Trumpet.
20—Stopped Diapason.
                                       25—Hauthoy.
21—Principal.
                               Pedal, 3 Stops.
                                      28—Double Open Diapason,
26—Double Trumpet . . . . 16 feet.
27—Double Stopped Diapason 8 feet.
                                               metal . . . . . . 16 feet.
                                  Couplers.
 1—Swell to Great.
                                         4—Pedal keys to Great.
 2—Choir to Great.
                                         5—Octave Copula.
 3—Pedal keys to Choir.
```

### 225. LIVERPOOL.

The largest Organ yet constructed in England is that recently erected in the magnificent new Hall (St. George's) at Liverpool. It was built by Mr. Willis, under the direction of Dr. S. S. Wesley, and contains 100 Sounding Stops. The following account of this immense instrument is copied from a description compiled from particulars furnished by Dr. Wesley and Mr. Willis.

The instrument consists of four rows of keys, from G to A, i. e. GG to A in altissimo, 63 notes; and two octaves and a half of Pedals, from C to F, i. e. CCC to F, 30 notes. There are 108 Stops, and 8,000 Pipes, varying in length from 32 feet to 3-8ths of an inch, ten octaves apart.

Great, 25 Stops.			
1—Double Diapason 16 feet.	14—Fifteenth 2 feet.		
2—Open Diapason 8 feet.	15—Doublette, II rks.		
3—Open Diapason 8 feet.	16—Sesquialtera, VI rks.		
4—Open Diapason 8 feet.	17—Mixture, IV rks.		
5—Open Diapason(wood) 8 feet.	18—Fourniture, IV rks.		
6—Stopped Diapason 8 feet.			
	19—Cymbale, V rks.		
7—Principal 4 feet.	20—Posaune 16 feet.		
8—Principal 4 feet.	21—Ophicliede 8 feet.		
9—Principal 4 feet.	22—Trombone 8 feet.		
10—Flute 4 feet.	23—Trumpet 8 feet.		
11—Twelfth 3 feet.	24—Clarion 4 feet.		
12—Twelfth 3 feet.	25—Clarion 4 feet.		
13—Fifteenth 2 feet.			
Pedal, 17 Stops.			
26—Double Diapason (open,	34—Quint 6 feet.		
wood)	35—Fifteenth 4 feet.		
27—Double Diapason (open,	36—Mixture, III ranks.		
metal) 32 feet.	37—Fourniture, V ranks.		
28—Open Diapason (wood) 16 feet.	38—Posaune 32 feet.		
29—Open Diapason (metal) 16 feet.	39—Trombone 16 feet.		
30—Salcional (open, metal) 16 feet.	40—Ophicliede 16 feet.		
31—Bourdon (closed, wood) 16 feet.	41—Trumpet 16 feet.		
32—Principal (wood) 8 feet.	42—Clarion 8 feet.		
33—Principal (metal) 8 feet.	Oriect,		
The contract of the contract o			

Solo, 15 Stops.		
43—Double Diapason	50—Corno di Bassetto 8 feet.	
(closed, wood) 16 feet.	51—Harmonic Flute 4 feet.	
44—Open Diapason (wood) 8 feet.	52—Ophicleide 8 feet.	
45—Stopped Diapason 8 feet.	53 — Trombone 8 feet.	
46—Flute (orchestral) 4 feet.	54—Trumpet (Harmonic) 8 feet.	
47—Flageolet 2 feet.	55—Vox Humana 8 feet.	
48—Oboe (orchestral mid	56—Bassoon 8 feet.	
C) 8 feet.	57—Contra Fagotto 16 feet.	
49—Clarionet (tenor C) 8 feet.	o, contra ragono To rect.	
` '	1 26 - Cu	
	25 Stops.	
58—Double Diapason 16 feet.	71—Piccolo (open, wood) 2 feet.	
59—Open Diapason 8 feet.	72—Sesquialtera, III rks.	
60—Open Diapason 8 feet.	73—Mixture, III rks.	
61—Stopped Diapason 8 feet.	74—Furniture,IV rks.	
62—Dulciana 8 feet.	75—Trombone 16 feet.	
63—Principal 4 feet.	76—Contra Hautboy 16 feet.	
64—Principal 4 feet.	77—Horn 8 feet.	
65—Flute (open, wood)	78—Trumpet 8 feet.	
66—Flute (closed, wood) 4 feet.	79—Oboe 8 feet.	
67—Twelfth 3 feet.	80—Ophicleide 8 feet.	
68—Fifteenth 2 feet.	81—Clarion 4 feet.	
69—Fifteenth 2 feet.	82—Clarion 4 feet.	
70—Doublette, II ranks.		
Choir, 1	8 Stops.	
83—Double Diapason	92—Flute.	
(closed, wood) 16 feet.	93—Flageolet 2 feet.	
84—Open Diapason 8 feet.	94—Twelfth 3 feet.	
85—Dulciana 8 feet.	95—Fifteenth 2 feet.	
86—Viol di Gamba 8 feet.	96—Mixture, III ranks.	
87—Claribella 8 feet.	97—Cremona 8 feet.	
88—Stopped Diapason 8 feet.	98—Trumpet 8 feet.	
89—Dulcimer 4 feet.	99—Orchestral Oboe	
90—Principal 4 feet.	(tenor C) 8 feet.	
91—Celestiana.	100Clarion 4 feet.	
The Couplers or Mechanical Connexions are:		
Swell to Great Organ.	Choir to Pedals.	
Choir to Great Organ.	Great to Pedals.	
Solo to Great Organ.	Swell to Pedals.	
Solo to Choir Organ.	Solo Organ to Pedals.	
Creat to Carell Organ		

The grand source of wind is from two immense Bellows, each having three feeders, placed in the vaults below the floor of the Hall. These are blown by a steam-engine, consisting of a pair of oscillating cylinders. There are, besides, twelve other bellows, or reservoirs, each giving its own appropriate pressure of air to those Stops or Pipes which it supplies.

Great to Swell Organ.

The Pneumatic Lever is applied to each of the Manuals distinctly, and also distinctly or separately to the Manual Couplers. To the Pedal Organ there is a double set of Pneumatic Levers; but the most elaborate use of this power is found in its application to the combination of Stops; here we have it exhibited in a compound form to each Organ individually, and to the whole collectively, where by one opera-

# To face page 506.

# THE ORGAN, ST. GEORGE'S HALL, LIVERPOOL.

Note.—Since the preceding specification was first published (in the Musical Transcript), the following alterations in it have been made. In the Great Organ, a Quint of 6 feet has been substituted for one of the three Principals; and a Tenth has been inserted in lieu of one of the two Twelfths. In the Solo Organ, a Horn of 8 feet occupies the place of the Harmonic Flute of 4 feet (No. 51); the Trumpet (No. 54) is not "Harmonic;" and instead of a Vox Humana (No. 55), there is a Harmonic Trumpet of 4 feet. In the Choir Organ, there is an Octave Gamba in place of the "Dulcimer" (No. 89); and the 4-feet Flute (No. 92) is "Harmonic."

The Trumpet and Clarion in the Pedal Organ (Nos. 41 and 42) are of 8 and 4 feet respectively; and the Orchestral Oboe in the Solo Organ (No. 48) descends to Tenor C.

The above facts have been communicated by Mr. Henry Willis, together with several particulars relating to the mechanism of the instrument, which, however, arrived too late to be inserted in the present edition.



tion the player is enabled to produce a combination of Stops upon the entire instrument at once. This movement appears in a series of six handsome gold-gilt knobs, placed immediately under each set of Manuals, at about two keys' distance from each other, occupying a central position, always within reach of one or other of the performer's thumbs.

The Pneumatic Lever is also applied to the opening and shutting of the Swell louvres, and some other less important purposes.

The very extensive use Mr. Willis has made of this extraordinary power seems to have rendered any deviation from the ordinary valves, in immediate connection with the Pipes, unnecessary, excepting in the Pedal Organ, where the large Pipes have a very peculiar valve for their supply, which is quiet, sound, and free from the resistance resulting from the compressed air. Space, however, will not permit us to describe this curious mechanism.

The Pedal-board is a most ingenious contrivance of Dr. Wesley's. The Pedals radiate to a point some distance behind the player, when seated at the instrument; and are circular on plan, and conically segmental in elevation.

The mode of drawing the Stops is different from most Organs that we have seen—each knob, which is of solid ivory, presenting itself at an angle of about 30 degrees. By this arrangement, with that of the Pedals and the combination movement, the player has remarkable control over the instrument.

The improvements in the mechanism of this noble Organ are patent, and consist: 1st. Of the cylindrical valve. 2nd. The exhausting valve to the pneumatic lever, which would, by engineers, be called an opposition surface valve, its object being to facilitate the exhaustion of the bellows, and thus to enhance the reiteration of the touch. 3rd. The throttle valve to the same, whereby the noise always perceptible in Pneumatic Levers, without this application, is entirely overcome. This is simply a valve placed over the aperture through which the wind must pass to inflate the Pneumatic Lever; and, although the machine retains all the impulsiveness necessary to insure punctuality, its impetus is gradually checked by the Pneumatic Bellows closing this valve, which is admirably contrived to have no connexion with the movement. 4th. The combination movement, and the application of Pneumatic Levers in a compound form, by which we understand one acting upon another. 5th. An improved method of centring or hinging such movements as lead from Draw-stops to Slides, &c. 6th. (not patent). A most valuable contrivance in the coupling of the Pedals with the Manuals, whereby the four Couplers in reality become eight. This is effected by two Pedals on the left of the performer; one Pedal produces the connexion in unison with the Pedal Organ, the other in octaves with the same. They can be used separately or together, and stand in such a position as to enable the performer by one operation to detach the whole coupling movement, though the Stop be drawn. This is a mechanical contrivance so unique, and of such importance and utility, that we eannot help thus expatiating upon it.

Some delay had been experienced in the final arrangements for the erection of this Organ; but the result has justified the propriety of maturely considering the best plans before proceeding with the instrument. To the combined exertions of Dr. Wesley and Mr. Willis the Town Council and the inhabitants are indebted

for an unrivalled instrument; and while the opulence of the Corporation has justified such a large expenditure, the result is both satisfactory and creditable to the gentlemen who have conducted its erection.

## 226 LIVERPOOL.

The Organ in Great George Street Chapel is a magnificent and well-balanced instrument. It was built by Hill, in 1841, and contains 52 Sounding Stops, of which the following is a list:

the following is a fist.	
Great, 1	6 Stops.
1—Tenoroon to Tenor c  key	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
	20 Stops.
17—Tenoroon to Tenor c  key	26—Fifteenth
	8 Stops.
37—Open Diapason       8 feet.         38—Dulciana       8 feet.         39—Stopped Diapason       8 feet tone.         40—Clarabella       8 feet.         41—Principal       4 feet.	42—Stopped Flute       4 feet tone         43—Wald Flute       4 feet         44—Oboe Flute       4 feet         45—Cremona       8 feet tone
	an, 1 Stop.
	abilis8 feet.
Pedal, 47—Open Diapason 16 feet. 48—Bourdon 16 feet tone. 49—Principal 8 feet.	6 Stops. 4 feet. 51—Sesquialtera, V rnks $3\frac{1}{\delta}$ feet. 52—Trombone 16 feet.
Accessory Stops,	Movements, &c.
1—Swell to Great. 2—Choir to Great. 3—Great to Pedal.	4—Swell to Pedal. 5—Choir to Pedal. 6 to 10—Five Composition Pedals.
	pass.
Great, CC to $f^3$ in alt. Choir, CC to $f^3$ in alt.	Swell, CC to f <sup>3</sup> in alt. Pedal, CCC to Tenor d.

#### 227. LIVERPOOL.

The fine Organ in the Collegiate Institution, Liverpool, was built by Mr. Jackson, of Liverpool, in 1850. It contains the 40 Sounding Stops mentioned below.

Great, 13 Stops-16 ranks.

Great, 15 Stops—10 ranks.			
1—Tenoroon	16 feet.  16 feet tone.  8 feet.  8 feet.  8 feet tone.  4 feet.	7—Twelfth	
	Choir,	11 Stops.	
14—Open Diapason	8 feet. 8 feet. 8 feet. 8 feet. 4 feet.	20—Flute       4 feet.         21—Piceolo       2 feet.         22—Fifteenth       2 feet.         23—Bassoon       8 feet.         24—Clarionet       8 feet.	
	Swell, 9	Stops.	
25—Double Diapason	16 feet. 8 feet. 8 feet. 4 feet. 2 feet.	30—Eeho Dulciana Cornet,         III ranks.         31—Cornopean       8 feet.         32—Oboe       8 feet.         33—Clarion       4 feet.	
Pedal, 7 Stops.			
36—Principal	16 feet. 16 feet. 8 feet. 5\frac{1}{3} feet.	38—Fifteenth 4 feet. 39—Mixture, VI ranks. 40—Posaune 16 feet.	
Accessory Stops, Movements, &c.			
1—Swell to Great. 2—Choir to Swell. 3—Sub-octave Choir to Greatwell to Pedals.	reat.	5—Choir to Pedals. 6—Great to Pedals. 7—Super-octave to Pedals. 8 to 13—Six Composition Pedals.	

All the Manuals, CC to g<sup>3</sup> in altissimo. | Pedal, CCC to Fiddle g.

#### 228. MANCHESTER.

The Cathedral at Manchester contains two Organs; one at the West End, consisting of Great and Swell Organs, and no Choir; the other over the screen, consisting of a Choir Organ only, and without Pedals.

The West End Organ was made about seventy years ago, and paid for by the parish. The name of the builder is not known. At the first Musical Festival, in 1828, it was removed from the centre of the building, where it was originally erected, to the west end of the Church, where it still remains, and is used for the Sunday services, which are only parochial. The following is a list of the Stops in the West End Organ:

24—Principal . . . . . . . . . . . .

4 feet.

```
Great, 15 Stops—Compass from GG to F in alt.
 1—Double Stopped Diapason to GGG.
                                         9—Flute.
 2—Open Diapason.
                                        10-Twelfth.
 3—Ditto
           Ditto.
                                        11—Fifteenth.
 4—Dulciana.
                                        12—Sesquialtera, IV ranks throughout.
                                        13 -Trumpet.
 5-Claribella.
 6-Stopped Diapason.
                                        14—Clarion, bass.
 7—Principal.
                                        15—Cremona.
 8-Ditto.
                  Swell, 7 Stops—Compass from C to F in alt.
16—Double Diapason.
                                        20—Fifteenth.
17—Open Diapason.
                                        21-Hautboy.
18—Stopped Diapason.
                                        22—Trumpet.
19—Principal.
                                Pedal, 1 Stop.
       23—One Octave of Pedal Pipes, very small scale, from CCC to BB.
            Two Octaves and a half of Pedal keys.
   Pedal Coupler, Swell Coupler, old shifting movement, and the old "lifting door"
to the swell box. Tho entire scale is small, therefore very shrill, and the bass
remarkably thin.
   The Choir Organ is a little gem. It was built by Father Smith, and remains in
its original state. It contains 8 Stops, of which the following is a list:
 1—Open Diapason, to Middle c1.
                                          5—Flute throughout.
 2—Hohl-flote, to Middle c<sup>1</sup>.
                                          6—Fifteenth throughout.
 3—Stopped Diapason throughout.
                                         7—Vox Humana, Treble.
 4—Principal throughout.
                                          8—Bassoon, Bass.
                                  Compass.
                          GG with GG# to d3 in alt.
                             229.
                                   MANCHESTER.
   The fine Organ in St. Luke's, Manchester, was built by Hill, in 1840.
                       Great, 10 Stops—CC to F in alt.
                                         6—Twelfth ....
 1—Double Open Diapason 16 feet.
                                                                    3 feet.
                                         7—Sesquialtera, III ranks.
 2—Open Diapason . . . .
                           8 feet.
 3—Stopped Diapason . . .
                           8 feet.
                                         8—Mixture . . . II ranks.
 4—Principal .....
                           4 feet.
                                         9—Octave Fifteenth....
                                                                    1 foot.
 5—Fifteenth . . . . . . .
                                                                    8 feet.
                           2 feet.
                                        10—Posaune .....
                       Choir, 10 Stops—CC to F in alt.
                                        16—Fifteenth . . . . . . .
                                                                    2 feet.
11—Open Diapason . . . .
                           8 feet.
                                                                    4 feet.
12—Stopped Diapason . . .
                           8 feet.
                                         17—Oboe Flute . . . . . . .
13—Claribella . . . . . . .
                                        18—Wald Flute .....
                           8 feet.
                                                                    4 feet.
14—Principal .....
                                         19—Piccolo .....
                                                                    2 feet.
                           4 feet.
15—Dulciana .....
                                        20—Cremona . . . . . . .
                                                                    8 feet.
                           8 feet.
                         Swell, 7 Stops—Tenor C to F.
                                                                    2 feet.
21—Double Open Diapason 16 feet.
                                        25—Doublette, II ranks...
                                                                    8 feet.
22—Open Diapason . . . .
                           8 feet.
                                        26—Cornopean .....
23—Stopped Diapason ...
                                        8 feet.
                           8 feet.
```

```
Pedal, 3 Stops—One Octave, CCC to CC.
                                         30—Trombone . . . . . . 16 feet.
28—Open Diapason . . . . 16 feet.
29—Bourdon . . . . . . . 16 feet.
                                   Couplers.
 1-Choir to Great.
                                          5—Swell to Pedals.
                                          6, 7—Two Composition Pedals to Swell.
 2—Swell to Great.
                                          8, 9, 10—Three Composition Pedals to
 3-Great to Pedals.
 4-Choir to Pedals.
                                                      Great.
```

#### 230. MANCHESTER.

The Organ in Holy Trinity Church, Manchester, was built in 1852, by Kirtland and Jardine, of Manchester. It has 4 Manuals, Great Organ, Choir, Swell, and Solo, besides an independent Pedal, and contains 49 Stops, of which the following is a list:

```
Great, 14 Stops—CC to F, 54 notes.
                                   8—Clear Flute . . . . . . . .
 1—Bourdon . . . . . . . . 16 feet.
                                                          4 feet.
                                  2—Open Diapason .....
                        8 feet.
                                                         2 fect.
 3—Salcional . . . . . . . .
                        8 feet.
                                  2 fect.
                                  11—Sesquialtera, III ranks. 13 foot.
 4—Stop Diapason, bass..)
                        8 feet.
 5—Clarabella . . . . . . . . (
                                  12—Mixture....III ranks.
                                                          1 foot.
                                  6—Quint . . . . . . . . 5\frac{1}{3} feet.
                                                          8 fect.
 14—Clarion .....
                                                          4 fect.
                        4 feet.
                  Choir, 11 Stops—CC to F, 54 notes.
*15—Bourdon . . . . . . 16 feet.
                                   21—Rohrflute, Tenor c...
                                                          4 fect.
 2\frac{2}{3} feet.
                        8 feet.
                                   23—Fifteenth . . . . . . . . .
 17—Stop Diapason, bass.)
                                                          2 feet.
                        8 feet.
 18—Stop Diapason, treble
                                   24—Flageolet, Tenor c . . .
                                                          2 feet.
 19—Viola di Gamba, Tenor c 8 feet.
                                   25—Bassoon and Clarinet .
                                                          8 feet.
 20—Principal .....
                        4 feet.
                  Swell, 10 Stops—CC to F, 54 notes.
26—Bourdon . . . . . . . 16 feet.
                                 31—Fifteenth .....
                                                         2 feet.
27—Open Diapason.....
                                 32-Mixture, III ranks ...
                                                        1\frac{2}{3} foot.
                       8 feet.
28—Stop Diapason . . . . .
                       8 feet.
                                 33—Cornopean .....
                                                         8 feet.
29—Principal .....
                       4 feet.
                                 8 feet.
30—Twelfth . . . . . . . 2\frac{2}{3} feet.
                                 4 feet.
                 Solo, 5 Stops—Tenor C to F, 42 notes.
*39-Flute harmonique . . .
                        8 feet.
                                                          4 feet.
*37—Vox Angelica . . . . .
                                  8 feet.
                        8 feet.
*38—Flauto Traverso ....
                        4 feet.
                  Pedal, 9 Stops—CCC to F, 30 Notes.
                                  41—Open Diapason . . . . 16 feet.
 42—Stopped Diapason.... 16 feet.
                                  47—Mixture (19—22—26—29).
                                 *48—Posaune . . . . . . 16 feet.
 44—Principal .....
                        8 feet.
 45—Twelfth ..... 5\frac{1}{3} feet.
     Couplers..... 6 | Ventils ...... 4 | Composition Pedals.. 6
```

The keys are 25 feet from the Organ, yet the "touch" is remarkably crisp, and pleasant to the performer. The keys of the Solo, Swell, and Great Organs each project an inch over the keys next below them; by this means the top set (Solo) is brought 3 inches nearer to the performer than in keys made in the usual manner. The Stops marked (\*) have no Pipes in, but are "prepared" to receive them.

# 233. MANCHESTER.

The new Organ now being built for St. Peter's Church, Manchester, by Kirtland and Jardine, is to contain 47 Stops, of which the following is a list:

Great, 12 Stops—CC to g <sup>3</sup> in altissimo.		
1—Double Open Diapason 16 56	7—Clear Flute	
2—Open Diapason 8 56	8—Twelfth $2\frac{2}{3}$ 56	
3—Gamba	9—Fifteenth 2 56	
4—Stopped Dapason 8 56	10—Full Mixture, V rnks. 2 56	
5—Flute Harmonique 8 35	11—Sharp Ditto V rnks. 1 56	
6—Principal 4 56	12—Trumpet 8 56	
Swell, 12 Stops—Co	C to g <sup>3</sup> in altissimo.	
13—Bourdon 16 56	Twelfth Feet. Pipes $2\frac{2}{3}$ 56	
14—Open Diapason 8 56	20—Fifteenth 2 56	
15—Stopped Diapason 8 56	21—Mixture, V ranks 2 56	
16—Hohl Flute 8 56	22—Cornopean 8 56	
17—Principal 4 56	23—Hautboy 8 56	
18—Gedact Flute 4 56	24—Clarion 4 56	
~\		
Choir, 12 Stops—C Feet. Pipes.	C to g <sup>3</sup> in altissimo.	
25—Bourdon	31—Flauto traverso 4 56	
26—Spitzflote 8 56	32—Rohrflote 4 44	
27—Dulciana	33—Fifteenth 2 56	
28—Gedact 8 56	34—Mixture, IV ranks $1\frac{1}{3}$ 56	
29—Keraulophone 8 56	35—Bassoon	
30—Gemshorn 4 56	36—Æoline 8 56	
Pedal, 11 Stops—	-CCC to Tenor f.	
37—Sub-Bass wood 32 feet tone.	42—Principalmetal 8 feet.	
33—Open Diapason, metal 16 feet.	43—Violoncellowood 8 feet.	
39—Open Diapason, wood 16 feet.	44—Twelfth metal 5½ feet.	
40—Stopped Diapason,	45—Fifteenthmetal 4 feet.	
wood 16 feet tone.	46—Posaune metal 16 feet.	
41—Quint-Gedactwood $10\frac{2}{3}$ ft. tone.	47—Trumpet metal 8 feet.	
Accessory Stops,		
1—Coupler, Swell to Great, unison.	8—Great Organ to Pedals.	
2—Coupler, Swell to Great, octave.	9—Tremulant.	
3—Coupler, Swell to Great, sub-octave.	10 to 15—Six Composition Pedals; viz.	
4—Coupler, Swell to Pedal.	2 to Great Organ.	
5—Coupler, Great to Pedal.	2 to Choir Organ.	
6—Coupler, Choir to Pedal.	2 to Swell Organ.	
7—Sforzando Pedal, Great to Swell.		
Sumr	mary.	
Draw Stops, Great Organ 12	Copulæ 6	
Draw Stops, Choir Organ 12	Clochette 1	
Draw Stops, Swell Organ 12		
Draw Stops, Pedal Organ 11	Total mumb on of Dugger Ctong CA	
Composition Pedals 6	Total number of Draw Stops 60 Other Copulae	

#### 232. Ashton-under-Line.

The magnificent Organ, in the Parish Church at Ashton-under-line was the noble gift of Edward Brown, Esq. of the Firs, and was built by Hill, in the year 1845. It contains 55 sounding Stops, besides 8 Couplers, 3 Manuals, and a Pedal of 6 Stops. The following is its disposition:

read of the tops. The following is its a	is position.
	21 Stops.
Pipes. Feet.	Pipes. Feet.
1—Tenoroon Diapason 42 16	11—Twelfth 54 . 2 3 12—Fifteenth 54 . 2
2—Bourdon, CCC to	
BB 12 16 tone.	$13$ —Tierce $54$ $1\frac{3}{5}$
3—Open Diapason 54 8	14—Sesquialtera,
4—Open Diapason 54 8	III rnks. $162  cdots 1\frac{3}{5}$ 15—Mixture, III rnks. $162  cdots \frac{4}{5}$
5—Stopped Diapason to Tenor c 42 8 tone.	
6—Stopped Diapason, Bass 12 8 tone.	17—Tenoroon Trumpet 42 16 18—Double Trumpet,
Bass 12 8 tone. $7$ —Quint $54$ $5\frac{1}{3}$	CCC to BB 12 16
8—Principal 54 4	19—Posaun 54 8
9—Wald Flute, to	20—Clarion 54 4
m 4.2 4	21—Octave Clarion 54 2
10—Tenth 54	21—Octave Charlon 94 2
· · · ·	_
Swell, 1	
Pipes. Feet. 22-—Tenoroon Dulciana 42 16	31—Fifteenth 54 2
23—Bourdon, CCC to BB 12 16 tone.	32—Flageolet, Tenor c. 42 2
24—Open Diapason 54 8	33—Sesquialtera,
25—Echo Dulciana, to	III ranks. 162 1 <sup>3</sup> / <sub>3</sub>
Tenor c 42 8	34—Mixture, II ranks. 108
26—Stopped Diapason,	35—Echo Dulciana
Treble 42 8 tone.	Cornet, to Tenor
27—Stopped Diapason,	e, V ranks. 210
Bass 12 8 tone.	36—Tenoroon Trumpet
28—Principal 54 4	to Tenor c 42 16
29—Suabe Flute, to	37—Cornopean 54 8
Tenor c 42 4	38—Oboe 54 8
$30$ —Twelfth $54$ $2\frac{2}{3}$	39—Clarion 54 4
Choir, 1	
40—Open Diapason 54 8	Pipes. Feet.
41—Claribel, to Tenor c. 42 8	c 42 4
42—Viol de Gamba, to	46—Stopped Flute, to
Tenor c 42 8	Tenor c 42 4 tone.
43—Stopped Diapason,	47—Fifteenth 54 2
Bass 12 8 tone.	48 - Piccolo, to Tenor c 42 2
44—Principal 54 4	49—Cremona, to Tenor c 42 8 tone
	Stops. Pipes. Feet.
50—Open Diapason . Pipes. Feet. 27 16	53—Fifteenth 27 4
51—Bourdon 27 16 tone.	54—Mixture, V ranks 135 31
52—Principal 24 3	55—Trombone 27 16
	•
	Movements, &c.
1 to 8—Eight Couplers.	15—Sforzando Pedal.
9 to 14—Six Composition Pedals.	

# Compass.

Great Organ, CC to f3 in alt. 54 notes. | Choir Organ, CC to f<sup>3</sup> in alt. 54 notes. Swell Organ, CC to f<sup>3</sup> in alt. 54 notes. | Pedal Organ, CCC to Tenor d, 27 notes.

S	Summary of Pipes	and Stops.	
	-	Pipes,	Stops.
Great Organ		1230	21
Swell Organ		1134	18
			_
	Total	3060	55

# 233. STOCKPORT.

The Organ in the large room of the Stockport Sunday School was built in 1853, by Kirtland and Jardine of Manchester, according to a scheme drawn up by George Cooper, Esq. of London, and which does great credit to the judgment of that gentleman. The instrument contains 23 Sounding Stops, distributed among 2 complete Manuals and Pedal in the following manner:

Manuais and Tedai in the i	5					
	Gr	eat, 1	2 Stops.			
	Feet.	Pipes.		Feet.		Pipes.
1—Open Diapason,			8—Fifteenth	$^2$		54
(major)	8	54	9—Sesquialtera, IV rnks	$1\frac{1}{3}$		216
2 - Open Diapason,			10—Trumpet	8		54
(minor)	8	59	11—Clarion	4		54
3—Stopped Diapason	8 tone.	54	12—Cremona, to Fiddle			
4—Dulciana	8	54	G	8		35
5—Wald Flute	4	54			-	
6—Principal	4	54	Number of Pipes.			636
7—Twelfth	$2\frac{2}{3}$	54				
	Sv	vell 10	0 Stops.			
	Feet.	Pipes.	o ceops.	Feet.		Pipes.
13—Double Stopped		1	18—Hohl Flute	4		54
Diapason	10	E 1				F 4
	10	04	19—Fitteenth	2		54
14—Open Diapason		54	19—Fifteenth			
14—Open Diapason 15—Stopped Diapason	8	54	20—Sesquialtera, III rnks.	$1\frac{3}{5}$		162
15—Stopped Diapason	8	54	20—Sesquialtera, III rnks. 21—Cornopean	$\frac{1\frac{3}{5}}{8}$		$\begin{array}{c} 162 \\ 54 \end{array}$
15—Stopped Diapason 16—Keraulophon, to	8	54 54	20—Sesquialtera, III rnks.	$\frac{1\frac{3}{5}}{8}$	• •	$\frac{162}{54}$
15—Stopped Diapason 16—Keraulophon, to Tenor c	8	54 54 42	20—Sesquialtera, III rnks. 21—Cornopean	1 <sup>3</sup> / <sub>5</sub> 8 8	•••	162 54 54
15—Stopped Diapason 16—Keraulophon, to	8 8 4	54 54 42 54	20—Sesquialtera, III rnks. 21—Cornopean 22—Hautboy Pipes in Swell	1 <sup>3</sup> / <sub>5</sub> 8 8	•••	162 54 54
15—Stopped Diapason 16—Keraulophon, to Tenor c	8 8 4	54 54 42 54 Pedal,	20—Sesquialtera, III rnks. 21—Cornopean	1 <sup>3</sup> / <sub>5</sub> 8 8	•••	162 54 54

1—Swell to Great, Unison.	4—Great
2—Swell to Great, Sub-Octave.	5—Swell
3—Swell to Great, Octave.	

6 to 9—Four Composition Pedals to

Great Organ. 10 and 11—Two Composition Pedals to

Swell Organ. 12—Pedal, Sub-Octave-Swell. to Pedal.

to Pedal.

13-Pedal, Unison Octave Swell.

14—Pedal, Octave Swell.

15 - Sforzando Pedal, acting simultaneously upon the three Swell Couplers.

#### Compass.

Great, CC to f<sup>3</sup> in alt. Swell, CC to f<sup>3</sup> in alt.

Pedal, CCC to Tenor f.

The arrangement of the Pedal Swell Couplers enables the performer to make the various combinations of Great Organ with the Swell either by hand with the Draw-Stops, or by the foot. By their instrumentality, on the one hand, the power of the Instrument may be more than doubled, and, on the other, such a variety of ochestral effects may be produced as could in no other way be placed within reach of a single performer.

The Swell Organ is the largest in the district (excepting the one at the Holy Trinity Church, Manchester); the dimensions of the Swell Box being 10 feet 6 inches high, by 10 feet wide, and nearly 5 feet from front to back.

Another novel feature of the instrument is the introduction of the "equal temperament," as adopted in all the great Continental Organs. The advantages of this mode of tuning are very important, enabling the performer to play in any key, even the most extreme, without offending the ear of the musician, as is the case in the present mode, when playing in the keys of  $\Lambda$  flat, D flat, and many others.

The "Chorus" of the Great Organ, although consisting of IV ranks only, returns to an *Open Diapason*, Principal, Twelfth, and Fifteenth, at Treble c². By this arrangement, the portion of a Manual that is usually the weakest—the upper octave and a half—is reinforced by Pipes of greater gravity and sonority than usually appear in the Mixture-work; brilliancy meanwhile being secured by the acute pitch of the notes themselves. This is the first Organ in England in which this Composition (adopted at the suggestion of the writer) was tried with so few ranks of Compound-work; and it has since been followed by Robson, in his Belfast and other Organs; and by Walker, in his Prestbury Organ.

#### 234. OLDHAM.

The Organ in the Parish Church at Oldham was built in the year 1830, by Elliott and Hill, of London, and is a very fine instrument. It contains 31 Sounding Stops, of which the following is a list:

```
Great, 14 Stops.
 1-Double Diapason, Treble.
                                        8-Twelfth.
 2-Double Diapason, Bass.
                                        9-Fifteenth.
                                       10—Sesquialtera, IV ranks.
 3—Open Diapason, No. 1.
 4—Open Diapason, No. 2.
                                       11—Mixture, .. III ranks.
                                       12-Trumpet, Treble.
 5—Stopped Diapason.
                                       13—Trumpet, Bass.
 6—Principal, No. 1.
 7-Principal, No. 2.
                                       14—Clarion.
                               Choir, 8 Stops.
15—Open Diapason.
                                       19-Fifteenth.
16—Stopped Diapason.
                                       20-Flageolet.
17—Principal.
                                       21—Cremona.
18-Flute.
                                       22—Bassoon.
                               Swell, 8 Stops.
                                       27-Principal.
23—Double Diapason.
24—Open Diapason.
                                       28-Mixture, III ranks.
25—Stopped Diapason.
                                       29—Trumpet.
26-Dulciana.
                                      30-Hautboy.
                                Pedal, 1 Stop.
```

31-Pedal Pipes.

# Accessory Stops, Movements, &c.

1—Coupler, Swell to Great.
2—Coupler, Great to Pedal.
3—Coupler, Choir to Pedal.
4, 5, 6—Three Composition Pedals.

#### Compass.

Great, GG to f3 in alt.
Choir, GG to f3 in alt.
Swell Organ, Tenor c to f3 in alt.

Swell Clavier, down to GG, and acting on Choir Organ below Tenor c. Pedal Clavier, GG to Tenor d.

#### 235. Huddersfield.

The Organ in Buxton Road Chapel, Huddersfield, was built by T. J. Robson, of London, and consists of three Manuals, Great, Choir, and Swell, with an independent Pedal Organ of 9 Stops. In its construction it has been a special object to embody as many of the finest features of the German and English Instruments as could conveniently be introduced. The Manual Organs are of the full compass, and the Pedal Organ (a department which is too often limited, and consequently defective either in range, number of Stops, or both) is of ample and corresponding proportions. The Organ contains 40 Sounding Stops, of which the following is a list:

# Great, 15 Stops.

# Compass, CC to C altissimo. (61 notes.)

1—Double Open Diapa-		8—Twelfth	3 feet.
son, metal through		9—Fifteenth	2 feet.
out	16 feet.	10—Piccolo	2 feet.
2—Large Open Diapason.	8 feet.	11—Sesquialtera, III rnks.	$1\frac{3}{5}$ foot.
3—Open Diapason	8 feet.	12—Mixture,II rnks.	$\frac{2}{3}$ foot.
4—Stopped Diapason	8 feet tone.	13—Furniture,III rnks.	
5—Quint	6 feet.	14—Trumpet	8 feet.
6—Principal	4 feet.	15—Clarion	4 feet.
7-Wald Flute	4 feet.		

# Choir, 4 Stops.

#### Compass, CC to C altissimo. (61 notes.)

16—Stopped Diapason and Claribella	8 feet tone.	18—Viol di Gamba 19—Principal	8 feet. 4 feet.
17—Dulciana			

# Swell, 12 Stops.

# Compass, CC to C altissimo. (61 notes.)

20—Double Diapason 16 feet tone.	27—Contra Fagotto,
21—Open Diapason 8 feet.	metal 16 feet.
22—Stopped Diapason 8 feet tone.	28—Clarionet, and Corni
23—Viol di Gamba 8 feet.	di Bassetto 8 feet.
24—Principal 4 feet.	29—Hautboy 8 feet.
25—Fifteenth 2 feet.	30—Horn
26—Sesquialtera, III ranks 1\frac{3}{5} foot.	31—Charion 4 feet.

# Pedal, 9 Stops.

The Compass of the Pipes, CCC to F (42 notes), three and a half octaves, the upper octave being added for the purpose of completing the Octave Copula, whereby the effect of 18 Stops is gained throughout the Pedal range.

32—Open Diapason	16 feet.	37—Sesquialtera, V ranks	3½ feet.
33—Violone	16 feet tone.	38—Posaune, metal	16 feet.
34—Principal	8 feet.	39—Trumpet	8 feet.
35—Quint		40—Clarion	
36—Fifteenth			

Coupl	ers, &c.			
!—Swell to Great.	1	3—	-Choir to Pe	edals.
2—Great to Pedals.		4	Octave Ped	als.
5 to 10, Six Co	niposition	Pedals		
Summary of S	Stops and	Pipes.		
	Stops.	•	Pipes.	
Great Organ	. 15		1232	
Swell Organ		• •	854	
Choir Organ	. 4		220	
Pedal Organ	. 9		546	
Copulas	. 4			
•	_		2852	
	4.1			

# 236. Huddersfield.

The Organ in Highfield Chapel, Huddersfield, was built by Walker in 1854. It is enclosed in an elegant Case, made from a design by Messrs. Perkin and Backhouse, of Leeds, and measures 23 feet in height, and 22 feet in width. The instrument contains 34 Sounding Stops, of which the following is a list:

0 1	8
	4 Stops.
Feet. Pipes.	Feet. Pipes.
1—Double Open Diapa-	7—Flute, wood 4 56
son, metal through 16 56	8—Twelfth
2—Open Diapason, metal,	9—Piccolo, metal 2 56
large 8 56	10—Fifteenth, metal 2 56
3—Open Diapason, metal,	11—Sesquialtera, III rnks $1\frac{3}{5}$ 168
small 8 56	12—Mixture II rnks $\frac{2}{3}$ 112
4—Stopped Diapason,	13—Trumpet 8 56
wood bass, metal	14—Clarion
treble 8 tone. 56	
5—Quint-gedact, wood . 6 tone. 56	Pipes in Great Organ 952
6—Principal, metal 4 56	1
Swell, 11 Stops—eve	ery Stop throughout.
Feet. Pipes.	Feet. Pipes.
15—Double Diapason,	21—Fifteenth 2 56
wood, Stopped 16 56	22—Sesquialtera, III rnks $1\frac{3}{5}$ 168
16—Open Diapason, metal 8 56	23—Horn 56
17—Keraulophon, metal 8 56	24—Oboe 56
18—Stopped Diapason,	25—Clarion 56
wood	
19—Principal, metal 4 56	Pipes in Swell 718
20—Flute, metal Treble . 4 56	
Choir, 6	Stone
Feet. Pipes.	Feet. Pipes.
26—Dulciana, metal 8 56	30—Flute, metal 4 56
27—Viol di Gamba, metal,	31—Cremona, Tenor c 54
Tenor c 44	
28Stopped Diapason,	Pipes in Choir Organ 256
Bass	1
29—Stopped Diapason, 8 56	
Treble	
Pedal,	3 Stone
Feet. Pipes.	Feet. Pipes.
32—Open Diapason, wood 16 29	34—Octave, metal
33—Bourdon, wood,	35—Spare for Trombone.
Stopped 16 29	Pipes in Pedal Organ 87
11	1-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2

Couple	rs, &c.
1—Swell to Great.	6—Choir to Swell.
2—Swell to Great, Sub Octave.	7—Swell to Choir.
3—Swell to Great, Super Octave.	8—Great to Pedal.
4—Swell to Pedal.	9—Pedals, Super Octave.
5—Choir to Pedal.	10 to 13—Four Composition Pedals.
Sumi	nary.
Stops. Pipes.	
Great Organ 14 952	Couplers 9
Swell 11 718	
Choir 6 256	44 2013
Pedal Organ 4 87	
Com	ipass.
All the Manuals, CC to g <sup>3</sup> in altissimo.	Pedal, CCC to Tenor e.

### 237. HALIFAX.

The Parish Church at Halifax contains one of Snetzler's finest as well as most unique Organs. In the year 1764, a subscription was set on foot in Halifax, for purchasing the present valuable Organ for the Parish Church, for keeping the Organ in repair, and for providing a salary for the Organist. The amount raised was upwards of £1200. Considerable opposition appears to have been manifested by the township of Sowerby to the erection of the instrument, on the plea that it would entail additional expense upon the township; and their Churchwardens appeared by Proctor to oppose the faculty. A suit was instituted; but such was the strong feeling of the parishioners generally in favour of the Organ, that a subscription was entered into, amounting to upwards of £720, to defray the expenses of the suit. The call upon the subscribers, however, only amounted to twenty-five per cent. The sum actually received was £194:5s, when the law suit was happily terminated; and, on the 11th of July, 1766, the faculty for playing the Organ was granted by the Archbishop of York, and the Organ was accordingly opened on the 28th and 29th of August following. This event was announced in the Leeds Intelligencer of August 19th, 1766, by an advertisement, of which the following is a copy: "At the opening of the new Organ, in the parish church of Halifax, Yorkshire, on Thursday and Friday, the 28th and 29th of this instant, August, will be performed, with the assistance of a very numerous band of the most eminent performers, both vocal and instrumental, from various parts of England,

# THE MESSIAH,

An Oratorio, composed by Mr. Handel.

Between the first and second Acts, a Concerto on the Organ.

"Tickets, 5s. and 2s. 6d. each. Doors to be opened at Nine o'Clock in the Morning each day, and the performance to begin at half an hour after Ten. There will be an Assembly each Evening at the Talbot.

"N. B. An Organist is wanted. Any person who is inclined to offer himself a Candidate may apply for farther particulars to the Rev. Mr. Bates, at Halifax."

On Saturday, the 30th of August, 1766, Mr. Herschell (afterwards Dr. Herschell, the celebrated astronomer) was unanimously elected Organist, but only held the appointment till the following November, when he removed to Bath, where he burst forth from obscurity, and rose to the highest pitch of celebrity in the dignified science of Astronomy.

The Organ has received several additions since then, the first of which was an octave and a half of Pedals—GG to Tenor c—by Greenwood, of Leeds. In 1836, Gray added an octave and a half of Double Open Diapason Pipes; put in a Dulciana to Gamut G, in lieu of the Vox Humana; also a new Bellows, and several Composition Pedals. In 1842, Hill extended the Swell down an octave, namely, from Fiddle g to Gamut G; added a Double Diapason and Cornopean to the Swell; and applied a Coupler to unite the Choir Organ to the Great in the octave below, which proved unusually effective, as the Open as well as the Stopped Diapason in the Choir Organ descends uninterruptedly down to GG. After these improvements, the Organ was re-opened on the 30th of January, 1843, by the present Organist, Mr. Frobisher, with a performance of Organ Music.

The Organ now contains 26 Sounding Stops, of which the following is a list:

```
Great, 11 Stops.
1-Open Diapason, through 8 feet.
                                      7—Sesquialtera, IV ranks
                                                                2 feet.
                                       8-Mixture .. III ranks
2-Open Diapason, through 8 feet.
                                                                1 foot.
                                       9-Mounted Cornet, to
3—Stopped Diapason ...
                         8 feet tone.
4—Principal . . . . . . . . . .
                         4 feet.
                                             Middle c1, V ranks
                                                                8 feet tone.
 5—Twelfth ... 2\frac{2}{3} feet.
                                      10—Trumpet . . . . . . .
                                                                8 feet.
 6—Fifteenth . . . . . . .
                                      4 feet.
                         2 feet.
                             Swell, 7 Stops.
12—Double Diapason.... 16 feet tone. | 16—Sesquialtera, III ranks 2\frac{2}{3} feet.
                                      17—Cornopean ......
13—Open Diapason . . . .
                         8 feet.
                                                                8 feet.
                         8 feet tone.
14—Stopped Diapason ...
                                      8 feet.
15—Principal .....
                         4 feet.
                              Choir, 7 Stops.
19—Open Diapason, through 8 feet.
                                      23—Flute.....
                                                                4 feet tone.
20—Stopped Diapason ...
                          8 feet tone.
                                      24—Fifteenth . . . . . . .
                                                                2 feet.
                                      25 \ Bassoon, Treble ... \ 8 feet.
21—Dulciana to Gamut G
                          8 feet.
                                         Bassoon, Bass . . . . .
4 feet.
                               Pedal, 1 Stop.
```

# 26—Great Open Diapason, wood, DD down to GGG.. $21\frac{1}{3}$ feet length.

# 238. HALIFAX.

The Organ in Harrison Road Chapel, Halifax, was built by Messrs. Holt (then of Halifax, now of Bradford), in 1838. It has 3 sets of keys; namely, Great Organ and Choir from GG, including GG‡, to F in alt, and Swell from Tenor C to F in alt,  $3\frac{1}{2}$  octaves, with 2 octaves of Pedals, CCC to Tenor C, and Pedal Pipes from GGG to CC.

```
Great, 10 Stops.
                                       6-Fifteenth.
 1—Open Diapason.
                                        7—Sesquialtera.
2—Open Diapason.
3—Stopped Diapason.
                                       8-Cornet
                                       9-Trumpet, Treble.
 4—Principal.
 5—Twelfth.
                                      10—Trumpet, Bass.
                               Choir, 6 Stops.
                                       14-Flute.
11—Stopped Diapason.
12—Dulciana.
                                       15—Fifteenth.
                                       16—Cremona.
13—Principal
```

#### Swell, 6 Stops. 20-Principal. 17—Double Stopped Diapason. 18—Stopped Diapason. 21—Hautboy. 19-Dulciana. 22—Trumpet. Pedal, 1 Stop. 23—Double Open Diapason down to GGG.. 211 feet length. Pedal Clavier down to CCC. Couplers. 1—Pedals to Great Organ. 3—Swell to Great Organ. 2—Pedals to Choir. 4—Swell to Choir. 239. BRADFORD. The Organ in Eastbrook Chapel, Bradford, was built by Hill, in 1844-5. has 3 Manual Organs of complete compass; a Pedal of 7 Stops; and 44 Stops, of which the following is a list: Great, 15 Stops. 1—Tenoroon . . . . . . 16 feet. $3\frac{1}{5}$ feet. 9—Tenth..... 2—Bourdon....metal 16 feet. 10—Twelfth ..... 24 feet. 2 feet. 3—Open Diapason . . . . 8 feet. 12-Sesquialtera, V ranks $1\frac{3}{5}$ foot. 4—Open Diapason . . . . 8 feet. 4 foot. 5-Stopped Diapason ... 13-Mixture . . III ranks 8 feet tone. 8 feet. $5\frac{1}{3}$ feet. 4 feet. 15—Clarion . . . . . . 7—Principal..... 4 feet. 8-Wald Flute ..... 4 feet Swell, 14 Stops. 23—Twelfth ..... 23 feet. 16—Tenoroon . . . . . . . 16 feet. 2 feet. 17—Bourdon..... 16 feet. 24—Fifteenth . . . . . . . . . . 25—Flageolet . . . . . 2 feet. 26—Sesquialtera, III rks. $1\frac{5}{5}$ foot. 18—Open Diapason . . . . 8 feet. 19—Stopped Diapason . . . 8 feet tone. 20—Dulciana, to Tenor c . 8 feet. 27—Cornopean ..... 8 feet. 21—Principal ..... 28—Hautboy . . . . . . . 4 feet. 8 feet. 4 feet. 29—Clarion..... 4 feet. Choir, 8 Stops. 30—Open Diapason . . . . 34—Wald Flute . . . . . 4 feet. 8 feet. 31—Stopped Diapason ... 8 feet tone. 35—Fifteenth . . . . . . . 2 feet. 36—Cremona . . . . . . . 8 feet tone. 32—Viol de Gamba . . . . 8 feet. 33—Principal . . . . . . . 4 feet. 37—Bassoon ..... 8 feet. Pedal, 7 Stops. 38—Open, wood, to GGG 32 feet. 42—Fifteenth.... 4 feet. 39—Open, metal..... 43—Sesquialtera, V ranks $3\frac{1}{5}$ feet. 16 feet. 40—Principal . . . . . . . 8 feet. 44—Trombone . . . . . . 16 feet. 6 feet. Accessory Stops, Movements, &c. 1—Coupler, Swell to Great. 4—Coupler, Choir to Pedal. 2—Coupler, Great to Pedal. 5, 6, 7—Three Composition Pedals. 3—Coupler, Swell to Pedal.

Compass.

Great, CC to f<sup>3</sup> in alt, 54 Notes.

Swell, the same. Choir, the same.

Pedal, CCC to Tenor d, 27 Notes.

# 240. LEEDS.

The Organ in St. Peter's Chapel, Leeds, was built by the late Mr. Joseph Booth, of Wakefield, and contains 30 Sounding Stops.

Great, 11 Stops—C0	CC to F, 66 Notes.
1—Double Open Diapason, metal,	6—Principal. •
meets the Pedals.	7—Twelfth.
2—Open Diapason, metal.	8—Fifteenth.
3—Open Diapason, metal.	9—Sesquialtera.
4—Stopped Diapason.	10—Trumpet. 11—Trombone.
5—Principal. Choir, 6 Stope	
	15—Principal.
12—Open Diapason, metal. 13—Stopped Diapason.	16—Flute.
14—Dulciana.	17—Bassoon and Cremona.
Swell, 11 Stop	
18—Double Open Diapason, metal.	24—Twelfth.
19—Open Diapason, metal.	25—Fifteenth.
20—Stopped Diapason.	26—Cremona.
21—Dulciana.	27—Hautboy.
22—Principal.	28—Trumpet.
23—Principal.	9.0-4
Pedal, 3 Stops	
29—Double Open Diapason	30—Open Diapason.
down to GGG 21½ feet.	31—Principal.
Couples	
1—Great Organ to Pedals.	3—Choir to Great.
9 Swell to Great	
2—Swell to Great.	4 to 7—Four Composition Pedals.
	_
241.	LEEDS.
241. The Organ in Brunswick Chapel, Lee	_
241. The Organ in Brunswick Chapel, Lee Booth, of Wakefield.	LEEDS. ds, was also built by the late Mr. Joseph
241. The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—	LEEDS.  ds, was also built by the late Mr. Joseph  —GG to F in alt.
241.  The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops— 1—Double Open Diapason,	LEEDS.  ds, was also built by the late Mr. Joseph  —GG to F in alt.  6—Twelfth.
241. The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	Leeds.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal 21½ feet.  2—Open Diapason, metal . 10½ feet.  3—Open Diapason, inetal . 10½ feet.  4—Stopped Diapason.	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal 21½ feet.  2—Open Diapason, metal . 10½ feet.  3—Open Diapason, inetal . 10½ feet.  4—Stopped Diapason.  5—Principal.	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal 21½ feet.  2—Open Diapason, metal . 10½ feet.  3—Open Diapason, metal . 10½ feet.  4—Stopped Diapason.  5—Principal.  Choir, 8 Stops—  12—Double Dulciana, metal 16 feet.  13—Open Diapason, metal 10½ feet.  14—Viol di Gamba.	LEEDS.  ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal 21\frac{1}{3} \text{ feet.}  2—Open Diapason, metal . 10\frac{2}{3} \text{ feet.}  3—Open Diapason, metal . 10\frac{2}{3} \text{ feet.}  4—Stopped Diapason.  5—Principal.  Choir, 8 Stops—  12—Double Dulciana, metal 16 \text{ feet.}  13—Open Diapason, metal 10\frac{2}{3} \text{ feet.}  14—Viol di Gamba.  15—Stopped Diapason.	ds, was also built by the late Mr. Joseph  GG to F in alt.  G—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  G—Twelfth.  Fifteenth.  S—Sesquialtera, IV ranks.  GC to Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  G—Twelfth.  Fifteenth.  S—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.  26—Principal
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.  26—Principal
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.  26—Principal
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.  26—Principal
The Organ in Brunswick Chapel, Lee Booth, of Wakefield.  Great, 11 Stops—  1—Double Open Diapason, metal	ds, was also built by the late Mr. Joseph  GG to F in alt.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, IV ranks.  9—CornetV ranks.  10—Trumpet.  11—Clarion.  GG to F in alt.  16—Principal.  17—Flute.  18—Bassoon.  19—Cremona.  CC to F in alt.  26—Principal

#### 242. PRESTON.

The Organ in Preston Parish Church was originally built by Davis, of London, in 1802, and had a Great Organ from GG to F in alt, and a Swell to Fiddle G. No Pedals or Pedal Pipes—Diagonal Bellows.

In 1822. A set of Unison Pedal Pipes (an octave and half) and new Bellows were put in.

In 1842. A new Choir Organ was added by Gray and Davison, of London, at the cost of S. Horrocks, Esq. Guild Mayor; but, unfortunately, the Great Organ, and Swell, and Pedals received no addition.

In 1850. The Organ was entirely rebuilt; a new Pedal Organ added; the Swell extended to Tenor C; and several new Stops added to it and to the Great Organ. These additions were made by Jackson, of Liverpool, from funds raised by public subscription.

In 1854. W. A. Cross, Esq. of Red Scar, gave funds for a Metal Double Diapason and a new Great Organ Sound-board; Mr. Greaves, the Organist, adding the # Twentieth at his own expense. Two spare Slides were prepared on the Great Organ Sound-board for a wood Principal and a wood Fifteenth. The Organ has now 36 Sounding Stops, of which the following is a list:

Great, 16 Stops. 1—Double Diapason, bass 9—Fifteenth, metal. 1—Double Diapason, bass 2—Double Diapason, treble } in metal. 10—Fifteenth, wood. 3—Stopped Diapason. 11—Sesquialtera, III ranks. 4—Open Diapason, large scale. 12—Mixture.... II ranks. 5—Open Diapason. 13—Twentieth. 14—Trumpet, bass. 6—Principal, metal. 7-Principal, wood. 15—Trumpet, treble. 8-Twelfth. 16—Clarion. Choir, 7 Stops. 21—Flute. 17—Stopped Diapason. 22-Fifteenth. 18—Clarabella. 19—Dulciana. 23—Cromorne. 20—Principal. Swell, 9 Stops. 29-Fifteenth. 24—Double Diapason. 25—Stopped Diapason. 30—Mixture. 31—Hautboy. 26—Open Diapason. 27-Keraulophon. 32-Cornopean. 28-Principal. Pedal, 4 Stops. 35—Fifteenth.... 4 feet. 33—Open Diapason . . . . 16 feet. 34—Principal . . . . . 8 feet. 36—Sesquialtera, III ranks.

2 feet.

# Accessory Stops, Movements, &c.

1—Coupler, Pedals to Great.	5—Coupler, Octave Coupler Swell.
2—Coupler, Pedals to Choir.	6, 7—Three Composition Pedals for
3—Coupler, Swell to Great.	Great Organ Stops.
4—Coupler, Choir to Swell.	3.500 3.800 3.51

# Compass.

Great and Choir Organs, from CC to f<sup>3</sup> Pedal, CCC to Tenor e. in alt.

Swell, from Tenor C to f<sup>3</sup> in alt.

1—Double open Diapason 16 feet.

#### 243. Preston.

The Organ in St. Walburgh's Catholic Church, Preston, was built by Messrs. Hill and Co. in 1855. It contains 30 Sounding Stops, distributed among 2 Manuals and Pedal, in the following manner:

# Great, 15 Stops. Every Stop throughout.

9—Fifteenth....

2—Open Diapason 8 feet. 3—Gamba 8 feet. 4—Stopped Diapason 8 feet tone. 5—Quint 5½ feet.	10—Piccolo
6—Octave 4 feet. 7—Wald Flute 4 feet. 8—Twelfth 2\frac{2}{3} feet.	14—Clarion
Swell, 1	12 Stops.
16—Double Open Diapason       16 feet.         17—Open Diapason       8 feet.         18—Salicional       8 feet.         19—Stopped Diapason       8 feet tone.         20—Octave       4 feet.         21—Suabe Flute       4 feet.	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
Pedal,	3 Stops.
28—Open Diapason 16 feet. 29—Octave 8 feet.	30—Trombone 16 feet.
Couplers. 1—Swell to Great. 2—Great to Pedal. 3—Swell to Pedal.	Compass.  Great, CC to f <sup>3</sup> in alt.  Swell, CC to f <sup>3</sup> in alt.  Pedal, CCC to Tenor e.

#### 244. LANCASTER.

The Organ in St. Thomas's Church, Lancaster, was the noble gift of the Rev. Colin Campbell to his Church and to its Congregation. It was built by Banfield, of Birmingham, and is an extensive instrument, consisting of 35 Sounding Stops, comprising 3 complete Manuals, and an independent Pedal of 4 Stops. The Organ is enclosed in a very beautiful case of oak, made by Hatch, of Lancaster, from a design by Messrs. Sharpe and Paley, the Architects.

524 APPENDIX

The Pedal Clavier is made on the radiating principle; and the doors which close up the Organ are furnished with plate glass panels. The Specification of the abovenamed Organ is as follows:

named Organ is as follows:	- 0.	
	1 Stops.	
1—Open Diapason       54       8         2—Open Diapason       54       8         3—Clarabella       54       8         4—Stop Diapason       54       8 tone         5—Principal       54       4         6—Twelfth       54       2 <sup>3</sup> / <sub>2</sub> 7—Fifteenth       54       2	8—Sesquialtera, III rks. 162. 135 9—MixtureII rks. 108. 25 10—Trumpet	
. Choir,	9 Stops.	
12—Dulciana, through	Pipes. Feet.  18—Flute	
Swell,	11 Stops.	
Pipes. Feet.  21—Double Diapason,	27—Mixture—III ranks 162. 15 28—Horn	
Pipes. Feet.	Pipes.	
32—Grand Open Diapason 2916 33— Bourdon 2916 tone. 34— Principal 29 8	35— Grand Mixture, III ranks 87  174 Making a total of 2033 pipes.	
Coup		
Great Organ to Pedals. Choir Organ to Pedals. Swell Organ to Pedals. Pedal Organ in Octaves. Swell to Great.	Swell to Choir.  Swell and Choir to Great.  Great to Swell Sub-octave.  Great to Choir Sub-octave.	
245. CARLISLE.		
The old Organ in the Cathedral at C	Carlisle had but 1 Manual, ranging from	

The old Organ in the Cathedral at Carlisle had but 1 Manual, ranging from GG to e³ in alt, and furnished with the following 9 Stops:

# Manual.

1—Open Diapason	7—Tierce
2—Stopped Diapason 53 3—Principal 53	8 — Sesquialtera, III ranks159 9—Cornet, IV ranks100
4—Recorder 53 5—Twelfth 53	602
7310 .1	

The above instrument was removed in 1806, to make way for the present one by Avery, containing 17 Stops; and which was opened on the Easter Sunday of the year just mentioned. The following is a list of the contents of the present Organ:

Great, 8 Stops.

```
1-Open Diapason.
                                         5-Fifteenth.
                                         6-Sesquialtera, III ranks.
2—Stopped Diapason.
                                         7—Cornet, III ranks.
3-Principal.
 4-Twelfth.
                                         8—Trumpet.
                                Choir, 4 Stops.
9-Stopped Diapason.
                                        11—Principal,
10—Dulciana to Fiddle g, grooved into
                                        12—Flute.
       Stopped Diapason below.
                                Swell, 5 Stops.
                                        16—Cornet, III ranks.
13—Open Diapason.
                                        17-Hautboy.
14—Stopped Diapason.
15 - Principal.
                                   Couplers.
  Great and Choir, GG to d3 in alt.
                                           An Octave and a half of Pedals.
  Swell, Fiddle g to d3 in alt.
```

#### 246. Newcastle-on-Tyne.

The Organ in St. Nicholas's Church, Newcastle-on-Tyne, was built by the elder Harris, about the year 1670. Compass of the Manuals, GG to C, 53 notes.

The Great Organ contained Open and Stopped Diapasons, two Principals, Twelfth and Fifteenth, Tierce, Sesquialtera (II ranks), Mixture (III ranks), mounted Cornet (V ranks), Trumpet treble, Trumpet bass. The Choir Organ contained Open and Stopped Diapasons, Flute, 12th treble to c, and 15th.

In 1767, the Swell was added by Snetzler, and contained Dulciana, Stopped Diapason, Hautboy, Trumpet, and Cornet (III ranks): Compass, down to G below middle C.

In August, 1814, the Organ was taken down by Wood, Small, and Co. of Edinburgh, who added a Double Diapason on the Keys from fiddle G downwards; a new set of Keys, extending the Manuals up to F;  $1\frac{1}{2}$  Octave Pedals; and repaired the whole instrument.

In December, 1839, Mr. Bruce, who succeeded Wood, Small, and Co., added Copula Stops, Swell to Great and Choir to Great, Pedals to Great; enlarged the scale of the double Diapason, took them off the keys and placed them on a pedal windchest; enlarged the Swell box, carrying all, excepting the Hautboy, down to Gamut G, and converting the Cornet into Principal, 12th and 15th, and added a new bellows.

In December, 1845, Mr. Nicholson, of Newcastle-on-Tyne, made the greatest alterations; the Organ was cut through the centre, and the west-front moved about 3 feet, to make room for a new pedal wind-chest, to contain 3 Stops. He made an entirely new Swell box; replaced the pipes added by Bruce with new ones more in character with those of Snetzler, adding an Open Diapason and Cornopean. The

pedal pipes were considerably enlarged in scale and carried up to E; new Pedals were laid down; a Double Reed was added to the Pedal Organ; the 12th in the Choir was taken out and a Cremona inserted; one of the Principals in the Great Organ was made into an Open Diapason; and a separate new bellows for the Pedal Organ was inserted.

The Organ at present contains the following Stops:

```
Great, 12 Stops.
 1-Open Diapason.
                                            7—Tierce.
                                          8—Sesquialtera...II ranks.
9—Mixture....III ranks.
 2—Open Diapason.
 3-Stopt Diapason.
                                          10—Cornet . . . . V ranks.
11—Trumpet, treble.
 4-Principal.
 5—Twelfth.
                                         12—Trumpet, bass.
 6-Fifteenth.
                                  Choir, 5 Stops.
13—Open Diapason.
                                          16-Fifteenth.
14—Stopped Diapason.
                                           17-Cremona.
15—Flute.
                                   Swell, 9 Stops.
18-Dulciana.
                                           22—Twelfth (to be made into a Mixture,
19—Open Diapason (to be made into
                                                  II ranks).
                                           23-Fifteenth.
        Tenoroon).
20—Stopped Diapason.
                                           24-Hautboy.
21-Principal.
                                           25-Cornopean.
                                           26—Trumpet (to be made into a Clarion).
                                  Pedal, 2 Stops.
30-Open Diapason, CCC to E.
                                         | 31—Trumpet, CCC to E.
                                     Copulas.
                                           3—Pedals to Great.
4—Pedals to Choir.
           1-Swell to Great.
           2-Choir to Great.
```

The Open Diapasons, though not powerful, are very good; the Stopped Diapasons are exceedingly beautiful; the Flute is a very fine stop; and the Mixtures are very brilliant. The Great Organ Trumpet in the bass requires an octave of new pipes, the old ones being much broken. The whole of the Swell is exceedingly good, and the instrument altogether most effective. The whole of the later alterations and additions were made at the suggestion and under the direction of the present Organist, Dr. Ions.

### 147. Durham.

The Organ in Durham Cathedral was built by Father Schmidt, in 1684-5, and, as left by him, had 2 Manuals, GG to d³ in alt, and 17 Stops, 1063 pipes. For its construction he received £700, and the materials of the old Organ. The instrument was repaired by Abraham Jordan, in 1748, who is supposed to have added the Swell. The painting and gilding of the pipes cost, in addition, £50. In 1815, Mr. England repaired the Organ; and it was completed by his son-in-law, Nicholls. He added a Principal and Cornet to the Swell, a Cremona to the Choir Organ, new keys, and extended the Compass by two semitones in the treble; he also added

seventeen dwarf Pedals and the same number of Pedal Pipes. The Organ was again repaired by Mr. Buckingham, in 1823; and in 1840 he put in a Venetian Swell Movement, new Bellows, and a Coupler Movement. In 1844, Mr. Bishop made considerable alterations to the Organ, by extending the compass of the Swell to Tenor c, and placing a Clarion in room of the Cornet. He also added the Composition Pedals, a new Sesquialtera, Mixture, Twelfth, and Tierce; a new Stopped Diapason and Dulciana in the Choir Organ; a Claribella to Great Organ, in place of the Cornet; double Pedal Pipes, and two octaves of German Pedals. And, in 1847, Mr. Bishop moved the Organ to its present site, on the north side of the Choir, when he put a new Hautboy Stop in the Swell.

The Great Organ Case is 18 feet 6 inches wide by 4 feet 8 inches in depth, and about 32 feet in height; the Choir Case is 9 feet in width by 3 feet in depth.

```
Great, 12 Stops.
                                          8-Fifteenth.
 1—Open Diapason.
                                          9-Tierce.
 2—Open Diapason.
                                         10-Sesquialtera, III ranks.
 3—Stopped Diapason.
 4—Claribella, in place of V-rank Cornet.
                                         11—Trumpet.
 5-Principal.
                                         12—Double Diapason, GG to Fiddle g,
 6-Flute.
                                                two octaves above.
 7-Twelfth.
                                Choir, 7 Stops.
13-Dulciana.
                                         17-Flute, metal throughout.
                                         18-Fifteenth.
14—Stopped Diapason.
                                         19-Cremona.
15—Principal.
16-Dulciana Principal.
                                Swell, 6 Stops.
20-Open Diapason.
                                         23 —Trumpet.
                                         24- Hautboy.
21 - Stopped Diapason.
22 - Principal.
                                         25—Clarion.
                                Pedal, 1 Stop.
                   26—Double Open Diapason, two Octaves.
                       Accessory Stops, Movements, &c.
 1-Coupler, Swell to Great.
                                          3—Choir to Pedal.
 2-Great to Pedal.
                                          4 to 7—Four Composition Pedals.
                                  Compass.
    Great, CC to e 3 in alt.
                                             Swell, Tenor c to e 3 in alt.
    Choir, GG to e 3 in alt.
                                             Pedal, two octaves.
                                       York.
```

The Organ in York Cathedral, originally built by Messrs. Elliott and Hill, from the plans of Dr. Camidge, has undergone several alterations, additions, and transpositions since its first erection in 1829. It contains 30 Stops and 8,000 Pipes; and cost about £5,000, including the original gift of £3,000 by the late Earl of Scarborough, who was the senior Prebendary of the Cathedral at the time the first fire occurred. His Lordship dying before the instrument was completed, the remaining £2,000 were furnished by the Chapter, assisted by subscriptions from the neighbouring Nobility, Clergy, and Gentry. The Great Manual contains 4,813 Pipes; the Swell Organ, 1,856; the Choir Organ, 1,399; and the Pedal Organ, 200 Pipes.

The Pipes of all the Stops are of metal, excepting those particularized as being of wood. By means of a Coupler, the two lowest octaves of the Swell Organ form the upper portion of the Pedal Organ.

# Great Manual, CCC to CCC. The West Organ, 6 Octaves.

2110 11 000 016	un, o courtou
1—Bourdon, wood, stop-	10—Sesquialtera, III ranks, 7 ranks.
_ ped 16 feet.	and Mixture of IV ranks, }
2—Bourdon, large, open 16 feet.	11—Flute Principal 8 feet.
3—Open Diapason 8 feet.	12—Fifteenth 4 feet.
4—Large metal Principal 8 feet.	13—Tierce $\dots 3\frac{1}{2}$ feet.
5—German Flute, wood,	14—Larigot 3 feet.
open	15—Super Octave 2 feet.
6—Octave Open Diapason 8 feet.	16—Octave Principal 4 feet.
7—Principal 8 feet.	17—Cymbal, VII ranks.
8—Twelfth 6 feet.	18—Posaune 16 feet tone.
9—Fifteenth 4 feet.	19—Trumpet 16 feet.
	20—Shawn 8 feet.
The East Orga	
1—Bourdon, wood, stop-	12—Principal 8 feet.
ped 16 feet.	12—Fifteenth 4 feet.
2—Great Open Diapason 16 feet.	13—Tierce $3\frac{1}{2}$ feet.
	14—Larigot 3 feet.
_ 1	
^ ^.	15—Super Octave 2 feet. 16—Flute, Piincipal 8 feet.
5—Harmonica, wood, open 8 feet.	
	17—Great Cornet of X,
6—Great Principal 8 feet.	IX, and VIII ranks.
7—Octave Principal 4 feet.	18—Bassoon 16 feet.
8—Twelfth 6 feet.	19—Clarionet 16 feet.
9—Fifteenth 4 feet.	20—Clarion
10—Sesquialtera, III ranks. 7 ranks.	
Tuba Mirab	ilis Organ.
1—Grand Ophicleide 16 feet.	2—Cornopean 16 feet.
Swell, 5	Octaves.
3—Viola 8 feet.	12—Twelfth 3 feet.
4—Dulciana 8 feet.	13—Fifteenth 2 feet.
5—Open Diapason 8 feet.	14—Cornet 5 feet.
6 — Philomela, wood, open 8 feet.	15—Scherp 3 feet.
7—Celestina 8 feet.	16—Horn 8 feet.
8—Octave Diapason 8 feet.	17—Cremona 8 feet.
9—Dulcet, wood, open 4 feet.	18—Trumpet 8 feet.
10—Principal 4 feet.	19—Hautboy 8 feet.
11—Flageolet 4 feet.	20—Dulciana 8 feet.
Choir, 6	
1—Stopped Diapason,	7—Wald Flute 8 feet.
wood 16 feet.	8—Octave 4 feet.
2—Dulciana 16 feet.	9—Corno Bassetto 16 feet.
3—Claribella, wood, open 8 feet	10—Keraulophon 8 feet.
4—Open Diapason 16 feet.	11—Twelfth, Mixture, V ranks.
5—Principal 4 feet.	15—Fifteenth, Mixture, IV ranks.
6—Ophicleide Diapason 16 feet.	

## Pedal—two Octaves, CCCC to CC.

1—Bombarde (4-ft. dia-	5—Sub-bass (wood, 2½-ft.
gonal) 32 feet.	diagonal) 32 feet.
2—Bombarde (2½-ft.dia-	6—Double Bass (wood,
gonal) 16 feet.	2-ft. diagonal) 16 feet.
3—Double Diapason (2-ft.	7—Sacbut (wood) 32 feet.
diameter) 32 feet.	8—Trombone 16 feet.
4 - Double Principal (16	
inches diameter) 16 feet.	

#### 249. Doncaster.

The Organ that stood in the Parish Church of St. George, at Doncaster, previous to its destruction by fire, was so magnificent and in some respects unique an instrument as to merit some passing notice. Its "foundation" was an unusually fine specimen of the united work of the younger Harris and Byfield, which was remarkable alike for the freshness and the beauty of its tone. It originally consisted of 23 Stops, all of which had been retained on account of their surprising quality. In the following account, the old Stops are distinguished by asterisks. The two Open Diapasons in the Great Organ were mellow and pure; the Stopped Diapasons, of which there were four, all of metal, and to different scales and varied proportions, were clear, liquid, and resonant; the Reeds were full, penetrating, and arresting; and the Compound Stops brilliant, ringing, and full of vivacity. The instrument had been enlarged at different periods: by Donaldson, of York, in 1802; Mr. Buckingham, of London, in 1822; Mr. Ward, of York, about twenty years since; and after that, by Mr. Brown, of Doncaster, who added the large Swell and the back Great Organ. At the time of the conflagration, the Organ was being partly remodelled and re-erected (in a side Chapel), by Hill, under the direction of Mr. Jeremiah Rogers, the Organist to the Church, and was, previous to its removal, one of the finest instruments in the kingdom. It was the first Organ erected in this country in which the Continental principle was carried out in its amplitude and integrity, of placing three complete 16-feet or Double Stops, and a Quint of 51/3 feet, on the Great Manual; and which comprehensive arrangement has not been followed in any other Organ of English manufacture up to the present time. caster Organ had 50 Sounding Stops, distributed among four distinct departments; the Great Organ was a "16-feet Manual," in the German acceptation of the term, the tone of which was supported by a "32-feet Pedal." The following was its disposition:

Great, 20 Stops.

1-Double Open Diapason, 16 feet.	*11—Tierce $1\frac{5}{5}$ foot.
2—Double Stopped Dia-	*12—Sesquialtera, V rnks. 1 foot.
pason16 feet tone.	13—Mixture II rnks.
*3—Open Diapason, front. 8 feet.	14—Furniture, II rnks.
*4—Open Diapason 8 feet.	15—SharpIV rnks.
*5—Stopped Diapason 8 feet tone.	*16—Cornet, mounted,
6—Quint $\dots \dots \dots$	V rnks.
*7—Principal 4 feet.	17—Double Trumpet 16 feet.
8—Principal 4 feet.	*18—Trumpet 8 feet
*9—Twelfth $2\frac{2}{3}$ feet.	*19—Trumpet 8 feet.
*10—Fifteenth 2 feet.	*20—Clarion 4 feet.

Choir, GG to f3 in alt.

4-Viol di Gamba.

# Choir, 8 Stops.

22—Dulciana 8 feet. *23—Principal 4 feet.	26—Cremona 8 feet tone. *27—Bassoon 8 feet.	
*24—Flute 4 feet.	*28—Vox Humana 8 feet tone.	
Swell, 18	5 Stops.	
29—Bourdon 16 feet tone.  *30—Open Diapason 8 feet.  *31—Stopped Diapason . 8 feet tone.  *32—Principal 4 feet.  33—Flute 4 feet.  34—Twelfth 2 ½ feet.  35—Fifteenth 2 feet.  36—Sesquialtera, III rnks.	37—Mixture, III rnks.         38—Double Trumpet 16 feet.         39—Horn, large scale 8 feet.         40—Cornopean 8 feet.         *41—Trumpet 8 feet.         *42—Hautboy 8 feet.         43—Clarion 4 feet.	
Pedal, 7 Stops.		
44—Great Open Bass Diapason, wood 32 feet. 45—Open Diapason, wood 16 feet. 46—Sub-bass, wood 16 feet tone.	47—Principal, metal 8 feet. 48—Fifteenth, metal 4 feet. 49—Posaune, metal 16 feet. 50—Trumpet, metal 8 feet.	
Compass.		
Great, old work, GG to f <sup>3</sup> in alt. Great, new work, CC to f <sup>3</sup> in alt.	Swell, CC to f <sup>3</sup> in alt.  Pedal, CCC to Tenor d.	

As the new Parish Church is being rebuilt on a scale of even greater magnificence than that which rendered the former structure so famous, owing to the munificence of the residents of the town and neighbourhood, it is fully anticipated that the townspeople of Doncaster will exhibit the same generous spirit in regard to their new Organ, by securing at least as fine an instrument for their Organist; who, in expending the funds which their liberality placed at his disposal from time to time, spared neither his own trouble nor private means in bringing their former noble instrument to such perfection.

#### 250. LINCOLN CATHEDRAL.

The Organ in Lincoln Cathedral was built in 1326, by W. Allen; and extended by his son, Charles Allen, in 1351.

### Great, 11 Stops.

Compass of Great and Choir Organs, from GG to F in alt

Compass of Great and Che	or Organs, from GG to F in air.
1—Large Open Diapason. 2—Small Open Diapason. 3—Stopped Diapason. 4—Clarabella. 5—Principal. 6—Twelfth.	7—Fifteenth. 8—Cornet, treble,IV ranks. 9—Sesquialtera, bass, III ranks. 10—Trumpet, treble. 11—Trumpet, bass.
Cho	ir, 5 Stops.
2—Stopped Diapason.	15—Principal. 16—Flute.
3—Dulciana.	TO-FIGUE.

17—Fifteenth.

# Swell, 7 Stops-Gamut to F in alt.

18—Double Diapason.	23—Twelfth.
19—Open Diapason.	24—Fifteenth.
20—Stopped Diapason.	25—Hautboy.
21—Principal.	26—Horn.
22—Flute.	
	7 Stops.
	1
27—Sub-Bourdon 32 feet tone.	
28—Open Diapason 16 feet.	32—Sesquialtera.
29—Principal 8 feet.	33—Trombone 16 feet.
30—Twelfth 6 feet.	
Accessory Stops,	Movements, &c.
1—Swell to Great.	4—Swell to Choir
2—Swell to Choir.	4—Swell to Choir 5 to 9—Five Composition Pedals.
3—Pedal to Great.	1
Com	pass.
Great, GG to f <sup>3</sup> in alt.	Pedal Stops, Nos. 27 and 28, CCC
Choir, GG to f <sup>3</sup> in alt.	to Fiddle g: Nos. 29 to 33,
Swell, Gamut G to f <sup>3</sup> in alt.	CCC to FFF #, seven semi-
Pedal Glavier, CCC to Fiddle g.	tones, to nieet Great Organ at
	GG.

# 251. Boston.

The large Organ in the Centenary Chapel, Boston, Lincolnshire, was built by Gray and Davison, in the year 1850. It has Great and Choir Manuals, from CC, 8 feet, to F in alt; the Pedal Organ, two octaves and a fourth; Compass, from CCC, 16 feet, to Tenor F. The whole of the Stops in this, as well as in the Manuals, except the Keraulophon and Clarionet Flute, go throughout. The Swell is to Tenor C.

There are two Bellows—one for the Manuals, the other for the Pedal Organ; and four Composition Pedals; also the new and effective Sforzando Pedal.

The sides, as well as the front of the Case, contain Speaking Pipes; and the dimensions of the instrument are—twenty-six feet high, twenty-three feet wide, and eighteen feet deep.

There are forty-nine Stops, and two thousand four hundred and ninety Pipes.

### Great, 14 Stops,

1—Double Open Diapason	16 feet.	8—Octave Quint	3 feet.
2—Open Diapason	8 feet.	9—Super Octave	2 feet.
3—Open Diapason	8 feet.	10—Flageolet	2 feet.
4—Stopped Diapason	8 feet.	11—Sesquialtera, III ranks.	
5—Quint	6 feet.	12—Furniture III ranks.	
6—Octave	4 feet.	13—Posaune	8 feet.
7—Flute	4 feet.	14—Clarion	4 feet.
Choir, 12 Stops.			
15—Open Diapason	8 feet.	21 -Flute	4 feet.
16—Gamba	8 feet.	22—Gemshorn	4 feet.
17—Keraulophon	8 feet.	23—Super Octave	2 feet.
18—Stopped Diapason, bass	8 feet.	24—Flageolet	2 feet.
19—Clarionet Flute	8 feet.	25—Sesquialtera, III ranks.	
20—Octave	4 feet.	26—Corno di Bassetto	8 feet.

# Swell, 10 Stops.

DWCII, I	o bups.	
27—Bourdon       16 feet         28—Open Diapason       3 feet         29—Stopped Diapason       3 feet         30—Octave       4 feet         31—Super Octave       2 feet	32—Sesquialtera, III ranks.         33—Contra Fagotto 16 feet.         34—Cornopean 3 feet.         35—Oboe 3 feet.         36—Clarion 4 feet.	
Pedal, 6 Stops.		
37—Grand Open Diapason 16 feet. 38—Grand Violon 16 feet. 39—Grand Bourdon 16 feet.	40—Grand Octave 8 feet. 41—Grand Super Octave. 4 feet. 42—Grand Trombone 16 feet.	
Couplers.		
43—Swell to Great Manual. 44—Choir to Great Manual. 45—Swell to Choir Manual. 46—Swell Manual to Pedals.	47—Great Manual to Pedals. 48—Choir Manual to Pedals. 49—Sforzando Pedal.	

### 252. NEWARK.

The fine Organ in the Church of Newark-upon-Trent was originally built by G. England, in the year 1804; and was at first of FFF compass. The Great Manual, however, has recently been reconstructed, to the German compass, by Foster and Andrews, of Hull; who have, to a great extent, re-modelled the instrument, under the direction of the present Organist, Dr. Dearle. All the Stops that the Organ is designed to contain are not yet in; but, when they are so, the Specification will be as follows:

# Great, 13 Stops. 1—Bourdon $\{$ or Double $\}$ 1.6 feet $\{$ 8—Twelfth . . . . . . . . $2\frac{2}{3}$ feet.

2—Tenoroon (Diapason.) 16 feet. 3—Small Open Diapason. 8 feet. 4—Large Open Diapason. 8 feet. 5—Stopped Diapason. 8 feet tone. 6—Claribella. 8 feet. 7—Principal. 4 feet.	9—Fifteenth 2 feet. 10—Sesquialtera, III ranks. 11—Mixture II ranks. 12—Trumpet 8 feet. 13—Clarion 4 feet.
Choir, 8 Stops.	
14—Dulciana       3 feet.         15—Stopped Diapason       8 feet.         16—Principal       4 feet.         17—Flute       4 feet.	18—Fifteenth 2 feet.   19—Mixture . II ranks 1
Swell, 11 Stops.	
22—Double Diapason       16 feet.         23—Open Diapason       8 feet.         24—Stopped Diapason       8 feet tone.         25—Viol di Gamba       8 feet.         26—Principal       4 feet.         27—Fifteenth       2 feet.	28—Sesquialtera, III ranks.   29—Horn
Solo, 6 Stops.	
33—Harmonic Flute 8 feet. 34—Clarionet Flute 8 feet tone. 35—Claribella 8 feet.	36—Hautboy 8 feet. 37—Corno di Bassetto 8 feet tone 38—Tuba Mirabilis 8 feet.

# Pedal, 6 Stops.

39—Large Open 16 feet. 40—Bourdon 16 feet tone.	42—Fifteenth	4 feet.
41—Principal 8 feet.	44—Trombone	16 feet.
Accessory Stops,	Movements, &c.	

1 to 7—Seven Couplers.

8 to 11—Four Pneumatic Composition Pedals.

## Compass.

Great, CC to f<sup>3</sup> in alt. Choir, FFF to f<sup>3</sup> in alt. Swell, CC to f<sup>3</sup> in alt. Solo, Tenor c to f<sup>3</sup> in alt. Pedal, CCC to Tenor f.

## 253—Southwell.

The Organ in Southwell Collegiate Church was originally built by Father Schmidt; but, having been damaged by fire, it was admirably repaired and completed by Snetzler, whose bill, dated January, 1766, is now in possession of the Chapter. Compass of Great and Choir Organs, from GG to d³ in alt; of the Swell, from Fiddle g to d³ in alt; and of the Pedal Clavier, GG to Tenor c. The general effect of the instrument is excellent, considering the smallness of the number of its Stops; and the Diapasons are very fine.

Great. 8 Stops.

1—Open Diapason. 2—Stopped Diapason. 3—Principal. 4—Twelfth.	5—Fifteenth. 6—Sesquialtera, III ranks. 7—Trumpet. 8—Cornet to Middle c¹, V ranks.
Choir, 5	Stops.
9—Stopped Diapason.	12—Flute.
10—Dulciana to Gamut G. 11—Principal.	12—Flute. 13—Fifteenth.
Swell, 4	Stops.
<ul><li>14—Open Diapason.</li><li>15—Stopped Diapason.</li></ul>	16—Principal. 17—Fifteenth.

## 254. NOTTINGHAM.

St. Mary's Church, Nottingham, contains a most excellent Organ by Snetzler, containing 23 Sounding Stops, among which are three Metal Open Diapasons down to GG. The following is a list of its Stops:

```
Great, 10 Stops.
 1—Open Diapason.
                                       6-Fifteenth.
                                       7—Sesquialtera.....IV ranks.
2—Open Diapason.
3—Stopped Diapason.
                                       8—Cornet to Middle e1.. V ranks.
4-Principal.
                                       9—Trumpet.
5—Twelfth.
                                      10—Clarion.
                              Choir, 6 Stops.
                                     14—Flute.
11—Open Diapason.
12—Stopped Diapason.
                                      15—Fifteenth.
13—Principal.
                                     16—Bassoon.
```

Swell, 6 Stops. 20—Cornet. . III ranks. 17—Open Diapason. 21—Trumpet. 18—Stopped Diapason. 22-Hautboy. 19—Principal. Pedal, 1 Stop. 23—Open Diapason, Gamut G to CCC...16 feet length. Compass. Swell, Tenor c to e3 in alt. Great, GG to e3 in alt. Choir, GG to e<sup>3</sup> in alt. Pedal Clavier, GG to Fiddle g. Couplers. Swell to Great. Choir to Pedal. Great to Pedal. 255. NOTTINGHAM. The Organ in the Mechanics' Hall, Nottingham, was built by Bevington and Sons, in the year 1849. It originally had 45 Sounding Stops, to which 8 have since been added by Groves, of London, who removed the Choir and Swell Organs from inside the case to ante-rooms underneath the Orchestra. arranged the Organ on the direct action principle; i. e. placed the Great Organ Sound-board so that its sliders run parallel with the keys, and are therefore brought under control by a simple and direct Draw-stop action. The following is an enumeration of the Stops. Great, 18 Stops. 1—Tenoroon.......... 16 feet. 10—Waldflute..... 4 feet. 2-Bourdon, to meet No. 1 16 feet tone. 11—Decima..... 3—Open Diapason . . . . 8 feet. 12—Twelfth . . . . . . . . . . . . 2 feet. 13—Fifteenth.... 4—Open Diapason . . . . 8 feet. 2 feet. 5—Stopped Diapason... 8 feet tone. 14—Sesquialtera, III rnks. 1\frac{3}{5} foot. 8 feet. 15—Mixture... III rnks. 6—Clarabella.....  $\frac{4}{5}$  foot. 7—Hohlflute..... 8 feet. 16—Posaune.... 8 feet. 8—Quint.....  $5\frac{1}{3}$  feet. 17—Trumpet..... 8 feet. 9—Principal . . . . . . 4 feet. 18—Octave Trumpet.... 4 feet. Choir, 13 Stops. 25—Clarabella..... 19—Double Stopped Dia-8 feet. 16 feet tone. 26—Principal . . . . . . . pason...... 4 feet. 20—Open Diapason . . . . 8 feet. 27—Flute..... 4 feet. 21-Stopped Diapason. . . 8 feet tone. 28—Flageolet . . . . . . . . . 2 feet. 22 -- Dulciana . . . . . . . . 29—Double Bassoon.... 8 feet. 16 feet. 30—Oboe..... 23—Viol di Gamba.... 8 feet. 8 feet. 8 feet. 31—Clarionet..... 8 feet tone. 24—Keraulophon.... Swell, 15 Stops. 32—Great Double Dia-40—Fifteenth..... 2 feet. 32 feet tone. 41—Piccolo . . . . . . . . . . . . . 2 feet. pason.... 42—Octave Fifteenth.... 16 feet tone. 1 foot. 33—Double Diapason.... 43-Furniture, V ranks... 34—Open Diapason.... 8 feet. 13 foot. 44—Trombone.... 35—Open Diapason . . . . 8 feet. 16 feet. 8 feet tone. 45—Cornopean..... 8 feet. 36—Stopped Diapason . . . 5\frac{1}{3} feet. 46—Hautboy..... 8 feet. 37—Quint..... 4 feet. 47—Clarion..... 4 feet. 38—Octave......

39—Wald Flute.....

4 feet.

48—Octave Clarion....

2 feet.

# Pedal, 5 Stops.

50—Open Diapason, metal 16 feet.	52—Fifteenth 4 feet. 53—Trombone 16 feet.
51 - Principalwood 8 feet.	

Accessory Stops, Movements, &c.

1 to 4, Four Couplers.

5 to 12, Eight Composition Pedals.

## Compass.

Great, CC to g<sup>3</sup> in altissimo. Choir, CC to g<sup>3</sup> in altissimo. Swell, Tenor c to g<sup>3</sup> in altissino. Pedal, CCC to Tenor d.


## 256. Peterborough.

The present Organ in Peterborough Cathedral was built by William Allen, of London, and was opened in June, 1309. It cost 500 guineas and the old Organ; of which the Case and both Open Diapasons from middle d<sup>1</sup> downwards were retained.

	Great, 10 Stops.	
1—Open Diapason. 2—Open Diapason. 3—Stopped Diapason. 4—Principal. 5—Flute.	6—Twelfth. 7—Fifteenth. 8—Sesquialtera, Bass, IV ranks. 9—Cornet	
Choir, 6 Stops		
11—Stopped Diapason. 12—Dulciana. 13—Principal.	14—Flute. 15—Fifteenth. 16—Cremona.	
Swell, & Stops.		
17—Open Diapason. 18—Stopped Diapason. 19—Principal.	20—Twelfth. 21—Fifteenth. 22—Trumpet.	
257. Lynn Regis.		

The old Organ at St. Margaret's, Lynn Regis, Norfolk—partly the work of Dallans, and partly the production of some more ancient workman—was given to the Church by "John Tinner," in 1679. The present fine instrument was built by the celebrated Snetzler, under the direction of Dr. Burney, in the year 1754. It is the largest instrument Snetzler ever made in England; it slightly exceeding in this respect his other celebrated piece of handiwork at Halifax. The Lynn Organ originally contained a IHI-rank Furniture in the Great Organ, in addition to the IV-rank Sesquialtera (as at Halifax); also a separate Tierce, and a Bourdon, in metal, to CC, excepting the two lowest Pipes, which were of wood. These three Stops were at some time cancelled, and a second Open Diapason, Principal, and Fifteenth placed in their stead; a Clarabella has also been inserted in the Choir Organ, in place of the Vox Humana. In the Swell, there were originally three unison Reeds (Hautboy, Trumpet, and French Horn); but there are now but two. The Organ was repaired in 1796, by Lincoln; and underwent a second renovation

in 1816. About eight years since, it received the important addition of a Pedal Diapason, to GGG, which was added by Holdich, of London. The Organ now contains 27 Sounding Stops, of which the following is a list:

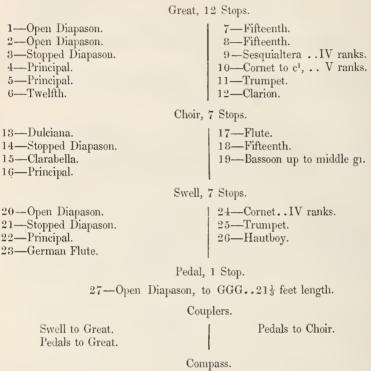

Great, GG to e<sup>3</sup> in alt. Choir, GG to e<sup>3</sup> in alt. Swell, Tenor f to e<sup>3</sup> in alt. Pedals, down to GG.

The Swell Clavier descends to GG, and acts on the Bass of the Choir Stopped Diapason, Dulciana, and Flute, below Tenor f, which are made to draw separately and independently for that purpose, whereby the apparent number of Sounding Stops is increased from 27 to 30.

This is the first English Organ that had a Dulciana; a Stop that, in this example, runs through to GG in metal.

#### 258. Norwich.

The Organ in Norwich Cathedral has an elaborately carved Gothic oak case; it stands over the screen, and consequently has a double front, containing, in the western, the open Diapason (said to be of Harris's make), and, in the choir front, an open Diapason of Byfield's. The tone of the instrument is of fine quality; and, although it is not so powerful as many of the Organs recently built, it is inferior to none in general effect. The Organ underwent a considerable change some years since, in being removed to its present situation, when the Choir Organ was taken from its usual position and placed on the south side of the instrument, and the Swell Organ on the opposite side, both being on a level with the base of the Great Organ, and unseen from the Choir. At this time, Double Diapason Pedal Pipes, down to GGG, were added by Bishop, and located on the north side of the building, under

the triforium, having separate bellows and a long movement. The instrument contains.

```
Great, 10 Stops.
                                           6-Twelfth.
 1—Open Diapason.
                                            7-Fifteenth.
 2—Open Diapason.
                                            8-Tierce.
3—Stopped Diapason.
4-Clarabella, in place of V-rank Cornet.
                                           9—Sesquialtera.
                                          10-Trumpet.
 5—Principal.
                                 Choir, 6 Stops.
                                          14—Stopped Flute.
11—Dulciana to Tenor C.
12—Stopped Diapason.
                                          15—Fifteenth.
13—Principal.
                                          16—Cremona to Tenor f.
                                 Swell, 5 Stops.
17—Open Diapason.
                                          20—Hautboy.
18—Stopped Diapason.
                                          21—Trumpet.
19—Principal.
                                  Pedal, 1 Stop.
                22—Open Diapason to GGG .. 21<sup>1</sup>/<sub>3</sub> feet length.
                        Accessory Stops, Movements, &c.
1—Coupler, Swell to Great.
                                           3-Coupler, Choir to Pedal.
2—Coupler, Great to Pedal.
                                           4, 5, 6—Three Composition Pedals.
                                    Compass.
    Great, GG to f3 in alt.
                                            Swell Clavier to GG, acting on Choir
    Choir, GG to f3 in alt.
                                               Organ below Tenor c.
    Swell, Tenor c to f<sup>3</sup> in alt.
```

## 259. Norwich.

The Organ in the Church of St. Peter Maneroft, Norwich, is a fine instrument; originally built by Harris, and afterwards repaired by England, who added the Dulciana to the Choir Organ, and put in a new Swell. The following is a list of its Stops, as drawn up by the late Mr. Russell.

```
Great, 12 Stops.
 1—Open Diapason.
                                          8—Sesquialtera, III ranks.
                                         9—Mixture...II ranks. 10—Furniture.. III ranks.
 2—Stopped Diapason.
 3—Principal.
 4-Twelfth.
                                         11—Cornet, mounted, to Middle c1,
 5—Fifteenth.
                                                V ranks.
 6—Tierce.
                                         12—Trumpet.
 7—Larigot.
                                Choir, 8 Stops.
                                         17—Flute.
13—Dulciana to Gamut G.
14—Open Diapason to Tenor d.
                                         18—Fifteenth.
15—Stopped Diapason to Tenor d.
                                         19-Vox Humana throughout.
16—Principal to Tenor d.
                                         20—Bassoon throughout.
                                Swell, 6 Stops.
                                         24—Cornet, III ranks.
21—Open Diapason.
                                         25—Hautboy.
22—Stopped Diapason.
23-Principal.
                                         26—Trumpet.
```

The Open Diapason, Stopped Diapason, and Principal in the Choir Organ, are borrowed from the corresponding Stops of the Great Organ, from Tenor d downwards.

## 260. GREAT YARMOUTH,

The Organ in St. Nicholas Church, Great Yarmouth, is a particularly fine instrument. It was built by Jordan, Bridge, and Byfield, at a cost of £900, and was opened about the middle of December, 1733. It is enclosed in a handsome oak Case, 18 feet wide, 33 feet high to the top of the ornaments, and 7 feet deep. The Compass of the Great and Choir was originally from GG to d3 in alt. omitting the low GG#; the Swell went to Tenor c, and was enclosed in a box 7 feet in width. The metal for the Pipe-work was very fine, being nearly all tin; but the feet of the 15 large front Pipes settled down after a time, either from lack of strength in the first instance, the effect of the sea air, or some unascertained cause. In the year 1812, Mr. England, of Stephen Street, Tottenham Court Road, London, was employed to repair the Organ. He put in 15 new front Pipes; rounded out and repaired those inside; added 3 sets of new Manuals; fresh leathered the Bellows; applied an additional Wind-Trunk, the previous one being too small to supply the instrument fully; carried the Compass of the Manuals upwards from d3 to f3 in alt.; laid down an octave and a half of Pedals, from GG to Tenor c, with 17 Pipes connected with them-viz. 4 Unison Pipes from GG to BB \, then 13 Double Pipes from CC to c; removed the old rattling Choir movement, consisting of backfalls, and introduced a tracker movement; cleaned the Organ, and regilt the front Pipes. For making these several improvements, Mr. England received 320 guineas.

In 1844, Mr. Gray applied a new Pedal Clavier, together with 13 large scale Pipes to GGG, with the necessary sound-board and movements; removed the 3 old Diagonal Bellows, and put in a pair of Horizontal Bellows, 12 feet long by 6 feet in breadth; replaced the lower octave of Pipes of the inner Open Diapason, which had settled down at the feet; substituted metal Pipes in the Choir Organ, from Gamut G upwards, in place of the wood Pipes of the Open Diapason, of which latter material that Stop had been at first exclusively formed; removed the two Vox Humanas from the Choir, and inserted a Cremona to Fiddle g; added an octave to the Bass of the Swell, and deepened the box, as well as widening it at the back by a foot to receive the larger Pipes; and substituted a III-rank Sesquialtera for the old III-rank Cornet. He also added a second set of Pallets to the lowest octave of the Great Organ Sound-board, whereby the supply of wind in the Bass was rendered far more ample and satisfactory. For these additions and improvements, Mr. Gray received £350.

Great, 13 Stops. All the Stops throughout, except the Cornet. 1-Front Open Diapason. 8—Sesquialtera . . V ranks. 9—Mixture . . . . III ranks. 2—Inside Open Diapason. 3—Stopped Diapason, metal Treble. 10—Mounted Cornet, V ranks. 11—Trumpet. 4-Principal. 12-Trumpet. 5—Twelfth. 13—Clarion. 6-Fifteenth. 7—Tierce. Choir, 7 Stops.

All the Stops throughout, except the Cremona.

14—Open Diapason, metal to Gamut G, wood from FF to GG.

15—Stopped Diapason, metal Treble.

16—Principal.

17—Stopped Flute, metal Treble.

18—Fifteenth.

19—Mixture, II ranks.

20—Cremona to Fiddle g.

Swe	ell, 7 Stops.
21—Open Diapason.	24—Scsquialtera, III ranks.
22—Stopped Diapason, metal down to	o 25—French Horn.
Tenor c.	26—Trumpet.
23—Principal.	27—Clarion.
Peda	al, 2 Stops.
28—Great Open Diapason, down to G	GG, in wood
	wood16 feet length.
Accessory Sto	ops, Movements, &c.
	3—Coupler, Choir to Pcdal.
2—Coupler, Great to Pedal.	4, 5, 6—Three Composition Pedals.
The GG Open, in front, is 7 inches	s in diameter; the inside GG 7½ inches.
England's CCC Pipe measures 7½ i	
Gray's GGG, 21 inches by 19; th	e CC, 8 inches by 7.
26	51. Ely.
The Organ in Ely Cathedral, erecte	ed by Hill, in 1851, is placed in the triforium,
	t six feet. The keys are placed in a stone
	nd communicate with the Organ by means of
	enclosed in a handsome Case, of oak, made
according to a design prepared by Mr.	
	_
	t, 13 Stops. eet.   8—Super Octave 2 feet.
1—Double Diapason 16 fe 2—Open Diapason 8 fe	<b>1</b>
3—Open Diapason 8 fe	
4—Stopped Diapason 8 fe	
5—Quint 6 fc	eet.   12—Trumpet 8 feet.
6—Octave 4 fe	•
7—Octave Quint 3 fe	eet.
	r, 7 Stops.
14—Open Diapason 8 fe	_
15—Clarabella, throughout 8 fe	1
16—Stopped Diapason 8 fe 17—Octave 4 fe	
	ll, 6 Stops.
21—Double Diapason 16 fe	et. 24—Octave 4 feet.
30 0: 3 75:	eet. 25—Trumpet 8 feet. eet. 26—Hautboy 8 feet.
	al, 6 Stops.
27—Open, wood	
28—Open, metal 16 fe 29—Octave 8 fe	1 1
	pps, Movements, &c.
1—Swell to Great. 2—Choir to Great	3—Pedals to Great. 4—Pedals to Choir.
	•
	ompass.

Great, CC to f<sup>3</sup> in alt. Choir, CC to f<sup>3</sup> in alt. Swell, Tenor c, to f<sup>3</sup> in alt. Pedal, CCC to Tenor d.

#### 262. Cambridge.

The Organ in Trinity College was commenced by Father Smith, who, however, dying during its construction, it was voiced and tuned by his Son-in-law, Christopher Schrieder, in 1708. A Swell was afterwards added by Byfield, and a set of Pedal Pipes by Avery. Subsequently, Messrs. Flight and Robson effected considerable repairs, and also raised the pitch of the instrument, which had previously been very flat. An apparatus was also added to the Bellows for the purpose of steadying the wind, and which was the precursor of the more recent Concussion Bellows. Organ was considerably enlarged by Gray, in 1834, who extended the Great Organ from the original GG or 10\frac{2}{3} feet compass, to the CCC, or 16-feet compass. Since then, Hill has introduced a larger and far more effective Swell; and, still more recently, has put new Great Organ Sound-boards, the original ones, by Father Smith, having become crazy and decayed from age. These are so admirably constructed that the Pipes have now room to speak, instead of being inconveniently crowded, as they were before. Several new and effective Stops have also been introduced, while, by the transposition of others, the whole has been rendered far more brilliant and effective. The whole of these latter improvements were made under the direction of the present Organist, Dr. Walmisley. The instrument now contains 29 Sounding of subject the following is a list

Stops, of which the following is a list:	
Great, 1	4 Stops.
1—Double Diapason, Open metal to the Gamut G key, Stopped to the CC key. 2—Open Diapason, down to CCC. 3—Stopped Diapasonto GG. 4—Gambato CC. 5—Salicionalto CC. 6—Quintto the CC key.	7—Principal, throughout.  8—Wald Flute.  9—Twelfth, throughout.  10—Fifteenththroughout.  11—SesquialteraIII rks. throughout.  12—MixtureII rks. throughout.  13—Trumpetthroughout.  14—Clarionthroughout.
Choir, 6	Stops.
15—Open Diapason. 16—Stopped Diapason. 17—Dulciana.	18—Principal. 19—Flute. 20—Cremona.
Swell, 8	3 Stops.
21—Double Stopped Diapason. 22—Open Diapason. 23—Stopped Diapason. 24—Principal.	25—Sesquialtera, III ranks. 26—Oboe. 27—Trumpet. 28—Clarion.
Pedal,	1 Stop.
29—Sub Bourdon	32 feet tone.
Accessory Stops,	Movements, &c.
1—Great to Pedal, 16 feet pitch. 2—Great to Pedal, 8 feet pitch. 3—Choir to Pedal, 16 feet pitch. 4—Choir to Pedal, 2 feet pitch.	5—Swell to Great. 6—Tremulant. 7, 8, 9, 10—Four Composition Pedals.

Compass.

Swell, Gamut G to f3 in alt.

Pedal, CCC to Tenor c, two octaves.

Great, CCC to f3 in alt

Choir, GG to f in alt.

### 263. Cambridge.

The Organ in the Chapel of St. John's College, Cambridge, was built by Hill, in 1839. It is not completed, preparation being made for five more Stops, which will be added when the new Chapel is built.

Great, 10 Stops.	
Compass, FFI	of to f <sup>3</sup> in alt.
	6—Claribella. 7—Twelfth and Fifteenth on one slide. 8—Fifteenth (No. 2). 9—Sesquialtera. 10—Trumpet.
12—Stopped Diapason.	15—Principal
13—Dulciana.	14—Flute. 15—Principal. 16—Cremona.
Swell, 9 Stops—	-FF to f in alt.
17—Open Diapason. 18—Stopped Diapason. 19—Dulciana. 20—Principal. 21—Harmonica.	22—Sesquialtera, IV ranks. 23—Hautboy. 24—French Horn. 25—Clarion.
Pedal, 1 Stop.	
26—Open Diapason, to FFF.	
Couplers.	
1—Swell to Great. 2—Octave Swell to Great.	3—Choir to Great.
264 Tudvey	

#### 264. Turvey.

The Organ in Turvey Church, Bedfordshire, is an admirable instrument, and was built by Hill, in the early part of the present year, 1855. It contains 27 Sounding Stops, of which the following is a list:

#### Great, 9 Stops. 1—Double Open Diapason 16 feet. 6—Twelfth.... $2\frac{2}{3}$ feet. 2—Open Diapason. . . . . 8 feet. feet. 8—Sesquialtera, III rks. 3—Stopped Diapason ... 8 feet tone. 9—Trumpet . . . . . . . . . 8 4 feet. 5—Flute..... 4 feet. Swell, 8 Stops. 10—Double Diapason . . . 16 feet. 14—Principal...... 4 feet. 15—Fifteenth ..... 2 feet. 11—Open Diapason ... 8 feet. 12—Stopped Diapason... 8 feet tone. 16—Cornopean..... 8 feet. 8 feet. 17—Hautboy..... 8 feet. Choir, 6 Stops. 22—Flute ..... 18—Open Diapason.... 8 feet. 4 feet. 23 Cremona..... 19—Stopped Diapason ... 8 feet tone. 8 feet tone. 20—Salicional..... 8 feet. 8 feet. 4 feet. 21—Principal.... Solo, 1 Stop.

24—Tuba Mirabilis, on a fourth Manual.....

## 265. NORTHAMPTON.

The Organ in All Saints' Church, Northampton, is a very fine instrument. It was built by Mr. Hill, about 10 years since; a great portion of the previous Organ being used up in the new work. It contains 44 Sounding Stops, 3 Manuals, and an independent Pedal of 7 Stops. The following is a specification of the instrument as left by Mr. Hill:

Great, 16 Stops—CC to F.		
1—Double Open 16 feet.	9—Fifteenth	2 feet.
2—Double Stopped through-	10—Sesquialtera, III rks. 1	$\frac{3}{5}$ foot.
out 16 feet.	11—Doublette II rks. 2	2 feet.
3—Open Diapason 8 feet.	12—Furniture, IV rks.	foot.
4—Open Diapason 8 feet.	13—Double Trumpet 1	6 feet.
5—Stopped Diapason 8 feet.	14—Posaune	8 feet.
6—Quint 6 feet.	15—Trumpet	8 feet.
7—Principal 4 feet.	16—Clarion	4 feet.
8—Twelfth 3 feet.		
Choir, 6 Stop	os—CC to F.	
17—Dulciana 8 feet.		4 feet.
18—Stopped Dulciana 8 feet.	21—Fifteenth	2 feet.
19—Principal 4 feet.	22—Cremona	8 feet.
Swell, 15 Sto	ops—CC to F.	
23—Double Diapason 16 feet.	31—Mixture, II rks.	
24—Open Diapason 8 feet.		6 feet.
25—Stopped Diapason 8 feet.		8 feet.
26—Dulciana 8 feet.		8 feet.
27—Principal 4 feet.		8 feet.
28—Twelfth 3 feet.	36—Clarion	4 feet.
29—Fifteenth 2 feet.	37—Flute 4	4 feet.
30—Sesquialtera, III rks.		
Pedal, 7 Stops—	-CCC to Tenor d.	
38—Open, wood 16 feet.	42—Sesquialtera, V rks.	
39—Sub Bass 16 feet.	43—Trombone 10	6 feet.
40—Principal 8 feet.	44—Trumpet	8 feet.
41—Fifteenth 4 feet.	•	
3 Pedal Couplers.	1 Manual Coupler.	
1	•	

#### 266. NORTHAMPTON.

The Organ in the Exchange Room, at Northampton, is the German instrument that was placed in the Great Exhibition building of 1851, by Schulze, of Paulinzelle, near Erfurt. It is an admirable Organ, and presents varieties of tone, both in regard to character and strength, quite unusual in an instrument with so few Stops. It contains 16 Sounding Stops, of which the following is a list:

Great, {	3 Stops.	
1—Bourdon 16 feet tone.	6—Octave 4 feet.	
2—Open Diapason 8 feet.	Quint and drawing 23 feet.	
3—Gamba 8 feet.	Super-octave together 2 feet.	
4—Hohl-flote 8 feet.	8—Mixture, V ranks 2 feet.	
5—Gedact 8 feet tone.		
Choir,	6 Stops.	
8—Lieblich Gedact, to	12—Flauto Traverso 8 feet.	
Gamut G key (GG	13—Geigen Principal 4 feet.	
Pipe) 16 feet tone.	14—Flauto Traverso and	
10—Geigen Principal 8 feet.		
	1 slider 4 feet.	
Pedal, 2 independent Stops, and 2 by communication.		
a—Sub-bass, borrowed from	b—Flute Bass, borrowed from	
Manual Bourdon 16 feet tone.	Manual Gedact 8 ft.tone.	
15—Octave Bass (wood). 8 feet.	16—Posaune, Free Reeds 16 ft.tone.	
Couplers.		
1—Great to Pedal	2—Choir, Sub-octave to Great.	
Compass.		
Great, CC to $f^3$ in alt. Choir, CC to $f^3$ in alt.	Pedal, CCC to Tenor d.	
em To the of the state of		

The Pedal Clavier is concave in section, consequently the extreme keys are much more within convenient reach than usual.

## 267. ROCHESTER.

The Organ in Rochester Cathedral was built by Samuel Green. In 1835, it was considerably enlarged by Hill. It contains 24 Stops, of which the following is a list:

Great, 10 Stops.

1—Open Diapason.	6—Twelfth.
2—Open Diapason.	7—Fifteenth.
3—Stopped Diapason.	8—Sesquialtera, III ranks.
4—Claribella, in place of IV-rank	9—Mixture II ranks.
Cornet.	10—Trumpet.
5 — Principal.	1
Choir,	5 Stops.
11—Open Diapason, through, in place of	13—Dulciana.
Bassoon.	14—Principal.
12—Stopped Diapason.	14—Principal. 15—Fifteenth.
Swell,	8 Stops.
16—Open Diapason.	20—Dulciana Principal.
17—Stopped Diapason.	21—Cornet, III ranks.
18—Dulciana.	22 —Trumpet.
19—Principal.	23—Hautboy.
Pedal,	1 Stop.
24—Open Pipes, CC dow	n to CCC16 feet length.
Aceessory Stops,	Movements, &c.
1—Coupler, Swell to Great.	3—Coupler, Choir to Pedal.
2—Coupler, Great to Pedal.	3—Coupler, Choir to Pedal. 4 to 7—Four Composition Pedals.
Com	pass.
Great, GG to e <sup>3</sup> in alt.	Swell, Tenor e to e <sup>3</sup> in alt.
Choir, GG to e <sup>3</sup> in alt.	Pedal Clavier, GG to Tenor d.

### 268. CANTERBURY.

It is not known who was the original builder of the Organ in Canterbury Cathedral; but it was re-built by Samuel Green, in 1784, who put in new Diapasons and enlarged the scale of the Pipes. It was removed, in 1827, from above the screen, by Longhurst, sen. In 1842, Mr. Hill enlarged the Organ, by putting in new keys and a long movement of upwards of 90 feet; he also re-built the Swell Organ, and extended the compass to Tenor c. The Organist now sits in the Choir behind the Decani Lay Clerks. The Organ, which is now placed over the south aisle, has 3 sets of keys; Compass, from GG to E; two octaves of Pedals, and one octave of Pedal Pipes from CCC to CC.

```
Great, 12 Stops.
 1-Open Diapason.
                                             7—Twelfth.
                                             8—Sesquialtera, III ranks.
 2—Open Diapason.
                                            9—Mixture.... II ranks.
 3—Stopped Diapason.
 4—Claribella, Treble, in place of V-rank
                                           10—Trumpet, Treble, in place of Tierce.
                                            11—Great Trumpet (throughout).
       Cornet.
 5-Principal.
                                            12—Clarion..... (throughout).
 6—Fifteenth.
                                  Choir, 6 Stops.
                                           16—Open Flute.
17—Principal.
18—Cremona.
13—Stopped Diapason.
14—Dulciana.
15—Stopped Flute.
                                  Swell, 10 Stops.
                                           24—Twelfth.
19—Stopped Diapason.
                                           25—Sesquialtera, III ranks.
26—Cornopean.
27—Trumpet.
28—Hautboy.
20—Double Open Diapason.
21—Unison Open Diapason.
22—Principal.
23—Fifteenth.
                                  Pedal, 2 Stops.
29—Stopped Diapason (wood).
                                         30—Open Diapason (wood).
                                     Couplers.
 1-Swell to Great.
                             2—Pedal to Great.
                                                       3—Pedal to Choir.
```

## 269. TONBRIDGE WELLS.

The Organ in Trinity Church, Tonbridge Wells, was built by Gray, in 1840, and is a very fine one.

```
Great, 8 Stops—Compass, GG to F in alt.

1—Stopped Diapason.
2—Open Diapason.
3—Open Diapason.
4—Principal.

Choir, 6 Stops—GG to F in alt.

9—Stopped Diapason.
10—Open Diapason.
11—Principal.

Great, 8 Stops—Compass, GG to F in alt.
7—Sesquialtera, III ranks.
8—Trumpet.

Choir, 6 Stops—GG to F in alt.
12—Fifteenth.
13—Flute.
14—Cremona to Fiddle G.
```

Swell, 5 Stops—Compass, from Tenor C to F in alt.

15-Open Diapason. 18-Trumpet. 16—Stopped Diapason. 19-Hautboy. 17-Principal.

Pedal, 1 Stop.

20-Open Diapason, CC to CCC, one octave.. 16 fect length.

Coupler to Great Organ. Four Composition Pedals. Two Octaves and a note of German Pedals, from CCC.

## 270. Cranbrook.

The Organ in the Parish Church at Cranbrook, Kent, is a most excellent instrument. It was built by Mr. Willis, in 1854, and consists of two complete rows of Keys, of the Compass from CC to F in alt, fifty-four notes, and two Octaves and a half of Pedals, of the Compass CCC to F, thirty notes. It contains the following Stops:

## Great, 11 Stops.

I—Double Diapason, closed	5—Dulciana, metal 8 feet.
wood 16 feet.	6—Flute (Harmonic) metal 4 fect.
2—Large Open Diapason,	7—Principal, metal 4 feet.
metal 8 feet.	8—Twelfth, metal 3 feet.
3—Small Open Diapason,	9—Fifteenth, metal 2 feet.
metal 8 feet.	10—Sesquialtera, Vrnks. met. $1\frac{3}{5}$ foot.
4—Stopped Diapason and	11—Trumpet, metal 8 feet.
Ĉlaribella, wood 8 feet.	
	· · · · · · · · · · · · · · · · · · ·
Swell, 1	10 Stops.

12 - Double Diapason, closed	17—Fifteenth, metal 2 feet
wood 16 feet.	
13—Open Diapason, metal 8 feet.	19—Contra Hautboy, metal 16 feet
14—Stopped Diapason, wood. 8 feet.	20—Hautboy, metal 8 feet
15—Gamba (to Tenor C), met. 8 feet.	
16—Principal, metal 4 feet.	

### Pedal, 1 Stop.

22—Grand Open Diapason, wood.....16 feet.

### Couplers.

1—Swell to Great. 2-Swell to Pedals. 3—Great to Pedals.

### 271. CHICHESTER.

The Organ in the Cathedral at Chichester was built by Renatus Harris, in 1678, and originally had but 1 Manual; no Pedals; only one Open Diapason, which stood in the West Front of the Case, diapered and gilded; and no Reed Stop. In the year 1725, Byfield added the Choir Organ, and put a Trumpet Stop into the Great Organ. In 1778, the East Front Open Diapason was added by Knight, who at the same time built the Swell. In 1806, England considerably improved the Organ, by introducing new and larger sound-boards; at the same time making the Great and Choir Manuals long Octaves; putting a II-rank Mixture into the Great

Organ; placing a Hautboy in the room of the Swell Trumpet, and a Dulciana to Gamut G, in lieu of the Choir Cremona. The old Pipes were at the same time rounded out and repaired. For these repairs and improvements, England received 200 guineas. A Pedal Clavier, of the compass GG to Tenor c, was also laid down, by England, acting on the Bass Keys of the Great Manual. In 1829, Pilcher added a set of Unison Pedal Pipes from FFF to Tenor c, and placed a Clarabella in the Swell in the room of the IV-rank Cornet. He also put in a new Horizontal Bellows, using the old Diagonals as the two feeders, and also re-gilt the Choir front pipes. The cost was about £100. In 1844, a set of Double Open Pedal Pipes from FFFF to CC, and a separate Bellows, were added by Gray and Davison, the largest Pipes being laid horizontally at the back of the Organ, in the Organ loft. The Swell Clavier was at the same time extended to GG, communicating with and pulling down the corresponding Keys of the Choir Organ; a Clarabella Stop was inserted in place of the V-rank Cornet in the Great Organ; a Cremona was put into the Choir; a Coupler, Swell to Great, was applied; also two Composition Pedals; and the whole of the Pipes were repaired, and many much improved. The cost was £218. In 1851, the present Swell of 8 Stops was added by Hill, and the Organ now contains the following Stops:

# Great, 10 Stops.

1—Open Diapason.
2—Open Diapason.
3—Stopped Diapason.
4—Clarabella, in place of V-rank
Cornet.
5—Principal.

6—Twelfth.
7—Fifteenth.
8—Sesquialtera..III ranks.
9—Mixture.....II ranks.
10—Trumpet, draws in halves.

Choir, 6 Stops.

11—Dulciana to Gamut G.

12—Stopped Diapason.

13—Principal.

14—Flute.

15—Fifteenth.

16—Cremona to Fiddle g.

Swell, 8 Stops.

17—Double Diapason.

18—Open Diapason.

19—Stopped Diapason.

20-Principal.

21—Fifteenth.

22—Sesquialtera, III ranks.

23—Hautboy.

24—Cornopean.

Pedal, 2 Stops.

25—Great Open Bass, to FFFF, 24 feet. | 26—Open Diapason, to FFF.. 12 feet.

Accessory Stops, &c.

1—Swell to Great.

2-Great to Pedal.

3—Choir to Pedal.

4, 5, Two Composition Pedals.

Compass.

Great, GG to d<sup>3</sup> in alt. Choir, GG to d<sup>3</sup> in alt.

Swell, Tenor c to d<sup>3</sup> in alt.

Swell Clavier, GG to d<sup>3</sup> in alt. Pedal, FFF to Tenor c, 20 notes.

### 272. Winchester.

The fine new Organ in Winchester Cathedral was built by Willis, under the direction of Dr. S. S. Wesley. It comprises 4 Manuals, an independent 32-feet Pedal of 8 Stops, and altogether 48 Sounding Stops, nearly all of which are whole Stops. The following is the scheme:

# Great, 13 Stops.

01000,	· · · · · · · · · · · · · · · · · · ·		
1—Double Diapason	8—Fifteenth		
Swell, 1	13 Stops.		
14—Double Diapason       16 feet.         15—Open Diapason       8 feet.         16—Stopped Diapason       8 feet tone.         17—Principal       4 feet.         18—Flute       4 feet.         19—Twelfth       2 \frac{2}{3} feet.         20—Fifteenth       2 feet.	21—Sesquialtera. 22—Mixture.   23—Trumpet 16 feet. 24—Trumpet 8 feet.   25—Hautboy 8 feet.   26—Clarion 4 feet.		
Choir,	8 Stops.		
27—Open Diapason       8 feet.         28—Stopped Diapason       8 feet tone.         29—Dulciana       8 feet.         30—Principal       4 feet.	31—Flute		
Solo, 6 Stops.			
35—Harmonic Flute 8 feet. 36—Harmonic Flute 4 feet. 37—Piccolo 2 feet.	38—Horn		
Pedal, 8 Stops.			
41—Double Double Dia- pason	44—Open Diapason 8 feet.   45—Principal 4 feet.   46—Mixture.		
son 16 feet.	47—Trombone 16 feet.		

# Compass of all the Manuals, CC. Pedal, CCC.

48—Tromba....

# Couplers.

Swell to Great.	Choir to Pedal
Choir to Great.	Swell to Pedal.
Great to Pedal.	

43-Double Dulciana ... 16 feet.

## 273. SALISBURY.

The Specification of the Organ that Harris built for Salisbury Cathedral, with its "Fifty Stops, four sets of Keys, and eleven Stops of Echos," is sufficiently curious to warrant its insertion here; particularly as it has never before been

548 APPENDIX.

printed. Although, according to tradition, it was a very fine instrument, yet its unusually large size was to some extent due to "show;" not made up so much by the introduction of Half or Incomplete Stops-for there were but two Stops of less than the full range in the whole Organ, if we except the Echos—as (1) from the adoption of a system of "Communication," whereby some Stops belonging to one Manual were made to act on a second, drawing separately and sounding independently, as though composed of entirely distinct sets of pipes; (2) by making every rank of the Choruswork in the Echo draw separately; and (3) by providing three Manuals out of the four with a "Spare Stop." The custom of bringing Stops, or portions of Stops, from one Manual on to another "by Communication," as it was termed, was a favourite one with Harris. The Bass of the Open Diapason, Stopped Diapason, and Principal, of the Choir Organ at St. Mary Axe, are borrowed in this manner; and, this plan having been followed by the above-mentioned and other builders, examples still exist in the instruments at Isleworth, St. Bartholomew the Great, St. Dionis Backchurch, &c. In the particular instrument, however, under consideration, no less than thirteen of the fifteen Great Organ Stops were made to act after this manner, on a separate Manual, as a second Great Organ. The principle of making up an imposing-looking specification by such means, appears to have been disapproved of by the younger Harris and Byfield; for they, in their agreement for the Doncaster Organ, contracted for 23 Stops, "without any communication, or any Set of Pipes made to serve in a double capacity in or upon both Organs\*." Harris's Salisbury scheme was as follows:

## Great, 16 Stops.

	_		
1—Open Diapason	9—Larigot		
Borrowed Gre	eat, 14 Stops.		
17—Open Diapason       8 feet.         18—Stopped Diapason       8 feet tone.         19—Principal       4 feet.         20—Flute       4 feet tone.         21—Twelfth $2\frac{2}{3}$ feet.         22—Fifteenth       2 feet.         23—Tierce $1\frac{5}{5}$ foot.	24—Larigot       1½ foot.         25—Sesquialtera, IV ranks.       26—Trumpet       8 feet.         27—Clarion       4 feet.         28—Cromhorn       8 feet tone.         29—Vox Humana       8 feet tone.         30—Spare Stop.		
Choir, 8 Stops.			
31—Open Diapason to Gamut G	35—Twelfth		

<sup>\*</sup> Historical Introduction, page 93.

# Echo, to Middle c<sup>1</sup>, 11 Stops.

39—Open Diapason 8 feet.	45—Tierce 1 \( \frac{7}{5} \) foot.
40—Stopped Diapason 8 feet tone.	
41—Principal 4 feet.	47—Trumpet 8 feet.
42—Flute 4 feet tone.	48—Vox Humana 8 feet tone.
	49—Cromhorn 8 feet tone.
44—Fifteenth 2 feet.	

50—Drum Pedal, tuned to CC\*.

Towards the end of the last century, the Cathedral underwent an extensive repair. While the alterations were in progress, King George the Third, who was then residing chiefly at Windsor, visited Salisbury, and, hearing that the means depended on the contributions of the gentlemen of Wiltshire and Berkshire, said to Bishop Barington, "I desire that you will accept a new Organ for your Cathedral, being my contribution as a Berkshire gentleman." The present instrument was accordingly built, by Green, in 1792, and cost 1000 guineas and the old Organ. It contains 25 Sounding Stops, of which the following is a list:

```
Great, 10 Stops.
                                            7—Sesquialtera, III ranks.
 1—Open Diapason.
 2-Open Diapason.
                                            8—Furniture .. II ranks.
                                           9 { Trumpet, Bass. Trumpet, Treble. 8—Cornet, V ranks to Middle c^1.
 3-Stopped Diapason.
 4-Principal.
 5—Twelfth.
 6-Fifteenth.
                                 Choir, 6 Stops.
                                          14—Principal.
11—Stopped Diapason.
12-Dulciana to Tenor c.
                                          15-Fifteenth.
13—Flute.
                                          16—Bassoon
               Swell, 8 Stops—Compass from Gamut G to E in alt.
                                          21—Trumpet.
17—Open Diapason.
18—Stopped Diapason.
                                          22—Hautboy.
19—Dulciana.
                                          23—Cornet, III ranks.
                                          24-Vox Humana.
20-Principal.
                                 Pedal, 1 Stop.
                      25—Double Diapason Pipes to FFF.
                                   Couplers.
 1—Swell to Choir.
                                           4-Octave Coupler to the Double
 2-Swell and Choir to Great.
                                                 Diapasons.
 3—Pedals to Great.
```

There is a tradition that part of Harris's Organ went to Abingdon Church, in Berkshire. The Choir Organ, with additions, was re-erected at Helston, in Cornwall, by Green and Blythe, where it was opened December 8, 1799.

<sup>\*</sup> The Drum Pedal was made with two Pipes, tuned at half tones from each other. There were such devices in existence, at the commencement of the present century, in the following Organs:

Christ Church, Spitalfields... tuned to C. St. Botolph, Aldgate ..... tuned to D. St. John's, Wapping ..... tuned to D. St. Nicholas, Deptford ..... tuned to D. Abingdon, Berks.

#### 274. Bristol.

The Organ in Bristol Cathedral was built by Renatus Harris, in 1685.

Great, 12 Stops.		
1—Open Diapason.	7—Fifteenth.	
2—Open Diapason.	7—Fifteenth. 8—Sesquialtera, IV ranks.	
3—Stopped Diapason.	9—Tierce.	
4—Principal.	10—Trumpet.	
5—Principal.	11—Clarion.	
6—Twelfth.	11—Clarion. 12—Cornet, V ranks.	
Choir,	4 Stops.	
13-Open Diapason, in place of Principal.	15—Flute.	
13—Open Diapason, in place of Principal.   14—Stopped Diapason.	16—Fifteenth.	
Swell, 6	Stops.	
17—Open Diapason.	20—Hautboy.	
18—Stopped Diapason.	21—Trumpet.	
19—Principal.	20—Hautboy. 21—Trumpet. 22—Cornet, III ranks.	
	1 Stop.	
23—Double Diapason Pipes, one octave.		
Couplers.		
1—Swell to Great.	One Octave of Pedal Keys.	

2—Pedals to Great.

#### 275. Bristol.

The Organ in St. James's Church, Bristol, was built in 1824, by Smith, of that city, under the direction of Dr. (then Mr.) Hodges. It has 4 Manuals; the Stops of one of which, however, are, "by communication," obtained from the Great Organ. The Sesquialtera in the Great Organ, and the Cornet in the Swell, are not separate Stops, but are simply connecting movements for drawing the preceding three single-ranked Stops in combination. This instrument was the first in England that had a Covered Stop on the Pedal down to CCCC, the 32-feet sound. It also presents the earliest English specimen of an Octave Manual Coupler. The Swell Stops and Sound-board, moreover, are continued beyond the compass of the Manual, i. e. up to c4 in altissimo, so that the Octave Coupler operates with more than usual effect. The following is a list of the Stops:

```
Great, 14 Stops.
 1—Open Diapason....
                         8 feet.
                                       2—Open Diapason ....
                         8 feet.
                                      3—Stopped Diapason...
                         8 feet tone.
                                      11—Twenty-second ....
                                                                1 foot.
 4—Principal . . . . . . . .
                         4 feet.
                                           Sesquialtera, III ranks.
                                      12—Mixture.... II ranks.
 5—Principal . . . . . . .
                         4 feet.
 6—Twelfth....
                        2<sup>2</sup>/<sub>3</sub> feet.
                                      13—Trumpet . . . . . . . . . .
                                                                8 feet.
 7—Fifteenth....
                         2 feet.
                                      14—Octave Bassoon . . . .
                                                                4 feet.
 8—Fifteenth . . . . . . . . . . . .
                         2 feet.
                           Inside Choir, 5 Stops.
            Chiefly borrowed, by communication, from Great Organ.
                                      4 feet.
15—Open Diapason . . . .
                         8 feet.
16-Stopped Diapason...
                                      19—Clarionet . . . . . . .
                                                                8 feet tone.
                         8 feet tone.
17—Principal .....
                         4 feet.
```

Swell, 9 Stops.			
20—Open Diapason 8 feet.	25—Tierce		
21—Stopped Diapason 8 feet tone.	Cornet, III ranks.		
22—Principal 4 feet.	26—Hautboy 8 feet.		
23—Twelfth $\dots 2^{\frac{2}{3}}$ feet.	27—Trumpet 8 feet.		
24—Fifteenth 2 feet.	28—Cremona 8 feet tone.		
Pedal,	5 Stops.		
29—Double Stopped Dia-	31—Stopped Diapason 16 feet tone.		
pason 32 feet tone.	32—Principal 8 feet.		
30—Open Diapason 16 feet.	33—Bassoon 16 feet.		
Accessory Stops, Movements, &c.			
1—Coupler, Swell to Great.	5—Coupler, Great to Pedal.		
2—Coupler, Swell Octave to Great.	6—Coupler, Choir to Pedal.		
3—Coupler, Swell to Choir.	7 to 10—Four Wind-trunk Valves.		
4—Coupler, Choir to Great.	•		
Compass.			
Great, CC to e <sup>3</sup> in alt.	Swell, Tenor c to c4 in altissimo.		
Choir, CC to e <sup>3</sup> in alt.	Pedal, CCC to Tenor c.		
Inside Choir, CC to e <sup>3</sup> in alt.			

The dimensions of the Case are as follow; viz. height, 28 feet; width, 16 feet; depth, 10 feet; and the Choir Organ is in front.

## 276. Wells.

The Organ in Wells Cathedral was originally built by Father Smith, in 1664; and was re-built by Green, in 1786. An octave and a half of Pedals and Double Pedal Pipes were added by Smith, of Bristol, about the year 1830. Compass of the Great and Choir Organs, GG to e<sup>3</sup> in alt. The instrument contains 23 Sounding Stops, of which the following is a list:

```
Great, 11 Stops.
 1—Open Diapason.
                                         7—Tierce.
 2—Open Diapason.
                                         8—Sesquialtera, III ranks.
                                       9—Furniture . . II ranks.
 3-Stopped Diapason.
 4-Principal.
                                       10—Trumpet.
                                       11—Cornet . . . IV ranks.
 5-Twelfth.
 6-Fifteenth.
                               Choir, 5 Stops.
12—Stopped Diapason.
                                       15—Flute.
13—Dulciana.
                                       16-Fifteenth.
14—Principal.
                               Swell, 6 Stops.
17—Open Diapason.
                                       20—Cornet . . . . III ranks.
18—Stopped Diapason.
                                       21—Trumpet.
19—Principal.
                                       22—Hautboy.
                                Pedal, 1 Stop.
              23—Open Diapason, CC to GGG.. 21½ feet length.
```

#### 277. EXETER.

The Organ in Exeter Cathedral was originally built by John Loosemore, in 1665; but it has since received many improvements from Schrider, Jordan,

Micheau; also from Robson, Lincoln, and, lastly, from Gray. On the east front of the Case, along the impost, is the following inscription: "John Loosemore made this Organ, 1665." The Swell and the Treble of the Double Diapason were added by Jordan, Bridge, and Byfield, in the latter half of the last century; the Dulciana was introduced by Lincoln; and the lower part of the Swell, as well as some of the Pedal Pipes, by Gray.

```
Great, 11 Stops.
 1-Double Diapason throughout.
                                            7—Fifteenth.
 2-Open Diapason.
                                            8-Sesquialtera, V ranks.
                                            9—Bassoon.
 3-Open Diapason.
                                           10-Trumpet.
 4—Stopped Diapason.
 5—Principal.
6—Twelfth.
                                           11—Cornet to c1, V ranks.
                                 Choir, 5 Stops.
12-Stopped Diapason.
                                          15—Flute.
13—Dulciana to Tenor c.
                                           16-Cremona.
14—Principal.
                                 Swell, 6 Stops.
17—Open Diapason.
                                          20—Sesquialtera, III ranks.
                                          21—Hautboy.
22—Trumpet.
18-Stopped Diapason.
19—Principal.
                                  Pedal, 1 Stop.
                 23—Open Diapason to GGG .. 21\frac{1}{3} feet length.
                                  Couplers, &c.
 1-Swell to Great.
                                            4-Pedals to Choir.
 2—Swell to Choir.
                                            5—Octave Pedal.
 3-Pedals to Great.
                                            6 to 9-Four Composition Pedals.
                                    Compass.
Great and Choir, GG to d<sup>3</sup> in alt.
                                                Pedal, two octaves.
Swell, Gamut G to f3 in alt.
```

#### 278. RIPON.

There is a fine Organ in Ripon Cathedral, built by Father Schmidt. About twenty years since, some new Stops were added by Wren and Boston, of Manchester; and, at the same time, a new Case was made to the instrument. The Organ now contains 26 Sounding Stops, of which the following is a list:

```
Great, 13 Stops.
                                       7-Twelfth.
1—Double Stopped Diapason.
2—Open Diapason.
                                        8—Fifteenth.
3—Open Diapason.
                                        9—Tierce.
4—Open Diapason Treble, by Wren
                                      10—Sesquialtera.
      and Co. Manchester.
 5-Stopped Diapason.
                                       12-Cornet.
 6—Principal.
                                      13—Trumpet.
                              Choir, 5 Stops.
14-Open Diapason.
                                      17—Principal.
15—Stopped Diapason.
                                      18—Flute.
16-Dulciana.
```

```
Swell, 7 Stops.

19—Open Diapason.
20—Stopped Diapason.
21—Dulciana.
22—Principal.

Pedal, 1 Stop.
26—Open Diapason, CC down to GGG.. 21½ feet length.

Couplers.

Swell to Great. | Great to Pedal. | Choir to Pedal.
```

## 279. BANGOR.

The Organ in Bangor Cathedral was built by Samuel Green, in 1779. No alterations or improvements have been made, except a few pedals which pull down the keys of Great Organ, which were added by Bucher and Fleetwood, of Liverpool, in 1826.

```
Great, 7 Stops.
 1-Open Diapason.
                                        5—Sesquialtera, treble.
 2—Stopped Diapason.
                                        6—Sesquialtera, bass.
3-Principal.
                                        7-Trumpet.
4-Fifteenth.
                               Choir, 3 Stops.
 8-Stopped Diapason.
                          9—Dulciana.
                                                 10—Principal.
                               Swell, 5 Stops.
                                       14—Hautboy.
11—Open Diapason.
12-Stopped Diapason.
                                       15-Cornet.
13—Principal.
```

#### 280. St. Asaph.

The Organ in St. Asaph's Cathedral was built by Hill, in 1834. Compass, from GG. The Pedal Pipes are placed at a distance from the instrument, immediately behind the stalls, and the whole effect is considered truly magnificent, the Cathedral being so well adapted for sound. The Organ contains:

Pedals to Great.

Pedals to Choir.

```
Great, 12 Stops.
                                         7—Wald Flute.
 1—Open Diapason (lowest notes wood).
 2—Open Diapason (lowest notes metal).
                                         8—Flute.
 3—Stopped Diapason, treble.
                                         9-Twelfth.
 4—Stopped Diapason, bass.
                                        10—Fifteenth.
 5—Dulciana.
                                        11—Sesquialtera.
 6—Principal.
                                        12—Trumpet.
                               Choir, 7 Stops.
                                        17—Principal.
13—Stopped Diapason, treble.
14—Stopped Diapason, bass.
                                        18—Suabe Flute.
15-Open Diapason.
                                        19-Cremona.
16—Viol da Gamba.
                               Swell, 5 Stops.
20-Open Diapason.
                                        23—Trumpet.
21—Stopped Diapason.
                                        24—Hautboy.
22—Principal.
              25—An Octave and a half of Pedals and Pedal Pipes.
                                  Couplers.
```

Swell Coupler.

## 281. St. David's.

The Organ in St. David's Cathedral was originally built by Father Schmidt, of whose workmanship (excepting the old oak case) only the Open Metal Diapason Pipes remain; the rest is the production of Mr. Lincoln, and was supplied about ten years ago. The Compass of the Great Organ is from CC to F in alt, Mr. Lincoln having added five notes to the original range, which was CC to C in alt.

Of the reeds in the Great Organ, the Posaune only is complete; but the instrument is pierced and ready for the Clarion, although there are as yet no pipes for it. There is no Choir Organ, which is a sad defect, as it is so much required in the Cathedral service.

Great, 11 Stops. 1-Double Diapason (i. e. Bourdon 7—Twelftli. and Tenoroon). 8—Fifteenth. 2—Open Metal Diapason (Schmidt's). 9—Sesquialtera. 3—Open Wood Diapason. 10—Mixture. 4—Quint. 11—Posaune (very fine). 12-Clarion (no pipes as yet). 5-Principal. 6-Wald Flute. Swell, 9 Stops—From Tenor C. 13—Double Diapason. 18—Doublette. 19-Cornopean. 14—Diapason, metal. 15—Diapason, wood. 20-Hautboy. 16—Principal. 21—Clarion. 17-Piccolo. Pedal, 1 Stop. 22-Open Diapason from CCC.. 16 feet. Couplers. Swell to Great. Pedals to Manuals. Two Octaves of Pedals.

### ORGANS IN SCOTLAND AND IRELAND.

#### 282. Glasgow.

The large and fine Organ in the City Hall, Glasgow, containing fifty-five Stops, and upwards of three thousand Pipes, is, by many degrees, the most complete instrument yet erected in Scotland. Each manual has a range of five complete octaves, or sixty-one notes, extending from CC to C in alt, thus affording facility for the just execution of any known orchestral music, without the distortion, inversion, and consequently frequent mutilation, of its passages. The Pedal Clavier has a compass of two octaves and a third, and, besides being capable of connection at will with any or all of the Manuals, commands an independent Organ of its own. The general contents of the instrument are as follow:

#### Great, 15 Stops. 9—Ottavina ..... 1—Bourdon..... 16 feet. 2 feet. 10—Sesquialtera, III rks. 2—Open Diapason . . . . 8 feet. 11—Mixture ... III rks. 3—Stopped Diapason... 8 feet. 8 feet. 12—Flute Harmonique... 8 feet. 13-Flute Harmonique... 4 feet. 5-Octave..... 4 feet. 8 feet. 6—Piccolo..... 4 feet. 3 feet. 15—Clarion ..... 4 feet. 7—Twelfth.... 8—Fifteenth..... 2 feet.

## Swell, 16 Stops.

16—Bourdon 16 feet.	24—Flageolet 2 feet.		
17—Open Diapason 8 feet.	25—Sesquialtera, III rks.		
18—Keraulophon 8 feet.	26—Mixture II rks.		
19—Stopped Diapason Bass 8 feet.	27—Contra-Fagotto 16 feet.		
20—Clarionet Flute 8 feet.	28—Cornopean 8 feet.		
21—Octave 4 feet.	29—Oboe		
22—Flute 4 feet.	30—Voix-Humaine 8 feet.		
23—Fifteenth 2 feet.	31—Clarion 4 feet.		
Choir,	10 Stops.		
32—Open Diapason (tin) 8 feet.	37—Flute 4 feet.		
33—Clarionet Flute 8 feet.	38—Fifteenth 2 feet.		
34—Stopped Diapason Bass 8 feet.	39—Piccolo 2 feet.		
35—Salcional 8 feet.	40—Corno di Bassetto 8 feet.		
36 — Octave 4 feet.	41—Voix-Celeste 8 feet.		
Pedal, 6 Stops.			
42—Contra Bourdon 32 feet.	45—Octave		
43—Open Diapason 16 feet.	46—Fifteenth 4 feet.		
44—Bourdon 16 feet.	47—Trombone 16 feet.		
Coupling	Stops, &c.		
48—Swell to Great Manual, Unison.	52 — The Reeds and Harmonic Flutes		
49—Swell to Great Manual Super-	Great to Swell Unison by a Peda		

49—Swell to Great Manual, Super-50-Swell to Great Manual, Sub-Octave, 51—Choir to Great Manual, Sub-Octave.

of Great to Swell, Unison, by a Pedal.

53—Swell Manual to Pedals.

54—Great Manual to Pedals.

55-Choir Manual to Pedals.

There is a tremulant in connection with the Swell, and six composition Pedals for producing varied combinations of the Great Organ Stops, besides two for the Swell; and the Organ is further provided with the Pneumatic Lever for lightening the touch. The last four stops of the Great (the harmonic flutes and reeds) are placed on a distinct sound-board, in order that they may be supplied with air at a higher pressure than that allotted to the rest of the Great Organ; and this pressure is again increased in the three upper octaves of these Stops. Furthermore, by a peculiar mechanical arrangement, these four Stops can at pleasure be thrown out of connection with the Great Organ keys, and placed under the command of the Swell Manual.

#### 283. Edinburgh.

The Organ in the Music Hall, at Edinburgh, is a particularly fine instrument. It was built in the year 1843, by Mr. Hill, of London, and contains 38 Sounding Stops, of which the following is a list:

### Great, 14 Stops.

	,	1	
1—Tenoroon		8Wald Flute	4 feet.
2-Bourdon, to meet No. 1	16 feet tone.	9—Duodecima	$2\frac{2}{3}$ feet.
3—Unison open		10—Super Octave	2 feet.
4—Unison closed, Treble	8 feet tone.	11—Sesquialtera, III rks.	$1\frac{3}{6}$ foot.
5—Unison closed, Bass.		12—Mixture II rks.	🖁 foot.
6—Quint	$5\frac{1}{3}$ feet.	13—Doublette II rks.	2 feet.
7—Octave	4 feet.	14—Posaune	8 feet.

## Choir, 11 Stops.

17—Salicional	<ul><li>8 feet tone.</li><li>8 feet.</li><li>8 feet.</li><li>4 feet tone.</li></ul>	21—Oboe Flute	2 feet. 8 feet tone. 8 feet.	
G 11 G				

## Swell, 10 Stops.

26—Tenoroon Dulciana	16 feet.	31—Flageolet	2 feet.
27—Unison open	8 feet.	32—Doublette II ranks	2 feet.
28—Unison closed	8 feet tone.	33—Echo Cornet, IV ranks.	
29—Octave	4 feet.	34—Oboe	8 feet.
30—Suabe Flute	4 feet.	35—Cornopean	8 feet.

## Pedal, 3 Stops.

36—Contra Bass, open	16 feet.	38—Trombone,	of wood	16 feet.
37—Bourdon, stopped	16 feet tone.			

## Accessory Stops, Movements, &c.

1—Coupler, Swell to Great.	4—Coupler, Choir to Pedal.
2—Coupler, Choir to Great.	5, 6, 7—Three Composition Pedals.
3—Coupler, Great to Pedal.	

## Compass.

Great, CC to f <sup>3</sup> in alt.	Swell, Tenor c to f3 in alt.
Choir, CC to f <sup>3</sup> in alt.	Swell, Tenor c to f <sup>3</sup> in alt. Pedal, CCC to Tenor d.

The Case is 35 feet in height, and  $17\frac{1}{2}$  feet in width.

#### 284. Dublin.

The original Organ in St. Patrick's Cathedral, Dublin, was built by Renatus Harris, in 1697; in confirmation of which, the following is extracted from the Chapter book: "12th August, 1695. The Dean and Chapter agree with Renatus Harris, of London, Organ Builder, to make and set up a Double Organ for the sum of £505. In the Great Organ, Open Diapason of metal, Stop Diapason of wood, Principal of metal, Nason of wood, a great 12th of metal, 15th of metal, Sexquialtra of metal, a Mixture of metal, a Cornet of metal. In the Little Organ—a Principal of metal, Stop Diapason of wood, 15th of metal, Nason of wood, being in all 13 Stops, consisting of 800 Pipes, Sound board, &c. &c. The Pipes of the old Organ to be removed and to allow £65 for same."

"11th March, 1697. Organ erected and examined by the several Vicars." 10 May, 1697. Further contract for additional Stops for £350, to be paid at Strongbow's Tomb, in Christ Church, on stated times named—viz. Trumpet Stop, Echo Stop, *Time Stop* (?), entire Open Diapason, Flute of metal, Great Furniture of 3 ranks."

By whom the present Organ was rebuilt, &c. (probably by Byfield) we have no means of ascertaining; it has evidently been altered and improved of later years, by its having a Pedal Organ of two Octaves and two Notes. The Organ contains:

# Great, 11 Stops, GG to F in alt.

1—Open Diapason.	7—Tierce.
2—Large Open Diapason.	8—SesquialteraIII ranks.
3—Stopped Diapason.	9—Furniture III ranks.
4—Principal.	10—Cornet from Tenor C, V ranks.
5—Twelfth.	11—Great Trumpet.
6—Fifteenth.	· ·
Obain A Stane	CC to Elimolt

	Choir, 4 Stops,	GG to r in alt.
12—Stopped Diapason.		15-Large Principal, stopped and open,
13—Dulciana.		borrowed from the Great Organ
14—Flute.		by means of tubes.
	Swell, 8 Stops,	from Gamut G.

Swell,	ö	Stops,	irom	Gamut G.
			1 00	T10.1.

16—Double Diapason.	20—Twelfth.
17—Open Diapason.	21—Fifteenth.
18—Stopped Diapason.	22—Hautboy.
19—Principal.	23—Trumpet.

Pedal, 2 Stops, from CCC to E, two Octaves and two Notes.

24—Double Diapason, 16 feet. 25—Stopped Diapason, 8 feet, unison. Couplers.

> Great to Swell. Pedals to Great.

#### 285. DUBLIN.

The Organ in Christ Church Cathedral, Dublin, was originally built by Byfield, of London, in A. D. 1751, but has been altered by various builders, and numerous additions made at different times. It originally consisted of  $2\frac{1}{2}$  rows of keys, Great and Choir Organs, GG long octaves to d3 in alt, Swell from fiddle g to d3 in alt. An excellent Swell was added in 1845, from CC to F in alt. The older Organ formed a portion of the one built by Renatus Harris for the Temple Church, London. Upon the erection of the present instrument by Byfield, he took the old Organ in exchange as part of payment, which instrument was sold, after his death, for £500, for Wolverhampton Church. This Organ originally contained a Double Bassoon to the DD key (DDD Pipe), which appears to have been the first double Reed introduced into any British Organ.

```
Great, 10 Stops, GG to F in alt.
```

, 1	,
1—Double Open Diapason.	6—Twelfth.
2—Open Diapason, No. 1	7—Fifteenth.
3—Open Diapason, No. 2.	8—Doublette, 8ve, 15th, and 22nd.
4—Stopped Diapason.	9—Sesquialtera, III ranks (useless).
5—Principal.	10—Trumpet (entirely useless).
Choir, 5 Stops,	GG to F in alt.
11—Open Diapason, from middle D	13Stopped Diapason.

upwards. 14—Principal. 12-Dulciana. 15—Flute.

21—Twelfth.

Swell, 11 Stops, CC to F in alt.

16—Double Stopped Diapason.	1 22—Fifteenth.
17—Open Diapason.	23—Doublette, 8ve, 15th, and 22nd.
	24—Sesquialtera.
11 1	25—Oboe.
20 Principal	1 96 Twimnet

Pedal, 2 Stops, CC to D, two Octaves and two Notes. 27—Open Diapason . . . 16 feet. 28—Principal.... 8 feet. Coupling Actions. Swell to Great. Great to Pedals. Swell to Pedals. 286. DUBLIN. The greater portion of the Organ in Trinity College Chapel, Dublin, was built by Telford, of Dublin, in 1838. It occupies the case of an Organ built by Green, of London. The Choir of Green's instrument was not removed, on account of its excellence; the Swell, Great, and Pedal Organs are alone new. Great, 8 Stops, GG to F in alt. 1-Open Diapason. 5—Twelfth. 2—Open Diapason. 6 - Fifteenth. 7-Sesquialtera. 3—Stopped Diapason. 8—Trumpet. 4-Principal. Choir, 4 Stops, GG to E in alt. 9—Stopped Diapason. 11—Principal. 10-Dulciana. 12-Fifteenth. Swell, 9 Stops, C, 4 feet, to F in alt. 13—Double Stopped Diapason. 18—Principal. 14—Open Diapason. 19 — Fifteenth. 20-Oboe. 15-Dulciana. 21—Trumpet. 16—Stopped Diapason. 17—Principal. Pedal, 5 Stops, GG to C, Octave and a half. 22—Unison. 25 - Fifteenth. 23-Principal. 26—Trumpet. 24—Twelfth. Coupling Actions. Swell to Great. Great to Pedals. DUBLIN. 287. The Organ in the Roman Catholic Church of St. Nicholas, Dublin, was built by Telford, of Dublin. Great, 12 Stops, FFF to F. 1-Great Open Diapason, 7—Twelfth, metal . . . .  $2\frac{2}{3}$  feet. 8 feet. 8—Fifteenth, metal . . . metal..... 2 feet. 2—Open Diapason, metal 8 feet. 9—Sesquialtera, III rks. 8 feet. 3—Dulciana, open, metal 10—Mixture.... II rks. 4—Stopped Diapason, wood 8 feet. 8 feet. 5-Principal, metal .... 4 feet. 12—Clarion..... 4 feet. 6—Second Principal, metal 4 feet. Choir, 7 Stops, FFF to F. 8 feet. 17—Flute, wood..... 13—Open Diapason, metal 4 feet. 18—Fifteenth, metal . . . . 14—Dulciana, metal.... 8 feet. 2 feet.

19—Cremona, metal....

8 feet.

15—Stopped Diapason, wood 8 feet.

4 feet.

16—Principal, metal . . . .

Swell, 10 Stops, Gamut G
--------------------------

20—Double Stopped Dia-	25—Twelfth, metal $2\frac{2}{3}$ feet.
pason, wood 16 feet.	26—Fifteenth, metal 2 feet.
21—Open Diapason, metal 8 feet.	27—Sesquialtera, III rks.
22—Dulciana, metal 8 feet.	28—Trumpet 8 feet.
23—Stopped Diapason, wood 8 feet.	29—Hautboy 8 feet.
24—Principal, metal 4 feet.	
Pedal, 5 Stop	s, FFF to F.
30—Double, open, wood 16 feet.	$33$ —Twelfth $2\frac{2}{3}$ feet.
	34—Fifteenth 2 feet.
32—Octave 4 feet.	

## 288. Dublin.

The Organ in the Roman Catholic Church of St. Francis Xavier, Gardener Street, Dublin, was built by Flight and Robson, and finished and erected by Gray and Son.

Great, 13 St	ops, FFF	to G i	n alt.
--------------	----------	--------	--------

Feet. Pipes.	Feet. Pip	pes.			
1—Double Diapason,	6—Principal metal 4	63			
metal and wood 16 51		63			
2—Great Open Diapason,	8—Fifteenth metal 2	63			
metal 8 63	9—Twenty-second, metal 1	63			
3—Small Open Diapason,	10—Sesquialtera, III rks.				
metal 51	metal 1 1	89			
4—Stopped Diapason,	11—Mixture II rks. 1 1:	26			
wood 8 63	12—Trumpet metal 8	63			
5—Quint metal 5 51		63			
Choir, 8 Stope	s—FFF to G.				
Feet. Pipes.		pes			
14—Open Diapason, metal 8 63		44			
15—Dulciana, wood and		63			
metal 8 51		51			
16—Stopped Diapason,		63			
wood 8 63		39			
Swell, 12 Stops—FF to G in alt.					
Feet. Pipes.					
		es.			
22—Double Stopped Dia- pason, bass, wood 16 51		$\frac{51}{51}$			
pason, bass, wood 16 51 23—Double Open Dia-					
1 .	A	53			
pason, treb. metal 16 51	1	51			
24—Open Diapason, metal 8 51		51			
25—Stopped Diapason,		51			
wood	33—Clarion metal 4	51			
26—Principal, metal 4 51					
Pedal, 2 Stops—FFF to F.					
34—Double Open Dia-					
pason, wood 16 25		25			
Accessory Stops, Movements, &c.					

1 to 8—8 Composition Pedals. 9 to 12—4 Coupling Actions.

### 289. Belfast.

The Organ in the New Church of St. Malachy, Belfast, was built by Telford, of Dublin, in 1849. It has three complete Manuals, from CC to F in alt, and a Pedal, from CCC to E—two Octaves and four Notes; also 33 Sounding Stops, of which the following is a list:

```
Great, 13 Stops—CC to F in alt.
 1—Bourdon, wood . . . . 16 feet.
                                           6—Principal ...metal
                                                                      4 feet.
 2—Tenoroon, metal.... 16 feet.
                                           7—Twelfth.... metal 2⅔ feet.
 3 - Great Open Diapason,
                                           8—Fifteenth ...metal
                                                                      2 feet.
                                           9—Doublette . . . metal
       metal.....
                                                                      1 foot.
                            8 feet.
 4—Small Open Diapason,
                                          10—Sesquialtera . . . metal, III ranks.
                                          11—Mixture . . . . metal,
                                                                     II ranks.
       metal.....
                            8 feet.
 5—Stopped Diapason,
                                          12—Posaune....metal
                                                                      8 feet.
                                          13-Clarion . . . . . metal
                                                                      4 feet.
       wood . . . . . . . . . . . . .
                            8 feet.
                        Choir, 7 Stops—CC to F in alt.
14—Dulciana . . . metal . .
                            8 feet.
                                          17—Viol di Gamba, metal
                                                                      8 feet.
15—Stopped Diapason,
                                                                      4 feet.
                                          18—Principal . . . . metal
                                                                      4 feet.
                            8 feet.
                                          19—Wald Flute . . . wood
       wood......
16—Claribella, wood....
                            8 feet.
                                          20—Fifteenth . . . . metal
                                                                      2 feet.
                        Swell, 10 Stops-CC to F in alt.
                                          26—Fifteenth . . . metal
21—Double Stopped Dia-
                                                                      2 feet.
                                                                      1 foot.
                                          27—Doublette . . . . metal
       pason .....wood 16 feet.
22—Open Diapason, metal
                            8 feet.
                                          28—Sesquialtera, metal, III ranks.
23—Dulciana . . . metal
                                                                      8 feet.
                            8 feet.
                                          29—Cornopean . . . metal
                                          30-Hautbois . . . . metal
                                                                      8 feet.
24 — Principal . . . . metal
                            4 feet.
25—Twelfth . . . . . metal 2\frac{2}{3} feet.
                      Pedal, 3 Stops—CCC to E, 29 Notes.
31—Grand Double Open
                                          32—Double Trombone .. 16 feet.
       Diapason . . . . . 16 feet.
                                          33—Unison Trombone ...
                                  Couplers, &c.
 1—Swell Organ to Great Manual.
                                           4—Great Organ to Pedals.
 2-Swell Organ to Choir Manual.
                                           5 to 8—Four Composition Pedals.
 3—Swell Organ to Pedals.
            The largest Pipe is 16 feet long; the smallest, \(\frac{3}{2}\) of an inch.
```

#### 290. BELFAST.

The Organ in St. Patrick's Roman Catholic Chapel, Belfast, was built by Gray

and Son, in 1840. Great, 10 Stops—GG to F. 6—Fifteenth. 1—Open Diapason. 7—Cornet..... III ranks. 2—Open Diapason. 8—Sesquialtera.. III ranks. 3—Stopped Diapason. 9-Mixture . . . . II ranks. 4—Principal. 5—Twelfth. 10—Trumpet. Choir, 7 Stops. 11-Stopped Diapason, treble. 15—Flute. 16—Claribella. 12 - Stopped Diapason, bass. 17—Cremona. 13—Dulciana. 14-Principal.

	Swell, 10 Stops—	3 Octaves and a half.		
1	18 – Open Diapason.	23—Twelfth.		
	19—Double Diapason, treble.	24—Fifteenth.		
	20—Double Diapason, bass.	25—Sesquialtera.		
	21 — Stopped Diapason.	26—Trumpet.		
	22—Principal.	27—Oboe.		
Pedal, 1 Stop—CCC, 2 Octaves.				
28—Double Open Diapason 16 feet.				
Couplers, &c.				
	1—Swell to Great Organ.	5—Coupler for combining Double Dia-		
	2—Choir Organ to Pedals.	pasons, to produce mysterious		
	3—Great Organ to Pedals.	and other effects.		
	4—Double Diapason to Pedals.	6 to 9 — Four Composition Pedals.		
	-	-		

### 291. Cashel.

The Organ in Cashel Cathedral, Tipperary, was built by Samuel Green, of London, in 1786; and, although small, is a very good one. It contains 17 Stops.

, , , , , , , , , , , , , , , ,	, , , , , , , , , , , , , , , , , , , ,
	Great, 8 Stops.
1—Open Diapason.	5—Fifteenth.
2—Stopped Diapason.	6—Sesquialtera.
3—Principal.	7—Trumpet.
4—Twelfth.	8—Cornet.
	Choir, 4 Stops.
9—Dulciana.	11—Principal.
10—Stopped Diapason.	11—Principal. 12—Fifteenth.
	Swell, 5 Stops.
13—Open Diapason.	16—Principal.
14—Stopped Diapason.	16—Principal. 17—Hautboy.
15—Dulciana.	· ·
	Octave and a half of Pedals.

Couplers for Great and Choir Organs.

## 292. Cashel.

The Organ in Cashel Roman Catholic Cathedral, Ireland, was erected, in 1846, by Bevington and Sons. It is one of the largest Organs in the South of Ireland.

Great, 11 Stops—FFF to F.			
Pipes.	Pipes.		
1—Tenoroon, metal	8—Sesquialtera, IV ranks 240		
2—Bourdon, bass, FFFF	9—Mixture III ranks 180		
3—Open Diapason, FFF, metal 60	10—Trumpet		
4—Stopped Diapason 60	11—Clarion 60		
5—Principal 60			
6—Twelfth 60	900		
7—Fifteenth 60			
Choir, 9	Stops.		
Pipes.	Pipes	í.	
12—Open Diapason, FFF, metal 60	18—Fifteenth 60		
13 — Dulciana, FF 49	19—Clarionet		
14—Stopped Diapason, treble	20—Bassoon, bass, FFF 18		
15 - Stopped Diapason, bass, FFF	And the same of th		
16—Principal, FFF 60	409		
17—Flute, FFF 60			

Swell, 8 Stops—Tenor C to F.  Pipes.  21—Double Diapason
Accessory Stops, Movements, &c.
1 to 6—Six Composition Pedals. 7 to 10—Four Coupling Movements.
Great Organ       900       Pedal       Pipes.         Choir       409       Total       1749
293. Совк.
St Mary's Roman Catholic Church, Cork, contains 25 Stops, of which the
following is a list:  Great, 9 Stops.  1—Double Diapason, metal.  2—Bourdon, metal.  3—Open Diapason.  4—Stopped Diapason.  5—Principal.  Great, 9 Stops.  6—Twelfth.  7—Fifteenth.  8—Sesquialtera, III ranks.  9—Trumpet.
Choir, 7 Stops.
10—Dulciana. 11—Stopped Diapason, treble. 12—Stopped Diapason, bass. 13—Principal.  14—Flute. 15—Fifteenth. 16—Cremona.
Swell, 7 Stops.  17—Double Diapason, wood. 18—Open Diapason. 19—Stopped Diapason. 20—Principal.  Swell, 7 Stops.  21—Fifteenth. 22—Sesquialtera, III ranks. 23—Hautboy.
Pedal, 2 Stops.  24 - Open Diapason, CCC.   25—Principal, CC.  An Octave and a half of Pedal keys.
Copulæ.  1—Pedals to Great.   2—Pedals to Choir.   3, 4, 5—Three Composition Pedals.
294. CLOYNE.
The Organ in Cloyne Cathedral was erected in the year 1813. The Diapasons on the Great Organ are particularly good; to the Great Organ there has been added an octave and a half of Pedals.

Great, 9 Stops.

1—Open Diapason.
2—Stopped Diapason.
3—Principal.
4—Flute.
5—Twelfth.

6—Fifteenth.
7—Sesquialtera, half stop.
8—Cornet, half stop.
9—Trumpet.

```
Choir, 3 Stops.

10—Stopped Diapason. | 11—Principal. | 12—Flute.

Swell, 3 Stops.

13—Open Diapason. | 14—Principal. | 15—Trumpet.
```

The Cathedral of Cloyne is situated in a retired valley, within about two miles of the southern coast of the county of Cork, and twenty miles of the city, and about eight miles from Queenstown to the east. It is built in the shape of a cross; the choir part is small, and the chancel large; there is a splendid eastern window of stained glass, and two cross aisles off the chancel, formerly belonging (as private chapels) to two great families of the county, being at that time in the possession of the Roman Catholics. There is a perfect round tower, of a hundred feet high, one of the most perfect in Ireland, within about twenty feet of the walls. It is stated to have been built in the year 604, and, taking it altogether, nothing can exceed it as an ancient piece of architecture.

#### 295. KILKENNY.

The Organ in the Cathedral Church of St. Canice, Kilkenny, was first erected in the Great Exhibition building at Dublin, and was afterwards sold to the Dean and Chapter of the above Cathedral. The Case is Gothic, handsomely carved. The Organ contains 3 rows of Keys—Great, Swell, and Choir; and Pedal, of 2 Octaves and 2 Notes.

Great, 11 Stops—CC to F in alt, 54 Notes.			
No. of Pipes.	No. of Pipes.		
1—Open Diapason, No. 1 54	8—Sesquialtera, III ranks 162		
2—Open Diapason, No. 2 54	9—Mixture II ranks 108		
3—Stopped Diapason }	10—Trumpet 54		
4—Claribel	11—Clarion 54		
5—Principal 54			
6—Twelfth	702		
7—Fifteenth 54			
Swell, 8 Stops—Tenor	C to F in alt, 42 Keys.		
No. of Pipes.	No. of Pipes.		
12—Double Diapason 42	17—Double Trumpet 42		
13—Open Diapason 42	18—Cornopean 42		
14—Stopped Diapason 42	19—Clarion 42		
15—Principal 42			
16—Doublette (15, 22d) 84	378		
Choir, 8 Stops—CC to F in alt, 54 Notes.			
No. of Pipes.	No. of Pipes.		
20—Double Diapason, Bass—	24—Viol de Gamba Tenor c 42		
closed wood	25—Principal CC 54		
21—Double Diapason, Treble—	26—FluteTenor c 42		
closed wood	27—Cremona		
22—Stopped Diapason 54			
23—DulcianaTenor c 42	323		
Pedal, 1 Stop—CCC to D, 27 Notes.			
28—Great Open Diapason (16 feet) 27 Pipes.			
Coupling Actions, 5.			
1—Swell to Great.	4—Pedals to Choir.		
2—Swell to Choir.	5—Pedals to Swell.		
3—Pedals to Great.			
This Organ contains 1,430 Pipes.			

31 Stops.

# 296. Tuam.

The Organ building for Tuam Cathedral, by Bevington, will consist of:

The Organ building for Tuam Cathe	dral, by Bevington, will consist of:			
Great, No. of Pipes.  1—Double Diapason	11 Stops.    8—Sesquialtera, III ranks 162   9—Mixture II ranks 108   10—Trumpet 54   11—Clarion			
	, 8 Stops.			
12—Bourdon (8 feet Stopped) . 12 13—Double Diapason (Treble) . 42 14—Dulciana	17—Principal			
Swell, 8 St	ops—Tenor C.			
No. of Piper   20—Double Diapason   42   21—Open Diapason   42   22—Stopped Diapason   42   23—Principal   42   24—Mixture, II ranks   84	25—Double Trumpet			
28—Open Diapason (16 feet) 27 29—Principal(8 feet) 27	30—Great Posaune (16 feet) 27 Total No. of Pipes in Pedal Organ, 31			
Copulas.				
1—Pedals to Great. 2—Pedals to Choir.	3—Swell to Great. 4—Swell to Choir.			
•	sition Pedals. CC to D) of German Pedals.			
Number of Pipes in Great Organ Number of Pipes in Choir Organ Number of Pipes in Swell Organ Number of Pipes in Pedal Organ	323 378			
	Total Number of Pipes 1538			
	Total Number of Stops 33 Total Number of Copulas 4			

37

## 297. NEWFOUNDLAND.

The Organ in St. John's Cathedral, Newfoundland, was built by Robson, in 1853. It contains 46 Sounding Stops, of which the following is a list:

Creat 10 Stone Comm	OC to C #C Notes
Feet. Pipes.	pass, CC to G, 56 Notes Feet. Pipes.
1—Double Diapason,	10—Fiftcenth 2 56
Bass 16 tone. 56	11—Sesquialtera,
2—Double Diapason	12—Mixture X ranks 560
3—Open Diapason, Large 8 56	13—Furniture )
4—Open Diapason 8 56	14—Contra Fagotto 16 56
5—Stopped Diapason 8 tone. 56	15—Posaune 56
6—Quint 6 56	16—Clarion
7—Principal	
8—Tenth $3\frac{1}{2}$ 56	1232
9—Twelfth 3 56	
Swell, 13 Stops—Compa	ss, CC to G, 56 Notes.
Feet. Pipes.	Feet. Pines
17—Double Diapason,	24—Sesquialtera V ranks 280
Bass 16 tone. 56	25—Mixture
18—Double Diapason }	26—Horn 8 56
19—Open Diapason 8 56	27—Oboe
20—Stopped Diapason 8 tone. 56	28—Clarion
21—Principal 4 56 22—Twelfth 3 56	29—Octave Clarion 2 56
00 100 11	840
23—Fifteenth 2 56	010
Choir, 11 Stops—Compa	
30—Dulciana 8 56	37—Piccolo
31—Viol di Gamba 8 44	38—Mixture (Dulciana
32—Stopped Diapason 8 tone. 56	Scale), III ranks 168
33—Clarabella Flute 8 44	39—Bassoon
34—Celestina Viol 4 56	40—Clarionet \ \cdots \cdots \ 8 \text{ tone. } 56
35—Principal 4 56	
36—Flute	648
Pedal, 6 Stops—Compas	s CCC to F 30 Notes
	45—Trombone 16 feet.
41—Open Diapason 16 feet. 42—Stopped Diapason 16 feet tone.	46—Trumpet 8 feet.
43—Principal 8 feet.	——————————————————————————————————————
44—Basso Flauto 3 feet tone.	100
	· Pro
Copula	
1—Swell to Great.	3—Great to Pedals.
2—Swell to Pedals.	4—Choir to Pedals.
Summary of	Stops, &c.
	Feet. Pipes
Great	
Swell	
Choir	
Pedal	4
Copulas	
	50 2856
	50 ¥050

## 298. BOSTON, UNITED STATES.

The following is an account of the Organ referred to on page 434, as being built by the Messrs. E. and G. Hook, for the Tremont Temple, Boston, United States. It is reprinted from the "description" circulated by the builders at the time of the opening of the instrument, in 1854.

"This instrument, which is by far the largest and the most comprehensive in this country, consists of four complete Manuals, from CC to A in alt, 58 notes, the Swell throughout, and an independent Pedal Organ from CCC to D, 27 notes. Wind is supplied by three bellows at different pressures. It contains seventy registers, comprising every variety of tone, and embracing all the novelties of the most celebrated European Organs.

"It occupies a space at the end of the Hall, 50 feet high, and 50 feet wide, and is concealed by an open-work screen. The following are the Stops in this instrument:

```
Great, 15 Stops.
 1—Tenoroon Open Diapason.
                                      9-Grand Fifteenth.
                                     10-Fifteenth.
 2—Grand Open Diapason.
 3-Open Diapason.
                                     11—Sesquialtera, II ranks.
                                     12—Mixture . . . III ranks.
 4-Melodia.
                                     13—Furniture . . IV ranks.
 5—Stopped Diapason.
                                     14-Trumpet.
 6-Grand Principal.
 7—Principal.
                                     15—Clarion.
 8-Twelfth.
                            Choir, 10 Stops.
16—Open Diapason.
                                     21—Mixture....III ranks.
17—Dulciana.
                                     22-Hohl Flute.
                                     23-Viol d'Amour.
18—Stopped Diapason.
                                     24-Clarionet.
19—Principal.
20-Fifteenth.
                                     25-Bassoon.
                             Swell, 15 Stops.
26-Sub-Bass.
                                     34—Fifteenth.
                                     35—Sesquialtera, III ranks.
27—Double Diapason.
                                     36—Trumpet, Bass.
28—Open Diapason.
                                     37—Trumpet, Treble.
29—Viol di Gamba.
30—Stopped Diapason.
                                     38—Hautboy.
31-Principal.
                                     39-Clarion.
32-Night Horn.
                                     40—Double Trumpet.
33—Twelfth.
                             Pedal, 10 Stops.
                                     46—Violoncello.....
41—Double Bourdon .... 32 feet.
                                                                8 feet.
42—Bourdon . . . . . . . 16 feet.
                                     6 feet.
43—Open Diapason .. wood 16 feet.
                                     48—Principal .....
                                                               4 feet.
44—Open Diapason.. metal 16 feet.
                                     49—Trombone . . . . . . . . . .
45—Open Diapason .....
                                     8 feet.
                                                              16 feet.
                             Solo, 6 Stops.
51-Horn Diapason.
                                     54—Wald Flute.
52-Gamba.
                                     55-Piccolo.
53-Clarabella.
                                     56-Trumpet.
```

Couplers, &c.			
57—Swell to Great, Unison.	64—Great to Pedals.		
58—Swell to Great, Super Octaves.	65—Choir to Pedals.		
59—Choir to Great, Sub-Octaves.	66—Pedal Octaves.		
60—Swell to Choir, Unison.	67—Pedal Bourdon Separation.		
61—Swell to Solo Unison.	68—Pedal Open Diapason Separation.		
62—Solo to Great Unison.	69—Solo Organ Signal.		
63—Swell to Pedals.	70—Bellows Signal.		

"The distinguishing features of this Organ are the unusual size, compass, and effectiveness of the Swell, the complete Pedal Organ, and the Solo or Fourth Manual—the latter an uncommon thing, even in Europe. These, combined with perfect equality and finish in the voicing, and an easy and delicate touch, place the instrument far in advance of any yet built in this country, and put it at least on a level with the celebrated Organs of England and the Continent."

### 299. HENLEY-ON-THAMES.

The new Organ in the Church at Henley-on-Thames was built by Mr. Holdich, in 1854. It contains 36 Sounding Stops, of which the following is a list:

Great 12 Stops

	Great,	12 Stops.	
1—Large Open Diapason	8 feet.	7—Fifteenth	2 feet.
2—Open Diapason	8 feet.	8—Tierce	$1\frac{3}{5}$ foot.
3—Clarabella Treble, and		9—Sesquialtera	
Stopped Diapason Bass	8 feet.	10—Mixture	$\frac{2}{3}$ foot.
4—Principal	4 feet.	11—Trumpet	8 feet
5—Flute	4 feet.	12—Clarion	4 feet.
6—Twelfth	$2\frac{2}{3}$ feet.		
	Choir,	8 Stops.	
13—Dulciana	8 feet.	17—Flute	4 feet.
14—Clarabella	8 feet.	18—Fifteenth	2 feet.
15—Stopped Diapason Bass	8 feet.	19—Piccolo	2 feet.
16—Principal	4 feet.	20—Cremona	8 feet tone.
-	Swell,	12 Stops.	
21—Double Diapason	16 feet.	27—Fifteenth	2 feet.
22—Bourdon	16 feet.	28—Tierce	15 foot.
23—Open Diapason	8 feet.	29—Sesquialtera	1 foot.
24—Stopped Diapason	8 feet.	30—Double Trumpet	16 feet.
25—Viol di Gamba	8 feet.	31—Cornopean	8 feet.
26—Principal	4 feet.	32—Hautboy	8 feet.
		Diaocton.	
Pedal, 4 Stops.			
33—Grand Double Diapason	n 16 feet.	35—Grand Principal	8 feet.
34—Grand Bourdon		36—Grand Trombone	
Compass.			
Manuals, CC to f <sup>3</sup> in		Pedal, down to CCC.	

#### 300. Carlisle.

A new Organ has just been ordered for Carlisle Cathedral, which is to be erected in its place of destination by next November. It is to contain 3 Manuals: viz. Great, Swell, and Choir, each having a Compass of 4 Octaves and a half, from CC to G in alt, and a Pedal Board containing 30 Notes, or 2 Octaves and a half, from

CCC to F; and all the Registers are to extend throughout the entire Compass of the Key Boards, without an exception.

Mr. W. T. Best has kindly assisted Mr. Ford, the Organist to the Cathedral, in preparing the Specification for the Instrument, which will be built by Mr. Willis.

The Instrument, which will be tuned on the principle of equal temperament, is to possess 35 Registers, independently of the Couplers—5 in number—and 2,338 Pipes; and will be supplied with the Pneumatic Lever, and Pneumatic Combination Movement, together with every other modern Mechanical Improvement.

The following is a list of the Stops the Carlisle Organ is to contain:

Great, 11 Stops.			
1—Double Open Diapason,		7—Sesquialtera, V ranks,	
	16 feet.	metal	
2—Open Diapason	8 feet.	8—Furniture III ranks,	
3—Stopped Diapason, wood	8 feet.	metal	
4—Principal metal	4 feet.	9—Trombone metal	8 feet.
5—Twelfth metal	3 feet.	10—Trumpet metal	8 feet.
6—Fifteenth metal	2 feet.	11—Clarionmetal	4 feet.
	Swell, 1	1 Stops.	
12—Double Dulciana, metal	16 feet.	the remaining four of	
13—Open Diapason metal	8 feet.	metal.	
14—Stopped Diapason, wood	3 feet.	18—Contra Fagotto wood	16 feet.
15—Principalmetal	4 feet.	19—Hornmetal	8 feet.
16—Flageoletwood	2 feet.	20—Oboe metal	8 feet.
1 T 17		1 01 Clauisu mestal	4 feet.
17—Echo Cornet, V ranks,		21—Clarion metal	4 leet.

The Swell to possess, in addition, a Tremulant of the improved modern construction, as patented by Willis.

	Chon, c	o wps.		
23—Open Diapason metal	8 feet.	26—Gambametal	8 feet.	
24—Claribellawood	8 feet.	27—Harmonic Flutemetal	4 feet.	
25—Dulcianametal	8 feet.	28—Clarionettemetal	8 feet.	
Pedal, 7 Stops.				
29—Open Diapasonwood	16 feet.	33—Fifteenthmetal	4 feet.	
30—Violon metal	16 feet.	34—Trombone metal	16 feet.	
31—Bourdonwood	16 feet.	35—Trumpetmetal	8 feet.	
39_Principal metal	8 feet	*		

# Couplers.

Swell to Great—Choir to Great—Pedal to Great—Pedal to Swell—Pedal to Choir.

Sum	nary.	
No. of Registers.		No. of Pipes.
Great	Great	952
Swell	Swell	840
Choir 6	Choir	336
Pedal 7	Pedal	210
35		2338

### ADDENDA.

Page.

- 1. The excellent old custom mentioned in the second paragraph, of placing the Choir Organ in a second Case "in front," has been revived in the instances of the New Organs recently erected in the Churches of St. James's, Piccadilly, and St. Martin's in the Fields, London, with very picturesque effect.
- 9. After Sec. 33. This refers to their method of operation when a few Stops only are being used; but when the full Organ is employed, two or three Bellows will sometimes supply wind and be collapsing simultaneously.
- 18. The average "rise" of a reservoir, whether of large or small dimensions, is 10 inches, beyond which height it is not usually made to ascend; for, inasmuch as an increased demand for wind must call for an increased supply of the same, the feeder-surface is generally enlarged with the capacity of the reservoir; in other words, a larger Bellows altogether is, under such circumstances, provided, as being in every way preferable.
- 41. Fig. 49. In this and the two following wood-cuts the Pipes are represented as being arranged in a single row, for the sake of distinctness; though, in reality, they are more frequently planted in double rows.
- 43. After Sec. 186. When, however, the Swell Reeds are numerous, it is not an uncommon arrangement to place half their number in front and the remainder at the back.
- 47. After Sec. 203. The Organ in the Abbey Church at Selby, with two Manuals, has the Swell below and the Great Organ operating upon the upper row of keys.
- 68. After Sec. 296. The Organ in the Parish Church at Great Yarmouth, built by Jordan, in 1733, possessed the rare advantage (for the period) of a Tenor c Swell; while that in the Church of St. Mary, Redcliff, Bristol (by Harris and Byfield), had originally a Gamut G Swell; which, however, was afterwards reduced in compass to Fiddle g. It would perhaps be difficult, at this distance of time, to ascertain what might have been the cause which led to this alteration in the wrong direction (unless, indeed, the box that enclosed the Pipes was too small); but it has its parallel in the fact, that, in the North of England, a Finger Organ has recently been removed from a Church to make way for a "Grinder."
- 75. After Sec. 317. Another species of spotted metal, which, however, must not be classed with that described on page 75, has been produced, containing scarcely any admixture of tin; but it is easily detected by the spots not projecting from the mass, but rather appearing as stains upon it, and from the whole lacking the bright silvery whiteness that distinguishes the good spotted metal.

570

ADDENDA.

Page. 85.

After Sec. 365. In consequence of the word "Rohr" or reed being applied by German Organ-builders in the way mentioned on page 85, the Reed Stops are not unfrequently distinguished by the name of *Tongue* Stops.

113. After Sec. 516. The first Double Dulciana was made by the late Mr. Bishop, and forms part of the Organ erected by that builder in the new Church in Acre Lane, Clapham, about the year 1828.

115. After Sec. 527. The Dulciana was certainly not invented by Snetzler, but simply introduced by that builder into this country. The Cathedral Organ at Passau contains a Stop of the kind that was made by Snetzler previously to his leaving Germany for England, and which is thus incidentally mentioned by Burney, in his "Tour," vol. i, p. 187.

"M. Snetzler made some of the front Pipes; he likewise made the Vox Humana and octave *Dulciana* in the little Organ, which are the two best solo Stops that the instrument contains."

A Pedal Dulciana, of 16 feet, forms a portion of the new Organ recently erected in Winchester Cathedral, by Willis.

123. After Sec. 594. The Cornopean Stop was invented by Hill, the first specimen being introduced into an Organ built for — Fraser, Esq. of Manchester.

169. Since the Chapter on "musical pitch" was printed off, the writer has had an opportunity of carefully-trying the Organ in the Chapel of Hampton Court Palace, one of Father Smith's most interesting instruments yet remaining, the Pipes of which have never undergone transposition. On testing the pitch of that Organ by the same fork that had been used for a similar purpose abroad, it was found to be rather above the fork; which latter being a little below the mathematical pitch, would make Smith's pitch to be as nearly as possible correct.

195. After Sec. 854. Although CC Manual Organs were occasionally made in England soon after the commencement of the present century—the Chamber Organ belonging to the late Samuel Wesley, built by Elliott, being an example—yet the present general recognition of that range is mainly due to the exertions of Dr. Gauntlett, who, ably backed by Mr. Hill, consistently recommended its adoption, about fifteen years since, amid great opposition. The present prevalent feeling in favour of a separate Pedal Organ, instead of a lengthened Manual, is also in a great measure due to the same influence.

255. After Sec. 1079. The Mixture-work in the Newcastle-on-Tyne Organ, mentioned in the text as including an *Open Diapason* rank in the Treble, and which was made as long back as the year 1676, is of the following composition:

### NEWCASTLE-ON-TYNE MIXTURES BY HARRIS.

		,	
	Tierce,	Sesquialtera, Il ranks.	Mixture, III ranks.
CC	17	19—22	24-26-29.
Middle c¹♯	17	19—22	17-24-26.
Middle d <sup>1</sup>	17	19—22	15-17-24.
Middle a <sup>1</sup>	17	1— 8	15—17—24.
Treble d <sup>2</sup>	17	1— 8	12—15—17.

The Chorus-Stops of the Organ at St. Peter Mancroft, Norwich, by the same builder, included, according to the account prepared by the late Wm. Russell, about the commencement of the present century, two Open Diapasons, two Principals, and a Quint. The following is the scheme given:

### ST. PETER MANCROFT MIXTURES, BY HARRIS.

	Tierce.	Larigot.	Ses. III r.	Mix. 11 r.	Fur. III r.
CC	. 17 .	. 19	19-22-26.	. 29—33	22-26-29.
FF#	. 17 .	. 19	19-22-26 .	. 29—33	15—19—22.
Tenor c#	. 17 .	. 19	12-15-19.	. 22—26	15—19—22.
Tenor f#	. 17 .	. 19	12-15-19.	. 22—26	8—12—15.
Middle c¹♯	. 17 .	. 19	8-12-15.	. 19—22	8—12—15.
Middle fı#	. 17 .	. 19	8-12-15.	. 19—22	1— 8—12.
Treble c <sup>2</sup> #	. 17 .	. 19	1- 5- 8.	. 15—19	1— 8—12.

Snetzler also incorporated an Open Diapason rank in the Treble of his Mixtures at Halifax, as already stated in the text. The Composition he adopted was as follows:

### HALIFAX MIXTURES, BY SNETZLER.

	Sesquialtera, IV ranks.		Furniture, 111 ranks.
CC	15—17—19—22	• • • • • • • • • • • • • • • • • • • •	22-26-29.
Tenor c	15—17—19—22	• • • • • • • • • • • • • • • • • • • •	15—19—22.
Middle c <sup>1</sup>	8-12-15-17		15-19-22.
Middle g <sup>1</sup>	8-12-15-17	• • • • • • • • • • • • • • • •	8—12—15.
g <sup>5</sup> in alt	1 81215		8—12—15.

Page.

- 257. Sec. 1086, fifth line, after "vocabulary." The terms "Quart-de-Nasard, Quinta Decima," &c. present examples of *single* ranked Stops being named from the sound they produce as compared with that of other *deduced* Stops, rather than as calculated from the fundamental pitch.
- 259. Sec. 1090, ninth line, after "invaluable." The increasing pressure system for augmenting the power of the Treble of Reed and other Stops has recently met with an able advocate in Mr. Henry Smart, at whose recommendation a few examples of Stops voiced upon this principle have already been produced in this country by Mr. Davison. Mr. Smart has also laboured successfully to secure the introduction of several other French novelties.
- 273. Sec. 1160, after seventh line. Sometimes the old builders would fasten the feet of their larger wood Pipes into one of the angles of the block, instead of in the centre, rather than groove the Pipe off; but this rendered the Pipes top-heavy and very unsafe.
- After Sec. 1258. The acoustical illusion referred to is seldom so successful in the upper part of the Pedal range (i. e. from CC upwards) as in the lower; hence it would be an advantage to have a Coupler to attach the CC key of some Manual having a Double Stop to the CC Pedal,—following the same system of union thence upwards,—which would have the effect of bringing a 32-feet ground-tone on to the upper part of the Pedal range. As the omission of a Pedal Stop, of the size of tone just mentioned, is felt even

572

Page.

334.

more in the upper part of the Pedal compass than in the lower, a Coupler of the kind proposed would be attended by a good result in all cases where a 32-feet sounding Stop does not actually exist on the department in question.

318. The Organ in the old Church at Amsterdam is a very old one indeed. The name of the builder is not known, but is supposed to be Christian Fater, of Amsterdam.

The Organ in St. Sulpice, at Paris, was built by Clicquot, in 1781, and originally cost 86,450 francs; the repairs and additions, up to 1846, costing 60,000 francs more; making a total of 146,450 francs, or about £5850 of our money. In 1845, the Organ was re-modelled by Cavaillé, at which time Barker's Pneumatic Lever was introduced. The old Bellows were also removed, and four grand reservoirs, with three smaller, substituted; supplied by one single and two double feeders, put in motion by three bellowshandles; and the Organ is now supplied with wind at three different pressures, namely, 6 inches, 3 inches and 3 lines, and 3 inches. The Trumpet in the Swell (Recit.), on a strong wind, is in a separate box placed in front, just above the Organist. The compass of the Manuals is from AA to f3 in alt, 57 keys; the Pedal range being from CCC to Tenor d, 27 keys. At the commencement of the present year, Mons. Ducroquet inserted in the Great Organ a "Flute à Pavillon de 8 Pieds," in place of the Nazard; and a "Keraulophon de 8 Pieds," instead of the Tierce. The following are " Pèdales de combinaison :"

1—Great to Pedal. 2—Positif to Great.

3—Positif to Great.

3—Bombarde to Great.

4—Recit. to Great.

6—Swell Pedal.

7—Swell Pedal to Trumpet on strong wind.

For many of the above particulars relating to the St. Sulpice Organ, the writer is indebted to the courtesy of G. T. Chambers, Esq. of Paris.

## INDEX TO THE HISTORY OF THE ORGAN.

	/
Page.	Page.
Λ.	E.
AGRICOLA (Rodolph), organ-builder, &c 57	Eadwine's Psalter, representation of an
Andrè, of Brunswick, organ-builder 48	organ from
Antegnati, of Brescia, a celebrated family	Engelbreent (Ufric), priest and organ-
of organ-builders	builder
Athenous, his description of the hydraulic organ	England (George), notice of, and list of his
Avery (John), notice of, and list of his	organs
organs107	his organs108
organis	Engler (Michael), organ-builder111
В.	Excter Cathedral, Roger North's descrip-
Bagpipe, its origin 4	tion of the organ there
Beck (David), of Halberstadt, organ-builder 57	
Bedos (Dom), his work entitled L'Art du	F.
Facteur des Orgues 9	Faber (Nicholas), priest and organ-builder 42
Bellows, the ancient, described 32	French organ-builders, some notice of110
—— " à la lanterne"	
— its first invention	G.
Bernhard, the reputed inventor of the pedal 42	Gabler (Johann), organ-builder
Beton, or Betun (William), organ.builder 49	Gaffurius's (Franchinus) Theorica Musica,
Blowing, ancient mode of	engraving of an organ from
Bonani's (Father) Gabinetto Armonico, no-	German organ-builders, early 48
tice of eurious organs from	improvements by
and list of his organs100	Giafar, the Arabian, an organ constructed by 14
Broughe, organ-builder	Gibbs, organ-builder
Bumbulum cum fistula acreâ, an organ so	Glyn and Parker (Messrs.), notice of these
called	builders
Byfield (John), biographical notice of, and	— list of their organs
list of his organs 93	Gori's Thesaurus Diptychorum, curious rc-
— (John), jun. biographical notice of,	presentation of an organ from 30
and list of his organs101	Green (Samuel), biographical notice of 104
Byfield, Bridge, and Jordan—list of organs	—— list of his organs
by these builders conjointly100	
	H.
C.	Hancock, organ-builder104
Carillon-playing described	Harris (Renatus), biographical notice of 85
Casparini (Eugenius), organ-builder 111	list of his organs
Cassiodorus, his description of the pneu-	— (John), biographical notice of 92 — list of his organs 93
matie organ	Häuser's Kirchenmusik, representation of
Chamberlyn, or Chamberlaine (John), or-	an hydraulic organ from 10
gan-builder	Herbst (Heinrich), organ-builder 111
Chapington (John), organ-builder 50	Hermann, a Jesuit, organ-builder 58
Churches, organs first introduced into 13	Hildebrand (Zacharie and Johann Gott-
Colonna (Vincenzo), organ-builder 58	fried), organ-builders111
Columbi (Vincenzo), organ-builder 58	
Constantinople, representation of an organ	1.
on the obelisk at	Italian organ-builders
Crang and Hancock (Messrs.), notice of	John de John, organ-builder 49
these builders	Jordan (Abraham), senior and junior, bi-
Ctesibius, his invention of the water organ 8	ographical notice of
D.	Julian the Apostate, his epigram on the
Dalham (George), organ-builder 55	organ 11
Dallam (Robert), organ-builder	, , , , , , , , , , , , , , , , , , ,
Dallans (Ralph), organ-builder 54	K.
Dunstan (St.), organs erected by 15	Kepler, his opinion of the water organ 8
Durham Cathedral, Smith's specification	Key-board, the first
of the organ for	the improved

Page.	Page.
Kleng (Gregorius), organ-builder 42	P.
Kircher's (Athanasius) Musurgia, engrav-	" Pair of Organs" explained 40
ings of primitive organs from 3, 4	Parker, organ-builder
Kranz (Henry), organ-builder 48	Pedal (the), its invention 41
Krebs (Frederick), organ-builder 48	Pepin (King), his introduction of the organ
_	into France 14
In.	Pepys' Diary, extracts from, concerning
Lobsinger (Hans), of Nuremberg, inventor	organs
of the bellows with one fold 56	Perugino (Luca Blasi), organ-builder 58
Loosemore (John), of Exeter, organ-	Portative organs explained 37
builder	Position of the organ in ancient times 59
Luseinius's Musurgia, engraving of the	Positive organs explained 39
Regals from	Powell (Dr.), his account of hydraulic
M.	organs
	his notices of the euriosities of organ
Mace's (Thomas) Musick's Monument, notice of a chamber organ from 66	building
Maeraphe d'Aruehin, a Hebrew instru-	Sciagraphia, representation of key-board
ment 4	
Mersennus's Harmonie Universelle, engrav-	representation of the ancient mode of
ing of an ancient bellows from 34	blowing from, 33
Mixture Stops, their supposed origin 34	Preston, of York, organ-builder 50
Monastie Organs, the first 36	Pull-downs, their origin
———— in England	
Müller (Christian), organ-builder 112	R.
Müller (Nieholas), organ builder 48	Regals, the term explained 37
, ,,	- engraving of, from Luseinius's Mu-
N.	surgia 38
North (Hon. Roger), his description of the	Roder (Johann Miehael), organ-builder111
organ of Exeter Cathedral 51	Rosenburger, or Rothenburger (Conrad),
	organ-builder
0.	
Organ (the) anterior to the invention of	S.
the key-board	Salisbury Cathedral, account of a curious
as mentioned in Genesis and other	print of Harris's organ
books of the Old Testament 2	Schowt, or Stut (John), organ-builder 50
— Hydraulie	Schrider (Christoph.), biographical notice of 94
— first introduced into the Church 13	Sehwarbrook (Thomas), biographical no-
— Anglo-Saxon	tiee of, and list of his organs 96
— Mediæval, after the invention of the	Silbermann (Andreas), biographical notice
key-board	of, and list of his organs109
— Monastie 36	— (Gottfried), ditto110
— Portative	— (Johann Andreas), ditto110
— Positive 39	— (Johann Daniel), ditto
—— its position in ancient times 59	Cotemporaries and suecessors of this
— at Magdalen College, Oxford, erro-	eelebrated family111
neous account concerning 73	Smid (Erhart), organ-builder 48
Organs, meaning of "a pair" explained 40	Smith (Father), biographical notice of 75
notices of English	—— list of his organs 82
— notices of foreign 58	Gerard), Father Smith's nephew,
— English, prior to the Rebellion 74	list of his organs
— their destruction in England during	Smyth (Thomas), organ-builder
the Great Rebellion 69	Snetzler (John), biographical notice of 102
Organ-builders, payments to old, in mo-	list of his organs
nastie times	Sterzing (Adam), organ-builder111
— early, in Germany	Stops, mixture, their supposed origin 34
early, in England	Swell (the), invented by the Jordans 97
improvements by German	Syrinx, or Pipe of Pan 3
— Italian	T.
—— further improvements by	Temple organ (the), account of the cele-
Organ-building, the euriosities of 65	brated contention concerning 76
the founders of modern	Tertullian, his opinion of the water organ 9
Organ Cases, eurious decorations of, in	Thamer of Peterborough, organ-builder. 50
former times	Theophilus, the Monk, his eurious Treatise
Organist, duties of this officer in monastic	on Organ-building in the 11th century
times 44	18 to 30
Organum, the Greek and Roman use of the	Thessner (Zacharius), organ-builder 111
word	Tibia Utricularis 3
— the term, in the middle ages 35	Tibia Utricularis

# INDEX TO THE CONSTRUCTION OF THE ORGAN, &c.

Page.	Dome
A.	Choir-screen (the), erection of Father
	Smith's organ an at St. D. V.
Accompaniment (Choral), the adaption of	Smith's organ ou, at St. Paul's, opposed, 225
the organ tone to the purposes of176	Choir (Vocal), its relative position with
Acoustic capacity of a manual organ, how	the organ
increased to adapt its tone to a large	Church Organ, general requisites of a234
building	Ciphering, the different causes of 179
Acoustic principles, the effect of large	Clarabella 116
organs not constructed on238	Clarion
Acoustical facts regarding sound 215	(octave)
- grounds on which double stops are	Clarionet
introduced into organs238	— (Flute)
Ancmometer (the), explained	Claviers (the), their situation 46
Anchometer (the), explained 21	their prepar compare and lead 1
Th.	their proper compass considered192
В.	Clear-flute
Bassoon	Compass, the CC and GG, compared, 196 to 205
— (Double)123	Composition Pedals, their arrangement
Bellows, their usc 7	considered
— different kinds of 7	Compound Stops considered 248 to 260
—— the diagonal, described 8, 9	Construction of an Organ, hints to those
— the horizontal, described 8, 11, 17	who have to superintend the 192 to 205
—— original defects of the diagonal 10	Contra-Fagotto
- structural features of the horizontal . 12	Cornet
— working of the horizontal 15	— (Mounted)
— construction of the reservoir 16	— (Echo)
— of the feeder 16, 19	Corni di Bassetto
— the cuckoo feeder	Corno-flute
— the double feeder 20	Cornopon
	Cornopean
the concussion, described	Couplers (Manual), various kinds of 52
— the blowing action of the 16	— (Pedal) 55
— the waste pallet	Cromorne, or Krumm-horn
— defects in, and their causes186	Cymbal
how they should be made 277	_
Block-Flute119	D.
Bordun113	Decima
Building-frame (the)270	Diapason (Double Open)
	— (Double Stopped) 113
С.	— (Open)114
Cathedral (recent) arrangements respect-	(Stopped)115
ing the organ and choir 231	Dolcan
Celestina	Double Pedal Pipes. Their introduction
Chancel (the) an eligible situation for a	as the first pedal stop not in accordance
Chancel (the) an eligible situation for a divided organ	w th the laws of organ building
Choir-screen (the), Smith and Harris's	with the laws of organ-building211
	Double Stops, acoustical grounds on which
cathedral organs placed on	they are introduced into organs 238

Page.	Page
Double Trumpet122	Key Movement (the), defects in 18
Doublette120	Krumm-horn12
Draw-Stops, arrangement of, considered. 266	r
Dulciana       114,570         Dulciana (Double)       113,570	L. Larigot120
— (Principal)118	Harigot
1 /	М.
E.	Manual. The meaning of the German
East-end of an aisle, or a chancel chapel, as	terms, 16-feet, 8-feet, and 4-feet24
the situation for the organ, considered	Manuals (the) 44, 47
Echo Organ (the) described	their true compass ascertained 193
tone of an organ	arguments against the CC compass considered
Echo Cornet	— How the CC compass was first ex-
	cceded208
F.	Mauuals and Pedals, their width and pro-
Fagotto	per situation to each other
Equity course of in the state of the state o	Mixtures121
Faults, causes of, in organs, together with	—— their composition
their remedies	—— specimens of their composition in old
Fifteenth, Super Octave119	organs
—— (Octave)	Movement (long), described 46
Flageolet	Music-dcsk (the), considered266
Flute	N.
— (Harmonic)	Nason118
— (Hohl) 116 — (Spitz) 118	0.
(Wald)	Oboe-Flute119
— (Clear)119	Ophicleide
— (Oboc)119	Organ (the), Great, described
— (Suabe)	— Choir, described
— (Block)	—— Swell, described
Furniture121	Pedal, described.
	— Echo, described 60
G	course of faults which arise in and
G. Gamba 116	cause of faults which arise in, and
Gamba116	cause of faults which arise in, and how they may be remedied178
~ .	cause of faults which arise in, and
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40	
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41	
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42	
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       42	- cause of faults which arise in, and how they may be remedied 178  its situation considered
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42	- cause of faults which arise in, and how they may be remedied 178 - its situation considered
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       42	- cause of faults which arise in, and how they may be remedied
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       42         — double oncs in the bass advisable       277         H.       Harmonic Flute       115	- cause of faults which arise in, and how they may be remedied
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       42         — double ones in the bass advisable       277         H       Harmonic Flute       115         Harmony (divided) on the organ       197	- cause of faults which arise in, and how they may be remedied
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       27         H       H         Harmonic Flute       115         Harmony (divided) on the organ       197         Hautboy       123	- cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         277           H.         H.           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123	- cause of faults which arise in, and how they may be remedied
Gamba       116         Geigen Principal       117         Gemshorn       118         Grooves, their situation       40         — first plan of arrangement of       41         — second plan of ditto       42         — third plan of ditto       42         — double oncs in the bass advisable       277         H.       Harmonic Flute       115         Harmony (divided) on the organ       197         Hautboy       123         — (double)       123         — (octave)       124	- cause of faults which arise in, and how they may be remedied 178  - its situation considered
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         277           H.         H.           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123	- cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         27           H.         H.           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared	cause of faults which arise in, and how they may be remedied 178  its situation considered 215 to 239  its size in proportion to the congregation and church 233  its exterior arrangements 261 to 269  its interior arrangements 270 to 299  Organs. Plans for instruments of various sizes 293 to 319  Organ Case (the), nature and use of 261  Organ Compass, the CC contrasted with the GG
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         277           H           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Hohl Flute         116           Horn         123	- cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double oncs in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234	- cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         27           H.         H           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double oncs in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234	cause of faults which arise in, and how they may be remedied 178  its situation considered
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         27           H.         H           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         27           H.         H           Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           I.         Intonation, unequal         188           K.         Keraulophon         116	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           I.         Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influ-         116	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double oncs in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154           — The internal resources of musical art	- cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Holl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154           — The internal resources of musical art capable of giving any character to any	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           I.         Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154           — The internal resources of musical art capable of giving any character to any key         155	— cause of faults which arise in, and how they may be remedied
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154           — The internal resources of musical art capable of giving any character to any key         155           Keys, the different characters of         153	
Gamba         116           Geigen Principal         117           Gemshorn         118           Grooves, their situation         40           — first plan of arrangement of         41           — second plan of ditto         42           — third plan of ditto         42           — double ones in the bass advisable         277           H.         Harmonic Flute         115           Harmony (divided) on the organ         197           Hautboy         123           — (double)         123           — (octave)         124           Hohl Flute         116           Horn         123           Human Voice, its strength, as compared with that of the organ-wind         234           I.         Intonation, unequal         188           K.         Keraulophon         116           Key. Pitch supposed to exercise an influence in establishing its character         154           — The internal resources of musical art capable of giving any character to any key         155	— cause of faults which arise in, and how they may be remedied

	Dawa
Page.	Page.
Pipos, pyramidal and inverted 82	Proportions, bad, causes of, in many organs.271
- their standard length 08	Pyramidon
— their standard length 98	
— names of the sounds produced from . 98 — elassification of sounds produced from 99	Q.
- ologgification of sound, moderned from 00	Quarter-tones
- Classification of sounds produced from 55	
the size of those used for stop-mea-	R.
	Rauselt-quint
surement101	Transcrieding
— stopped, described	Reod, the open
- faults connected with the anarch of 180	— the closed
— faults connected with the speech of 189	the closed
— (Fluo) 83	— the free 95
— of metal 83	
of metal	Resonance, its influence on the tone of an
— of wood 85	organ
1 1 0	
— the speech of 87	Roller-board (the) 50
— the voicing of	Roller-boards, how they should be disposed. 277
the voicing of	
— influence of the materials of 91	Room, conducive to the orderly arrange-
- influence of the wind on the	ment of the organ272
initiation of the wind on the	
tone of	— unconfined space not lost274
	1
— number of vihrations in 96	
eauses of their inequality of tone 189	S.
(Frank) common amount of 2	
— (Front) general arrangement of 3	Saleional or Salieet117
various figures in which they	Sesquialtera
The total angular of the winter they	Ol'A' M
may be formed 4	Shifting Movement63
arrangement of, in regard to	Situation (the) of an organ considered.
sound 4	215 to 232
— the decoration of 6	Size of the organ, particulars concerning
	bize of the organ, particulars concerning
— (Reed) 83	the
the formation of 02	
— — the formation of 93	Sound, how produced and propagated215
———— the tubes of	—— impediments to its distribution 219
1:02	
— different mouth-pieces of 94	— arrangements favorable to 219
- influence of the tube on the	— velocity of
Inductive of the tube on the	
tone of 95	— acoustical facts regarding215
— influence of the tongue on the	— penetration of,
tone of 96	Sounds, table of, produced by the several
— the production of sound from . 96	leading manual and pedal stops from the
- very susceptible of change of	low C key
tomponetune 101	
temperature191	Sound-hoard, formation of a 28
— wooden, of various kinds 81	— pallets described
2-d	1 1:44-
- influenced by the change of	— bars ditto
temperature190	grooves ditto 30
temperature	
—— stopped wood, deranged by heat and	— table ditto
stopped wood, deranged by heat and drought	— upper-hoards of the, ditto 35
To:	
Pipe-work, its scale eonsidered279 to 285	— the sliders 37
— the materials for, considered 285	— the hearers
	the heaters
Pitch, its influence in establishing the cha-	— the pipe-raeks 39
racter of key	— arrangement of stops on the 43
—— how to alter that of organ pipes159	— its distribution
— altered in organs hy heat and cold,	advantages of a large
in different seasons 160	Spitz Flute
	Sto- :4- 1-6-:4: 100
— that to which an organ should be	Stop, its definition
tuned	Stop (draw), action described 60
the presumed lower pitch of two cen-	—— disarrangements connected with it186
turies since163	Stops, their various kinds described 106
— the early English composers supposed	—— their size, how ascertained108
to have disregarded definite pitch. 164	their classification into reed stops and
	2
— grounds for believing in the former	flue stops108
existence of a high ecclesiastical	- their classification into foundation,
piteh165	mutation, and compound stops110
old organs in Germany a whole tone sharp	- Foreign, the names of, with their
old organs in dermany a whole tone	Toronga, the names of, with their
sharp	English equivalents 434 to 443
— the flattened pitch accompanied by a	— their names in English Organs112
raised notation 168	—— Sub-bordun
- lower again at the commencement of	— Double Open Diapason
	Danie Open Diapason
the 18th century, in England,	— Double Duleiana113
	— Double Stopped Diapason or Bordun 113
France, and Germany168	
— to which of the three church pitches	— Pyramidon 113
	- Open Dianagon
should an organ be tuned?169	— Open Diapason
Plans for Organs of various sizes293 to 313	— Dulciana
Platform (the)	- Harmania Fluta
Platform (the)270	— Harmonie Flute115
Pneumatic Action (the) described 57	— Voix Celestes115
Posaune	— Stopped Diapason
Price of an organ considered288 to 292	- Clarionet Flute
Principal, Octave117	— Clarabella
	D D

	Page.	Page.
Stone	Dolean	- 11 1
c cops,	Viol di Comba an Comb	Stops, various matters connected with the
	Viol di Gamba, or Gamba	division of, and their selection ac-
	Keraulophon	eording to their size 240 to 247
	Hohl-flute (Hollow-toned Flute)116	— (Compound) considered 248 to 260
	Geigen Principal (Violin Diapason) 117	Suabe-Flute119
	Saleional, or Salicet	Sub-Bordun112
	Fifth, Quint, Double-Twelfth, Dia-	Suggestions for the consideration of those
	pente	who have to superintend the construction
	Principal, Octave117	and erection of an organ192 to 205
	Dulciana Principal, Dulcet 118	Swell (the) described 67
	Flute118	Swell-box (the), how it should be made 278
	Spitz-flute	Swell Pedal (the) eonsidered
	Gemshorn	Swell Tedar (the) considered
		m
	Nason	Т.
	Wald-flute (wood or forest-flute)118	Temperament, the phenomenon in nature
	Clear-flute	that occasions its necessity, and the dif-
	Oboe-flute	ferent systems140
	Suabe-flute119	— unequal
	Celestina 119	perfect 149
	Tth Double Tienes Dime 110	perfect
	Tenth, Double Tierce, Decima 119	equal
	Twelfth, Duodecima	a reason in favour of unequal 143
	Fifteenth, Super-octave	— illustrations of sacred music as
	Block-flute(common or ordinary flute)119	sounded on an unequally tempered
	Piccolo	organ144
	Flageolet	unequal, advocated on the score that
	Tiange Seventee-th 190	
	Tierce, Seventeenth	it preserves a distinct character of
	Larigot, Nineteenth Octave-twelfth. 120	key152
	Octave Fifteenth, Twenty-second120	equal, recommended on the same
	Doublette	grounds153
	Sesquialtera120	as the only source of distinction of
	Mixture	key, questioned154
	Furniture	eharacteristics of equal 156
	C	
	Cornet	Tenth-Double Tierce
	The Mounted Cornet	Tertian
	Echo Cornet	Tierce120, 258
	Double Trumpet	Tone, extent of, in an organ
	Double Bassoon, Contra Fagotto 123	Tremulant (the) described 70
	Doublo Hautboy	Trombone
	Trumpet	
	Horn	— (Double)
	Cornopean	Tuba Mirabilis
	Trombone, Posaune123	Tuning, laying the bearings, and extend-
	Ophicleide, Tuba Mirabilis 123	ing their influence to the stops generally, 158
	Hauthov	how the pitch of the several kinds of
	Bassoon, Fagotto	organ-pipe is altered159
	Clarionet, Cormorne, Cromorne, or	Twelftb, Duodecima119
		1 Welles, Daodeelma
	Krumm-horn, Cremona, Corni di	χ7
	Bassetto	V.
	Corno-flute	Velocity of sound
	Vox Humana124	Vibrations, the number of, produced in a
	Clarion	flue-pipe 96
	Octave Hautboy124	Viol di Gamba
	Octave Clarion	Vogler's (the Abbe) simplification system 274
	of various sizes, founded on a pheno-	Voice, compass of the human, supposed to
	menon in nature 126	have changed164
	menon in nature	Tr : Ol :
	their arrangement on the sound-	Voix Celestes
	board 43	Vox Humana124
	reasons for marking their length on	
	the knobs	W.
	theoretical exceptions to certain128	Wald-Flute
	particulars concerning the seale and	West-end of a Church, examples of conti-
		nental organs so situated 221, 223
	balancing of	
	the correct use of	its merits, as the situation for an
	general rules for the use of171	organ, eonsidered
	character of tone of some of the	—— an architectural objection to 223
	leading	- Smith and Harris's parish church
	the combination of, so as to produce	organs usually so placed224
	any required strength 173	— Harris's proposal for a grand west-
	their arrangement on the sound-board. 43	end organ in St. Paul's eathedral 225
	the grangement of the sound-board. 45	
	the proportionate division of a given	Wind-chest, its use
	number of, among the several de-	Wind-trunks
	partments	— how they should be made 278

### INDEX TO THE BRITISH AND FOREIGN ORGANS

### DESCRIBED IN THE APPENDIX;

# SHOWING THE NUMBER OF SOUNDING STOPS CONTAINED IN EACH INSTRUMENT.

A.	No. of Stops. Page
No, of Stops. Page.	Cashel Cathedral, Roman Catholie. 29561
Abbevillo Cathedral	Celle, Ludwig's Church15364
Amiens Cathedral	Chester Cathedral36504
— Church of St. Remy34330	St. John's Church 28504
Amsterdam Old Church51318	Chiehester Cathedral
— New Church	Clapham Church
Antwerp Cathedral	Cloyne Cathedral
St. Paul's Church51337	Coblentz, Church of Castor3934
St. Asaph's Cathedral25553	Cologne, Cathedral
Ashton-under-line, Parish Church. 55 513	— Minorets Church
70	— Jesuits Church
В.	— St. Maria de Capitol
Bangor Cathedral	—— St. Columba
Beauvais Cathedral64335	St. Ursula
Belfast, St. Malaehy33560	Como Cathedral
St. Patriek's	Stmo. Croeifisso
Berlin, St. Mary's Church40377	Constance Cathedral
— Garrison Church	Cork, St. Mary's
Birmingham Town Hall53500	Craeow, Evangelist's Church 15 398
Bonn Cathedral	Cranbrook Parish Church22545
Bonn Protestant Church	_
Boston Centenary Chapel42 531	D.
— (U.S.) Tremont Temple56566	St. David's Cathedral22554
Bradford, Eastbrook Chapel44520	Delft, New Church
Bremen Cathedral	Doneaster Parish Church50529
Breslau Cathedral	Dresden Catholie Church48381
— Ditto, Second Organ	— Evangelist's Church 32 382
—— Ditto, Third Organ 8390	—— St. Mary's Church 43383
— St. Mary's Church55391	—— Church of St. Sophia33383
— St. Elizabeth's Church54392	—— Holy Cross
— St. Bernhardine	Dublin, St. Patrick's Cathedral 25 556
— Ditto, Seeond Organ	—— Christ Church Cathedral28557
— St. Vineent	—— Trinity College
— St. Ethelbert	—— St. Nieholas Church34 558
Eleven Thousand Virgins27395	St. Xavier's Church35559
— St. Salvator	Durham Cathedral 526 526
— Cemetery Church	T.
— St. Mauritius 9397	E. 20 555
St. Barbara	Edinburgh Music Hall38555
University Music Room 14 397	Eltsleben
Bristol Cathedral	Ely Cathedral
St. James's Church	Erdmannsdorf
Brussels Cathedral	Eton College 492
a	TA .
Carllala Cathadad	F. Alle
Carlisle Cathedral	Florence, Church of the Badia 8419
— Ditto New Organ	— St. Gaetano
Cambridge, Trinity College 29 540	— St. Maeo
— St. John's College26541	Frankfort Cathedral
Canterbury Cathedral	— St. Paul's Church 74349
Cashel Cathodral	Freiburg Cathedral (Saxony)45385

No. of Stops Page.	No. of Stops. Page
Friburg Cathedral (Brisgau)24347	LONDON AND ITS ENVIRONS.
Friburg Protestant Church 32 347	Foundling Hospital4946
Friburg Cathedral (Switzerland) 61402	St. Gabriel's, Pimlico 32 47
Fulda, Town Church48350	St. George's, Hanover Square2141
′	St. George's, Camberwell25485
G.	German Lutheran Church, Savoy 1846
Geneva Cathedral45424	St. Giles's, Camberwell4148
another Church	Greenwich Hospital 2648'
	Hampton Court Palace2048
Genoa, St. Ambrogio	Hampton Court I alace 20 47.
— Ćarigrana	Hanover Square Concert Room. 1747
— St. Felipo Neri 21423	St. John's, Waterloo Road 26 48
— St. Maria	St. John's, Horsleydown2748
Gersau Cathedral	St. John's, Hackney2546
Glasgow City Hall	St. James's, Piccadilly36 47
Gloucester Cathedral 29 495	St. James's, Bermondsev 29 48
—— Shire Hall	St. Katherine's, Regent's Park., 2247
Goerlitz, St. Peter and St. Paul	Lee Church, Kent 29 48
— St. Mary's Church	St. Leonard's, Shoreditch2546
Gotha, St. Augustine's Church34351	St. Luke's, Old Street3246
— St. Margaret's Church26351	St. Luke's, Chelsea
Gouda, St. John's Church 51 321	St. Margaret's, Westminster2547
dolida, St. John's Church 51521	St. Mark's, Pentonville2646
TT	St. Mark's, remonvine
H.	St. Martin's in the Fields 5446
Haarhausen	St. Martin's Hall4046
Haarlem Cathedral	St. Mary's, Rotherhithe2048
Hackney Church	St. Mary's, Clapham2848
The Hague, Lutheran Church39322	St. Mary-at-Hill
Halberstadt, Great Church65360	St. Miehael's, Cornhill3545
Halifax Parish Church 26518	St. Michael's, Chester Square 37 47
— Harrison Road Chapel23519	St. Olave's, Southwark4048
Halle, St. Mauriee40357	Panoptieon 60 . 44
Hamburg, St. Catharine's Church. 54 368	St. Paul's Cathedral2944
— St. Jacobi	St. Paul's, Knightsbridge4347
— St. Michael's Church	St. Peter's, Cornhill4045
— St. Nieholas Church 67 371	St. Peter's, Walworth
— St. Neholas Church	
II. Peter's Church	St. Philip's, Waterloo Place1947
Henley-on-Thames	St. Saviour's, Southwark2848
Hereford Cathedral24497	St. Sepulchre's, Snow Hill 42 45
Hirschberg, Christ Church62361	St. Stephen's, Walbrook 26 45
Huddersfield, Buxton Road Chapel .40 516	St. Stephen's, Coleman Street 21 45
Highfield Chapel34517	Temple Church
	Trinity Church, Brompton2348
K.	Wesleyan Chapel, Poplar 45 45
Katscher, Catholic Church 21 358	Westminster Abbey 32 44
Kidderminster Town Hall28500	Lancaster, St. Thomas's Church 35 52
Kilkenny Cathedral 28563	Langensulza, St. Boniface 34 35
Kronstadt Cathedral	Leeds, St. Peter's Chapel
Krumols, Catholie Church	— Brunswick Chapel
	Leipzig University Church 58 38
L.	Lichfield Cathedral 2350
LONDON AND ITS ENVIRONS.	Liege, St. Martin's Church3533
St. Andrew's, Holborn 27 452	Liegnitz, St. Peter and St. Paul. 42 38
St. Ann's, Limehouse34458	Lincoln Cathedral
St. Botolph, Aldgate18457	Liverpool, St. George's Hall 10050
Buckingham Palace 8447	George Street Chapel 52 50
Second Organ 7 447	— Collegiate Institution 40 50
Catholic Chapel, Moorfields 31 463	Loiz, Marien-Kirche 3435
Chapel Royal, St. James's30477	Lübeck, Marien-Kirehe82 37
Chapel Royal, Whitehall33471	Ditto, Second Organ 3337
Christ Church, Newgate Street39449	— another Church
Christ Church, Spitalfields45459	Lucerne Cathedral 48 40
Christ Church, St. Marylebone22476	Lynn Parish Church
Clapham Church	
St. Clement Danes23 466	M.
Croydon Chureh 24 489	Manchester Cathedral23510
Cyclorama, Regent's Park47475	— Choir Organ in Ditto 8 510
St. Dunstan's, Fleet Street 24 464	— St. Luke's Church
St. Edmund the King20455	St. Peter's Church 47 512
Exeter Hall	— Trinity Church
	Example Carrow Con

No. of Stops. Page.	No, of Stops. Page.
Merseburg Cathedral	Seville Cathedral
Milan Cathedral32414	—— Second Organ
—— Second Organ	Shrewsbury, St. Mary's Church 23502
	Surewsbury, St. Mary's Church25502
—— St. Alessandro	—— St. Chad's Church
—— St. Maria	Siena Cathedral
—— St. Raphael	— Conventual Church
Muhlhausen	Soleure Cathedral
Munich, Concert Room	Southwell Collegiate Church 17 533
brunien, Concert Room20405	
**	Stockport Sunday School 23 514
N.	Strasbourg Cathedral
Naumberg, St. Wenzel52362	St. Thomas's Church 36 345
New York, Trinity Church31431	—— Protestant Church
Church of the Annunciation 30 432	Stratford-on-Ayon
Presbyterian Church36433	Stutgard, Striftskirche 68407
Newark Parish Church	
Neweastle-on-Tyne Parish Church. 31525	T.
Newfoundland, St. John's Cathedral 46 565	Tewkesbury Abbey
Northampton, All Saints' Church 44 542	Tonbridge Wells, Trinity Church 20 544
	Towns Cathedral
— Exchange Room	Tours Cathedral
Norwich Cathedral22536	Trebniz, Catholie Church33363
— St. Peter Maneroft	Triebel, State Church
Nottingham, St. Mary's Church 23 533	Tuam Cathedral
— Mechanies' Hall	Turvey Church
Nymengen, St. Stephen's Church53320	
1. J mengen, bt. btephen o onarch	U.
0	
	Utreeht, Protestant Church323
Oldham Parish Church	
Oxford Cathedral	V.
—— Magdalen College	Verden Cathedral
0 - 0-	Vienna Cathedral
P.	— St. Michael's Church
	— Lutheran Church
Paris, St. Denis, near	
— St. Eustache	— Minorets' Church
— The Madeleine	St. Peter's Church30401
—— St. Sulpice	
— St. Vincent de Paul	W.
Perleberg	Waltershausen
Peterborough Cathedral	Warsaw, Lutheran Church27398
Prague, St. Dominico	Weingarten, Benedictine Monastery 64 408
Preston Parish Church36522	Weissenfels, Lock Church19364
—— St. Walburgh's Church30523	Wells Cathedral
	Winehester Cathedral48547
R.	Windsor, Chapel Royal33490
Radley College	Windsor Castle, St. George's Hall.29 491°
Ratisbon, St. Emeran	Winterthur, Principal Church44406
Ripon Cathedral	Wismar, St. Mary's Church56376
Rochester Cathedral24543	Woreester Cathedral
Rome, St. Peter's 27411	—— Shire Hall 53498
—— Second Organ 21 413	
Rotterdam Cathedral76316	Υ.
— Octagon Church	Yarmouth Parish Church29538
Rouen, Church of St. Ouen 49 332	York Cathedral
Liouvilly Official Of Dr. Odell 1111111011111002	1011 Oautoutus,
S.	7.
Salisbury Cathedral	Zerbst, St. Nicholas
Salisbury Cathedral	Zerost, 15t. Micholas, 3/ 394
Salzwedel, St. Catharine 42363	•



### SUBSCRIPTION LIST.

HIS ROYAL HIGHNESS FIELD-MARSHAL PRINCE ALBERT, K.G. K.T. K.P.

The Right Hon. Colvill George Lord Colvill—of Ochiltree, South Ville, Lambeth.

The Very Rev. Viscount Mountmorris-Deanery, Achonroy, Ballymate.

Lord Benholme—76, King Street, Edinburgh.

The Rev. Sir Frederick A. Gore Ouseley, Bart. M. A. and Mus. Doc. Precentor of Hereford, and Professor of Music in the University of Oxford.

Sir Henry Dryden, Bart.—Canons Ashby, Northampton. 2 copies.

Sir Henry Gordon, Bart.—Northcourt, Isle of Wight.

Sir George T. Smart, Organist and Composer to Her Majesty's Chapel Royal.

The Venerable Archdeacon Harrison—Precincts, Canterbury.

Rear Admiral O'Brien.—Fareham, Hants.

The Rev. David Williams, D.C.L. Prebendary of Winchester, and Warden of New College, Oxford. 2 copies.

The Rev. Frederick Rouch, M.A. Minor Canon of Canterbury Cathedral and Vicar of Lower Halstow, Kent.

Dean and Chapter of Christ Church, Dublin.

The Liverpool Collegiate Institution.

The Liverpool Library.

The Free Public Library, Liverpool.

The Sacred Harmonic Society, Exeter Hall.

#### Α.

Abbott, Mr. Thomas W.—23, Great Pulteney Strect.

Acworth, G. B. Esq.—Rochester.

Adams, W. S. Esq.—Haymarket.

Adye, W. L. Esq.—Office of Ordnance.

Ainsworth, George M. Esq.—Manchester.

Allen, The Rev. E. E.—Millom, Broughton-in-Furness, Lancashire.

Amott, John, Esq.—Organist of the Cathedral, Gloucester.

André, Messrs. G. and Co.—19, South Ninth Street, Philadelphia.

Angel, Alfred, Esq.—Organist of Exeter Cathedral.

Ann, Mr. Isaac-Musicseller, Swindon, Wilts.

Archer, Frederick J. Esq.—Organist, St. Clement's Church, Oxford.

Armstrong, W. B. Esq.—Professor of Music, Kendal.

Ashlin, W. C. Esq.—Bank of Liverpool.

Astley, The Rev. John-Chalton Rectory, Horndean, Hants.

Aspinwall, John, Esq.—Organist, St. George's Church, Bolton-le-Moors.

Atkins, R. A. Esq.—Organist of the Cathedral, St. Asaph.

Atkinson, Francis J. Esq.—Manchester.

Atlee, Charles, Esq.—Ealing Park, Ealing, Middlesex

Auty, Mr. David B.—Furness Railway Company's School, Barrow-in-Furness, near Ulverstone.

В.

Backwell, Mr.—Bookseller, Castletown, Isle of Man.

Baker, Mr. G.—Professor of Music, Poole.

Baldry, A. Esq.—Torquay.

Banks, E. W. Esq.—Witham, Essex.

Barber, Stephen N. Esq.—Denmark Hill, Surrey.

Barlow, B. Esq.—Organist, Leek.

Barlow, George, Esq.—Organist, Congleton.

Barnby, William, Esq.—Organist of St. Saviour's and St. Michael's, York.

· Barnes, Edwin, Esq.—Organist, Hornsey Church.

Barratt, G. Esq.—Organist of Trinity Church, Hotwells, Clifton.

Barratt, John P. Esq.—Organist, Stonyhurst College.

Barrow, Francis, Esq.-Lincoln's Inn.

Barry, Charles, Esq.—Liverpool.

Barwick, Mr. Brice W.—Musicseller, Keighley.

Bates, Mr. Joseph-6, Ancoat's Grove North, Manchester.

Beaumont, J. F. Esq.—Whaddon, Cambridgeshire.

Bedsmore, S. Esq.—Assistant Organist, Lichfield.

Beer, A. C. C. Esq.—Organist of St. Peter's Church, Pimlico. 2 copies.

Beevor, Charles, Esq.—Surgeon, 41, Upper Harley Street.

Belcher, W. T. Esq.—Organist, Birmingham.

Bell, Doyne C. Esq.

Bembridge, S. Esq.—Egerton Terrace, Stretford New Road, Manchester.

Bennett, C. Esq.—Organist, Shiffnal, Salop.

Bennett, William, Esq.—Organist of St. Mary's Church, Andover.

Benson, George, Esq.—Lay Clerk of Westminster Abbey.

Bentham, William, Esq.

Best, W. T. Esq. -- Organist of Lincoln's Inn.

Bevington, Mr. Henry—Organ-builder, 48, Greek Street, Soho.

Billinghurst, Mr.—Brixton.

Bishop, John, Esq.—Cheltenham.

Bishop, J. C. Son, and Starr, Messrs.—1, Lisson Grove.

Blacket, Mr.—Bookseller, Newbury.

Blackburn, John, Esq.—Oatwood House, Horsforth, near Leeds.

Blackburne, Edward, Esq.—34, Merrion Square South, Dublin.

Bliss, The Rev. Frederick, B. A.—Iwerne-Courtnay, Blandford.

Blockley, John J. Esq.—2, Park Road, St. John's Park, Hampstead.

Bloxam, Henry, Esq.—Solicitor, Shrewsbury.

Booth, John Stocks, Esq.—Professor of Music, Sheffield.

Booth, Mr. William-Musical Instrument Maker, Leeds.

Bosward, Mr. Edward James-Organ-builder, Birmingham.

Botsford, J. W. Esq.—Exchango Street, Manchester.

Bowden, Mr. R. T.—Hyde, near Manchester.

Bower, George William, Esq.—22, Chiswell Street, London.

Boyt, Mr. J. H .- 76, Market Street, Poole.

Boyton, John E. Esq.—Watlington, Oxon.

Bradbury, Mr. Henry, jun.—Printing, &c. Establishment, Deansgate, Bolton.

Braine, W. R. Esq.—Organist and Director of the Choir at St. Barnabas Church, Kensington.

Braybrooke, Mrs.

Bridgman, Frederick, Esq.—Professor of Music, Edinburgh.

Brookes, George, Esq.—Solicitor, Whitchurch, Salop.

Brotherton, James, Esq.—Inland Revenue, Sonierset House.

Browne, The Rev. Alfred—Flitton Vicarage, near Silsoe, Beds.

Browne, Mr. Robert, jun.—Organist, Lowestoft.

Brunel, I. Esq.—18, Duke Street, Westminster.

Bryceson, Mr. Henry.—Organ-builder, 5, Tottenham Court, New Road.

Buck, Z. Esq. Mus. Doc.—Cathedral Organist, Norwich.

Buckham, The Rev. John-Bishopswood Parsonage, Brewood, Staffordshire.

Bunnett, E. Esq.—Upper Close, Norwich.

Burns, The Rev. A.—Middleborough, Yorkshire.

Burrington, Alfred B. Esq.—Organist, Dawlish, Devon.

Burton, John, Esq.—Organist of the Parish Church, Scarboro'.

Burton, R. S. Esq.—Organist of the Parish Church, Leeds.

C.

Cafferata, J. Esq.—25, Plumpton Terrace, Everton Road, Liverpool.

Calverley, Edmund, Esq.—Oulton Hall, Wakefield.

Camidge, Thomas Simpson, Esq.—Professor of Music, York.

Campbell, Charles, Esq.—Liverpool.

Campbell, The Rev. Colin-Leicester. 2 copies.

Caparn, W. H. Esq.—Organist, Newark.

Carder, Alfred, Esq.—Organist of Whitechapel Church.

Carling, William, Esq.—Hitchin.

Cattley, The Rev. Richard, M.A.—King's Lynn.

Cecil, The Rev. William—Rector of Long Stanton St. Michael, Cambridgeshire.

Chater, W. Esq.—Organist, Coventry.

Chambers, G. T. Esq.—Rue Rivoli, 28 bis, à Paris.

Cheetham, John Taylor, Esq.—Organist to the Baptist Chapel, Oldham.

Clarke, Charles Harwood, Esq.

Clark, Thomas, Esq.—Martock, Somersetshire.

Clarke, Fred. Führmann, Esq.—53, Upper Bedford Place.

Clarke, James, Esq.—Organist of St. Michael's, Burleigh Street, Strand.

Clarke, Joseph, Esq.—Skirbeck, near Boston.

Clarke, J. F. Esq.—Professor of Music, Leeds.

Clarke, W. E. jun. Esq.—Liverpool.

Clayton, Solomon, Esq.—Organist of Salem Chapel, Bradford.

Clayton, Wm. Esq.—Organist, Warwick.

Coles, The Rev. Thomas Henry, D.D.—Honington, near Grantham, Lincolnshire.

Colliss, W. Esq.—4, Arthur Street East, City.

Cooch, George, Esq.—Solicitor, Newport Pagnel.

Coombe, W. F. Esq.—Springfield, Chelmsford.

Coop, C. Esq.—Organist, Holbeach.

Cooper, The Rev. Allen T.—1, Suffolk Street, Pall Mall.

Cooper, J. T. Esq. F.R.S.A.—Organist of St. Paul's Church, Islington.

Corps, Mr. James—Organ-builder, 3 Caroline Place, Camden Town.

Coverly, Edward Roger de, Esq.—48, Poland Street.

Cowherd, James, Esq.—Newton-in-Cartmel, Westmoreland.

Cox, Alfred, Esq.—Organist, Brighton.

Cox, The Rev. Joseph—Litton Cheney, Dorset.

Cox, Samuel H. Esq.—Organist of St. James's Church, Cheltenham.

Crabb, Mr. T.—Berkhampstead.

Cramer, J. B. Esq.—Organist of All Saints Church, Loughborough.

Craven, William, Esq.—Dockroyd, near Keighley, Yorkshire.

Creak, T. Edward, Esq.—Organist, Honiton.

Cross, Capt. W. A.—1st Royal Lancashire Militia, Redscar, near Preston.

Crossley, G. J. Esq.—Professor of Music, 9, Victoria Street, Sheffield.

Crowe, Richard, Esq.—Professor of Music, Collegiate Institution, Liverpool.

Crowther, W. H. Esq.—Broseley, Salop.

Crane, Frederick, Esq.—55, Regent Street.

Cruse, Edward, Esq.—Bach Villa, Marlborough Hill, St. John's Wood.

Cummings, W. H. Esq.—38, Red Lion Square. 2 copies.

Curtis, Lambert G. Esq.—Organist, Norwich.

D.

Daniell, F. W. Esq.—Paymaster-General's Office, Whitehall.

Daniel, Robert, Esq.—Organist of the Parish Church, Ulverstone.

Darnell, Captain—Mount Villa, York

Davie, Charles, H. Esq.—Per Mr. H. Baillière, New York.

Dawes, Mr. Albert—Organist of the 2nd Presbyterian Church, and to the Classical Harmonist Society, Belfast, Ireland.

Dawson, Alfred A. Esq.—Organist of Sandon Church, Staffordshire.

Dawson, The Rev. James—Incumbent of Belmont, Lancashire.

Dawson, Thomas, Esq.—25, Warrington Street, Oakley Square, St. Pancras.

Dawson, W. H. C. Esq.—Reading.

Dawson, William, Esq.—Organist, Berkeley Episcopal Chapel, Berkeley Square.

Dean, A. jun. Esq.—Organist, Halifax and Huddersfield.

Dearle, Edward, Esq. Mus. Doc.—for the Library, Newark.

Delavanti, Mr.—Music Warehouse, Manchester.

Denton, J. Esq.—Bradford.

Dickson, The Rev. W. E .- Goostrey Parsonage, Middlewich, Cheshire.

Dickson, W. Esq.—Alnwick.

Dix, Thomas, Esq.—Organist, Faversham.

Dixon, George, Esq. Mus. Bac. Oxon-Organist, Retford.

Dixon, William, Esq.—Organist, Grantham.

Done, William, Esq.—Organist of the Cathedral, Worcester.

Dreaper, Mr. W. P.—Musicseller, 56, Bold Street, Liverpool.

Drew, C. J. H. Esq.—Organist of Percy Chapel, Weston Road, Bath.

Dyer, Mr. J. P.-Musicseller, Warminster.

Dymond, John J. Esq.—Professor of Music, London.

Ē.

Eaude, Mr. Thomas—Conductor of the Warrington Musical Society.

Edeson, John Robert, Esq.—Organist of All Saints', Gordon Square, St. Pancras.

Elliott, James, jun. Esq.—New Hall, Dymchurch.

Emberson, William, Esq.—Professor of Music, Arundel.

Estill, Edward, Esq.—9, Orange Court, Castle Street, Liverpool.

Evans, E. J. Esq.—Organist, Liverpool.

Evans, John, Esq.—Professor of Music, Liverpool.

F.

Fagg, Mr. John-Music Warehouse, Hull.

Fairclough, Charles, Esq.—Lower Castle Street, Liverpool.

Favarger, Réné, Esq.

Fawcett, John, jun. Esq. Mus. Bac. Oxon—Organist of the Parish Church, Bolton-le-Moors, Lancashire.

Felkin, William, Esq.—Beeston, near Nottingham.

Fernley, John, Esq.—Stanley Grove, Manchester.

Field, Mr. G.—Organist of St. Mary's, Bathwick, Bath.

Fisher, W. Esq.—Banker, Preston.

Fitzgerald, James, Esq.—Organist of St. Mary's and St. George's Churches, Kidderminster.

Fitzgerald, W. Esq.—Organist, Chertsey.

Fletcher, Mr. E.—Organ-builder, 7, Hamilton Terrace, Southampton.

Flight and Son, Messrs.—Organ-builders, St. Martin's Lane, London.

Ford, H. E. Esq.—Organist of the Cathedral, Carlisle.

Forster and Andrews, Messrs.—Organ-builders, Hull. 2 copies.

Foulis, Robert, Esq. M. D.—124, Princes Street, Edinburgh.

Foulkes, William, Esq.—Whitchurch, Shropshire.

Fowle, Thomas Lloyd, Esq.—Amesbury, Wilts.

Fox, Charles, Esq.—Leatherhead, Surrey.

Foxcroft, Joseph, Esq.—Manchester.

French, Mr.—Musicseller, Rochester.

French, Thomas, Esq. 2 copies.

Frobisher, Joseph Henry, Esq.—Organist of the Parish Church, Halifax.

Fry, Mr. J.—Bookseller, Chelmsford.

Fuller, Mr. E. H.—Music Warehouse, Derby.

G.

Gale, Mr. William—16, Harcourt Street, New Road, St. Mary-le-bone.

Gardner, Charles, jun. Esq.—Organist of St. John's Church, Blackheath.

Garrett, G. M. Esq.—Organist, St. George's Cathedral, Madras.

Gaylard, Mr. C.—Organ-builder, Preston, Lancashire.

Gee, Samuel, Esq. R. A. M.—Organist of St. Mark's, Surbiton, 12, Lansdowne Place, South Lambeth.

Gibbon, John, Esq.—Quay Street, Haverfordwest.

Giles, Mr.—(at Dr. Buck's) Norwich.

Gilbert, J. H. Esq.—Manchester.

Gilbert, Walter B. Esq. Mus. Bac. Oxon—Organist of the Parish Church, Tonbridge; and late of St. Bride's, Fleet Street, London. 2 copies.

Glennie, The Rev. J.—Secretary to the Society for promoting Christian Knowledge, 17, Great Queen Street, Lincoln's Inn Fields.

Gooch, Thomas Frederick, Esq.—Organist of the Parish Church, Ware, Herts.

Goulden, Thomas, Esq.—Organist of St. Margaret's, Canterbury.

Graham, George Frederick, Esq.—Organist, Montreal, Canada East.

Graham, Thomas, Esq.—Organist of the Parish Church, Wigan.

Grant, William, Esq.—Organist, 10, German Terrace, Brock Street, Birkenhead.

Gray and Davison, Messrs.—Organ-builders, New Road, Fitzroy Square.

Greatheed, The Rev. S. S.—Tonbridge.

Greaves, J. J. Esq.—Organist of the Parish Church, Preston. 2 copies.

Greaves, T. J. Esq.—Organist, Lambeth.

Green, Edward, Esq.—Emanuel College, Cambridge.

Green, Thomas, jun. Esq.—Professor of Music, 1, Bow Lane, Preston.

Greenall, Mr. George -- Organ-builder, Lancaster.

Griesbach, J. H. Esq.—Maida Hill.

Griffiths, F. J. Esq.—Organist of Parish Church and St. James's Chapel, Daventry.

Griffiths, G. R. Esq.—Organist of St Saviour's, Upper Chelsea.

Griffiths, William, Esq.—Kennington.

Grosvenor, S. Esq. Mus. Bac. Oxon—Dudley.

Groves, Mr. Samuel—Organ-builder, Great Marlborough Street.

Gunton, Edward, Esq.—Professor of Music, Birkenhead.

Gunton, George, Esq.—Professor of Music, Manchester.

Guy, Joseph, Esq.—Organist, Tichfield.

Η.

Hall, The Rev. J. E.—6, Cleveland Terrace, Paddington.

 $Hallen,\ The\ Rev.\ George {\ \ } Penetanguishine,\ Canada\ West.$ 

Harcourt, James, Esq.—Organist, Norwich.

Hardman, Mr. Thomas—Organist, Holy Trinity, Bolton, and St. Stephen's, Lever Bridge. 2 copies.

Harrington, William, Esq.—Organist, Wellingboro'.

Harris, The Rev. C.—Trinity Church, Cheltenham.

Harrison, Henry W. Esq.—Liverpool.

Harrison, Mr. T.—Musicseller, Birmingham. 2 copies.

Harrod, Mr. T.—Hunter's Vale, Hockley, Birmingham.

Hart, Mr. James—Organist of the Parish Church, Milton, next Gravesend.

Havergal, The Rev. H. E.—Cople Vicarage, Bedfordshire.

Havergal, The Rev. W. H. Rector of St. Nicholas, and Hon. Canon of Worcester.

Hawkins, Mr.—Horse Fair, Rugeley.

Hayden, Henry, R. Esq.—Organist of St. Leonard's.

Hayne, L. G. Esq.—Queen's College, Oxford.

Haynes, W. Esq.—Organist of the Abbey and Trinity Churches, Great Malvern.

Head, John, Esq.—Liverpool.

Heaton, The Rev. H. E.—Jesus College, Oxford; and Plas Heaton, Denbigh, N. Wales.

Heisch, Charles, Esq.—Middlesex Hospital.

Hempel, Charles F. Esq.—Organist of St. Mary's, Truro.

Henshaw, W. Esq.—Organist of the Cathedral, Durham.

Heylyn, Henry, Esq.—West Brixton Lodge, West Brixton.

Heywood, Thomas, Esq.—Manchester.

Hickson, Thomas, Esq.—Melton Mowbray.

Higgs, James, Esq.—Organist, St. Mark's, Kennington; 11, Crescent Terrace, Millbank, Westminster.

Higham, Mr. Frederick-Builder, Wolverhampton.

Hiles, J. Esq.—Organist of the Parish Church, Portsmouth.

Hill, Samuel, Esq.—Rose Cottage, Hopwood, near Manchester.

Hill, Mr. William—Organ-builder to Her Majesty, 12, Tottenham Court, New Road.

Hime and Addison, Messrs.—Musicsellers, St. Ann's Square, Manchester. 6 copies.

Hime and Son, Messrs.—Musicsellers, Liverpool. 6 copies.

Hirst, George, Esq.—Professor of Music, Liverpool.

Hobson, Alfred, Esq.—Cheltenham.

Hodge, J. S. Esq.—East Malling, near Maidstone; late Choir Master and Master of the Boys, St. Mary's Cathedral, Limerick.

Hoggett, Mr. G.—Organ-builder and Professor of Music, 45, Brunswick Street, Darlington.

Holden, George, Esq.—Professor of Music, Liverpool.

Holt, Mr. Wm.—Organ-builder, Preston Place, Bradford.

Hook, Messrs. E. and G. G.—Organ-builders, Boston, U. S. America. 3 copies.

Hoole, Mr. Samuel—44, London Road, Southwark.

Hope, W. C. Esq.—Sandford Park, West Derby, Liverpool.

Hoper, Richard, Esq.—Portslade, Sussex. 2 copies.

Hopkins, J. L. Esq. Mus. Bac. Cantab.—Organist of Rochester Cathedral.

Hopkins, John, Esq.—Organist of the Parish Church, Epsom.

Hopkinson, Thomas, Esq.—Organist of the Parish Church, Pontefract.

Horney, Mr. W.—Easington Lane, Durham.

Horsley, Charles Edward, Esq.—12, Blomfield Terrace, Paddington.

Howell, William, Esq.—The Grove, Kentish Town.

Hughes, Mr. W. J.—Archbishop Sancroft's School, Harleston, Norfolk.

Hullah, John, Esq.—St. Martin's Hall, London.

Hulme, James, Esq.—188, Waterloo Road, Burslem.

Humphries, Alfred, Esq.—Organist, Walton-on-Thames.

Hyde, Capt. T. C. S.—Twickenham Green, Middlesex.

I.

Ibbs, Robert, G. Esq.—Leatherhead.

Ingpen, John E. Esq.—9, Halsey Terrace, Cadogan Terrace, Chelsca

Ingram, Thomas, Esq.—Walcot Place, London, and Professor of Music at the College, Brighton.

Ions, Thomas, Mus. Doc. Oxon—Newcastle-on-Tyne.

Isaac, J. Whitmore, Esq.—Boughton, Worcestershire.

J.

Jackson, Mr. John-Bookseller, Ulverstone.

Jackson and Winn, Messrs.—Musicsellers, Bradford.

Jarvis, R. H. Esq.—24, Dorset Square.

Janes, Robert, Esq.—Organist of the Cathedral, Ely.

Jardine, Mr. F. W.—Organ-builder, Manchester. 2 copies.

Jardine, Mr. George-Organ-builder, New York.

Jebb, The Rev. John-Peterstow Rectory, Ross, Herefordshire.

Jeffery, Thomas B. Esq.—Liverpool.

Jewson, James P. Esq.—Organist, Stockton-on-Tees.

Johnson, Mr. J. O. R. A. M.—Organist of the Church, Dunstable.

Jones, Edward, Esq.—Professor of Music, Sheffield.

Jones, George, Esq.—Lincoln's Inn.

Jones, Gregory, Esq.—Secretary of the Collegiate Institution, Liverpool.

Jones, Jabez, Esq.—Organist of the Abbey Church, Tewkesbury.

Joule, Benjamin St. J. Baptiste, Esq.—Honorary Organist of St. Peter's Church, Manchester.

Joy, Walker, Esq.—4, Queen Square, Leeds.

Κ.

Kampf, H. W. Esq.—Wolverton Station.

Kelly, Mr. C.—8, High Street, Kensington.

Kilburn, William Edward, Esq.

Kinkee, Frederick, Esq.—Organist and Choir Master, St. Paul's, Knightsbridge.

Kirtland, Mr. James—Organ-builder, Manchester. 2 copies.

Knight, Henry, Esq.—Organist, Broseley.

L.

Lake, George, Esq.—Organist of St. John's, Paddington.

Langley, Mr. James—Organ-builder, Grove House, Greatham, Co. Durham.

Law, Mr. Robert-Organist of St. Peter's, Montrose.

Lawrence, H. M. Esq.—Lee Grove, Blackheath.

Lawrence, The Rev. Richard—Tonbridge.

Leach, Mr. John—Organist, St. James's Church, Bradford.

Lee, John, H. Esq.—Professor of Music and Singing, 77, Newman Street, London.

Lees, Mr. John—Organist, Oldham.

Leigh, Samuel, Esq.—Organist, Parish Church, Gawsworth, Macclesfield.

Lewis, John, Esq.—Solicitor, Wrexham.

Linpus, Henry F. Esq.—Organist of All Saints' and St. Peter's, Wandsworth, Linkfield Cottage, Isleworth.

Limpus, R. Esq.—Organist to the Church of St. Michael, Cornhill. 2 copies.

Linter, Ricardo, Esq.—Weymouth.

Lisle, Thomas, Esq.—Wolverhampton.

Lissant, G. B. Esq.—Organist of St. Paul's Cathedral, Calcutta.

Lloyd, Henry P. Esq.—Organist of Christ Church, Birkenhead.

Löhr, G. A. Esq.—Organist, Leicester.

Longhurst, W. H. Esq.—Assistant Organist of Canterbury Cathedral

Lonsdale, Mr. C.—26, Old Bond Street.

Lott, Edwin M. Esq.—Organist of St. Luke's, Jersey.

Μ.

Macculloch, R. Esq.—Guernsey.

Macfarren, G. A. Esq.

McCollum, Julius, Esq.—Boston, U. S.

McGlashan, James, Esq.—50, Upper Sackville Street, Dublin.

Mc Korkell, Charles, Esq.—Organist of All Saints, Northampton.

Macrory, Edmund, Esq.—Middle Temple.

Magill, Mr. John-Musicseller, and Organist of Christ Church, Liverpool.

Makepeace, Mr. William—Lay Clerk of Rochester Cathedral and Professor of Music, Rochester.

Makins, George Hogarth, Esq.

Malton, W. D. Esq.—36, Wimpole Street.

Marsh, Thomas, Esq.—Organist of St. Michael's Church, Alnwick.

Martin, George William, Esq —the Grove, Clapham Common.

Martin, J. U. Esq.—Organist, East Dereham.

Mason, Mr. Joseph—Pianoforte and Musicseller, Norfolk Street, Glossop.

Mathews, Henry, Esq.—Organist, Stratford-on-Avon.

Maude, J. A. Esq.—52, Eaton Square.

May, Mr. Harry,-11, Holborn Bars.

Mayhew, C. J. Esq.—4, Stone Buildings, Lincoln's Inn.

Medwin, Mr. Henry Innes—2, Crown Row, Walworth.

Mellor, Mr. Richard — Musicseller & Organist of Ramsden Street Chapel, Huddersfield.

Messiter, Arthur H. Esq.—Organist, Worthing.

Milne, J. K. Esq.—33, Hanover Street, Edinburgh.

Molineux, Mr. John-Organist and Choir Master of St. Paul's, Sketty, Swansea.

Molineux, Mr. Thomas—Dallon Street, Manchester.

Monk, E. G. Esq. Mus Bac.—Professor of Music, St. Peter's College, Radley, near Abingdon.

Monk, W. H. Esq.—King's College, London.

Moran, C. Esq.—Holyhead.

Morine, Mr. Charles-Organist of St. Mary's Catholic Church, Burnley.

Morrell, The Rev. T. B.—Rector of Henley-on-Thames.

Morton, W. Esq.—Trinity College, Oxford.

Murphy, Mr. J. Seymour—Organ-builder, Duncan Street, Cork.

Musgrave, T. Esq.—Scarboro'.

N.

Nelson, W. Esq.—Professor of Music, Fulneck, near Leeds.

Newall, Mr. Jonathan—Music Warehouse, Ashton-under-Lyne. 2 copies.

Nicholson, Mr. F.—Eagle Quay, Manchester.

Nicholson, Mr. John-Organ-builder, Worcester.

Nicholson, Richard, Esq.—Rochdale.

Noble, J. S. Esq.—Organist of Christchurch, Spitalfields.

Norbury, John, jun. Esq.—5, Finsbury Square.

Norman, John, Esq.—Professor of Music, Rochester.

Nottingham, R. W. Esq.—Organist of Christ Church, Streatham.

Nuth, Alfred, Esq.—Wilts and Dorset Bank, Fordingbridge.

Nutter, Mr. Henry-Organist of St. Paul's Church, Tunstall.

0.

Oakden, Mr. Edward—Organist, Manchester.

Oakes, Charles, Esq.—Ridding's House, Derbyshire.

O'Keefe, The Rev. Daniel-12, Clarendon Villas, Brook Green, Hammersmith.

Oldham, Mr. Samuel, sen.—Professor of Music, Hyde, near Manchester.

Orr, Mr. W.—Professor of Music, Bank Street, Kilburnie, near Kettering.

Osborne, — Esq.—near Worcester.

Owen, Mr. William - Tremadoc.

Ρ.

Palmer, Benjamin, jun. Esq.—Organist of St. Paul's Church, Clapham.

Parker, Septimus, Esq.—Leatherhead. 2 copies.

Partridge, Mr.—Organist of St. Thomas, Coventry.

Parvin, Mr. Wm.—Organ-builder, Bolton-le-Moors.

Pearce, George, Esq.—Guernsey.

Pearson, James, Esq.—Organist of St. Thomas's, Manchester.

Pech, Dr. James, et Mus. Bac. ex Coll. Nov. Oxon—St. Columb Choir, Kensington Park.

Peckett, Mr. A. J.—Professor of Music, Scarboro'.

Penny, Mr.—Bookseller, Frome.

Phelps, The Rev. Joseph F.—St. John's, Newfoundland.

Philipps, John Sutherland, Esq.—3, Berkeley Place, Cheltenham.

Phillips, J. W. Esq.—Professor of Music, Wakefield.

Phillips, Percival, Esq.—Professor of Music, Sheffield.

Pirie, James, Esq.—Organist of St. James's Church, Guernsey.

Pressley, The Rev. Charles—Fraserburgh, N. B.

Preston, Mr. Thomas G.—Organist, Docking, Norfolk.

Price, Alfred, Esq.—Rignum Villa, Gloucester.

Prout, Mr. Henry E.—Plymouth.

R.,

Radley, Mr. William-South Villa, Lambeth, Steward to Lord Colvill.

Rawlings, J. T. Esq.—Organist, St. Julian's Church, Shrewsbury.

Rea, William, Esq.—Organist of St. Andrew, Undershaft.

Redhead, Richard, Esq.—Organist to All Saints', Marylebone, 46, Upper Gower Street, Bedford Square.

Reed, J. Westbrook, Esq.—Raleigh Lodge, Tulse Hill, Surrey.

Reeves, Mr.—St. Helen's, near Liverpool.

Revell, Miss-Organist, Chelsea College.

Rhodes, Mr. James-Musicseller, Darley Street, Bradford

Rhodes, John, Esq.—Organist of St. George's, Southwark.

Richards, Brinley, Esq.—Hon. Member, Associate, and Professor at the Royal Academy of Music.

Richardson, Mr. J.—Sheffield.

Richardson, Thomas B. Esq.—Organist, Swindon, Wilts.

Rider, Mr. T.—Organist, Leeds.

Rigg, The Rev. Arthur, M. A.—Chester.

Robson, Mr. T. J. F.—Organ-builder, 101, St. Martin's Lane.

Rodd, Edward Hearle, Esq.—Penzance.

Roe, John, Esq.—Organist of Christ Church, St. Paneras; 52, Stanhope Street, Regent's Park.

Rogers, Handel, Esq.—Organist of the Cathedral, Limerick.

Rogers, Jeremiah, Esq.—Organist of the Parish Church, Doncaster.

Rooke, R. L. Esq —Hon. Secretary to the P. C. Choir, Leeds.

Room, Mr.—Organ-builder, Preston, Lancashire.

Ross, R. R. Esq.—Manchester.

Rost, J. D. Esq.—Organist of St. Paul's, Dock Street.

Ruck, George, T. Esq.—19, St. Dunstan's Hill.

Ruck, Silas, Esq.—Raleigh Lodge, Tulse Hill, Surrey.

Rudd, J. B. Esq.—Guisbro', Yorkshire. 2 copies.

Rumsey, The Rev. Lacy Henry, M. A.—Jamaica, West Indies.

Rumsey, Mr. John-Organist, Shepton Mallett.

S.

Sanders, James, Esq.—Organist of St. Francis Xavier, Liverpool.

Savory, Douglas, Esq.—65, Marland Place, Southampton.

Scaife, Mrs.—Leicester.

Schoelcher, Victor, Esq.

Scobell, G. Esq.

Second, Frederick, Esq.—Organist, Darlington.

Seed, Richard, Esq.—Conductor of the Ardwick Gentlemen's Glee Club, Manchester.

Shargool, Edwin, Esq.—Organist of St. Mary's Church, Stafford.

Sharman, W. H. Esq.—New Street, Birmingham.

Sharp, Edward, Esq.—Organist of the Asylum for Female Orphans, 12, Fludyer Street, Westminster.

Shaw, Benjamin, Esq.—Gillygate, York.

Shaw, J. Esq.—Organist, Christ Church, Preston.

Shelmerdine, W. Esq.—Organist of the Mechanics' Hall and Derby Road Chapel, Nottingham.

Simes, Henry S. Esq.—Westfield Gardens, Brighton.

Simms, E. Esq.—Organist, Coventry.

Simms, H. Esq.—Organist, Birmingham.

Simms, R. H. Esq.—Organist and Professor of Music, Wrexham. 2 copies.

Simpson, G. Esq.—Professor of Music, Hanley.

Simpson, John, Esq.—Organist of the Parish Church, Bradford.

Slater, William, jun. Esq.—75, Princess Street, Manchester.

Smart, Henry, Esq.—Organist of St. Luke's, 4, Regent's Park Terrace.

Smee, G. Esq.—Bank of England.

Smith, Elder, and Co. Messrs.—Cornhill.

Smith, E. F. Esq.—Professor of Music, Liverpool.

Smith, Mr. James—Musicseller, 66, Lord Street, Liverpool. 2 copies.

Smith, J. O. Esq.—Organist of Christ Church, Cheltenham.

Smith, Samuel, Esq.—Willow Cottage, Egham Hill.

Smith, William, Esq.—Allerton Hall, Gledhow, near Leeds.

Smyth, The Rev. A. Bowyer—Attleborough Rectory, Norfolk.

South, George Henry, Esq.—Organist of the Parish Church, Sheffield.

Southgate, T. B. Esq.—Professor of Music, Highgate; and Organist of St. Anne's, Highgate Rise.

Southern, Mr. W.—Organist of St. Mary's, Leamington.

Spark, Edward J. Esq.—Choir Master of the Parish Church, Bury, Lancashire.

Spark, W. Esq.—Professor of Music, Leeds.

Stacey, Mr. William-Music Warehouse, 93, West Street, Sheffield.

Staniland, Mr. George—Organ-builder, Abingdon.

Staton, W. Esq.—Organist of St. Mary's, Harrow-on-the-Hill.

Stephens, Charles E. Esq.—Organist of the Church of the Holy Trinity, Bishop's Road, Paddington, 2, Howley Place, Maida Hill.

Stephenson, W. F. Esq.—Organist of Trinity Church, Ripon.

Stevens, Edwin, Esq.—Organist of the St. James's Chapel, Jersey.

Stevens, The Rev. William H.—Stoke Rectory, Guildford.

Stewart, Robert B. Esq.—5, Buchanan Street, Glasgow.

Stidolph, Harold E. Esq.—Tunbridge.

Still, The Rev. Henry H.—Rusthall, Tunbridge Wells.

Stirling, Miss Elizabeth—3, Randall's Terrace, East India Road.

Stone, J. T. Esq.—Dartford, Kent.

Stonex, Henry, Esq.—Organist, Regent Road, Great Yarmouth.

Stothert, Mr.—Oxford Street, Preston.

Stott, F. S. Esq.—Architect, Chapel Lane, Bradford, Yorkshire.

Street, Thomas, Esq.—Ealing.

Strickland, Mr. William H.—School for the Blind, York.

Sturges, Mr. T — Organ-builder, &c. 13, York Street, Ramsgate.

Stutfield, H. W. Esq. — Organist, St. George's in the East.

Styrap, H. G. Jukes de, Esq.—Langley, Bucks.

Sudlow, W. Esq.—Clapham.

Suggate, Alfred Albert, Esq.—Member of the Leipsic Conservatorium, Professor of Music and Singing, Lowestoft.

Summers, William, Esq.—10, Great Marlborough Street, Regent Street.

Swanson, Mr. F.—Blackheath.

Sykes, Mr. J.—Musicseller, Leeds.

Т,

Taylor, James, Esq.—Professor of Music, Gloucester Taylor, W. F Esq.—Professor of Music, Bristol.

Telford, Mr. W.—Organ-builder, 109, St. Stephen's Green, Dublin.

Thirtle, E. Esq.—Organist of the Parish Church, Boston, Lincolnshire.

Thomas, Charles, Esq.—Organist of the Parish Church, Rye.

Thompson, George Edward, Esq —Woodland House, Prospect Row, Woolwich, Kent.

Thompson, John, Esq.—Organist of the Abbey Church, Mercvale. 2 copies.

Thorn, E. H. Esq.—Organist, Henley-on-Thames.

Thorpe, Thomas, Esq.—Organist, Pateley Bridge, Ripon, York.

Thurnam, Edward, Esq.—Organist of the Parish Church, Reigate, Surrey.

Thynne, John Frederick, Esq.—Professor of Music, Tavistock, Devon.

Tolputt, Mr. W. B .- Organist of the Parish Church, Folkestone.

Toms, Charles James, Esq.—Professor of Music, Liverpool

Townley, C. A. Esq.—Burleigh Villa, Bridge Road, St. John's Wood.

Townsend, Henry, Esq.—Stanton House, Hinckley.

Townsend, Mr. John-Music Warehouse, Manchester.

Trimnell, Thomas Tallis, Esq.—Organist of the Parish Church, Chesterfield.

Trust, H. J. Esq.—Organist of St. Mary's Church, Paddington.

Tuckerman, Dr. S. P.—Boston, U. S. 2 copies.

Turpin, E. H. Esq.—Organist, Catholic Chapel, Nottingham.

### V.

Vaudrey, James, Esq.—London.

Venables, Charles, Jun. Esq.—Conductor of the Taplow and Maidenhead Amateur Choral Society.

Vent, — Esq.—25, Brudenell Place, New North Road, Hoxton.

Vesey, F. Gerald, Esq.—Trinity College, Cambridge.

Vincent, Charles J. Esq.—Organist of the Parish Church of St. Michael, Houghton-le-Spring.

Violette, Mr. E.—Organ-builder, 43, King's Road, Camden Town.

### W.

Walkem, The Rev.—Chaplain of the Altrincham Union, Knutsford, Cheshire.

Walker, Alfred, Esq.—Hodge Lane, Horbury, near Wakefield.

Walker, Henry, Esq.—Organist, Upper Temple Street, Manchester.

Walker, Mr. William—110, Constitution Street, (Town Hall) Leith.

Walker, Mr. Joseph—Organ-builder, 27, Francis Street, Bedford Square.

Walmisley, H. B. Esq.—late Organist of Holy Trinity Church, 18, Cowley Street, Westminster.

Walmisley, T. A. Esq. Mus. Doc.—Trinity College, Cambridge; Professor of Music in the University.

Warren, E. Esq.—1, Saxon Street, Dover.

Warren, Joseph, Esq.—20, Conduit Street, London.

Warren, Miss—Organist, Royston.

Wastfield, A. Esq. Mus. Doc.—Organist, 3, Queen's Place, Caermarthen.

Watts, J. Esq.—Organist, Ormskirk.

Webster, T. Esq.—Liverpool.

Whately, W. Esq. Q. C.—2 copies.

Whimfield, E. W. Esq.—Conservative Club.

White, John, Esq.—Liverpool.

White, Thomas Wolsey, Esq.—Professor of Music, Brighton.

Whitthorn, J. Esq.—Chatham.

Whomes, — Esq.—Organist, Woolwich.

Wilberforce, Charles, Esq.—Organist of the Unitarian Chapel, Renshaw Street, Liverpool.

Wilkie, Mr. Joseph--Melbourne, Victoria.

Willcox, John H. Esq.—Boston, U. S.

Williams, W. Esq.—Organist of St. Martin's Church, Jersey.

Willis, Mr. Henry—Organ-builder, Manchester Street, King's Cross, London.

Willis, John, Esq.—Beverley.

Wilson, J. M. Esq.—Esplanade, Bridlington Quay.

Wilson, William, Esq.—Organist, St. James's, Garlick, Hythe.

Winn, Miss E. L -Nostell Priory, Wakefield.

Winscom, Edwin, Esq.—Organist, 20, South End, Croydon.

Wood, Samuel, Esq.—Clitheroe.

Wood, Mr. T.—Organist, Huddersfield.

Woodward, B. Esq.—Organist of St Paul's Church, Wednesbury.

Woodward, William W. Esq.—Organist of St. Marie's Catholic Church, Derby.

Woolcott, Mr. Charles—5, St. Paul's Church Yard.

Wray, W. B. Esq —late Organist and Choir Master, Blind Asylum, Liverpool.

Wright, A. Esq. —Organist, Birmingham.

Wyllie, Mr. R. W.—of the Cathedral, Exeter.

### Y.

Yardley, P. Esq.—Organist and Professor of Music, Bishop's Stortford.

Yarworth, The Rev. W. Vaughan-Westbury-upon-Trym, near Bristol.

Yeo, Mr. W. S - Professor of Music, Plymouth.

Yeomans, Alfred, Esq.—Professor of Music, Stourbridge.

Young, John M. W. Esq.—Organist of the Cathedral, Lincoln.

Young, Robert, Esq.—Organist, Berwick-on-Tweed.

Young, The Rev. Thomas Drake—Parsonage, Sutton Bridge, near Wisbeach.



# MESSRS. FORSTER AND ANDREWS

(FORMERLY OF LONDON),

# Organ Builders,



Respectfully draw the attention of those interested in procuring Organs to their extensive Manufactory, not excelled by any in the Provinces, which is replete with every convenience for the production of First-class Instruments. Subjoined is a list of 100 Organs which Messrs F. and A. have lately erected, and to which they are kindly permitted to refer.

Hook East Retford Pudleston Anston Epworth Idle Rudstone Allington Everton Isle of Man-2 Rimswell Alford Kirkstall Grantham-3 Swine Burstwick Gate Burton Keyingham Skirlaugh Broughton Goole Louth Stapenhill Beverley Great Ponton Lincoln South Elkington Bradford Gainsborough Laceby Sculcoates Barkby Beetham Grimsargh Longnor South Ossett South Kelsey Great Chart Leeds Bingley Hull-12 Melbourne Scarboro'-4 Bassingham Hunmanby Market Rasen Staunton Bishops Norton Hessle Nottingham Shipley Cheltenham Heckmondwike Newland Cleethorpes Tansley Hatfield North Shields West Butterwick Conisbro Nostell Priory Hungerton Waltham Colsterworth Hornsea Newark Whitby Coningsby Owersby Wootton Huttoft Cockermouth Haworth Pontefract Workington Derby-3 Halifax Pennington York-2 Dent

N.B.—Detailed Prospectuses forwarded (gratis) on application.

### DAVID HAMILTON,

## Organ Knilder to Ver Majesty the Queen,

### EDINBURGH,

Respectfully intimates that he builds to order Organs of all sizes, of the finest material and workmanship. He begs leave to inform those interested in the erecting, reconstructing, or repair of Organs in Churches or Public Halls, that, having originally studied his profession in Germany, he has built Organs on the principles of the great German builders during twenty-five years he has been established in Scotland. He visits the Continent once every year for the purpose of acquainting himself with every successive improvement and invention in the art, and has frequent opportunities of inspecting and studying the plans and constructions of the largest Organs in Germany, Holland, and France.

Mr. Hamilton is the inventor of the Pneumatic Lever, an apparatus which has proved of the utmost importance in Organ building, and which he first constructed in the year 1833. He applied this invention to the Organ in St. John's Episcopal Church, Edinburgh, in the year 1835, and in 1838 he exhibited a model of it at a meeting of the British Association. Some years subsequently, this invention began to be employed in Paris, although its use has not, until lately, been general with British Organ builders. The form of the Pneumatic Lever now employed is precisely that which Mr. Hamilton gave it on first discovering its principle. About four years ago, Mr. Hamilton discovered a still greater improvement, by which the advantages of simplicity, durability, certainty of action, and lightness of touch are obtained in a still higher degree than in the Pneumatic Lever.

Mr. Hamilton particularly calls attention to the Metal Pipes of his Organs; his superior manufacture of which has attracted favourable attention in Germany, and which, for many years past, he has made of pure tin, in preference to the cheaper compound generally employed: by the use of the purer material, he is able to obtain both a much finer quality of tone and greater durability. Specimen pipes sent on application.

greater durability. Specimen pipes sent on application.

Estimates and specifications for Organs of every size furnished; and all orders, whether under previous estimate or not, executed on the most moderate scale of charges, consistently

with perfect materials and workmanship.

### EDWARD JAMES BOSSWARD,

Organ Builder, Birmingham, (From Mr. Hill's, London),

Tuner of the Organ in the Birmingham Town Hall.

Organs of every description tuned and repaired in any part of the United Kingdom.

### J. C. BISHOP, SON, and STARR,

Organ Bnilders to Wer Majesty,

LISSON GROVE SOUTH, NEW ROAD, ST. MARYLEBONE.

INVENTORS OF THE COMPOSITION PEDALS, ANTI-CONCUSSION VALVE, CLARABELLA STOP, ETC.

### SAMUEL GROVES, ORGAN BUILDER,

Inventor and Provisional Patentee of Rotary Pneumatic Apparatus for pumping or forcing air, whereby an Organ of any dimensions may be supplied with wind by machinery instead of manual labour, at a comparatively small expense. DIRECT ACTION, which, in an Organ of 3 rows of keys, causes upwards of 600 centres to be dispensed with; Lever Valve, which so thoroughly resists the pressure of air as to render the touch of a large Organ most agreeable (equally light to that of a grand piano of the first maker), and admits a full supply of wind to the pipes.

7, Great Marlborough-street; Manufactory, 11, Little Marlborough-street, Regent-street, London.

Just Published, folio, pp. 80, price 12s. The Child's Fragress, from Birth to Glorg.

Illustrated in a selection of Poetical Pieces, adapted to Music, in 3 Vocal Parts; with Pianoforte Accompaniment. By the Rev. William Cecil, A. M. Rector of Longstanton St. Michael, near Cambridge.

By the same Author, folio, pp. 178, in Leather Wrapper, price One Guinea,

The Church Chair Organ Book.

The Three Vocal Parts detached, 4s cach; Hymn Book, 2s. 6d. London: Seeleys, Fleet-street and Hanover-street; and sold by Dixon, Market-street, Cambridge.

## KIRTLAND AND JARDINE

(SUCCESSORS TO S. RENN),

# Organ Builders,

DICKINSON STREET, ST. PETER'S SQUARE,

### MANCHESTER.

Messrs. Kirtland and Jardine have the satisfaction of stating that the system invariably pursued by them of employing only the most experienced assistants, making use of the best materials, and taking the utmost eare in the finish of their Instruments, together with a moderate charge, has resulted in rendering their Establishment for the manufacture of Organs second to none in the Provinces.

The Building, Mechanical, and Musical Departments are each a separate eare; the former under the superintendence of Mr. Kirtland (nephew to, and many years with, Mr. Renn), and the latter under the direction of Mr. Jardine, from Messrs. J. C. Bishop and Sons, London; this arrangement enables them to impart a very superior finish to their Instruments.

Messrs. Kirtland and Jardine have made personal examinations of some of the finest specimens of the German and French Schools of Organ Building; they have been the first to introduce into this Country the admirable system of the Abbé Vogler; and they have adopted those Stops from the Continental Organs which are of new and beautiful tone, among which may be mentioned the Viola and Cone Gambas, the Flute Harmonique, the Flauto Traverso; the Hohl, Doppel, and Swabe Flutes; the Saleional, the Vox Angeliea, the Posaune, Cor Anglais, &c.

Messrs. Kietland and Jardine have invented a Pallet, which greatly assists the articulation of the pipes, and produces a light and agreeable touch. In Organs of very large size, they apply the "Pneumatic Lever" to the Key and Composition movements. Their Mechanism is constructed so as to work without the rattling noise audible in most Organs. Their Bellows also are made on a greatly improved principle; and, if required, can be arranged so as to be supplied without the aid of hand or foot actions.

ESTIMATES GIVEN FOR CHURCH AND CHAMBER ORGANS.

OBGANS RE-MODELLED AND REPAIRED.

INSTRUMENTS OF VARIOUS SIZES KEPT IN STOCK, FOR SALE OR HIRE Contracts made for Annual Tunings.

BARREL AND SELF-ACTING ORGANS.

TESTIMONIALS FORWARDED ON APPLICATION.

Organ Manufactory.

DICKINSON STREET, ST. PETER'S SQUARE, MANCHESTER.

# Organ Alaterials.

Organ Pipes of all Descriptions, Keys, and everything in Organ Building, on moderate Terms.

### EDWARD VIOLETTE

(Many years in some of the best Continental Manufactories),

Manufacturer to the Trade,

43, KING'S ROAD, CAMDEN TOWN, LONDON.

French and German Stops, and all the latest Improvements.

Voicing, Tuning, and Repairs.

### BEVINGTON and SONS.

Church, Chamber, and Barrel Organ Builders;

MANUFACTORY.

48, GREEK STREET, AND ROSE STREET, SOHO, LONDON.

### HENRY WILLIS,

ORGAN BUILDER,

18. MANCHESTER STREET, KING'S CROSS;

BUILDER OF THE CREAT ORGAN IN ST. CEORGE'S HALL, LIVERPOOL.

# Co Musicians in general.

### METRONOMES.

ROBERT COCKS and Co.'s Improved Maelzel Metronomes of very superior manufacture, much approved from their accuracy and durability; without Bell, 26s.; with Bell, 42s.

### PORTRAITS

Of Musical Composers, &c. for framing or binding with their works (an extensive series).

Busts in Bisque China, each 2s. 6d.

### CONCERTINAS.

A choice assortment of these favourite Instruments, by the best manufacturers, constantly in stock. Double-action, Full Compass, 48 Notes, Rosewood Fittings, and in Rosewood Cases, £6 6s.

A LARGE ASSORTMENT OF CHOICE OLD VIOLINS,

SOME VERY FINE TEXORS, VIOLONCELLOS, AND DOUBLE BASSES.

PRICED LISTS FURNISHED POSTAGE FREE.

### VUILLAUME'S CELEBRATED COPIES

OF THE

STRADUARIUS, GUARNERIUS, MAGINI, AND AMATI VIOLINS, £14.

Vuillaume's Bows, £ 1 10s.—Vuillaume's Prepared Rosin, 1s. per Box. Bow Hair, 1s. 6d. per Hank.

Musical Instruments of all descriptions, Pianofortes, Harps, Flutes. Clarionets, &c. at low prices.

Music Stools and Music Stands in every variety.

LONDON: ROBERT COCKS AND CO., NEW BURLINGTON STREET.

# ORGAN AND CHURCH MUSIC

PUBLISHED BY

# Robert Cocks and Co.

LONDON.

ANTHEMS AND SERVICES.
CHANTS.
ORGAN WORKS.
METRICAL PSALMS AND HYMNS.
ORATORIOS, SERVICES AND MASSES.
WORKS ON THE THEORY OF MUSIC.

ORDERS RECEIVED BY ALL MUSICSELLERS AND BOOKSELLERS,
AT HOME AND ABROAD.

&c. &c. &c.



# ANTHEMS AND SERVICES,

WITH ACCOMPANIMENT FOR THE

### ORGAN.

ATTWOOD, THOMAS. Sanctus and Responses, as performed at Her		
Majesty's Chapels Royal, and at St. Paul's Cathedral.		
Newly edited by John Bishop, of Cheltenham	3	0
CONTENTS.		
ANTHEMS. When the wicked man		
DOMAN WITH TABLE BE SEEN OUT THE TENER OF THE SEEN OF THE SEEN OUT TO SEE SEEN		
BOYCE, WILLIAM, Mus. Doc. Cathedral Music: being a Collection in Score		
of the most valuable and useful Compositions for that		
Service, by the early English Masters, selected by Dr.		
William Boyce. Newly edited and carefully collated and revised, with an Appendix to each Volume, contain-		
ing additional Services and Anthems, a Life of Dr. Boyce,		
Memoirs of the Composers, and an Accompaniment for		
the Organ, by Joseph Warren. 3 vols. extra folio, fine		
paper (reduced price)	6	(
Or the volumes separately, as under—viz:	U	
* */	10	
DR. BOYCE'S CATHEDRAL MUSIC, Vol. I price, separately, £2	12	0
CONTENTS.		
Editor's Preface; Original Preface to Vol. 1; Life and Portrait of Dr. Boyce— Memoirs of the Composers—viz.: Thomas Tallis, Richard Farrant, William Byrd, Elway Bevin, Thomas Morley, Dr. Orlando Gibbons, Dr. William Child, Dr. Benjamin Rogers, Thomas Tomkins, aud John Parsous.		
SERVICES.  THOMAS TALLIS. For four voices (Tr. C. T. B.†): Preces, Venite exultemus Domino		
Thomas Tallis. For four voices (Tr. C. T. B.†): Preces, Venite exultemus Domino (Chant), Te Deum, Benedictus, Creed of St. Athanasius (Chant).		
For five voices (Tr. 2 C. T. B.): Responses, Litany.		
For four voices (Tr. C. T. B.): Kyrie eleisou, Doxology, Nicene Creed, Sanctus, Gloria iu excelsis, Magnificat, Nunc dimittis.		
** The Preces, Responses, Litauy, and Chants, are in the Key of C;		
the Services, in the Dorian Mode.		
Richard Farrant. In G minor. For four voices: Te Deum and Benedictus (verses for 2 Tr. 2 C. 2 T. 2 B.); Kyrie eleison, Nicene Creed, Maguificat, and Nunc dimittis (Tr. C. T. B.).		

#### Dr. BOYCE'S Cathedral Music .- Vol. I. continued.

#### SERVICES.

- William Byrd. In D minor. For four, five and six voices: Te Deum and Benedictus (Tr. 2 C. 2 T. B.); Kyric eleison and Nicene Creed (2 Tr. 2 C. 2 T. B.); Magnificat and Nune dimittis (Tr. 2 C. 2 T. B.).
- ELWAY BEVIN. In the Dorian Mode. For four and five voices: Te Denm and Benedictus (Tr. 2 C. 2 T. B.); Kyrie eleison and Nicene Creed (Tr. C. T. B.); Magnificat and Nnne dimittis (Tr. 2 C. T. B.).
- Thomas Morley. Burial Service, in G minor. For four voices (Tr. C. T. B.): I am the resurrection, Man that is born of a woman, I heard a voice from heaven.
- s. In F. For four voices (Tr. C. T. B.): Te Deum, Benedictus, Kyrie eleison, Nicche Creed, Sanctus, Magnificat, Nunc dimittis. DR. ORLANDO GIBBONS.
- In D. For four voices: Te Denm, Jubilate, and Kyrie eleison (Tr. C. T. B.); Niceno Creed (verses for Tr. 2 C. T. B.); Sanctus, DR. WILLIAM CHILD. Magnificat, Nunc dimittis (Tr. C. T. B.).
- In E minor. For four voices (verses for 2 Tr. 2 C. 2 T. 2 B.): Te Deum, Jubilate, Kyric eleison, Nicene Creed, Sanctus, Magnificat, Nunc dimittis.
- RS. In D. For four voices (Tr. C. T. B.): Te Denm, Jubilate, Kyrie eleison, Nicene Creed, Sanctus, Magnificat, Nunc dimittis. DR. BENJAMIN ROGERS.
- Henry Aldrich, D.D. In G. For four voices (Tr. C. T. B.): Te Deum, Jubilate, Kyric eleison, Nicene Creed, Sanctus, Magnificat, Nunc dimittis.

### APPENDIX.

- Thomas Tomkins. Services in C. For four voices (Tr. C. T. B.): Te Deum, Benedictus, Kyrie eleison, Nicene Creed, Magnificat, Nunc dimittis.
- JOHN PARSONS. Burial Service, in D minor. For four voices (Tr. C. T. B.): I am the resurrection, Man that is born of a woman, I heard a voice from heaven.

### Dr. BOYCE'S CATHEDRAL MUSIC, Vol. II....price, separately, £2 12

#### CONTENTS.

Memoirs of the Composers, continued from Vol. 1; Dr. John Blow, Henry Purcell, William Mnnday, Dr. Christopher Tyc, Adrian Batten, Robert Creyghton, D. D. Jeremiah Clark, and Henry Aldrich, D. D.

#### SERVICES.

- DR. JOHN BLOW. In A. A. For four voices (verses for 2 Tr. 2 C. 2 T. 2 B.): Te Deum, Jubilate, Kyrie eleison, Nicene Creed, Cantate Domino, Dens misereatur.
  - In G. For four voices (verses for 2 T. 2 C. 2 T. 2 B.): Te Deum, Jubilatc, Kyrie eleison, Nicene Creed, Magnificat, Nunc dimittis.
  - In G. (Triple Measure.) For four voices (verses for 2 Tr. 2 C. 2 T. 2 B.): Kyrie eleison, Nicene Creed.
  - In E minor. For four voices (verses for 2 Tr. 2 C. 2 T. 2 B.): Te Deum, Benedicite, Jubilate, Kyrie eleison, Niccue Creed, Cantate Domino, Dens miscreatur.
- Henry Purcell. In B flat. For four voices (verses for 2 Tr. 2 C. 2 T. 2 B.): Te Deum, Benedictus, Kyrie eleison, Nicene Creed, Magnificat, Nunc dimittis.
  - Iu B flat. For four voices (verses for 2 Tr. 2 C. 2 T. 2. B.): Benedicite, Jubilate, Cantate Domino, Dens misereatur.

#### FULL ANTHEMS.

### FOR FOUR VOICES.

- WILLIAM MUNDY. O Lord, the Maker of all (D minor)..... Tr. C. T. B. DR. CHRISTOPHER TYE. will exalt thee, 1st Part (C minor)..... Sing unto the Lord, 2nd Part (C minor)..... Call to remembrance (D minor)..... RICHARD FARRANT. Hide not thon thy face (G minor)..... Almighty and everlasting God (F)

  O praise the Lord, all ye heathen (D minor)...

  Deliver us, O Lord (Dorian mode)...

  Praise the Lord, O my sonl (F)...

  O Lord, grant the King (F)... DR. ORLANDO GIBBONS. ADRIAN BATTEN. DR. WILLIAM CHILD.
- Dr. Benjamin Rogers. Behold, now praise the Lord (D).

  Dr. John Blow. The Lord hear thee (B flat)

  My God, my God, (A minor).

  Robert Creventon, D.D. I will arise (E flat).
- JEREMIAH CLARK. Praise the Lord, O Jerusalem (G) .....

	ANTHEMS AND SERVICES.	9
Dr. BOYCE'S Cathedral	MusicVol. II. continued.	
	FULL ANTHEMS,	
	FOR FIVE VOICES.	
THOMAS TALLIS, WILLIAM BYRD.	I call and cry (6 minor)	
	FOR SIX VOICES.	
WILLIAM BYRD. Dr. Orlando Gibbons.	Sing joyfully unto God (C)	
HENRY ALDRICH, D.D.	O give thanks (G)	
	APPENDIX. SERVICE.	
ROBERT CREYGETON, D.	D. In E flat. For four voices: Te Denm, Jubilate, and Kyrio eloison (Tr. C. T. B.); Nicene Creed (verses for 2 Tr. C. T. B.); Sanctus, Magnificat, and Nune dimittis (Tr. C. T. B.).	
	FULL ANTHEMS. FOR FOUR VOICES.	
THOMAS TALLIS. THOMAS TOMEINS.	O Lord, give thy Holy Spirit (G minor) Tr. C. T. B. Almighty and everlasting God (C)	
DR. ORLANDO GIBBONS.	Why art thon so full of heaviness (A minor.)  O Lord, increase my faith (G minor)	
	FOR FIVE VOICES.	
WILLIAM BYRD.	Save me, O God (G minor)2 Tr. C. T. B.	
Dr. BOYCE'S CATHED	RAL MUSIC. Vol. III, price, separately, £2 1 CONTENTS.	2 6
Original Preface to V Johu Goldwin, John Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupui	CONTENTS. Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. John Bull, Michael Wise, rr. William Turner, William Lawes, and Matthew Locke, otices of the Composers of the Chants; viz. Dr. Benjamin s, Dr. M. Greene, Dr. Christopher Gibbons, the Rev. Phocian y, Dr. James Nares, Thomas Purcell, Daniel Purcell, John	2 6
Original Preface to V John Goldwin, John V Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupuis Henley, William Morte	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. John Bull, Michael Wise, rr. William Turner, William Lawes, and Matthew Locke. otices of the Composers of the Chants; viz. Dr. Benjamin s, Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian y, Dr. James Nares, Thomas Purcell, Daniel Purcell, John William Tucker.	2 6
Original Preface to V John Goldwin, John ' Pelham Humphrey, D Short Biographical No Cooke, Dr. T. S. Dupuis Henley, William Morle Robinson, and the Rev.	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II.  Weldon, Dr. William Croft, Dr. John Bull, Michael Wise,  rr. William Turner, William Lawes, and Matthew Locke.  btices of the Composers of the Chants; viz. Dr. Benjamin  s, Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian  y, Dr. James Nares, Thomas Purcell, Daniel Purcell, John  William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.	2 6
Original Preface to V John Goldwin, John V Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupuis Henley, William Morte	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. Johu Bull, Michael Wise, r. William Turner, William Lawes, and Matthew Locke. Spr. Mercene, Dr. Christopher Gibbous, the Rev. Phocian ry, Dr. James Nares, Thomas Purcell, Daniel Purcell, John William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.  Sing we merrily (F)	2 6
Original Preface to V. John Goldwin, John Pelham Humphrey, D. Short Biographical N. Cooke, Dr. T. S. Dupuis Henley, William Morle Robinson, and the Rev. Dr. William Child.	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II.  Weldon, Dr. William Croft, Dr. John Bull, Michael Wise,  rr. William Turner, William Lawes, and Matthew Locke.  btices of the Composers of the Chants; viz. Dr. Benjamin  s, Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian  y, Dr. James Nares, Thomas Purcell, Daniel Purcell, John  William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.	2 6
Original Preface to V John Goldwin, John Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupnis Henley, William Morie Robinson, and the Rev.  Dr. William Child.  Dr. Orlando Gibbons.	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. John Bull, Michael Wise, rr. William Turner, William Lawes, and Matthew Locke. Dr. Benjamin St., Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian y, Dr. James Nares, Thomas Purcell, Daniel Purcell, John William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.  Sing we merrily (F)	2 6
Original Preface to V John Goldwin, John Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupnis Henley, William Morie Robinson, and the Rev.  Dr. William Child.  Dr. Orlando Gibbons.	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. John Bull, Michael Wise, rr. William Turner, William Lawes, and Matthew Locke. Otices of the Composers of the Chants; viz. Dr. Benjamin s, Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian s, Dr. James Nares, Thomas Phreell, Daniel Purcell, John William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.  Sing we merrily (F)	2 6
Original Preface to V Johu Goldwin, John Pelham Humphrey, D Short Biographical N Cooke, Dr. T. S. Dupuis Henley, William Morle Robinson, and the Rev.  Dr. William Child.  Dr. Orlando Gibbons.	CONTENTS.  Vol. III. Memoirs of the Composers, continued from Vol. II. Weldon, Dr. William Croft, Dr. John Bull, Michael Wise, rr. William Turner, William Lawes, and Matthew Locke. Otices of the Composers of the Chants; viz. Dr. Benjamin s, Dr. M. Greene, Dr. Christopher Gibbous, the Rev. Phocian s, Dr. James Nares, Thomas Purcell, Daniel Purcell, John William Tucker.  FULL ANTHEMS.  FOR SEVEN VOICES.  Sing we merrily (F)	2 6

#### VERSE ANTHEMS.

FOR SIX VOICES.

O God, thou hast cast us out (C minor)...... 2 Tr. 2 C. T. B.
Hear my crying, O God (E flat)................ 2 Tr. C. T. 2 B.

FOR ONE VOICE. How long wilt then forget me (G minor)... Treble or Tenor. JEREMIAH CLARK.

HENRY PURCELL. JOHN WELDON.

Dr. Joun Blow. HENRY PURCELL.

## Dr. BOYCE'S Cathedral Music.—Vol. III. continued.

#### VERSE ANTHEMS.

VERSE ANTHEMS.		
FOR TWO VOICES.		
Dr. John Blow.  Henry Purcell.  ——————————————————————————————————		
Privilly Henry Have morey prop ma 0 God (C minor) C. T. P.		
Pelham Humphery   Have mercy npon me, 0 God (C minor)   C. T. B. O Lord, my God (F minor)   C. T. B. O Lord, my God (F minor)   C. T. B. O Lord, my God (F minor)   C. T. B. O Lord, my God (C minor)   C. T. B. O Lord, thou has been our refuge (E minor)   C. T. C. Awake up, my glory (A)   Tr. C. B. C. T. B. Or. William Croft. O praise the Lord, all ye heathen (G minor)   2 Tr. C. Awake Up, my glory (A)   C. T. B. Or. William Croft. O praise the Lord, all ye heathen (G minor)   C. T. B. Or. William Croft. O praise the Lord, all ye heathen (G minor)   C. T. B.		
FOR FOUR VOICES.   The Lord is my light (D minor)		
FOR FIVE VOICES.		
MATTHEW LOCKE. Lord, let me know mine end (A minor) 2 Tr. C. T. B. Dr. William Croft. Give the King thy jndgments, O God (C)Tr. C. T. 2 B.		
CHANTS.		
Eighteen Single and Six Double.		
APPENDIX.		
Verse Anthem. (For Two Voices.)		
Dr. John Blow. Lord, how are they increased that trouble me (A minor)2 Te	nors	
OTHER DISTRICT TO THE STATE OF		
CECIL, RICHARD. I will arise and go to my Father. Anthem, by Richard Cecil, arranged for one or four voices by John Bishop	1	0
CRATHERN, W. I was glad. Anthem for three voices, with Organ or Pianoforte Accompaniment, by W. Crathern	1	0
HANDEL, GEORGE FREDERICK. The Dettingen Te Deum, composed in		
the year 1743, by G. F. Handel. The Vocal Parts given complete, with an Accompaniment for Pianoforte or Organ, by John Bishop, of Cheltenham	12	0
HANDEL, G. F. The Utrecht Te Deum, composed in 1713, by G. F. Handel. The Vocal Parts given complete, with an Accompaniment for Pianoforte or Organ, by John Bishop, of Cheltenham.	12	0
HANDEL, G. F. The Utrecht Jubilate, composed in 1731, by G. F. Handel, with the Introductory Symphony printed in Dr. Arnold's Score. The Vocal Parts given complete, with an Accompaniment for Pianoforte or Organ, by John Bishop, of Cheltenham	10	6
HANDEL, G. F. Anthems for the Coronation of King George II, composed in the year 1727, by G. F. Handel. The Vocal Parts given complete, with an Accompaniment for Pianoforte or Organ	12	0

	ANTHEMS AND SERVICES.		7
HANDEL G. F.	Anthem for the Funeral of Queen Caroline, composed in the year 1737, by G. F. Handel. The Vocal parts given complete, with an Accompaniment for Pianoforte or Organ	10	0
HANDEL, &c.	Beauties of Sacred Harmony, containing a series of Vocal and Instrumental Music selected from the sublime compositions of Corelli, Handel, Haydn, Mozart, Beethoven, and other eminent composers; arranged for voices with an Accompaniment for the Organ or Pianoforte, designed for the use of families by J. Coggins and J. C. Nightingale; music folio, six bookseach Or complete in one volume.	3 15	6 0
HANDEL, MEND	ELSSOHN, &c. Nine short Anthems from the works of Handel, Mendelssohn, and others, adapted to the introductory Sentences of the Common Prayer; together with a Selection of Sanctuses, Responses, and single and double Chants, by Tallis, Orlando and Christopher Gibbons, Farrant, White, Rogers, Dupuis, and others; arranged for one or four voices, with an Accompaniment for the Organ, Harmonium, or Pianoforte, and intended for the use of the United Church of England and Ireland, by Joseph Warren. Crown 8vo	1	G
HATHERLY, S.	To Deum and Jubilate for four voices. Full with verses, by S. Hatherly; approved and adopted by the most eminent Cathedralists. Music folio	7	0
HORSLEY, WILI	DAM, Mus. Bac. A Unison Service, consisting of the Te Deum, Jubilate, Kyric Eleison, Magnificat, and Nunc dimittis; to which is added a series of Single and Double Chants, composed and arranged, with an Accompaniment for the Organ or Pianoforte, by William Horsley, Mus. Bac. Oxon. Organist of the Asylum Chapel and of the Charter-House. Price.	5	0
HORSLEY, WILI	LIAM, Mus. Bac. Single or Double Chants, composed and arranged, with an Accompaniment for the Pianoforte or Organ (contained in the work last mentioned). Price, separately	1	0
sponses and eollected fron Peterstow, H	LIGHT	11	6
	PROSPECTUS.		
1847, contain that could be parts of the (	ne first volume of this work, published by subscription in led all the various editions of Tallis's Responses and Litany discovered, and the harmonized arrangements of the same Choral Service by several ancient Composers.		
(/701	3 3 3 3 3 3 3 3 3 4 4 3 4 4 3 4 4 3 4 4 3 4		

"The second volume, besides some additional ancient harmonics of the same nature, adapted to present use, will contain those documents which were announced in the Prospectus to the first volume; viz.

"1. The traditional uses of our Cathedrals and Colleges, both unisonal and harmonized. These, though for the most part retaining the general features of the ancient Chant, have several characteristic peculiarities, both in their harmonics and melodies, which, unless embodied in a permanent record, seem, in this age of change and novelty, in danger of being lost to the memory of churchmen.

### JEBB'S Choral Responses and Litanies-continued.

A reprint of all the musical notation and choral notices contained in the Manuals of Marbeck, Lowe, Playford, and Clifford.

"Besides these, will be inserted the first English Litany, noted; a few specimens of the most ancient English Psalm-Chants; and fragments of ancient Responses, &c collected from rare books and MSS.

"The harmonized Compositions will be in full score, and in the proper cliffs. The treble, however (in those services which are adapted for use), will be substituted for the medius or cantus eliff: and in the reprint of Marbeek, the five-lined staff for the ancient one of four lines.

"In the Preface, the authorities for the several documents will be stated, and some observations made upon the rationale of these parts of the Service.

"It is, perhaps, not unreasonable to hope that those who cherish feelings of veneration and attachment for the Church of England, may take an interest in a collection of memorials which so largely illustrate her Liturgy.

"Subscriptions received by the Publishers, Messrs. Robert Cocks & Co. (Publishers to the Queen), New Burlington Street, London.

CONTENTS OF VOL. II. "OF THE CHORAL RESPONSES AND LITANIES."

ONTENTS OF Vol. 11. "OF THE CHORAL RESPONSES AND LITAMES. Ancient Services adapted to present use; viz. 1, Tallis's Preces, Chants, and Responses, from Barnard's Church Music. 2. Tallis's Preces and Litany, from a MS. at Peterhouse, Cambridge. 3, 4, Byrd's first and second Preces and Chants from Barnard. 5. Gibbon's Preces in F, from the Peterhouse MSS. 6. Hooper's Preces. 7. Tomkins's Preces, Chauts, Responses, and two Litanies. 8. Holmes's Preces, Chauts, Responses, and two Litanies. 8. Holmes's Preces, Chauts, and Responses, 9, 10, Two Sets of Preces, by Amner. 11. Palmer's Preces. 12 Ayleward's Preces, Responses, and Litany. 13. Smithe's Responses. 14. Batten's Litany. 15. Molle's Litany and Suffrages, 16. Ransey's Litany. 17, 18, 19, 20. Four Latin Litanies and Suffrages; viz. Molle's, Loosemore's, in D minor and G minor, and Ramsey's. minor, and Ramsey's.

Ordinary Services of various Choirs; viz. the unisoual uses of—1, Salisbury—2, Lincoln—3, Wiuchester—4, Durham—5, Worcester—6, New College. The harmonized uses of—1, Canterbury—2, York—3, Dublin—4, St. Paul's—5, Durham Communiou Responses—6, Bristol—7, Exeter—8, Hereford—9, Lich— H

field-10, Norwich.

neud—10, Norwich.
 111. Old English Chants; viz. 1, Morley's eight Gregorian Chants—2, Four Chants from a MS. of Dean Aldrich—3, Specimens of Gibbons's Psalmody.
 11v. Obsolete Documents; viz. 1, The first English Litany, 1544—2, Merbecke's Book of Common Prayer, noted—3, Lowe's Directicus—4, Extracts from Playford's Introduction to the Skill of Music—5. Extracts from Clifford's Divine Services and Anthems.

Fragments, chiefly of single parts, from old MS. Part and Organ Books, of Preces, Psalms and Litanies, by Tallis, Portman, Parsons, Batten, Pickhaver,

Lugg, Child, and Reading,

It may perhaps be as well to state that the Preface will contain observations on the authority for Chanting the Prayers and Responses, as the sources of the English plain Chant, and as the ancient Method of Choral Psalmody after the Reformation; with a full Account of each Piece in the Volume. Also, that the Volume contains about 30 Single Chants, almost unknown, even to Church Musicians.

#### KENT, JAMES.

Morning and Evening Services of the Church of England, and the celebrated Anthems composed by James Kent; arranged, with an Accompaniment for the Organ or Pianoforte, by E. Sturges, Organist of the Foundling Hospital. Large music folio, two Vols. hound in cloth.....each £1

#### CONTENTS OF THE FIRST VOLUME.

Morning Service: Te Deum and Jubilate-Evening Service: Cantate Domino and Deus misereatur.

ANTHEMS.

Hear my prayer, O God. Sing, O heavens. My song shall be of mercy and judgment. Who is this that cometh from Edom?

Blessed be Thou, Lord God. The Lord is my Shepherd. When the Son of Man. In the beginning was the Word. 0

#### KENT'S Morning and Evening Services-continued.

### CONTENTS OF THE SECOND VOLUME.

ANTHEMS.

Lord how are they increased. Give the Lord the honour due. Hearken unto this, O man. Why do the Heathen so furiously rage to-gether? Rejoice in the Lord. The Lord liath prepared. Lord, what love have I unto Thy Law? Unto Theo, O God. All Thy works praise Thee. My soul truly waiteth. O Lord our Governor, It is a good thing to give thanks, Lord, who shall dwell. This edition of the Services and Anthems of Kent (one of the most generally admired of church writers) will be found to possess many points of excellence peculiarly its own. The score is accurately rendered, the accompaniments arranged with judgment, and lying well under the hands; while recent revision has purged it from those errors which are apt to escape editorial vigilance. The volumes are handsomely brought out, and form an indispensable addition to the library of the organist and the amateur. KING, WILLIAM, Mus. Bac. Morning and Evening Services, in B flat; consisting of Te Deum, Jubilate, Litany, Kyrie eleison, Doxology, Nicene Creed, Sanetus, Magnificat, and Nunc dimittis, for four voices, edited, with an Accompaniment for the Organ, by John Bishop.... KING, CHARLES, Mus. Bac. Cathedral and Church Services, composed by Charles King (now for the first time published, from MSS. in the possession of the Editor), arranged, with an Accompaniment for the Organ or Pianoforte, by Joseph Warren. Service in D.—No. 1. Te Deum, Jubilate..... - 2. Magnificat, Nune dimittis..... Λ Service in A.—No. 3. Te Deum, Jubilate — 4. Magnificat, Nune dimittis..... — 5. Gloria in excelsis..... 0 Service in F.—No. 6. Te Deum and Jubilate...... 0 - 7. Kyrie eleison and Nicene Creed... - 8. Magnificat and Nune dimittis... MARBECK, JOHN. "A Boke of Common Praier, noted for voices in unison;" arranged for modern use with an ad-libitum Organ Bass Accompaniment by Robert Janes, Organist of Ely Cathedral; engraved plates, music 4to.... 5 0 The Te Deum and Jubilate; for voices in unison, or for four voices (extracted from Marbeck's "Boke of Common Praier"), arranged for modern use, with an Accompaniment for the Organ or Pianoforte, by Robert Janes, PALESTRINA, VITTORIA, &c. Anthems and Services for Three, Four, and Five Voices; with an Accompaniment for the Organ or Pianoforte, selected chiefly from the Works of Standard Composers. First Series, demy 4to; pp. 240, bound in cloth, gilt lettered ..... 12 CONTENTS--FIRST SERIES. Christ became obedient unto Death......Four ANERIO. If any man will come after me......Four Voices. ALLEGRI. Deliver us, O Lord, our God. Four Blessing and Glory. Five I beheld; and lo, a great multitude. Five Voices. BATTEN. Voices. BIRD. .....Four CASCIOLINI. Kyrie.... Praise the Lord, 0 my soul......Four Voices. CREYGHTON. I will arise..... Four Voices. CROFT. Voices. Voices. Di Lasso.

The Lord is risen......Four

## PALESTRINA, &c. Anthems and Services—continued.

	•			
	DYOB.	In thee, O Lord, have I trus	stedFive	Voices.
	E	O God, thou art my God	Five	Voices.
	FARRANT.	Uall to remembrance	Four	Voices.
		Unto thee () Lord	Four Four Three	Voices.
	FESTA.	Thy way, O God, is holy	Three	Voices.
	GAUNTLETT.	Alleluia	the LifeFour	Voices.
		I am the Resurrection and	the Life Four	Voices.
	GIBBONS.	Almighty and everlasting	God Four	Voices.
	MORALES.	Unto us a Child is born	Three	Voices.
	MORLEY.	O give thanks	Fonr	
	Mozart. Nanino.	O taste and see	Four	Voices.
	NANINO.	This is the day which the	Four Four	Voices.
	OKELAND.	Projecthe Lord O my soul	Lord hath madeFive Four	Voices.
	PALESTRINA.	Blessed are all they	Four Three Is inspire Four Five ther Four Four Four	Voices.
		Come. Holy Ghost, our son	ls inspireFour	Voices.
		Come ve, and let us go up	Five	Voices.
		Come, ye blessed of my Fat	herFour	Voices.
		Communion Service	Four	Voices.
		Kyrie. Niceue Creed.	Sanctus. Gloria in excelsis.	
		How beautiful are the feet	Four	Voices.
		If God be for us	Four	Voices.
		is it nothing to von	Fonr	Voices.
		Will always give thanks	unto the Lord - Five	Voices.
		Kyrie	Four	Voices.
		Like as the hart	Four Four	Voices.
		Non nobis. Domine	. Five	Voices.
		O Praise the Lord	ls of hisFive	Voices. Voices.
		O Lamb of God	is of hisFive	Voices.
		O. Lamb of God	Five	Voices.
		O. Saviour of the World	Five	Voices.
		Sing we merrily unto God.	Five	Voices.
		These are they which came	Four	Voices.
	PURCELL.	O God, Thou art my God	Four	Voices.
	ROGERS.	Teach me, O Lord	Four	Voices.
	TALLIS.	Hear my prayer	Four	Voices.
		Hear the voice and prayer.	Four	Voices.
	VITTORIA.	Pohold I good my massage	Four Four	Voices.
	VIIIORIA.	Rehold the handmaid of th	ie LordFour	Voices.
		Behold the Lamb of God	Four	Voices.
		Break forth juto joy	Four	Voices.
		How beautiful upon the m	ountainsFour	Voices.
		How beautiful upon the m	ountains Three	Voices.
		I will sprinkle clean water	rFour	Voices.
		Now it is high time	Four Four Four heatheu Four	Voices.
		O, clap your nauds	hooth on Four	Voices.
		o, praise the Lord, an ye	nearneurour	voices.
PALES!	TRINA, &c.	Anthems and Service for the Organ or Pion	ces for Church Choirs, w	rith an
W	orks of Pak	etrina Sound Sorios	Domy 4to no 108 ho	und in
elo	th, gilt lette	ered	oforte; selected ehiefly fro Demy 4to. pp. 108, bo	8
		CONTENTS—SE	COND SERIES.	
		ANTHE	MS.	
	Dermaner	Dlow the turnest in Zier	Time	Moines
	PALESTRINA.	Drop down, ye heavens	Eight Voices. (Two Eight Voices. (Two Five Five Five Five Five Six Five Five	Voices.
		Arise, shine	Eight Voices. (Two	Choirs).
		This is the day		Voices.
		O give thanks Part 9	Five	Voices.
		Lift up your heads	Six	Voices.
		Thou art gone up on high	Five	Voices.
		Sing unto God. Part 2	Eight Voices. (Two	Voices.
	WHITE.	O Praise God	Eight Voices. (Two	Choirs).

SERVICES.

DE WAERT, Te Deum. | Nanino. Nunc Dimittis.

LUCA MARENZIO. Magnificat. | PALESTRINA. Jubilato.

0

CONTENTS.  Part 1. Dixit Dominus (Psalm) for 24 VoicesO. Benevoli.  — 2. Glorix in excelsis (Chorns) for 9 VoicesA. Peyernage. Duo Seraphiu (Motett) for 8 VoicesA. Gallus. Kyrie and Gloria (from a Mass) for 4 Voices, A. Scarlatti.	6 0
ROBERT COCKS AND CO.'s Chorister's Hand Book; a Collection of Fifty- two short and easy Anthems for Two, Three, and Four Voices, with an ad-libitum Accompaniment for the Organ, Harmonium, or Pianoforte; edited by Joseph Warren. 52 Nos. each 2d. or 1 Vol. bound in cloth	8 0
CONTENTS OF THE NUMBERS.	
1. My song shall be of mercy	COFT. CCELL. BENE. BENE. BENE. BREN. BENE. BREN. BENE. CONT. CROFT. CROFT. CROFT. CROFT. CROFT.
* Those marked thus (*) were performed at the Funeral of His late Grace the	
Duke of Wellington.	
ROBERT COCKS AND CO.'S Chorister's Handbook. New Series. In course of issue, in Nos	0 2 0 1
TALLIS, THOMAS. The Order of the Daily Service of the United Church of England and Ireland, as arranged for use in Quires and Places where they sing, by Thomas Tallis, Gentleman of the Chapel Royal, in the reigns of Edward VI and Queen Mary, and Organist and Gentleman of the Chapel in the time of Queen Elizabeth; newly edited by John Bishop, of Cheltenham, with a Preface and a Biographical Notice of Tallis, handsomely printed in red and black. Dedicated by permission to the Lord Bishop of Gloucester and	
Bristol. Post 8vo, fine paper  The Morning, Evening, and Communion Services by Thomas Tallis, in separate parts; edited by John Bishop. Treble,	4 0
Alto, Tenor, and Bass partseach Organ parts	$\begin{array}{ccc} 2 & 0 \\ 3 & 0 \end{array}$
CONTENTS.  Te Deum—Benedictus—Kyrie Eleison—Nicene Creed—Sanctus— Gloria in excelsis—Magnificat—Nunc dimittis.	

- WARREN, JOSEPH. The Order for Morning and Evening Prayer daily throughout the Year, with the Sentences, Exhortation, Confession, Absolution, Lord's Prayer, Apostles' Creed, Collects, and Prayers; also the Preees, Reponses, Venite, and Litany, for one or four Voices, with an Accompaniment (ad libitum) for Organ or Pianoforte, by Joseph Warren. Demy 4to......
- WHITCOMBE, A. A Service for the use of the Established Church, consisting of the Jubilate Deo, Kyrie Eleison, Magnificat, and Nune dimittis, arranged, with an Accompaniment for the Organ or Pianoforte, by A. Whitcombe. Price.... 3

# CHANTS, &c.

BISHOP, JOHN. A Collection of Ninety-three Chants for the use of the United Church of England and Ireland, compiled by John Bishop, of Cheltenham	1	4
CLARE, EDWARD. A Simple Guide for Chanting, for the use of Amateurs, followed by the Complete Service for the Church, and twenty Psalms from the Psalter, carefully pointed and adapted to the Chants in general use, by Edward Clare	3	0
One hundred and thirty-eight Single and Double Chants, comprising thirty Gregorian and one hundred and eight Cathedral and Parochial Chants, of the most approved Masters, ancient and modern; the whole arranged for the Organ or Pianoforte by Edward Clare	4	0
HATHERLY, S. The Canticles, divided according to true principles, and adapted to the form of Chant commonly called Anglican; together with specimens of the above Chants, composed in the Gregorian modes or tones by S. Hatherly; second edition, small 8vo	0	6
WARREN, JOSEPH. The Order for Morning and Evening Prayer daily throughout the year, for one or four voices, with an ad lib. Aecompaniment for the Organ or Pianoforte, by Joseph Warren (being an Appendix to the Chanter's Hand-guide),	1	0
The Hymns and Canticles of the United Churches of England and Ireland, newly pointed for Chanting, by Joseph Warren; second edition, small 8vo	0	6
The Chanter's Hand-guide, for the use of Churches, Chapels, Training Colleges, Schools, &c. eontaining the Psalter or Psalms of David, the Canticles, &c. pointed for Chanting, with 373 Cathedral Chants, very many of which (written by the most eminent Composers and Organists of this country expressly for this work) are now first published; edited by Joseph Warren. Demy 4to. pp. 140, bound in cloth.	5	0
The present Work was projected with a view of supplying a uniform book for general use, containing the Psalter or		

#### WARREN's Chanter's Hand-guide-continued.

Psalms of David, the Cantieles, and other Services, pointed for Chanting; with a Selection of Single and Double Chants, so arranged that both Chant and Words may be Cantieles, &c. are so printed that, whether for morning or evening prayer (with a trifling exception, wholly ununavoidable), there shall be no turning over the page for the remainder of the words .- See Preface to the Work.

Hints on Chanting—Venite, exultemus Domino—Te Deum laudamus—
Jubilate Deo — Benedietus — Magnificat — Cantate Domino—Nunc
dimittis—Deus misercatur—Benedicite, omnia opera Domini—The
Creed of St. Athanasius—Tho hundred and fifty Psalms of David—
Easter Day—Gunpowder Treason—King Charles the Martyr—The
Restoration of the Royal Family — The Queen's Accession — The
Burial Service—Three hundred and seventy-three Single and Double Chants by ancient and modern Authors.

WARREN, JOSEPH. Parochial Chant-book; a Selection of one hundred Chants, chiefly by the Old Masters, to which is added an Appendix containing fifteen Chants written expressly for this Work; the whole newly adapted to the Daily Psalms, and arranged for four Voices, or for the Organ or Pianoforte, by Joseph Warren... One hundred and forty - four Cathedral Chants. Six 
 books
 .each
 2

 Or in one vol. complete
 .12
 One hundred and forty - four Gregorian Chants. Six 
 books
 each
 2

 Or in one vol. complete
 12

### ORGAN MUSIC.

ADAMS, THOMAS. Varied Theme and Fugue	2	6
Six Fugues	6	0
BACH, JOHANN SEBASTIAN. Compositions for the Organ, with Pedal Obligato, edited from the critically correct version of Friedrich Conrad Griepenkerl and Ferdinand Roitzsch,		
by John Bishop of Cheltenham. In Volumeseach	15	0
Organ Compositions on Choräle or Psalm Tunes; edited from the Original MSS. by Felix Mendelssohn Bartholdy.		
In Six Bookseach	8	0
Forty-eight Preludes and Forty-eight Fugues, by Johann Sebastian Bach; edited by C. Czerny£1	11	6
The Art of Fugue, by Johann Sebastian Bach, edited by		
C. Czerny£1	1	0
Pianoforte Works, by Johann Sebastian Baeh ; edited by Carl Czerny. In Volumeseaeh	15	0

14	ORGAN MUSIC.		
	A Selection from Sebastian Bach's Works for the Pianoforte, prefaced with an Essay on the proper Study and Execution of these and similar Works, by Dr. Adolf Marx; translated by A. II. Wehrhan. Music folio	8	0
BECKER, CA	RL FERDINAND. Twenty-four Preludes for the Organ, composed as Exercises, and for use in Divine Worship, by C. F. Becker, Op. 15.	3	0
BEETHOVEN	. See Viner.		
BEST, W. T.	Modern School for the Organ, in Four Parts, by W. T. Best; price complete £1  Or the Parts separately, as follows:		6
	- Modern School for the Organ. Part I. Price	10	6
	CONTENTS.  Elementary Instructions in the Art of Organ Playing—General Description of an Organ—Music for the Organ—Manner of Playing the Organ—The Registers (with their classification)—The Art of Registering—Scale Exercises in all the major and minor keys.		
	- Modern School for the Organ. Part II	12	0
	CONTENTS.  Remarks on the development of a pure School of Organ-playing in Englaud—On the Compass of the Pedal-board and the notation in use—Twelve Exercises for the alternate use of the Right and Left Foot—Six Exercises for the alternate use of the Point and Heel of each Foot—The Major and Minor Scales—The Chromatic Scale—Six Exercises for the practice of passages of Special Difficulty, and to illustrate the Mixed System of using the Pedal.		
	Modern School for the Organ. Part III	7	0
	Eight Trios for Two Manuals and Pedal. Six Chorales for one, two, and three Claviers. Psalm Ivii for the Congregation and Organ. Choral Hymn for I'wo Choirs with Organ Accompaniment.  Modern School for the Organ. Part IV.	10	6
	CONTENTS. Twenty-four Studies—Fuga in F major—" God Save the Queen" with Variations and Finale.		
BEST, W. T.	by W. T. Best. In Books, each 3s.; or, the First Volume, containing 12 Books complete, oblong folio, bound		
	in eloth		0
	To Subscribers £1. 1s. To Non-subscribers	36	0
	Six Adagios for the Organ, composed by W. T. Best	5	0
	An Andante for the Organ, composed by W. T. Best  The Organ Student, containing Arrangements from the Works of eminent Composers, for the Organ, with pedal obbligate, by W. T. Best. In two volumes, oblong small folio, bound	1	6
BISHOP, JO	adapted as Solos for the Organ with Pedal Obbligato, by John Bishop.	21	0
	Haydn—With verdure clad	2	6
	——Now vanish before the holy beams	3	0
	Spohr — Though all thy friends (Calvary)	2	6
	- Twelve Choruses of Handel. (See Handel, G. F.)		

ORGAN MUSIC.	]	5
BRODERIP, ROBERT. The Organist's Journal, containing a Selection of Pioces for the Organ, suitable for the Service of the Church, extracted from the Works of the following great Masters: Pergolesi, Corelli, Handel, Avison, Stanley, Boyce, Green, Keeble, Haydn, Mozart, &c. &c. with some Pieces composed by the editor, Robert Broderip£1	1	0
BRYAN, C. A second Series of Effusions for the Organ, containing Fugues with Introductions, Swell, Diapason, and other Pieces, by C. Bryan; 6 Books, each	3	0
One Hundred and Fifty Short Interludes for Psalm Tunes, including Fifty for the Morning or Evening Hymn	6	0
CLARE, EDWARD. Prelude and Fugue for the Organ, with Pedal Obbligato	4	0
CORELLI, ARCANGELO. The Twelve Celebrated Concertos, adapted for the Organ by Thomas Billington	10 10	6
	_	0
CZERNY, CARL. Six Preludes and Fugues.  Preludio e Fuga for Pedal Organs	5 3	0
Twelve Introductory or Middle Voluntaries	5	0
Twenty Short Voluntaries	7	0
HANDEL, G. F. Twelve Choruses, arranged for Pedal Organs by John Bishop, of Cheltenham, each	2	6
A Collection of the Choruses of Handel, selected from all his Oratorios and Anthems, arranged for the Organ by W.  T. Best; extra size folio, oblong; publishing by subscription.  To Subscribers £1 1s.; to Non-subscribers.  Corfe's Beauties of Handel; consisting of upwards of 150	36	0
of the favorite Solos, Duets, and Trios, from the Vocal Works of Handel. 3 vols. oblong folio, each		0
Twelve Choruses for Pedal Organs, by John Bishop each	2	6
HERZOG, J. G. The Practical Organist; a New and Complete Collection of Organ Pieces of various kinds, forming a manual for improvement and for Divine Service, with Original Contributions from the most celebrated and esteemed Organ Composers, edited by J. G. Herzog, Organist of the Parish Church of München. In Eighteen Bookseach	3	6
JACOB, B. Handel's Cuckoo and Nightingale Concerto, with a new Pastoral and a Fugue, by J. S. Bach	3	0
LIEBE, LOUIS. Twenty-five Original Voluntaries for the Organ or Harmonium, with pedal, ad lib. intended for use in Divine Service, by Louis Liebe.	6	0
MENDELSSOHN, FELIX BARTHOLDY. J. S. Bach's Organ Compositions on Chorale or Psalm Tunes. (See Johann Sebastian Bach.)		
Six Grand Sonatas for the Organ, composed and dedicated to Dr. F. S. Schlemmer by Felix Mendelssohn Bartholdy. In One Volume £1  MOZART, W. A. Grand Organ Fugue in G minor. The only one composed	11	6
for the Organ by Mozart, with an Introduction by John Thomas Cooper, F.R.S.A. Organist of St. Paul's Church, Islington.	3	0
A Selection from the Requiem, by W. Russell	3	0
NEUKOMM, the Chevalier. Twenty-five Organ Voluntaries. Nos. 1 & 2, ea.	4	0

NIGHTINGALE, J. C. Mass Voluntaries; a Selection of Movements from the Masses of Haydn, Mozart, Beethoven, Hummel, Pergolesi, &c. arranged as Voluntaries for the Established Church Service and for private usc, by J. C. Nightingale.  In Eighteen Bookseach	7	6
Or in Two Vols. bound in clotheach £1	11	6
NIXON, HENRY G. Organ Themes; a Series of Subjects from the Works		
of Arne, Beethoven, Boyce, Handel, Haydn, Kent, Mar-		
cello, Mozart, Pergolesi, &c. arranged as Soft Voluntaries		
by Henry G. Nixon. In Six Bookseach	7	6
Or in One Vol. bound in cloth £1	16	0
Select Subjects; being a continuation of Organ Themes, and intended as Introductory and Concluding Voluntaries for the use of the Established Church, containing favourite		
Movements from the celebrated Masters, and a Variety of		
Original Pieces by Modern Authors. The whole selected		
and arranged for the Organ by Henry G. Nixon. In Six		
Bookseach	7	6
On in One Vol. bound in cloth£1	10	0
The Organist's Compendium; a Selection of Compositions		
for the Organ, by the most esteemed Composers, arranged by Henry G. Nixon. In 24 Numbers each	1	6
by Henry G. Nixon. In 24 Numbers each Or in One Vol. bound in cloth		0
	10	
RINCK, DR. CHRISTIAN HEINRICH. First Three Months at the Organ,		
expressly composed as an easy Guide to playing on that noble instrument by Christian Heinrich Rinck; new and		
enlarged edition, with an introduction, giving a practical		
explanation of the Organ, description of the Stops, &c.		
&c. by John Bishop, of Cheltenham	6	0
Introductory Practice, One Hundred and Twenty Exercises,		
&c. in all the Keys, intended as a Preliminary Study to		
the Author's Organ School. Op. 82	12	0
Organ Works; new and complete edition, edited by John Bishop. In Bookseach 3s. 4s. and	5	0
Twenty-four Grand Pieces, Op. 120. Four Bookseach	6	0
Devotional Recreations, Op. 116. In six Books cach	2	6
Or complete in one vol	$\overline{12}$	0
The Celebrated Practical School, for the Organ, by C. H. Rinck; translated from the Original by the late Samuel		
Wesley: Tenth edition carefully revised by John Bishop,		
of Cheltenham. Complete in six Books, Oblong-folio, each	7	6
Or in one vol. bound in cloth£1	16	0
CONTENTS.		
Book 1. Twelve short and easy Compositions in two parts—Twelve short and easy Compositions in three parts—Twelve short and easy Compositions in four parts (as preparatory exercises)—and Thirty Preludes in all the Keys.		
Book 2. Pedal Exercises and twelve Chorales with Variations.		
Book 3. Fifteen Volnntaries with Changes from the Great Organ to the Choir		
Organ.  Book 4. Fifteen Voluntaries with Fngues and Alterations of Choir and Great Organ.		
Book 5. Various Preludes and Fngnes in the Striet Style; and a Concerto, with Solos on the Flute Stop; and a Theme with Variations in the		
Free Style.  Book 6. Various Preludes and Fugues in the Strict Style, and a Grand Funtacion in the Processive for advanced performers		
Fantasia in the Free Style, for advanced performers.	10	6
RUSSELL, W. Twelve Voluntaries, in two books, each		
A Selection from Mozart's Requiem	3	0
SPOHR. See Viner.		

ORGAN MUSIC.	]	7
VINER, W. L. The Organist's Library, a selection of choice and beautifut Productions by the most esteemed Foreign and English Composers, ancient and modern, arranged for the Organ, with or without the Pedals, and calculated as Voluntaries for Public Worship. In Six Nos. each 2s. 6d. or in One Vol. complete.	12	0
Gems à la Spohr. A Selection of Slow Movements, from the Works of Louis Spohr, arranged for the Organ by W. L. Viner. Nos. 1 and 2, each	3	0
Gems à la Becthoven. A Selection of Slow Movements, from the Works of Beethoven, arranged for the Organ, by W. L. Viner. No. 1.	4	0
The Organist's Journal; two numbers, each  No. 1.—The Benedictus and Hosanna, from Mozart's Requiem, arranged for the Organ, &c.  No. 2.—Gloria in excelsis, Pergolesi's eelebrated Chorns,	1	6
arranged for the Organ, &c.  WARREN, JOSEPH. One Hundred Interludes	4	0
Easy Movements for the Organ	3	0
Beauties for the Organ; a Collection of Pieces adapted as Introductory, Middle, and Concluding Voluntaries. From the Works of Handel, Sebastian Bach, Haydn, Mozart, Beethoven, Weber, Cherubini, Graun, and other great Masters of the Italian, German, and English Schools. The whole selected and arranged for the Organ by Joseph Warren In Twelve Bookseach Or in One Vol. bound in cloth£1	2 1	6 0
Sacred Voluntaries; a Collection of Pieces adapted for the Introductory, Middle, and Concluding Parts of Divine Service, the whole selected from the Works of the Great Masters, and arranged for the Organ, by Joseph Warren. In Twelve Books	2 1	6
Soft Movements; selected from the Works of Handel, J. S. Bach, Haydn, Mozart, Beethoven, C. M. von Weber, Spohr, Graun, Gluck, and other eminent Composers, for the use of the Soft Stops on the Organ; the whole arranged and in part composed by Joseph Warren.		C
In Twelve Books	2	6 0
Bookseach	3	0
WESLEY, SAMUEL. Twenty-four Interludes, or short Voluntaries, for the Organ, in twelve different keys, major and minor; com-	8	0
posed by Samuel Wesley	4	0
WESLEY, SAMUEL SEBASTIAN. Psalms and Hynns for Pedal Organs.  Second edition	10	6
WILSON. Twelve Movements	4	0

# ORGAN DUETS.

of St. Ann's Psalm Tune 4		0
NIXON, H. G. The marv'lous work—Haydn		0
The heavens are telling—Haydn		0
The arm of the Lord—Haydn 4		0
Fixed in his everlasting seat—Handel		6 0
Hallelujah Chorus—Handel		6
For unto us a Child is born—Handel 3		0
The Lord shall reign—Handel		6
He gave them hailstones—Handel		$\frac{6}{6}$
From the eenser—Handel 3		0
Hallelujah to the Father—Beethoven 3		0
METRICAL PSALMS, HYMNS, &c.		
BACH, JOHANN SEBASTIAN. Thirty Hymns. A Collection of J. S.  Bach's eelebrated Chorales, adapted to select portions of Hymns from various Authors, with an Accompaniment for		
Organ or Pianoforte, edited by Joseph Warren 3		0
BRYAN, C. Psalms and Hymns		6
CLARE, EDWARD. Psalmody: A Collection of the most approved Psalms,		
Hymns, Single and Double Chants, &c. &c. arranged for the Voice and Organ or Pianoforte; adapted to appro- priate Versions by Edward Clare. In twelve Parts,		
each 3s. or Four Volumes, each 9		0
CLARK, THOMAS. Jubal's Lyre; Fifty Psalm and Hymn Tunes		0
Clare 5		0
KELLY. Hymns from Scripture, 2 books, each 3		0
RINCK, CHRISTIAN HEINRICH. A Selection of Psalms and Hymns, as used in the Established Church and Chapels, arranged with an Accompaniment for the Organ or Pianoforte,		
with APPROPRIATE PRELUDES and INTERLUDES, composed by Christian Heinrich Rinck, Op. 119. In Six		
Books, each 4s., or complete in One Volume, bound in cloth, gilt lettered	,	0
VINER, W. L. One Hundred Psalms and Hymns in Score for one Voice only, or two, three, or four voices; in one volume, bound in cloth		0
WARREN, JOSEPH. Robert Coeks and Co.'s Collection of 312 Psalm and		U
Hymn Tunes (including many composed expressly for this Work), in Score, for One, Two, or Four Voices, and an Accompaniment for Organ, Harmonium, or Pianoforte, edited by Joseph Warren, in 48 Nos. 2d. each, or in Four Volumes, Cloth Boards, 2s. each, or in One Volume.		
half-bound		0

# ORATORIOS, SERVICES, MASSES, &c.

# SUPERB MODERN EDITIONS, BY JOHN BISHOP, OF CHELTENHAM.

Parademidiah want		
MESSIAH, by G. F. Handel—Folio Edition—from Mozart's Score. The Vocal Score complete, with Accompaniment for the Organ or Pianoforte; music folio, pp. 182, bound in cloth, gilt lettered	15	0
MESSIAH, by G. F. Handel—Library Edition, in Imperial Octavo—from Mozart's Score. The Vocal Score complete with Accompaniment for the Organ or Pianoforte, with Appendix of 57 pages (containing different versions), and a complete book of the words prefixed; imp. 8vo. pp. 269, handsompted		
bound in cloth, gilt lettered	6	6
Note.—These are the only published editions which contain the effects of Mozart's celebrated Accompaniments.	0	Ü
THE CREATION, by Joseph HAYDN—Folio Edition—Vocal Score with Accompaniment for Organ or Pianoforte; music folio, pp. 201, bound in cloth, gilt lettered.	15	0
THE CREATION, by JOSEPH HAYDN—Library Edition, in Imperial Octave—Vocal Score with Accompaniment for Organ or Pianoforte, with a book of the words; imp. 8vo. pp. 193, bound in cloth, gilt lettered	4	6
THE CREATION, by Joseph Haydn—The People's Edition—Vocal Score with Accompaniment for Organ or Pianoforte, with book of words prefixed; imp. 8vo. pp. 181, in limp cloth (form-		
ing a Handbook for the Oratorios), gilt  THE SEASONS, by JOSEPH HAYDN—Folio Edition—Vocal Score complete with Accompaniment for the Pianoforte, by Muzio Clementi; music folio, pp. 192, bound in cloth, gilt lettered.	3 21	0
ISRAEL IN EGYPT, by G. F. HANDEL—Folio Edition—Vocal Score with	- 1	0
Accompaniment for Organ or Pianoforte; music folio, pp. 161, bound in cloth, gilt lettered	15	0
ISRAEL IN EGYPT, by G. F. Handel—Library Edition, in Imperial Octavo—Vocal Score with Accompaniment for Organ or Pianoforte, with book of words prefixed; imp. 8vo. pp.		
173, bound in cloth, gilt lettered	4	6
Aecompaniment for Organ or Pianoforte; music folio, pp. 189, bound in cloth, gilt lettered  JUDAS MACCABÆUS, by G. F. Handel—Library Edition, in Imperial	15	0
Octavo—Vocal Score with Accompaniment for Organ or Pianoforte, with book of words prefixed; imp. 8vo. pp. 212, bound in cloth, gilt	4	6
SAMSON, by G. F. Handel; Folio Edition—Vocal Score with Accompaniment for Organ or Pianoforte; music folio, pp. 218, bound in cloth, gilt lettered	15	0
SAMSON, by G. F. Handel (Edition by Dr. John Clarke)—Library Edition, in Royal Octave—Vocal Score with Accompaniment for Organ or Pianoforte, with book of words prefixed; royal		
8vo. pp. 332, bound in eloth	6	0

20 ORATORIOS, SERVICES, MASSES, &c.		
JOSHUA, by G. F. Handel; Folio Edition—Vocal Score with Accompaniment for Organ or Pianoforte; music folio, pp. 172, bound in cloth, gilt lettered	15	0
THE DETTINGEN TE DEUM. by G. F. Handel—Folio Edition—Vocal Score complete, with an Accompaniment for Organ or Pianoforte; stiff covers		0
THE DETTINGEN TE DEUM, by G. F. Handel—Library Edition, in Imperial Octavo—Vocal Parts complete, with an Accompaniment for Organ or Pianoforte; imp. 8vo. pp. 80, stiff covers.	2	6
THE UTRECHT TE DEUM, by G. F. Handel; Folio Edition—the Vocal Score complete, with Accompaniment for Organ or Pianoforte; music folio, pp. 49, stiff covers	12	0
THE UTRECHT JUBILATE, by G. F. HANDEL—Folio Edition; the Vocal Score complete, with an Accompaniment for the Organ or Pianoforte; music folio, pp. 44, stiff covers	10	6
ANTHEMS FOR THE CORONATION OF KING GEORGE II, by G. F. Handel—Folio Edition—the Vocal Score complete, with an Accompaniment for the Organ or Pianoforte; music folio, pp. 81, stiff covers	12	0
ANTHEM FOR THE FUNERAL OF QUEEN CAROLINE, by G. F. Handel—Folio Edition—the Vocal Score complete, with Accompaniment for the Organ or Pianoforte; music folio, pp. 58, stiff covers	10	0
ACIS AND GALATEA, Serenata, by G. F. Handel—Folio Edition—the Vocal Score complete, with Accompaniment for Organ or Pianoforte; music folio, pp. 99, bound in cloth, gilt lettered	12	0
ALEXANDER'S FEAST, by G. F. Handel.—Library Edition, in Imperial Octavo—from Mozart's Score; the Vocal Score complete, with Accompaniment for the Organ or Pianoforte; imp. 8vo. pp. 117, stiff covers	3	0
ZADOK THE PRIEST, by G. F. Handel—Library Edition, in Imperial Octavo—the Vocal Score complete, with Accompaniment for the Organ or Pianoforte; imp. 8vo. pp. 16, stiff eovers	0	6
STABAT MATER, by GIACOMO ROSSINI—Folio Edition—the Vocal Score complete with Accompaniment for Organ or Pianoforte; with the Latin words and also English words adapted from the Scriptures; edited by Joseph Warren, folio, pp. 80, bound in cloth, gilt lettered	12	0
THE MOUNT OF OLIVES, by L. von Beethoven—Folio Edition—the Vocal Score complete with Accompaniment for the Organ or Pianoforte; edited by Joseph Warren, music folio, pp. 75, stiff covers		0
BEETHOVEN'S FIRST SERVICE (first Mass in C)—Library Edition, in Imperial Octavo—with English words by W. Ball, Esc. and the original Latin words; Vocal Score complete, with Accompaniment for Pianoforte; imp. 8vo. pp. 132	3	6
MOZART'S FIRST SERVICE (first Mass in C)—Library Edition, in Imperial Octavo—with English words by W. Ball, Esq. and the original Latin words; Vocal Score complete, with Ac-		
companiment for Pianoforte; imp. 8vo. pp. 82  MOZART'S GRAND REQUIEM (in D minor)—Library Edition, in Imperial Octavo—with English words by W. Ball, Esq. and the	2	6
original Latin words; Vocal Score complete, with Aecompaniment for the Pianoforte; imp. 8vo. pp. 122.	3	6

# MISCELLANEOUS WORKS ON THE ORGAN.

ANDRE, J. Introduction to the use of the Pedals in Organ Playing, by J. André; translated and adapted to English Organs by J. A. Hamilton	3	0
HAMILTON, J. A. Catechism of the Organ, with an Historical Introduction, and a List and Description of the principal Organs in Great Britain, Ireland, Germany, France and Switzerland; the whole revised, corrected, and much enlarged, by Joseph Warren. Third edition, 18mo. pp. 270	4	0
HOPKINS and RIMBAULT. The Organ, its History and Construction: a		
Comprehensive Treatise on the Structure and Capabilities of the Organ, with specifications and suggestive details for instruments of all sizes, intended as a Handbook for the Organist and Amateur, by Edward J. Hopkins, Organist of the Temple Church; preceded by an entirely new History of the Organ, Memoirs of the most eminent Builders of the seventeenth and eighteenth centuries, and other matters of research in connection with the subject, by Edward F. Rimbault, LL.D. Member of the Royal Academy of Music in Stockholm, etc.; royal 8vo. pp.		
700, profusely illustrated, handsomely bound in cloth, gilt.	31	6
scheibler, H. An Essay on the Theory and Practice of Tuning in general, and on Scheibler's Invention of Tuning Pianofortes and Organs by the Metronome in particular; with an Appendix containing Description of Scheibler's Tuning Rings for Organ Pipes, and the String Chronometer; small		
8vo		0
WARREN, JOSEPH. Instructions for the Organ	4	0
A Few Hints to Young Organists	3	0
WORKS ON THE THEORY OF MUSIC.  ALBRECHTSBERGER, JOHANN GEORG. Methods of Harmony, Figured Bass, and Composition, adapted for self-instruction, by Albrechtsberger; translated from the last German edition, as augmented and arranged by his pupil, the Chevalier von Seyfried, with the Remarks of M. Choron; translated from the last Paris edition by Arnold Merrick. Second	3	0
WORKS ON THE THEORY OF MUSIC.  ALBRECHTSBERGER, JOHANN GEORG. Methods of Harmony, Figured Bass, and Composition, adapted for self-instruction, by Albrechtsberger; translated from the last German edition, as augmented and arranged by his pupil, the Chevalier von Seyfried, with the Remarks of M. Choron; translated from the last Paris edition by Arnold Merrick. Second edition, in two vols. 8vo. bound in cloth, lettered£2  CHERUBINI, L. A Course of Counterpoint and Fugue, by L. Cherubini, Member of the French Institute, Director of the Conservatoire of Music in Paris, Officer of the Legion of Honour, &c. translated by J. A. Hamilton, Author of	2	
WORKS ON THE THEORY OF MUSIC.  ALBRECHTSBERGER, JOHANN GEORG. Methods of Harmony, Figured Bass, and Composition, adapted for self-instruction, by Albrechtsberger; translated from the last German edition, as augmented and arranged by his pupil, the Chevalier von Seyfried, with the Remarks of M. Choron; translated from the last Paris edition by Arnold Merrick. Second edition, in two vols. 8vo. bound in cloth, lettered£2  CHERUBINI, L. A Course of Counterpoint and Fugue, by L. Cherubini, Member of the French Institute, Director of the Conservatoire of Music in Paris, Officer of the Legion of Honour, &c. translated by J. A. Hamilton, Author of the Musical Catcehisms, Grammar, Dictionary, &c. Second edition, two vols. half-bound in cloth£1  CLARKE, JAMES. Practical Exercises in Harmony and Thorough-Bass, with copious Examples, by James Clarke. Twenty-four	2 11	0
WORKS ON THE THEORY OF MUSIC.  ALBRECHTSBERGER, JOHANN GEORG. Methods of Harmony, Figured Bass, and Composition, adapted for self-instruction, by Albrechtsberger; translated from the last German edition, as augmented and arranged by his pupil, the Chevalier von Seyfried, with the Remarks of M. Choron; translated from the last Paris edition by Arnold Merrick. Second edition, in two vols. 8vo. bound in cloth, lettered £2  CHERUBINI, L. A Course of Counterpoint and Fugue, by L. Cherubini, Member of the French Institute, Director of the Conservatoire of Music in Paris, Officer of the Legion of Honour, &c. translated by J. A. Hamilton, Author of the Musical Catcehisms, Grammar, Dictionary, &c. Second edition, two vols. half-bound in cloth	2 11 1	0 0
WORKS ON THE THEORY OF MUSIC.  ALBRECHTSBERGER, JOHANN GEORG. Methods of Harmony, Figured Bass, and Composition, adapted for self-instruction, by Albrechtsberger; translated from the last German edition, as augmented and arranged by his pupil, the Chevalier von Seyfried, with the Remarks of M. Choron; translated from the last Paris edition by Arnold Merrick. Second edition, in two vols. 8vo. bound in cloth, lettered£2  CHERUBINI, L. A Course of Counterpoint and Fugue, by L. Cherubini, Member of the French Institute, Director of the Conservatoire of Music in Paris, Officer of the Legion of Honour, &c. translated by J. A. Hamilton, Author of the Musical Catcehisms, Grammar, Dictionary, &c. Second edition, two vols. half-bound in cloth£1  CLARKE, JAMES. Practical Exercises in Harmony and Thorough-Bass, with copious Examples, by James Clarke. Twenty-four	2 11 1	0

The state of the s		
CZERNY, CARL. School of Practical Composition; or Complete Treatise on the Composition of all kinds of Music, both Instrumental and Vecal by Carl Czerny, with numerous practical		
and Vocal, by Carl Czerny, with numerous practical Examples; translated by John Bishop. Folio, three vols.		
Each volume of this magnificent work forms a complete Treatise, and	11	6
may be nad separately.		
DONE, J. A short Treatise on Harmony, Thorough-Bass, and Modulation, including the Compass and Properties of Musical Instru-	4	0
ments in general, by J. Done	4	0
companiment, followed by Progressive Exercises in every Key, by F. J. Fétis; translated by John Bishop	12	0
GUNN, JOHN. An Essay, Theoretical and Practical, with copious and easy		
Examples on the application of the Principles of Harmony, Thorough-Bass, and Modulation, to the Violoncello, by		
John Gunn	12	0
KALKBRENNER, FREDERICK. A Treatise on Harmony, for the Pianist,		
containing general Principles of Modulation, for the ac-		
quirement of the Art of Preluding and Extemporizing, with		
Examples of Studies, Fugues, and Preludes for the Piano-		
forte; composed and dedicated to his Pupils by Frederick		
Kalkbrenner, Officier de la Legion d' Honneur; translated from the Original by Robert Lincoln Cocks	19	0
MARX, DR. ADOLPH BERNHARD. The Universal School of Music; a	12	U
Manual for Teachers and Students in every branch of		
Musical Art, with additional Notes, a Special Preface, and		
Supplement to the English Edition, by Adoph Bernhard		
Marx, Professor of Music at the University of Berlin;		
translated from the fifth edition of the Original German	1.5	^
by A. Wehrhan. 8vo. Royal, 367 pages, bound in cloth, The School of Musical Composition, practical and theoretical,	19	0
with additional Notes and a separate Preface for the Eng-		
lish Edition, by Dr. Adolph Bernhard Marx, Professor of		
Music at the University of Berlin; translated from the		
fourth edition of the Original German by A. Wehrhan.		
Vol. one, 8vo. Royal, 540 pages, bound in cloth£1  Die Musik des neunzehnten Jahrhunderts (The Music of the	1	0
19th Century); translated by A. Wehrhan. (In the Press)		
*** One of the most important works of the present century.		
REICHA, A. Course of Musical Composition; or, Complete and Methodical		
Treatise of Practical Harmony, by A. Reicha, Professor		
at the Conservatoire, Paris; translated, with the Remarks of Carl Czerny, by Arnold Merrick, and edited by John		
of Carl Czerny, by Arnold Merrick, and edited by John	9	0
Bishop. Vol. one, Royal 4to. pp. 355, bound in cloth. £2	2	U
SPENCER, CHARLES CHILD. The Elements of Musical Composition, demy 8vo	1	6
TURBRI. Complete Course of Harmony, dedicated to the Marchioness De		0
Vogüe, by Turbri, translated by J. A. Hamilton	2	0
WARREN, JOSEPH. A few Hints to Young Composers	3	0
WEBER, GOTTFRIED. The Theory of Musical Composition treated with		
a view to a naturally consecutive arrangement of topics,		
by Gottfried Weber (Doctor Honorarius, Knight of the		
First Class of the Hessian Order of Lewis, Honorary Member of the Royal Swedish Academy in Stockholm, of		
the Hollandic Union for the Promotion of Music, &c.);		
translated from the third large and improved German edition, with notes by James F. Warner, of Boston, U. S.		
Edited, with additions drawn from the German original,		
by John Bishop, of Cheltenham. 8vo. royal, two vols, bound in cloth£1	11	6
bound in Civilian		0

# THE HAMILTON COURSE.

THE HAMILTON COURSE.				
In the form of Catechisms. 18mo. &c. each neatly bound in cloth.				
HAMILTON, J. A. 1. Catechism of Harmony and Thorough-Bass	2	0		
Key to the Exercises	1	6		
James Clarke	2	0		
John Bishop	2	0		
from the Great Masters	3	0		
Playing from Score, with sixty-seven Examples	2	0		
A New Musical Grammar, in three Parts—viz. Notation; Harmony, and Counterpoint; Rhythm or Melody; by J. A. Hamilton. Fourth edition, 18mo. pp. 264, bound in				
eloth	3	0		
Elements of Harmony, being a concise Method of the Science, with numerous Precepts and Examples	1	6		
Rudiments of Music, or a complete Knowledge of the Art according to the present system	1	6		
A Dictionary, comprising the Explanation of 3,500 Italian, French, German, English, and other Musical Terms, Phrases, and Abbreviations; also a copious List of Musical Characters, with an Appendix consisting of a Reprint of John Tinetor's Terminorum Musicæ Diffinitorium, the first Musical Dictionary known; by John Bishop, of Cheltenham. Forty-sixth edition, 18mo. pp. 200, stiff				
eovers	1	0		
PIANOFORTE AND SINGING.				
HAMILTON, J. A. Modern Instructions for the Pianoforte, containing all the requisite Precepts and Examples on the Rudiments of Music, Fingering, &c. and illustrated by Seventy-three Exercises, Sixty-nine Preludes and Favorite Airs, Twelve Chants, and Four Vocal Pieces, with Pianoforte Accompaniment, viz. The Christian Pilgrim's Song, "I will arise," "Eve's Lamentation," and Barker's "Weep not for me," embracing—Four New Exercise, viz. an Exercise on Octaves, an Exercise on Chords, an Exercise on Arpeggios, and an Exercise on Double Notes, composed (by Czerny) expressly for this Edition; and additional valuable Lessons, selected and arranged by him from the works of Haydn, Mozart, Beethoven, and Weigl; the whole Revised and Fingered throughout by Carl Czerny. Large				
Music folio, Eighty-Eighth Edition, 63 pages	4	0		
Modern Instructions for Singing, containing a complete Compendium of the Rudiments of Music, full directions for the cultivation and management of the Voice, numerous Exercises and Examples on Vocalization, with Solfeggi, by Rossini and C. M. Sola, and a Selection of celebrated	-	0		
Songs. Folio, third edition	5	0		

# PIANOFORTES manufactured by ROBERT COCKS & CO. London.

Well-Seasoned and warranted to stand in all climates; with patent metal plate bracings, above and below, which effectually prevent the back frame from giving way under any climate, and serve to keep the Instrument perfectly in tune for a length of time.



No. 1.	Mahogany French-front Semi-Cottage or Piceolo, with carved checks, ornaments, and mouldings, improved grand desk, metallic plate, height 3 feet 8, width 4 feet 4, French polished. 6\frac{3}{4} octaves	£	s. 12
No. 2.	Rosewood French-front Semi-Cottage or Piecolo, with back, hollow carved cheeks, ornaments, and mouldings, improved grand desk, and elegant trussed legs, metallic plate, height 3 feet		
		47	10
	The same class of Instrument, in Zebra wood, or Walnut-tree, price	52	10
No. 3.	Rosewood Semi-Cottage or Pieeolo, ogee fall, plain silk front, metallie plate, $6\frac{3}{4}$ oetaves	31	10
No. 4.	Mahogany Semi-Cottage or Piecolo, square fall, plain silk front, metallie plate, $6\frac{3}{4}$ octaves	23	10
No. 5.	Rosewood Semi-Cottage or Piecolo, round fall, plain silk front, metallic plate, $6\frac{3}{4}$ octaves	27	0

"We lately experienced much pleasure in trying some of the Pianofortes manufactured by the house of ROBERT COCKS and CO. NEW BURLINGTON STREET, LONDON. They are chiefly cottages and piccolos. These pianos are remarkable for the beauty and equality of their tone, the facility of their touch, and their extremely elegant exterior. They have, moreover, an appearance of durability which is wholly out of the question in the cheap markets, where the public are persuaded into purchasing a pretty-looking instrument at a low rate, which, at the expiration of six months, is found to be worthless. Not that the instruments of Messrs. R. Cocks and Co. are dear—on the contrary, they are as cheap as the valueless instruments just mentioned, but they have the advantage of being firmly and compactly made of the best (and the best seasoned) materials, and of keeping well in tune for an unusual leugth of time."—Vide Musical World.

"" \*\* \* It is our candid opinion that, for workmanship and quality throughout, together with the extreme reasonableness of the prices, these Pianofortes cannot be surpassed. We can conscientiously recommend them to public attention and patronage."—Dramatio and Musical Review.

Pianofortes Let on Hire by the Month, Quarter, or Year, at 15s. per Month and upwards.

May be had, on application, gratis and postage free, a List of second-hand Pianofortes, and a List of Violins and other Instruments.

ROBERT COCKS AND CO. NEW BURLINGTON STREET, LONDON.







# DATE DUE

Bay : 1	The second secon	
Win Com	<b>ंग्र</b>	
GAYLORD		PRINTED IN U.S.A.



